

Documentation

OTRS 3.3 - Mwongozo wa msimamizi

Build Date:

2013-04-30

OTRS 3.3 - Mwongozo wa msimamizi

Copyright © 2003-2013 OTRS AG

René Bakker, Stefan Bedorf, Michiel Beijen, Shawn Beasley, Hauke Böttcher, Jens Bothe, Udo Bretz, Martin Edenhofer, Carlos Javier García, Martin Gruner, Manuel Hecht, Christopher Kuhn, André Mindermann, Marc Nilius, Elva María Novoa, Henning Oswald, Martha Elia Pascual, Thomas Raith, Carlos Fernando Rodríguez, Stefan Rother, Burchard Steinbild, Michael Thiesmeier, Daniel Zamorano.

Kazi hii ina hakimiliki ya OTRS AG

Unaweza nakili yote au sehemu ya yote ilimradi nakala ziwe na taarifa ya hakimiliki.

Kanuni chanzo za huu waraka unapatikana katika [github](#), kwenye [waraka-msimamizi](#).

UNIX ni alama ya biashara iliyosajiliwa ya X/Open Company Limited. Linux ni alama ya biashara iliyosajiliwa ya Linus Torvalds.

MS-DOS, Windows, Windows 95, Windows 98, Windows NT, Windows 2000, Windows XP, Windows 2003, Windows Vista na Windows 7 ni alama za biashara zilizosajiliwa za shirika la Microsoft. Alama nyingine za biashara zilizosajiliwa ni: SUSE na YaST za SUSE Linux GmbH, Red Hat na Fedora ni alama za biashara za Red Hat, Inc. Mandrake ni alama ya biashara ya MandrakeSoft, SA. Debian ni alama ya biashara ya Software in the Public Interest, Inc. MySQL na nembo ya MySQL ni alama za biashara za Oracle Corporation na washirika wake.

Majina yote ya biashara yanatumika bila kithibitisho cha matumizi yake ya bure na kuna uwezekano ni alama za biashara zilizosajiliwa.

OTRS AG kwa msingi inafuata nukuu za watengenezaji. Bidhaa nyingine zilizotajwa kwenye huu mwongozo zinaweza kuwa alama ya biashara ya mtengenezaji husika.




Table of Contents

Utangulizi	viii
1. Utangulizi	1
1. Trouble Ticket Systems - Vya msingi	1
1.1. Trouble ticket system ni nini, na kwanini unaihitaji?	1
1.2. Trouble ticket ni nini?	2
2. OTRS Help Desk	2
2.1. Misingi	2
2.2. Vipengele	2
2.3. Mahitaji ya programu na vifaa	11
2.4. Jamii	12
2.5. Huduma za kitaalamu za OTRS	12
2. Usanikishaji	14
1. Njia rahisi - Usakinishaji wa vifurushi vilivyojengwa tayari	14
1.1. Kusakinisha RPM katika seva ya Linux ya SUSE	14
1.2. Kusakinisha OTRS katika mifumo endeshi ya Red Hat Enterprise Linux au CentOS system	17
1.3. Kusakinisha OTRS kwenye mfumo wa Debian au Ubuntu	21
1.4. Kusakinisha OTRS kwenye mifumo ya Microsoft Windows	21
2. Usaninishaji kutoka kwenye chanzo (Linux, Unix)	24
2.1. Kuandaa usakinishaji kutoka kwenye chanzo	24
2.2. Usakinishaji wa moduli za perl	25
2.3. Kusanidi seva ya tovuti ya Apache	26
2.4. Usanidi wa hifadhidata	26
2.5. Kuanzisha kazi za mfumo zilizopangwa za OTRS	27
2.6. Huduma ya Mratibu wa OTRS	31
3. Kutumia kisaikinishi cha wavuti	31
4. Kuboresha kiunzi cha OTRS	34
5. Kuboresha Kisaikinishi cha Windows	39
5.1. Kufanya uboreshaji wa kiwango cha viraka kwenye Windows	39
5.2. Kufanya uboreshaji wa kiwango kidogo kwenye Windows	39
6. Programu-tumizi za ziada	40
6.1. Maswali yanasoulizwa mara kwa mara	40
3. Hatua za mwanzo	41
1. Kiolesura cha tovuti cha wakala	41
2. Kiolesura cha tovuti cha mtumiaji	41
3. Kiolesura cha tovuti cha uma	42
4. Kuingia kwa mara ya kwanza	43
5. Kiolesura cha tovuti - mapitio	43
6. Dashibodi	45
7. Nini maana ya foleni?	48
8. Nini maana ya mapitio ya foleni?	49
9. Mapendeleo ya Mtumiaji	50
4. Utawala	53
1. Eneo la MSIMAMIZI wa OTRS	53
1.1. Misingi	53
1.2. Mawakala, Makundi na Majukumu	53
1.3. Wateja na Makundi ya Wateja	62
1.4. Foleni	65
1.5. Salamu, saini, viambatanisho na violezo	67
1.6. Majibu otomatiki	76
1.7. Anwani za barua pepe	78
1.8. Taarifa	79
1.9. SMIME	81
1.10. PGP	81
1.11. Hali	82

1.12. SysConfig	83
1.13. Kutumia akaunti zote za barua	84
1.14. Inachuja barua pepe zinazolingia	84
1.15. Kutekeleza kazi za kiotomatiki na WakalaWaUjumla	87
1.16. Barua pepe ya msimamizi	89
1.17. Usimamizi wa kipindi	89
1.18. Batli ya mfumo	90
1.19. Maulizo ya SQL kupitia boksi la SQL	91
1.20. Msimaizi wa kifurushi	92
1.21. Huduma za Tovuti	92
1.22. Sehemu zinazobadilika	93
2. Usanidi wa Mfumo	94
2.1. Mafaili ua usanidi wa OTRS	94
2.2. Usanidi wa mfumo kupitia kiolesura cha mtandao	95
3. Kuweka nakala za dharura ya mfumo	96
3.1. Chelezo	96
3.2. Rejesha	96
4. Mpangilio wa barua pepe	97
4.1. Kutuma/Kupokea barua pepe	97
4.2. Linda barua pepe na PGP	102
4.3. Linda barua pepe na S/MIME	105
5. Kutumia mazingira ya nyuma ya nje	108
5.1. Data za mteja	108
5.2. Mazingira ya nyuma ya Mtumiaji mteja	108
5.3. Mazingira ya nyuma ya kuthibitisha Mawakala na Wateja	116
5.4. Kugeza kukufaa usajili binafsi wa mteja	119
6. Mpangilio wa tiketi	122
6.1. Hali za Tiketi	122
6.2. Vipaumbele vya tiketi	125
6.3. Jukumu la Tiketi & Kuangalia Tiketi	125
7. Shughuli zinazoendana na muda	128
7.1. Kuseti masaa, sikuku na majira ya biashara	128
7.2. Ufunguaji Otomatiki	129
8. Kugeza kukufaa matokeo ya PDF	129
9. Moduli ya takwimu	130
9.1. Kushughulikia moduli kwa kutumia wakala	130
9.2. Usimamizi wa moduli ya takwimu na msimamizi wa OTRS	140
9.3. Usimamizi wa moduli ya takwimu na msimamizi wa mfumo	140
10. Sehemu zinazobadilika	142
10.1. Utangulizi	142
10.2. Usanidi	143
11. Kiolesura cha Ujumla	162
11.1. Matabaka ya Kiolesura cha Ujumla	162
11.2. Mtiririko wa Mawasiliano ya Kiolesura cha Ujumla	164
11.3. Huduma za Tovuti	167
11.4. Kiolesura Michoro cha Huduma za Tovuti	168
11.5. Kiolesura cha Tungo Amri cha Huduma ya Tovuti.	184
11.6. Usanidi wa Huduma za Tovuti	186
11.7. Viunganishi	193
12. Mratibu wa OTRS	203
12.1. Kiolesura Michoro cha Mratibu	204
12.2. Kiolesura cha Tungo Amri ya Mratibu	205
5. Kugeza kukufaa	210
1. Orodha Dhibiti Sikivu	210
1.1. Utangulizi	210
1.2. Mifano	210
1.3. Marejeo	212
2. Usimamizi wa mchakato	216

2.1. Utangulizi	216
2.2. Mchakato wa mfano	216
2.3. Kutekeleza mfano	216
2.4. Rejea ya sanidi ya mchakato	240
3. Kutengeneza mandhari yako	259
4. Ujanibishaji wa mazingira ya mbele ya OTRS	259
6. Kuboresha Utendaji	260
1. OTRS	260
1.1. ModuliKielelezoTiketi	260
1.2. ModuliHifadhiTiketi	260
1.3. Kuhifadhi Tiketi	261
2. Hifadhidata	262
2.1. MySQL	262
2.2. PostgreSQL	262
3. Seva ya tovuti	262
3.1. Miunganiko ya hifadhidata iliyotengenezwa.	262
3.2. Moduli zilizopakiwa tayari -startup.pl	263
3.3. Pakia tena moduli za perl zinapo sasishwa kwnye diski	263
3.4. Kuchagua mkakati sahihi	263
3.5. mod_gzip/mod_deflate	263
A. Rasilimali za Ziada	264
1. Kundi la OTRS la tovuti.	264
2. Orodha za watumiwa	264
3. Ufuatiliaji makosa	265
4. Usaidizi wa ki biashara	265
B. Configuration Options Reference	266
1. DynamicFields	266
2. Framework	271
3. GenericInterface	400
4. ProcessManagement	412
5. Scheduler	421
6. Ticket	423
C. Mikopo	654
D. Leseni ya Nyaraka Huru ya GNU	656
0. UTANGULIZI	656
1. UTUMIKAJI NA FASILI	656
2. KUNAKILI BILA KUBADILISHA KITU	657
3. KUNAKILI KATIKA IDADI	657
4. MABADILIKO	658
5. KUJUMUISHA NYARAKA	659
6. MKUSANYIKO WA NYARAKA	660
7. KUJUMUISHA NA KAZI BINAFSI	660
8. TAFSIRI	660
9. USITISHAJI	660
10. MAREKEBISHO YA BAADAYE YA HII LESENI	660
Jinsi ya kutumia hii Leseni kwa ajili ya nyaraka zako	661

List of Tables

2.1. Maelezo ya hati tofauti za kazi zilizopangwa za mfumo.	28
4.1. Makundi chaguo-msingi yanayopatikana katika usakinishaji mpya wa OTRS	55
4.2. Haki zinazohusishwa na makundi ya OTRS	57
4.3. Makundi ya ruhusa ya ziada	58
4.4. Matukio kwa majibu Otomatiki	77
4.5. Kazi za vichwa-vya-X-OTRS tofauti	85
4.6. Sehemu zifuatazo zitaongezwa kwenye mfumo:	145
4.7. Orodha ya hati za init.d na mifumo endeshi inayotumika nayo	206
A.1. Orodhazawatumiwa	264



List of Examples

4.1. Inapanga barua taka katika foleni maalumu	87
4.2. .fetchmailrc	99
4.3. Kazi za mfano kwa moduli ya kuchuja Kiini::Mfumo::MkuuWaPosta::Kichu- jio::Fananisha	100
4.4. Kazi ya mfano kwa moduli ya kuchuja Kiini::Mfumo::MkuuWaPosta::Kichu- jio::CMD	101
4.5. Kazi za mfano kwa moduli ya kuchuja Kiini::Mfumo::MkuuWaPosta::Chuja::U- tambuziTiketiNambariNje	101
4.6. Usanidi wa hifadhidata ya mazingira ya nyuma ya mteja	108
4.7. Kutumia tiketi za kampuni na mazingira ya nyuma ya DB	111
4.8. Usanidi wa LDAP ya mazingira yanyuma ya mteja	111
4.9. Kutumia tiketi za Kampuni na mazingira ya nyuma ya LDAP	113
4.10. Kutumia zaidi ya mazingira ya nyuma ya mteja ya aina moja na OTRS	113
4.11. Thibitisha mawakala katika mazingira ya nyuma ya DB.	116
4.12. Thibitisha mawakala katika mazingira ya nyuma ya LDAP.	116
4.13. Halalisha Wakala kwa kutumia HTTPBasic	117
4.14. Thibitisha mawakala katika mazingira ya nyuma ya Radius.	118
4.15. Uthibitisho wa mtumiaji mteja katika mazingira ya nyuma ya DB	118
4.16. Uthibitisho wa mtumiaji mteja katika mazingira ya nyuma ya LDAP	118
4.17. Uthibitisho wa Mteja kwa kutumia HTTPBasic	119
4.18. Uthibitisho wa mtumiaji mteja katika mazingira ya nyuma ya Radius	119
4.19. Ufafanuzi wa thamani ya mfuatano - elementi moja	138
4.20. Ufafanuzi wa thamani za mfuatano - elementi mbili	138
4.21. Amilisha Sehemu1 katika Simu Mpya Tiketi Skrini.	154
4.22. Amilisha Sehemu1 katika Simu Mpya Tiketi Skrini kwa ulazima.	155
4.23. Amilisha sehemu mbali mbali katika Simu Mpya Tiketi Skrini.	156
4.24. Lemaza baadhi ya sehemu katika Simu Mpya Tiketi Skrini.	157
4.25. Amilisha Sehemu1 katika Skrini Kuza Tiketi.	158
4.26. Amilisha Sehemu1 katika Mapitio ya Skrini Ndogo za Tiketi.	159
4.27. Amilisha Sehemu1 katika kitendo cha TengenezaTiketi.	160
4.28. Amilisha Sehemu1 katika mapendeleo ya Mtumiaji.	161
4.29. Mfano kuanzisha Mratibu wa OTRS kwenye linux	206
4.30. Mfano Kuanza Mratibu wa OTRS	206
4.31. Mfano kulazimisha kusitisha Mratibu wa OTRS	207
4.32. Mfano kusajili Mratibu wa OTRS kama Huduma ya Windows	207
4.33. Mafano kuanza Mratibu wa OTRS kwenye Windows	208
4.34. Mfano kulazimisha kusitisha Mratibu wa OTRS kwenye Windows	208
5.1. ACL inayoruhusu uingizwaji kwenye foleni wa tiketi zenye kipaumbele cha tiketi 5.	210
5.2. ACL inaruhusu uingiaji kwenye foleni kwa zile tiketi zenye kipaumbele cha tiketi 5 na zimehifadhiwa kwenye hifadhidata.	211
5.3. ACL ikilemaza ufungaji wa tiketi katika foleni mbichi, na kuficha kitufe cha ku- funga.	211
5.4. Uondoaji wa ACL una hali imefungwa kikamilifu mara zote.	212
5.5. ACL inaonyesha huduma za Vifaa kwa ajili ya tiketi ambazo zinatengenezwa kwenye foleni zinazoanza na "HW"	212
5.6. Rejea inayoonyesha mipangilio yote muhimu ya ACLs.	213

Utangulizi

Hiki kitabu kimelewa kutumiwa na Wasimamizi wa OTRS. Pia ni ki rejeo kizuri kwa watumiaji wanya wa OTRS.

Sura zinazofwata zinaelezea usakinishaji, usanidi, na usimamizi wa progwamu ya OTRS. Theluthi moja ya kwanza ya nakala hii inaelezea kazi za muhimu za programu, wakati zinazobakia inafanya kazi kama marejeo ya seti nzima ya parameta zinazoweza kusandwiwa.

Hiki kitabu kinaendelea kuwa kazi iliyo kwenye mwendelezo, ikiwa lengo ni matoleo mapya. Tunahitaji maoni yenu ili kufanya hii nyaraka ya marejeo kuwa ya hali ya juu: ambayo inaweza kutumika, iko sahihi, na kamili. Tafadhali tuandikie kama unakuta kuna kitu hakipo kwenye hiki kitabu, kama vitu havijaelezewa kikamilifu, au kuna makosa ya kiuandishi na kisintaksia. Aina yoyote ya maoni yanathaminiwa na yanatakiwa kuwekwa kwenye mfumo wetu wa kufwatilia makosa katika <http://bugs.otrs.org>. Tunatanguliza shukrani kwa michango yenu.



Chapter 1. Utangulizi

1. Trouble Ticket Systems - Vya msingi

Hii sura inatoa utangulizi wa trouble ticketing systems kwa ufupi, pamoja na maelezo ya maana ya msingi ya trouble ticket. Mfano wa haraka unaeleza faida za kutumia mfumo kama huu.

1.1. Trouble ticket system ni nini, na kwanini unaihitaji?

Mfano ufwatao unaeleza trouble ticket system ni nini, na jinsi gani utafaidika na mfumo huu katika kampuni yako.

Tufikirie kwamba Max ni mtengenezaji wa rekoda za video. Max anapokea meseji nyingi kutoka kwa wateja wakihitaji msaada wa vifaa vyao. Siku nyingine anshindwa kujibu papo hapo au hata kukiri kupokea meseji hizo. Baadhi ya wateja wanakosa uvumilivu na kutuma meseji ile ile kwa mara ya pili. Meseji zote zenye maombi ya usaidizi zinahifadhiwa kwenye kisanduku pokezi kimoja. Maombi hayapangwi, na Max anajibu meseji hizo kwa kutumia programu ya mara kwa mara ya barua pepe.

Kwa kuwa Max hawezi kujibu kwa haraka meseji zote, anasaidiwa na wasanifu Joe na John katika hili. Joe na John wanatumia mfumo huo huo wa barua pepe, wakifikia kisanduku pokezi kile kile. Hawatambui kwamba Max anaweza kupokea maombi mawili kutoka kwa mteja mmoja mwenye hasira. Wakati mwingine wanatoa majibu tofauti kwa ombi moja lililojirudia, mteja anapokea majibu mawili tofauti. Kwa zaidi Max hajui undani wa majibu yao. Pia hajui undani wa matatizo ya wateja na masuluhisho yao, kama matatizo gani yanatokea mara nyingi, au kiasi gani cha muda na pesa anatumia kwenye usaidizi wa wateja.

Katika mkutano, mwenzake akamweleza Max kuhusu mfumo wa trouble ticket na jinsi unavyoweza kutatua matatizo ya Max ya usaidiziwa wa mteja. Baada ya kuangalia taarifa kwenye mtandao, Max akaamua kusanikisha OTRS kwenye kompyuta ambayo inapatikana kwenye tovuti kwa wateja na wafanyakazi wake. Sasa, maombi ya wateja hayatumwi kwenye kisanduku chake binafsi cha barua pepe bali kwenye akaunti ya barua pepe ya OTRS. Mfumo wa tiketi umeunganishwa na kikasha barua hiki na inahifadhi maombi yote kwenye hifadhidata yake. Kwa kila ombi jipya, mfumo unatengeneza jibu kiotomatiki na kulituma kwa mteja ili mteja atambue maombi yake yamepokelewa na atajibiwa hivi karibuni. OTRS inatengeneza kirejeo wazi, nambari ya tiketi, kwa kila ombi moja. Wateja sasa wana furaha kwa sababu maombi ya yanajibiwa na sio lazima kutuma ombi la pili kwa swali lile lile. Max, John na Joe sasa wanaweza kuingia kwenye OTRS na kivinjari tovuti na kujibu maombi. Kwa kuwa mfumo unafunga tiketi iliyojibiwa, hakuna meseji inayojibiwa mara mbili.

Tufikirie kwamba Mr. Smith ametuma ombi kwa kampuni ya Max, na meseji yake inafanyiswa mchakato na OTRS. John anatoa jibu fupi kwa swali lake. Lakini Mr. Smith ana swali linalofuata, ambalo analituma kama jibu kwa barua pepe ya John. Kwa kuwa John ametingwa, Max sasa anajibu meseji ya Mr. Smith. Kipengele cha historia kinamruhusu Max aone mtiririko mzima wa mawasiliano kwenye ombi hili, na anajibu kwa undani zaidi. Mr. Smith hajui kama watoa huduma zaidi ya mmoja wahehusika katika kutatua tatizo lake, na amefurahia maelezo ya majibu ya mwisho ya Max.

Bila shaka, haya ni mapitio mafupi ya viwezekanavyo na vipengele vya mfumo wa trouble ticket. Lakini kama kampuni yako inabidi ihudumie maombi mengi kutoka kwa wateja

kupitia barua pepe na simu, na kama watoa huduma tofauti inabidi wajibu kwa muda tofauti, tiketi itakuwa na usaidizi mkubwa. Inaweza kusaidia kurahisisha mtiririko wa kazi, kuongeza ufanisi, na kuboresha utendaji kwa ujumla. Mfumo wa tiketi unasaidia kutengeneza muundo rahisi wa mazingira ya usaidizi au meza ya usaidizi. Mawasiliano kati ya wateja na watoa huduma yanakuwa wazi zaidi. Matokeo ya mwisho ni ufanisi wa huduma. Na bila shaka, wateja walioridhika watabadilika kuwa matokeo mazuri ya biashara ya kampuni yako.

1.2. Trouble ticket ni nini?

Trouble ticket ni sawa na ripoti ya matibabu iliyotengenezwa kwa ajili ya mgonjwa. Mgonjwa akienda hospitali kwa mara ya kwanza, ripoti ya matibabu itatengenezwa kushikilia taarifa zote binafsi na za matibabu zinazomhusu. Baada ya kuhudhuria mara nyingi, na kuhudumiwa na daktari yule yule au wengine, daktari husika anasasisha ripoti kwa kuongeza taarifa mpya za mgonjwa na matibabu yanayoendelea. Hii inawezesha madaktari wengine na manesi kuweza kupata picha nzima ya kesi ya mgonjwa waliokuwa nayo. Mgonjwa akipona na kuruhusiwa kutoka hospitalini, taarifa zote za mgonjwa zinahifadhiwa kwenye nyaraka na ripoti inafungwa.

Mifumo ya trouble ticket kama OTRS inashughulikia trouble tickets kama barua pepe za kawaida. Ujumbe unahifadhiwa kwenye mfumo. Mteja akituma ombi, tiketi mpya inatengenezwa na mfumo ambayo ni sawa na ripoti ya matibabu inayotengenezwa. Majibu kwa hii tiketi mpya ni sawa na ingizo la daktari kwenye ripoti ya matibabu. Tiketi inafungwa kama majibu yametumwa kwa mteja, au kama tiketi imefungwa na mfumo. Kama mteja akijibu tena tiketi iliyofungwa, tiketi itafunguliwa tena na taarifa mpya zitaongezwa. Kila tiketi inahifadhiwa na taarifa kamili. Kwa kuwa tiketi zinashughulikiwa kama barua pepe za kawaida, viambatanisho na maoni ya muktadha pia yatahifadhiwa na kila barua pepe. Na pia taarifa za tarehe husika, wafanyakazi husika, muda wa kazi unaohitajika kushughulikia tiketi, na kadhalika vinahifadhiwa. Katika ngazi yoyote ya baadaye tiketi zinaweza kupangwa na inawezekana kutafuta na kuchambua taarifa zote kwa kutumia taratibu mbali mbali za uchujaji.

2. OTRS Help Desk

Hii sura inaelezea vipengele vya OTRS Help Desk (OTRS) Utapata taarifa kuhusu mahitaji ya programu na vifaa kwa ajili ya OTRS. Kwa zaidi katika sura hii utajifunza jinsi ya kupata usaidizi wa ki biashara kwa OTRS, ukihitaji, na jinsi ya kuwasiliana na jamii.

2.1. Misingi

OTRS Help Desk (OTRS) ni programu tumizi ya wavuti ambayo inasakinishwa katika seva ya wavuti na inaweza kutumika na kivinjari wavuti.

OTRS imegawanywa katika vijenzi tofauti. Kijenzi kikuu ni kiunzi cha OTRS ambacho kina kazi kuu zote za mfumo wa tiketi na programu-tumizi. Inawezekana kusakinisha programu-tumizi za ziada kama moduli za OTRS::ITSM, ushirikiano na ufumbuzi wa Ufuatiliaji wa Mtandao, msingi wa maarifa (Maswali yanayoulizwa mara kwa mara), na kadhalika.

2.2. Vipengele

OTRS ina vipengele vingi. Orodha ifwatayo inatoa mapitio ya vipengele muhim vilivyopo katika kiunzi cha OTRS.

2.2.1. Kiolesura cha mtumiaji

- OTRS inakuja na wavuti za kiolesura mpya na tofauti kwa ajili ya wakala na wateja.

- Inaweza kutumika katika kivinjari wavuti kipyra, ikijumuisha utayari wa retina na jukwaa jongevu.
- Kiolesura cha wavuti kinaweza kugeuzwa kukufaa kwa dhima na dhamira zako
- Dashibodi ya wakala ina nguvu na uwezo wa kugeuzwa kukufaa pia ina mapitio ya tiketi zako na usaidizi wa takwimu za michoro.
- Injini panufu ya ripoti inatoa takwimu tofauti tofauti na chaguo la kuratibu ripori.
- Kwa kutumia MchakatoUsimamizi inawezekana kufafanua skrini za tiketi zako na michakato (tiketi za mtiririko wa kazi)
- OTRS ina usimamizi wa haki za ndani ambayo inaweza kupanuliwa na orodha dhibiti ufikivu (ACLs) zilizo hakikiwa.
- Ina msaada kwa zaidi ya lugha 30 na majira tofauti ya saa.

2.2.2. Kiolesura cha barua

- Ina usaidizi wa barua pepe za MIME pamoja na viambatanishi.
- Ina geuza ki otomatiki HTML kwa ujumbe wa matini ghafi (ulinzi ulioongezeka kwa maudhui nyeti na inawezesha utafutaji wa haraka)
- Barua pepe zinazolingia zinachujwa na kufanyiwa mchakato na sheria ngumu, mfano kwa barua taka au ugawanyaji wa foleni.
- Msaada kwa viwango vya PGP na S/MIME kwa ajili ya usimamizi wa ufunguo/hati na uchakatishaji wa barua pepe.
- Majibu otomatiki, yana sanidika kwa kila foleni.
- Taarifa za barua pepe kwa wakala kuhusu tiketi mpya, vinavyofwatia au tiketi zilizo-fungwa.
- Inawezekana kufafanua kitambulishi cha tiketi yako ili kutambua vinavyofuata, mfano. Piga#, Tiketi# au Ombi#. Kuna vizalisha tiketi namba vingi (vyenye msingi wa tarehe, nasibu na kadh.) Unaweza kuongeza yakwapo pia. Vinavyofwatia vinaweza kujulikana kwa kurejea kwenye vichwa au tiketi namba za nje.

2.2.3. Tiketi

- OTRS inatumia tiketi kukusanya mawasiliano yote ya nje na ndani yanayokaa pamoja. Hizi tiketi zinapangwa kwa foleni.
- Kuna njia nyingi za kuangalia tiketi kwenye mfumo (kwa kutegemea Foleni, Hali, Kupanda ma kadh.) katika ngazi tofauti za undani (ndogo/kati/kuhakiki).
- Historia ya tiketi inarekodi mabadiliko yote kwa tiketi.
- Tiketi zinaweza kubadilishwa kwa njia tofauti, kama kujibu, kutuma mbele, kudunda, kuhamia kwenye foleni nyingine, sasisha sifa (hali, umuhimu na kadh.), kufunga na uhasibu wa muda wa kazi. Inawezekana kubadilisha tiketi nyingi kwa mkupuo (vitendo vya mkupuo).
- Muda wa kusubiri na muda wa kupanda / usimamizi wa SLA unaruhusu ratiba na vuzuizi vinavyotegemea muda.
- Tiketi zinaweza ku unganishwa na tiketi nyingine au vitu vingine mfano maswali yanayoulizwa mara kwa mara.

- Vitendo otomatiki na vya muda kwa tiketi vinawezekana na "WakalaWaKawaida"
- OTRS inakuja na injini tafuti yenye nguvu ambayo inaruhusu utafutaji tata na wa nakala kamili kwa tiketi.

2.2.4. Mfumo

- OTRS inafanya kazi katika mifumo endeshi mingi (Linux, Solaris, AIX, FreeBSD, OpenBSD, Mac OS 10.x, Microsoft Windows) na ina usaidizi kwa mifumo tofauti ya hifadhidata kwa OTRS back-end ya kati (MySQL, PostgreSQL, Oracle, MSSQL).
- Kiini cha mfumo kinaweza kupanuliwa kwa ku sakinisha vifurushi vya OTRS. Kuna vifurushi vingi vya bure (mfano FAQ, OTRS::ITSM na vingine) na pia vifurushi vya FeatureAd-don kwa wateja wenye mkataba wa huduma kutoka kundi la OTRS.
- Uunganishaji wa mazingira ya nyuma ya nje kwa ajili ya data za mteja, mf. kupitia AD, eDirectory au OpenLDAP. Wateja wanaweza kujithibitisha kupitia hifadhidata, LDAP, HTTPAuth au Radius.
- Kwa kiolesura cha ujumla ni rahisi kuunganisha OTRS na huduma nyingine za tovuti. Huduma rahisi za tpvuti zinaweza kuunganishwa bila kuunda programu, mazingira changamano na viendelezi vya kawaida. Kiunganishi cha tiketi cha OTRS kinaruhusu utengenezaji, usasishaji na utafutaji wa tiketi, kupitia huduma za tovuti kutoka kwenye programu tumizi nyingine kuacha mbili zinazohusika.

Sasa tuangalie mabadiliko katika matoleo ya hivi karibuni ya OTRS.

2.2.5. Vipengele vipya vya OTRS 3.3

2.2.5.1. Uzalishaji

- Orodha ya tiketi za dashibodi na mapitio ya tiketi za kawaida sasa zinaweza kuchujwa na safu za tiketi zinazofaa na safu zilizo onyeshwa zina sanidika.
- Chombo cha tiketi na mapitio ya kihakiki sasa yanaweza kupangwa.
- Imeongeza kifaa cha kalenda kwenye dashibodi ambacho kinaonyesha tiketi kama matukio.
- Imeongeza kifaa kwenye dashibodi ambacho kinaonyesha nambari ya tiketi kwa hali na kwa foleni katika mfumo wa matriki.
- Wakala sasa wanaweza kuweka alama kwa makala muhimu.
- Kifaa kipya cha uchaguzi wa mti inafanya ufanyaji kazi na data za mti (foleni, huduma na kadh.) kuwa wa haraka na rahisi.
- Imeongeza usadizi wa kutafuta tarehe zinazoendana (mf. zaidi ya mwezi 1 uliopita) katika sehemu zinazobadilika za Tarehe na Tarehe/Muda.
- Sasa inawezekana kubainisha violezo (awali "majibu ya kawaida") pia kwa utengenezaji wa tiketi mpya na upelekaji mbele tiketi.
- Orodha ya michakato inayopatikana sasa inaweza kuchujwa na ACLs.
- Usaidizi umeongezwa kuanzisha mchakato kutoka kwa kiolesura cha mteja.
- Katika sehemu nyingi nakala hazifupishwi tena kwa idadi maalumu ya herufi ("Foleni1..."), lakini badala yake kwa hali za skrini zilizopo. Hii inawezesha kuona taarifa nyingi zaidi kwa mkupuo.

- OTRS sasa iko tayari kwa Retina. Taswira sasa zinaweza kukabiliana na muonekano wa juu na ikoni za taswira zimebadilishwa na fonti za herufi kutoka webfont ya FontAwesome .
- Kipengele kipya "usimamizi wa dashibodi" kimeongezwa. Hii inawezesha kuonyesha chati za takwimu kwenye dashibodi. Tafadhali tambua IE8 haina msaada kwa kipengele hiki.

2.2.5.2. Kufanya kazi na mifumo ya nje

- OTRS sasa inaweza kutumia hifadhidata nyingi za kampuni za wateja, shukrani kwa Cyrille @ belnet-ict.
- OTRS sasa inaweza kutunza data za mtumiaji katika maeneo yanayobadilika ya tiketi kwa hifadhi ya kudumu katika tiketi. Hii itakuwa na faida katika uarifu.
- OTRS sasa inaweza kuweka barua pepe zinazoingia kwa usahihi chini ya tiketi zilizopo kulingana na nambari ya tiketi kutoka mifumo ya nje.
- OTRS sasa inaweza kutafuta barua pepe kupitia miunganiko ya POP3/TLS.

2.2.5.3. Usanikishaji & Usimamizi

- Kisakinishi cha wavuti sasa kinaweza kuanzisha OTRS katika hifadhidata za Seva za PostgreSQL, Oracle na SQL mbali na MySQL.
- OTRS sasa ina usaidizi kamili wa MySQL 5.6
- Kazi za wakala wa kawaida sasa zinaweza kutekelezwa kwa matukio ya tiketi zilizosandiwa.
- Kihariri kipya cha michoro cha ACL kinafanya uhariri wa ACL kuwa rahisi.
- Vichujio vya mkuu wa posta sasa vinaweza kutumia masharti hasi ya kuchuja, shukrani kwa Renée Bäcker.
- Vichujio vya mkuu wa posta sasa vinaweka bayana tarehe za kusubiri na Mmiliki / Mhusika wa tiketi mpya kwa kutegemea data za barua pepe zinazoingia.
- Nywila za Wateja na Mawakala sasa zinaweza kufanyiwa usimbaji fiche kwa kutumia kanuni imara ya bcrypt, ambayo ni nzuri zaidi ya SHA.
- Icons nyingi sasa kutumia font icon ambayo inafanya rahisi kujenga ngozi desturi na rangi tofauti ya msingi. Hii pia inaboresha utendaji kwa ujumla kupitia ndogo kiasi cha (picha) mafaili kupakia.

2.2.6. Vipengele vipya vya OTRS 3.2

2.2.6.1. Inalenga zaidi mteja

- Kituo kipya cha habari kwa wateja kinatoa muonekano mzuri wa dashibodi kwa mteja (kamouni). Unaweza kuona
 - Kupandishwa, kikumbusho, mpya na tiketi zilizo wazi za kampuni ya mteja.
 - Watumiaji wa mteja (mawasiliano) wanao milikiwa na kampuni ya huyu mteja, na hesabu za tiketi zao binafsi na njia za mkato za kutengeneza tiketi zao mpya.
 - Muonekano wa jumla wa hali ya tiketi za kampuni ya mteja.
- Kipengele kipya cha "swichi ya mteja" kinawezesha wakala mwenye ruhusa zinazo takiwa kuangalia kwenye jopo la mteja pamoja na haki zake.

2.2.6.2. Inaweza kugeuzwa kukufaa zaidi

2.2.6.2.1. Usimamizi wa mchakato

- usimamizi wa mchakato mpya unawezesha kuwakilisha michakato ndani ya OTRS.

2.2.6.2.2. Uboreshaji wa kiolesura cha mteja

- Kiolesura cha wavuti wa mteja sasa kina endana na AJAX na ACLs.
- Sasa inahitaji JavaScript na sio tangamanifu na Internet Explorer 6 au matoleo la nyuma.
- Katika kiolesura cha mteja, sasa unaweza ku seti chaguo-msingi la aina ya tiketi kwa tiketi mpya. Pia, sasa unaweza kuficha aina ya tiketi na kutumia chaguo-msingi kwa tiketi zote zinazotengenzwa kwa kutumia kiolesura cha mteja.

2.2.6.2.3. Maboresho ya kiolesura cha wakala

- Wakala sasa wanaweza kutafuta tiketi kwa muda wa kupanda.
- Chaguo jipya la kuonyesha SehemuZinazobadilika kama chaguo-msingi katika kutafuta tiketi.
- Usadifishaji wa matumizi ya skrini katika skrini za tiketi kuzuia kubiringiza katika madirisha ibukizi. Kwa kila skrini ya tiketi, ukubwa wa kihariri cha nakalatajiri sasa unaweza kusanidiwa kipekee.
- Sasa inawezakana kupeleka tiketi kwenye foleni nyingine ndani ya maongezi ya Viten-doVyaTiketi (DokezoLaTiketi, FungaTiketi na kadh.) baad aya ku amilisha sanidi za chaguo. Hii huwa inazimwa.
- Utafutaji wa tiketi utaenda moja kwa moja kwenye skrini ya ku kuza tiketi endapo tiketi moja itapatikana.
- Uwezo mpya wa kuficha Aina ya Makala kutoka kwenye skrini za TiketiKitendoKawaida ambazo zinaweza kuwa na manufaa kuweka data zaidi kwenye dirisha la kivinjari.
- Kuna kifaa kipya cha nje ya ofisi cha ndashibodi ambacho kina orodhesha wakala wote washirika wasiopatikana kwa muda huo.
- CKEditor 4 mpya inarahisisha na kuimarisha ufanyaji kazi na maudhui zenye nakala tajiri (kama barua pepe za HTML).

2.2.6.2.4. Maboresho ya utawala

- Taarifa zinazoendeshwa na matukio sasa zinaweza kutumwa kwa Aina za Mtumaji Nakala maalumu.
- Injini ya takwimu ya OTRS sasa inaelewa 'wiki' kuacha siku, miezi na miaka. Hii inaipa uwezo wa, kwa mfano tengeneza ripoti za tiketi 'zilizotengenezwa wiki iliyopita', au tengeneza ripoti inayo onyesha tiketi zilizotengenezwa kwa foleni kwa wiki.
- Inawezekana kuweka mafaili yaliyogeuzwa kukufaa ya DTL (kiolezo) katika Custom/Kernel/Output/HTML, ili kuchukua nafasi ya mafaili chaguo-msingi ya mfumo ya DTL kama inavyofanya kazi kwa mafaili ya Perl.
- Katika MsimamiziSMIME sasa inawezekana kuonyesha maudhui ya vyeti vinavyosomeka na binadamu.
- SysConfig sasa ina uwezo wa ku sanidi mipangilio ya aina za Tarehe na Tarehe Muda.

2.2.6.3. Ukuaji bora

2.2.6.3.1. Uwekaji nyaraka za tiketi umeboreshwa

- Wakati tiketi zinawekwa kwenye nyaraka, taarifa za tiketi au makala ambazo zinasomwa na wakala zinaweza kutolewa, pia kujiunga kwa wakala kwenye tiketi kunafutwa. Hii ipo hai kwa kawaida na inasaidia kupunguza idadi ya data katika hifadhidata kwenye mifumo mikubwa yenye tiketi na wakala wengi.
- Hii pia ni hati mpya ya kuondoa hii data kutoka kwenye nyaraka za tiketi zilizopo.
- Tiketi za kwenye nyaraka sasa zinaonekana kama 'soma' kwa wakala

2.2.6.3.2. Maboresho ya utendaji

- Usimamizi wa kipindi sasa ni mara 10 zaidi haraka, sana sana kukiwa na watumiaji hai wengi.
- Sasa inawezekana kuweka ukomo wa idadi ya wakala au watumiaji ambao wanatumia kwa pamoja/sambamba ili kuzuia kuzidiwa kwa uwezo wa seva.
- Punguzo kubwa katika nambari ya kauli za hifadhidata zilizotekelezwa katika mapitio ya tiketi na barakoa za tiketi katika mazingira ya mbele ya mteja na wakala.
 - Hii itapunguza mzigo kwenye seva za hifadhidata, sana sana kwenye mifumo mikubwa. Katika baadhi ya kesi OTRS itakuwa inaonekana kuwa na majibu zaidi (kama mfumo ulipunguzwa kasi na mzigo wa DB au ukawivu).
- Utendaji wa LDAP ulioboreshwa wa ulandanishi wa mtumiaji.
- Utendaji ulioboreshwa wa hifadhi muda wenye ma faili mengi ya hifadhi muda.

2.2.6.4. Ina upatanifu zaidi

2.2.6.4.1. Kiungo cha maswali yanayoulizwa mara kwa mara cha Kiolesurachakawaida

- Sasa inawezekana kuzipata data za moduli za maswali yanayoulizwa mara kwa mara (Hifadhidata ya maarifa ya OTRS) kupitia huduma ya tovuti (KiolesuraChaUjumla). Hii itakuwa ina faida kupachika makala za maswali yanayoulizwa mara kwa mara kwenye tovuti ya kampuni yako, kwa mfano.

2.2.7. Vipengele vipya vya OTRS 3.1

2.2.7.1. KIOLESURA CHA KAWAIDA - Kiunzi cha Huduma ya wavuti

- GI ni mfumo rahisi kuruhusu huduma ya mtandao kuunganishwa kwa OTRS na maombi ya tatu wa chama.
- OTRS ina pande mbili - kama mtoaji (seva, imeombwa kutoka mbali) au muombaji (mteja, muombaji wa mbali)
- Miunganiko ya huduma rahisi za tovuti inaweza kutengenezwa bila ya kuunda programu kwa kusanidi Kiolesura cha Ujumla.
- Mazingira changamano yanaweza kujulikana kwa kuongeza viendelezi vilivyogezwa kukufaa ambavyo vinaongeza kanuni za perl kwenye miundombinu ya kiolesura mi-chorokatika ngazi tofauti za ujenzi.
- *Viunganishi* Inafichua sehemu za OTRS kwa huduma za tovuti za Kiolesura cha Ujumla. Kwa mfano, kiunganishi cha tiketi kinafichua kazi za kutengeneza/kusasisha tiketi, ili zitumike katika huduma ya tovuti bila kujali usafiri gani wa mtandao unatumika.

- Mchakato wa mratibu wa daemon una msaada katika kushughulikia matukio solandanifu. Hii ni muhimu kuanzisha maombi ya huduma za tovuti solandanifukutoka kwenye OTRS kwenda kwenye mfumo mwingine, baada ya maombi ya wakala kujibiwa (mf. wakati tiketi imetengenezwa). Vinginevyo, inaweza kuzuia majibu, kusababisha kuongezeka kwa muda wa majibu kwa wakala.

Kwa Kiolesura cha Ujumla, huduma mpya za tovuti zinaweza kusanidiwa kwa urahisi kwa kutumia moduli za OTRS zilizopo, bila ya kanuni za ziada. Zinaweza kuunganishwa kutengeneza huduma mpya ya tovuti. Wakati wa kusanidi muunganiko mpya wa huduma ya mtandao, msimamizi inabidi aongeze:

- Huduma mpya ya wavuti katika kiolesura michoro cha mtumiaji cha msimamizi
- Metadata ya msingi (Aina ya usafiri (SOAP), URL na kadhalika) na
- Operesheni zilizopo (sehemu ya kiunganisho) na weka bayana jinsi data katika kila operesheni zitakavyounganishwa (zinazolingia na zinazotoka)

Kiolesura cha Ujumla cha Anaye eua kitasaidia msimamizi wa OTRS kukagua jinsi maombi yanavyolingia na jinsi yanavyoshughulikiwa katika matabaka tofauti.

2.2.7.1.1. Vipengele vya sasa

- Usafiri wa mtandano: SOAP/HTTP. Nyingine kama REST ma JSON zitaongezwa hapo mbele kutegemea na mahitaji ya wateja.
- Uunganishaji wa data za usanidi za Kiolesura Michoro cha Mtumiaji kwa ajili ya mabadiliko ya ufunguo/thamani kulingana na data zinazolingia na zinazotoka.
- Kieuaji michoro cha kukagua usanidi na mtiririko wa taarifa za huduma za tovuti zilizosanidiwa.
- Kiunganishi cha tiketi kinachoruhusu matumizi ya OTRS kama huduma ya tovuti inayoshughulikia tiketi.

2.2.7.1.2. Vipengele vya Baadaye

- Wasafirshaji wa mtandao wa ziada (REST, JSON).
- GI itabadili KishikoChaiPhone kama mazingira ya nyuma ya programu-tumizi za simu.
- Viunganishi vya ziada vitaongezwa kutoa sehemu nyingi zaidi za OTRS kutumika na huduma za wavuti (mf. kuruhusu utengenezaji, usasishaji, au ufutaji wa mawakala, watumiaji, huduma au CIs).

2.2.7.2. SEHEMU ZINAZOBADILIKA

Kipengele cha SehemuZinazobadilika kinachukua nafasi ya tiketi iliyopo na Nakala Huru ya Makala na Sehemu Huru ya Muda kwa umbizo linalobadilika ambayo pia itatengeneza fomu maalumu katika OTRS.

- Idadi ya sehemu isiyokuwa na ukomo inaweza kusanidiwa kwa kutumia kiolesura michoro cha mtumiaji kwa ajili ya usimamizi.
- Sehemu zina aina nyingi ambazo zinaweza kutumika kama tiketi na makala. Zilizopo kwa kawaida ni:
 - Nakala
 - Nakala ya mistari mingi
 - Kisanduku tiki

- Kunjuzi
- Chagua-nyingi
- Tarehe
- Tarehe na muda
- Aina mpya za sehemu za kawaida (mf. sehemu kawaida ya aina kunjuzi yenye kiini cha data cha nje) zinaweza kuongezwa kwa juhudi ndogo kwasababu sehemu hizo zime-tengenezwa katika njia ya moduli na zinaweza kuingizwa kirahisi.
- Mazingira yajayo ni, SehemuZinazobadilika zitaweza kutumika kwa vitu vingine tofauti na tiketi au katika moduli za kawaida. Kwa mfano, moduli ya kawaida inayoongeza vitu vitakavyoshughulikia "Oda" katika OTRS ingeweza kutumia SehemuZinazobadilika kuambatanisha data/sifa kwenye oda hizo.
- Hati ya kusasisha hifadhidata itabadilisha sehemu za Nakala Huru za historia na mipangilio ya usanidi unaohusiana kuwa muundo mpya.

2.2.7.3. MABORESHO YA USIMAMIZI WA TIKETI

2.2.7.3.1. Utengenezaji wa tiketi umeboreshwa

- Anwani za barua pepe tofauti sasa zinaweza kubaninishwa kama 'Kwa:', 'Nakala:', au 'Nakala fiche:' wakati wa kutengeneza simu mpya au tiketi ya barua pepe.

2.2.7.3.2. Usaidizi wa simu zinazolingia

- Simu zinazolingia sasa zinaweza kusajiliwa ndani ya tiketi zilizopo (mpaka sasa, simu zinazotoka tu ndio zilikuwa zinasajiliwa).

2.2.7.3.3. Kihakiki cha mapitio ya tiketi kimeboreshwa

- Inawezekana kutenga makala za watumaji wa aina fulani (mf. makala kutoka mawakala wa ndani) katika SysConfig zisionyeshwe kwenye moduli ya kihakiki cha mapitio.
- Aina fulani ya makala inaweza kusanidiwa na kuonyesha makala za aina hiyo kama zilivyopanuliwa kwa kawaida wakati muonekano umefikiwa.

2.2.7.3.4. Upelekaji wa tiketi umeboreshwa

- Skrini itakayo onyeshwa baada ya kuhamisha tiketi sasa inaweza kusanidiwa. Machaguo ni muonekano uliokuzwa wa tiketi (MuonekanoMwishoSkrini) au orodha ya tiketi (MapitioMwishoSkrini).

2.2.7.3.5. Vitendo vya mkupuo vimeboreshwa

- Na kitendo cha mkupuo, barua pepe zinazotoka sasa zinaweza kutumwa kwa muda mmoja. Kwa kuwa tiketi zinaweza kuwa na foleni tofauti, na hizi foleni kila moja inaweza kuwa na kiolezo tofauti, salamu na saini, hizi hazitumiki katika barua pepe ya Kitendo cha Mpito.
- Kitendo cha mkupuo cha ziada kinaruhusu kusanidi aina ya tiketi kwa tiketi zilizochaguliwa.

2.2.7.3.6. Usanidi wa Kukataa Anwani ya Barua pepe ya Mtumaji

- Hiki kipengele kinaruhusu kusanidi barua pepe badala ya anwani ya msimamizi kukataa utengenezaji wa tiketi mpya kwa barua pepe. Hiki kipengele kinaweza kutumika katika kesi zote ambapo wateja hawaruhusiwi kutengeneza tiketi mpya kwa barua pepe.

2.2.7.4. MCHAKATO OTOMATIKI

2.2.7.4.1. Matukio ya kupanda yameongezwa

- OTRS sasa itatengeneza matukio kwa kila aina ya upandaji (majibu, sasisha na azimio). Hii inaruhusu kufanya vitendo (kama taarifa) kabla ya upandaji kufanyika, wakati ukifanyika na wakati upandaji umeisha.

2.2.7.4.2. Mtambo wa taarifa umeboreshwa

- Moduli mpya ya taarifa za wakala wa ujumla inaruhusu msimamizi wa OTRS kufafanua ujumbe ambao utaonyeshwa katika mazingira ya mbele ya wakala wakati wakala anaingia kwenye mfumo.

2.2.7.4.3. Mahesabu ya muda yameboreshwa

- Aina zote za muda sasa zitatafutwa kwa na kutegemeana na seva ya programu-tumizi tu inayosuluhisha masuala hayo ambayo yamesababishwa na uhitilafiani kati ya muda wa masaa wa programu-tumizi na seva za hifadhidata.

2.2.7.4.4. WakalaWaKawaida ameboreshwa

- WakalaWaUjumla sasa anaweza kuchuja kwa muda wa kubadilisha tiketi.
- Kwa nyongeza, WakalaWaUjumla anaweza kuseti tiketi yenye jukumu la tiketi zilizo-fanana.

2.2.7.5. KIOLESURA CHA MTUMIAJI, NAKALA TAJIRI MCHARIRI, SETI KIBAMBO

2.2.7.5.1. Utendaji wa kiolesura cha mtumiaji umeboreshwa

- Kasi ya utungilizaji na muonekano wa makala umboreshwa, shukrani kwa Stelios Gikas <stelios.gikas@noris.net>!

2.2.7.5.2. Sasisha Mhariri Nakala Tajiri

- Usaidizi wa IOS5 umeongezwa
- Kuzuia quotes inaweza kushoto na kuingia muhimu.
- Usasishaji kutoka CKEditor 3.4 kwenda CKEditor 3.6, maboresho yanamaanisha utolewaji wa [CKEditor 3.5](#) na [CKEditor 3.6](#).
- Usaidizi wa IE9 umeboreshwa.
- Maongezi yanayoweza kubadilishwa ukubwa.

2.2.7.5.3. Msaada wa Msimbosare - Usimbaji wa Ndani Usio-wa-UTF-8 Umeachwa

- UTF-8 sasa ndiyo seti kibambo pekee inayoruhusiwa ya OTRS
- Mafaili yote ya lugha yanawekwa kwenye umbizo la UTF-8, ambalo linarahisisha jinsi zinavyoshughulikiwa na maboresho ya mbeleni ya utaratibu wa utafsiri.

2.2.7.6. USAIDIZI WA KIENDESHAJI CHA HIFADHIDATA

2.2.7.6.1. Utangamanifu wa KIENDESHAJI cha PostgreSQL umeboreshwa

- Usaidizi wa PostgreSQL 9.1 umeongezwa.

- Kiendeshaji kipya cha urith sasa kinapatikana kwa PostgreSQL 8.1 na matoleo ya nyuma.

2.2.7.6.2. Utangamanifu wa KIENDESHAJI cha MS SQL umeboreshwa

- Kiendeshi cha MS SQL sasa kinahifadhi data za jozi katika VARBINARY badala ya aina isiyokubalika ya NAKALA na pia NVARCHAR kuhifadhi tungo za nakala badala ya VARCHAR (kwa ajili ya msaada wa Msimbosare ulioboreshwa).

2.2.7.7. USHIRIKIANO WA BARUA

2.2.7.7.1. Utunzaji wa barua umeboreshwa

- Wakati wa kuunganisha kwenye akaunti za barua za IMAP, sasa inawezekana kushughulikia barua pepe kutoka kwenye kabrasha fulani la barua pepe, tofauti na kabrasha la KISANDUKU POKEZI.
- OTRS sasa inawza kuunganishwa kwenye seva za IMAP kwa kutumia Transport Layer security (TLS), ambayo ina manufaa kwa mazingira mapya yenye vikwazo.

2.3. Mahitaji ya programu na vifaa

OTRS inaweza kusakinishwa katika mifumo endeshi tofauti. OTRS inaweza kufanya kazi kwenye Linux na mifumo mingine ya Unix (mf. OpenBSD au FreeBSD). Unaweza kuitumia pia katika Microsoft Windows. OTRS haina mahitaji mengi ya vifaa. Tunashauri kutumia mashine yenye japo 2 GHz Xeon au CPU inayoendana nayo, 2 GB RAM, na kiendeshi diski kuu chenye 160 GB kwa ajili ya mpangiio mdogo.

Kuanzisha OTRS, utahitaji pia kutumia seva ya wavuti na seva ya hifadhidata. Kuachana na hilo, unatakiwa kusakinisha perl na/au kusakinisha baadhi ya moduli za ziada za perl kwenye mashine ya OTRS. Seva ya wavuti na Perl lazima zisakinishwe kwenye mashine sawa na OTRS. Mazingira ya nyuma ya hifadhidata yanaweza kusakinishwa kwa ndani au kwenye mwenyeji mwingine.

Kwa ajili ya seva ya tovuti, tunashauri utumiaji wa Seva ya Apache HTTP, kwasababu moduli yake ya mod_perl inaboresha kwa asilimia kubwa utendaji wa OTRS. Kuachana na hilo, OTRS inatakiwa kufanya kazi katika seva yoyote ya tovuti ambayo inaweza kutekeleza hati za Perl.

Unaweza kutumia OTRS katika hifadhidata tofauti. Unaweza kuchagua kati ya MySQL, PostgreSQL, Oracle, au Microsoft SQL Server. Kama ukitumia MySQL una faida kwamba hifadhidata na baadhi ya mipangilio ya mfumo inaweza kusanidiwa wakati wa usakinishaji, kupitia mazingira ya mbele ya wavuti.

Kwa ajili ya Perl, tunashauri kutumia japo toleo 5.8.8. Utahitaji baadhi ya moduli za ziada ambazo zinaweza kusakinishwa aidha kwa sheli ya Perl na CPAN, au kupitia meneja kifurushi wa mfumo endeshi wako (rpm, yast, apt-get).

Mahitaji ya programu

2.3.1. Usaidizi wa perl

- Perl 5.10 au zaidi

2.3.2. Usaidizi wa seva ya wavuti

- Apache2 + mod_perl2 au zaidi (inapendekezwa)
- Seva ya wavuti yenye usaidizi wa CGI (CGI haipendekezwi)

- Microsoft Internet Information Server (IIS) 6 au zaidi

2.3.3. Usaidizi wa hifadhidata

- MySQL 5.0 au zaidi
- PostgreSQL 8.0 au zaidi (8.2 au zaidi inashauriwa)
- Oracle 10g au zaidi
- Microsoft SQL Server 2005 au zaidi

Hiki kifungu katika mwongozo kuhusu usakinishaji wa moduli za Perl kinaelezea kwa undani jinsi unavyoweza kuanzisha vile vinavyohitajika na OTRS.

Kama ukisakinisha kifurushi jozi cha OTRS, ambacho kilitengenezwa kwa ajili ya mfumo endeshi wako (rpm, Windows-Kisakinishi), aidha kifurushi kina moduli zote za Perl zinazohitajika au meneja vifurushi wa mfumo wako anatakiwa kushughulikia utegemezi wa moduli za Perl zinazohitajika.

2.3.4. Usaidizi wa kivinjari wavuti

Kutumia OTRS, utakuwa SAWA kama ukitumia kivinjari cha kisasa ambacho msaada wa JavaScript umewezeshwa. Hatuna usaidizi kwa kivinjari vifuatavyo:

- Internet Explorer kabla ya toleo la 8
- Firefox kabla ya toleo la 10
- Safari kabla ya toleo la 5

Tunashauri mara zote kutumia toleo la hivi karibuni la kivinjari chako, kwa sababu ina utendaji bora wa JavaScript na utungilizaji. Utofauti mkubwa wa utendaji kati ya kivinjari vilivyotumika unaweza kutokea na data nyingi au mifumo mikubwa. Tunafurahia kukushauri katika suala hili.

2.4. Jamii

OTRS ina jamii kubwa ya watumiaji. Watumiaji na watengenezaji wanajadili OTRS na kubadilishana taarifa kuhusu maswaka husika kupitia orodha ya watumiwa. Unaweza kutumia orodha ya watumiwa kujadili usakinishaji, usanidi, matumizi, undani na uendelezaji wa OTRS. Unaweza kuripoti makosa ya programu katika mfumo wetu wa kufuatilia makosa.

Kurasa ya nyumbani ya jamii ya OTRS ni: <http://www.otrs.com/open-source/>.

2.5. Huduma za kitaalamu za OTRS

Ikiwa unahitaji msaada katika kusanidi au kugeuza kukufaa OTRS au unataka kuwa upande wenye usalama usisite kuwasiliana nasi: Tunatoa huduma pana ya kitaaluma kama msaada kwa kampuni kubwa dunia nzima, ushauri na uhandisi ikijumuisha ubunifu wa michakato, utekelezaji, kugeuza kukufaa, msaada wa programu, na huduma zinazosimamiwa kikamilifu.

[Mikataba yetu ya Huduma](#) inahakikisha msaada wa hapo hapo na msaada wa kitaalamu pia utathmini wa msaada na mwisho ufikivu wa bure kwa [vifaa vya nyongeza vya vipengele vya OTRS](#) - vipengele vya nyongeza vya muhimu vya OTRS yako.

OTRS Group inatoa [programu maalumu za mafunzo](#) katika nchi tofauti. Unaweza kushiriki katika aidha moja ya mafunzo yetu ya umma ya Msimamizi wa OTRS ambayo hufanyika

mara kwa mara, au kufaidika na mafunzo ya ndani ambayo yanapitia mahitaji yote ya kampuni yako.



Chapter 2. Usanikishaji

Hii sura inaelezea usakinishaji na usanidi wa msingi wa kiunzi cha kati cha OTRS. Ina shughulikia taarifa kuhusu usakinishaji wa OTRS kutoka kwenye chanzo, au kwa kifurushi jozi kama vile RPM au kitekelezwaji cha Windows.

Mada zinazopitiwa hapa zinahusu usanidi wa seva za tovuti na za hifadhidata, kiolesura kati ya OTRS na hifadhidata, usakinishaji wa moduli za ziada za Perl, kuseti haki sawa za ufikivu za OTRS, kuanzisha kazi za mfumo zilizopangwa za OTRS, na baadhi ya mipangilio ya msingi katika mafaili ya usanidi ya OTRS.

Fuata hatua hizi za undani katika sura hii kusakinisha OTRS katika seva yako. Kisha utaweza kutumia kiolesura chake cha tovuti kuingia na kusimamia mfumo.

1. Njia rahisi - Usakinishaji wa vifurushi vilivyojengwa tayari

Kama inapatikana kwenye jukwaa lako unatakiwa kutumia vifurushi ambavyo tayari vime-tengenezwa kusakinisha OTRS, kwa kuwa ni njia rahisi na inayowezekana. Unaweza kuzipata kwenye eneo la kupakua katika <http://www.otrs.com>. Vifungu vifwatavyo vinafafanua usakinishaji wa OTRS kwa kutumia vifurushi vilivyotengenezwa tayari au jozi katika SUSE, Red Hat na mfumo ya Microsoft Windows. Kama tu hutaweza kutumia vifurushi vilivyotengenezwa tayari kwa sababu fulani ndio utafwata mchakato wa kawaida.

1.1. Kusakinisha RPM katika seva ya Linux ya SUSE

Hiki kifungu kinaelezea usakinishaji wa kifurushi chetu cha RPM katika seva ya SUSE Linux. Tumejaribisha katika matoleo yote ya hivi karibuni ya SLES na openSUSE. Kabla hujaanza usakinishaji, tafadhali tembelea <http://www.otrs.com/downloads> na hakikisha unatumia kifurushi cha hivi karibuni cha OTRS RPM kinachopatikana.

1.1.1. Kuandaa hifadhidata kwa ajili ya OTRS

Unaweza kutumia OTRS katika mazingira ya nyuma tofauti ya hifadhidata: MySQL, PostgreSQL, Oracle au Microsoft SQL Server. Hifadhi data maarufu sana ya kuweka OTRS ni MySQL. Hii sura inaonyesha hatua unazotakiwa kuchukua kusanidi MySQL katika seva inayojikita kwenye SUSE. Bila shaka unaweza kusakinisha hifadhidata kwenye seva ya hifadhidata iliyojitolea kama ikihitajika kwa ajili ya mabadiliko kufanyika kiurahisi na sababu nyingine.

Note

Kama ukifwatat sura hii katika openSUSE 12.3 na kuendelea hutaweza kusakinisha MySQL lakini MariaDB badala yake, uma wa MySQL tangamanifu wakanuni za MySQL. Hili sio tatizo, itafanya kazi vizuri tuu (na hata vizuri zaidi wakati mwingine).

Sakinisha MySQL kwa kutekeleza amri ifuatayo kama mzizi:

```
linux:~ # zypper install mysql perl-DBD-mysql
```

Hii itasakinisha MySQL na machaguo-msingi kwenye mfumo wako. Utahitaji kubadili machaguo-msingi ili kufanya iwe kwa ajili ya OTRS yako. Kwa kutumia kihariri nakala fungua faili `/etc/my.cnf` na badili mstari wenye **max_allowed_packet** ndani yake, na ongeza mstari hapa chini, kama hivi:

```
max_allowed_packet=20M
query_cache_size=32M
```

Sasa tekeleza **rcmysql restart** kuanzisha upya seva ya hifadhi data na kuamilisha mabadiliko haya. Kisha anzisha `/usr/bin/mysql_secure_installation` na fuata maelekezo ya kwenye skrini kuseti nywila mzizi ya hifadhidata, ondoa ufikivu bila jina na ondoa hifadhidata ya majaribio. Mwisho, anzisha **chkconfig -a mysql** ili kuhakikisha mysql inaanzishwa kiotomatiki muda seva inapoanza.

1.1.2. Kusakinisha OTRS

Sakinisha OTRS kupitia tungo amri kwa kutumia **zypper**. Hii pia itavuta utegemezi kama seva ya wavuti ya apache na baadhi ya moduli za Perl. Hakikisha umenakili faili la OTRS RPM kwenda kwenye mpangilio orodha wa sasa.

```
otrs-sles:~ # zypper install otrs-3.3.*.rpm
....
Retrieving package otrs-3.3.3-01.noarch (1/26), 17.5 MiB (74.3 MiB unpacked)
Installing: otrs-3.3.3-01 [done]
Additional rpm output:
Check OTRS user ... otrs added.

Next steps:

[start database and Apache]
Make sure your database is running and execute 'rcapache2 restart'.

[install the OTRS database]
Use a webbrowser and open this link:
http://myserver.example.com/otrs/installer.pl

[OTRS services]
Start OTRS 'rcotrs start-force' (rcotrs {start|stop|status|restart|start-force|
                                stop-force}).

((enjoy))

Your OTRS Team
http://otrs.org/

otrs-sles:~ #
```

Hati: Amri ya kusakinisha OTRS.

Usakinishaji wa OTRS umekamilika. Anzisha seva yako ya wavuti kupakia mabadiliko maalumu ya OTRS katika usanidi wake, kama ilivyoonyeshwa kwenye hati chini. Pia anzisha **chkconfig** kuhakikisha OTRS inaanzishwa kiotomatiki seva inapojiwasha upya.

```
otrs-sles:~ # chkconfig -a apache2
apache2          0:off 1:off 2:off 3:on  4:off 5:on  6:off
otrs-sles:~ # rcapache2 start
Starting httpd2 (prefork) httpd2-prefork: Could not reliably determine the server's fully
qualified domain name, using 10.x.x.x for ServerName

done
```

```
otrs-sles:~ #
```

Hati: Kuanzisha seva ya wavuti.

1.1.3. Kusakinisha moduli za perl za ziada.

OTRS inahitaji moduli zaidi ya zinazoweza kusakinishwa na RPM. Unaweza kuzisakinisha baadaye kwa mikono. Unaweza kukagua moduli gani hauna kwa kuanzisha hati bin/otrs.CheckModules.pl inayopatikana kwenye mpangilio orodha /opt/otrs. Baadhi ya moduli zinahitajika kwa ajili ya sifa za hiari tu, kama mawasiliano na seva ya(z) IMAP au uzalishaji wa PDF. Kwenye SLES unatakiwa kuongeza hifadhi ya nje kwenye usanidi wa zypper ili kupata moduli zinazohitajika kwa ajili ya mfumo wako. Chagua moduli inayohitajika na toleo lako la mfumo endeshi kutoka hapa: <http://download.opensuse.org/repositories/devel:/languages:/perl/>. Ongeza hifadhi kama hii kwa ajili ya SLES 11 SP2:

```
zypper ar -f -n perl http://download.opensuse.org/repositories/devel:/languages:/perl/SLE_11_SP2 Perl
```

Kwenye openSUSE 12.3 hifadhi ya ziada inahitajika kwa ajili ya moduli Mail::IMAPClient tu, kama utahitaji kama unahitaji kukusanya barua kutoka kwenye seva ya IMAP inayolindwa na TLS. Mstari husika utaonekana kama hivi:

```
zypper ar -f -n perl http://download.opensuse.org/repositories/devel:/languages:/perl/openSUSE_12.3/ Perl
```

Mara ya kwanza unatumia zypper baada ya kuongeza hii hifadhi, utaombwa kuweka ufun-guo wake. Sasa unaweza kusakinisha moduli zinazokosekana kama hapa chini.

```
otrs-sles:/opt/otrs # zypper install -y "perl(YAML::LibYAML)"
Refreshing service 'susecloud'.
Retrieving repository 'perl' metadata [\]

New repository or package signing key received:
Key ID: DCCA98DDDCEF338C
Key Name: devel:languages:perl OBS Project <devel:languages:perl@build.opensuse.org>
Key Fingerprint: 36F0AC0BCA9D8AF2871703C5DCCA98DDDCEF338C
Key Created: Wed Oct 10 22:04:18 2012
Key Expires: Fri Dec 19 22:04:18 2014
Repository: perl

Do you want to reject the key, trust temporarily, or trust always? [r/t/a/?] (r): a
Retrieving repository 'perl' metadata [done]
Building repository 'perl' cache [done]
Loading repository data...
Reading installed packages...
'perl(YAML::LibYAML)' not found in package names. Trying capabilities.
Resolving package dependencies...

The following NEW package is going to be installed:
perl-YAML-LibYAML

The following package is not supported by its vendor:
perl-YAML-LibYAML

Retrieving package perl-YAML-LibYAML-0.38-12.4.x86_64 (1/1), 75.0 KiB (196.0 KiB unpacked)
Retrieving: perl-YAML-LibYAML-0.38-12.4.x86_64.rpm [done (55.7 KiB/s)]
Installing: perl-YAML-LibYAML-0.38-12.4 [done]
```

Hatua inayofuata ni kusanidi OTRS kwa kutumia kisanishi cha wavuti, kama ilivyoeleze-wa katika kifungu hiki.

1.2. Kusakinisha OTRS katika mifumo endeshi ya Red Hat Enterprise Linux au CentOS system

Hiki kifungu kinaelezea usakinishaji wa kifurushi chetu cha RPM kwenye seva ya Red Hat Enterprise Linux (RHEL) au CentOS. Kwa OTRS 3.3 na kuendelea, RHEL 6 au CentOS 6 inahitajika, toleo la 5 halina msaada. Kabla ya kuanza usakinishaji, tafadhali tembelea <http://www.otrs.com/downloads> na hakikisha unatumia kifurushi cha hivi karibuni cha OTRS RPM kinachopatikana.

1.2.1. Kuandaa hifadhidata kwa ajili ya OTRS

Unaweza kutumia OTRS kwa kutumia mazingira ya nyuma tofauti: MySQL, PostgreSQL, Oracle or Microsoft SQL Server. Hifadhidata maarufu kuweka kwenye OTRS ni MySQL. Hii sura inaonyesha hatua unazohitaji kupitia kusanidi MySQL kwenye seva ya RHEL. Bila shaka unaweza kusakinisha hifadhidata kwenye seva ya hifadhidata iliyojitolea kwa ajili ya kubadilisha kirahisi na sababu nyingine.

Sakinisha MySQL kwa kutekeleza amri ifuatayo kama mzizi:

```
[root@otrs-centos6 ~]# yum -y install mysql-server
```

Hii itasakinisha MySQL na machaguo-msingi kwenye mfumo wako. Utahitaji kubadili machaguo-msingi ili kufanya iwe kwa ajili ya OTRS yako. Kwa kutumia kihariri nakala fun-gua faili /etc/my.cnf na ongeza mistari miwili inayofwata chini ya kifungu [mysqld]:

```
max_allowed_packet=20M
query_cache_size=32M
```

Sasa tekeleza **service mysqld start** kuanzisha upya seva ya hifadhidata na kuamilisha mabadiliko haya. Kisha anzisha **/usr/bin/mysql_secure_installation** na fuata maelekezo ya kwenye skrini kuseti nywila mzizi ya hifadhidata, kuondoa ufikivu bila jina na kuondoa hifadhidata ya majaribio. Mwisho, anzisha **chkconfig mysqld on** ili kuhakikisha mysql inaanza kiotomatiki muda seva inapoanza.

1.2.2. Kusakinisha OTRS

Sakinisha OTRS kupitia tungo amri kwa kutumia **yum**. Hii pia itavuta utegemezi kama seva ya wavuti ya apache na baadhi ya moduli za Perl. Hakikisha umenakili faili la OTRS RPM kwenda kwenye mpangilio orodha wa sasa.

```
[root@otrs-centos6 ~]# yum install --nogpgcheck otrs-3.3.*.rpm
```

```
...
Dependencies Resolved
```

Package	Arch	Version	Repository	Size
Installing:				
otrs	noarch	3.3.3-01	/otrs-3.3.3-01.noarch	74 M
Installing for dependencies:				
apr	x86_64	1.3.9-5.el6_2	updates	123 k
...				
procmail	x86_64	3.22-25.1.el6	base	163 k

```
Transaction Summary
```

```

=====
Install      26 Package(s)

Total size: 80 M
Total download size: 6.0 M
Installed size: 88 M
Downloading Packages:
(1/25): apr-1.3.9-5.el6_2.x86_64.rpm          | 123 kB    00:00
...
(25/25): procmail-3.22-25.1.el6.x86_64.rpm   | 163 kB    00:00
-----
Total                                          887 kB/s | 6.0 MB    00:06
Running rpm_check_debug
Running Transaction Test
Transaction Test Succeeded
Running Transaction
  Installing : apr-1.3.9-5.el6_2.x86_64      1/26
  ...
  Installing : otrs-3.3.3-01.noarch         26/26
Check OTRS user ... otrs added.

Next steps:

[httpd services]
Restart httpd 'service httpd restart'

[install the OTRS database]
Make sure your database server is running.
Use a web browser and open this link:
http://myserver.example.com/otrs/installer.pl

[OTRS services]
Start OTRS 'service otrs start' (service otrs {start|stop|status|restart}).

((enjoy))

Your OTRS Team

Installed:
  otrs.noarch 0:3.3.3-01

Dependency Installed:
  ...

Complete!
[root@otrs-centos6 ~]#

```

Hati: Amri ya kusakinisha OTRS.

Usakinishaji wa OTRS umekamilika. Sasa unatakiwa kuhakikisha kwamba Apache imeanzishwa na kwamba inaanza wakati wote seva inapojiwasha upya.

```

[root@otrs-centos6 ~]# chkconfig httpd on
[root@otrs-centos6 ~]# service httpd start
Starting httpd: httpd: Could not reliably determine the server's fully qualified domain
name, using 10.x.x.x for ServerName [ OK ]
[root@otrs-centos6 ~]#

```

Hati: Kuanzisha seva ya wavuti.

1.2.3. Kusakinisha moduli za perl za ziada.

OTRS inahitaji baadhi ya moduli zaidi ya zilizosakinishwa na RPM. Unaweza kuzisakinisha baadaye kwa mikono. Unaweza kuona moduli gani unakosa kwa kuanzisha hati bin/otrs.CheckModules.pl iliyopo kwenye mpangilio orodha /opt/otrs. Baadhi ya moduli zinahitajika tu kwa ajili ya sifa za hiari, kama mawasiliano na seva ya (za) IMAP au uzalishaji wa PDF. Kwenye Redhat au CentOS tunashauri kusakinisha hizi moduli kutoka kwenye

hifadhi ya EPEL, hifadhi inayodumishwa na mradi wa Fedora, ambayo inatoa vifurushi vya ubora wa juu kwa ajili ya RHEL na vipengele vyake. Kwa taarifa zaidi angalia [tovuti ya EPEL](#).

Kama uko kwenye RHEL 6 au CentOS 6, unaweza kupata kifurushi cha hivi karibuni kutoka [tovuti hii](#). Unaweza kuongeza hii hifadhi kwenye yum moja kwa moja kwa kunakili URL ya RPM utakayoikuta kwenye kurasa hii na kutekeleza hili agizo:

```
[root@otrs-centos6 otrs]# yum -y install http://download.fedoraproject.org/pub/epel/6/i386/epel-release-6-8.noarch.rpm
Loaded plugins: security
Setting up Install Process
epel-release-6-8.noarch.rpm | 14 kB 00:00
Examining /var/tmp/yum-root-7jrJef/epel-release-6-8.noarch.rpm: epel-release-6-8.noarch
Marking /var/tmp/yum-root-7jrJef/epel-release-6-8.noarch.rpm to be installed
Resolving Dependencies
--> Running transaction check
--> Package epel-release.noarch 0:6-8 will be installed
--> Finished Dependency Resolution

Dependencies Resolved

=====
Package Arch Version Repository Size
=====
Installing:
epel-release noarch 6-8 /epel-release-6-8.noarch 22 k
Transaction Summary
=====
Install 1 Package(s)

Total size: 22 k
Installed size: 22 k
Downloading Packages:
Running rpm_check_debug
Running Transaction Test
Transaction Test Succeeded
Running Transaction
Installing : epel-release-6-8.noarch 1/1
Verifying : epel-release-6-8.noarch 1/1

Installed:
epel-release.noarch 0:6-8

Complete!
[root@otrs-centos6 otrs]#
```

Mara ya kwanza kutumia yum baada ya kuongeza hifadhi hii, utaombwa kuweka ufunguo wake. Sasa unaweza kusakinisha moduli zinazokosekana kama hapa chini:

```
[root@otrs-centos6 otrs]# yum -y install "perl(Text::CSV_XS)"
Loaded plugins: security
Setting up Install Process
Resolving Dependencies
--> Running transaction check
--> Package perl-Text-CSV_XS.x86_64 0:0.85-1.el6 will be installed
--> Finished Dependency Resolution

Dependencies Resolved

=====
Package Arch Version Repository Size
=====
Installing:
perl-Text-CSV_XS x86_64 0.85-1.el6 epel 71 k
Transaction Summary
=====
```

```
Install      1 Package(s)

Total download size: 71 k
Installed size: 154 k
Downloading Packages:
perl-Text-CSV_XS-0.85-1.el6.x86_64.rpm | 71 kB    00:00
warning: rpmts_HdrFromFdno: Header V3 RSA/SHA256 Signature, key ID 0608b895: NOKEY
Retrieving key from file:///etc/pki/rpm-gpg/RPM-GPG-KEY-EPEL-6
Importing GPG key 0x0608B895:
  Userid : EPEL (6) <epel@fedoraproject.org>
  Package: epel-release-6-8.noarch (@/epel-release-6-8.noarch)
  From    : /etc/pki/rpm-gpg/RPM-GPG-KEY-EPEL-6
Is this ok [y/N]: y
Running rpm_check_debug
Running Transaction Test
Transaction Test Succeeded
Running Transaction
  Installing : perl-Text-CSV_XS-0.85-1.el6.x86_64      1/1
  Verifying  : perl-Text-CSV_XS-0.85-1.el6.x86_64      1/1

Installed:
  perl-Text-CSV_XS.x86_64 0:0.85-1.el6

Complete!
[root@otrs-centos6 otrs]#
```

Hatua inayofuata ni kusanidi OTRS kwa kutumia kisanishi cha wavuti, kama ilivyoelezwa katika kifungu hiki.

1.2.4. Usakinishaji wa kiendeshi cha hifadhidata ya Oracle kwenye Red Hat / CentOS

Kama unataka kutumia OTRS kwenye hifadhidata Oracle, utahitaji kukusanya-zalisha na kusakinisha kiendeshi cha hifadhidata DBD::Oracle. Hii ni ngumu kidogo kusakinisha zaidi ya vifurushi vingine; hii ni kwasababu Oracle ni hifadhidata inayomilikiwa kibinafsi na si mradi wa Red Hat wala Centos unaruhusiwa kusambaza viendeshi katika hifadhi zao za RPM.

Kwanza kabisa tutahitaji kusakinisha gcc, make na CPAN ili tuweze kukusanya-zalisha na kusakinisha kiendeshi. Chini unaona amri katika CentOS; katika matoleo mengine inaweza kuonekana tofauti kidogo.

```
[root@otrs-centos6 otrs]# yum -y install gcc make "perl(CPAN)"
```

Hatua inayofuata ni kupata na kusakinisha programu ya hifadhidata. Kwa hili utahitaji kujiunga kwa ajili ya akaunti ya bure katika tovuti ya Oracle. Unaweza kupakua viendeshi katika ukurasa huu: <http://www.oracle.com/technetwork/database/features/instant-client/index-097480.html> Tafadhali chagua toleo la x86 au x86-64 la Linux kwa kutegemea na muundo wa mfumo wako. Unaweza kukagua hili kwa kutumia **uname -i**. Ni aidha 'x86_64' kwa ajili ya x86-64 au 'i386' kwa ajili ya x86. Unatakiwa kupakua vifurushi 'Instant Client Package - Basic', 'Instant Client Package - SQL*Plus', na 'Instant Client Package - SDK'. Zihifadhi mahali kwenye diski yako. Sasa kama mtumiaji mzizi unaweza kusakinisha vifurushi hivyo kwa kutumia amri ifuatayo:

```
[root@otrs-centos6 otrs]# yum install oracle-instantclient*
```

Baada ya hii unatakiwa kuseti vishika nafasi vya mazingira viwili na kusanya-zalisha kiendeshi cha DBD::Oracle. Kwa mara nyingine, fanya kazi hizi kama mtumiaji mzizi. Hatua zimeorodheshwa chini. Tafadhali tambua kwa ajili ya ufupisho baadhi ya mistari iliyotolewa na amri imeondolewa.

```
[root@otrs-centos6 otrs]# export ORACLE_HOME=/usr/lib/oracle/11.2/client64
[root@otrs-centos6 otrs]# export LD_LIBRARY_PATH=$ORACLE_HOME/lib
[root@otrs-centos6 otrs]# cpan
cpan[1]> look DBD::Oracle
...
Fetching with LWP:
  http://www.perl.org/CPAN/authors/id/P/PY/PYTHIAN/CHECKSUMS
Checksum for /root/.cpan/sources/authors/id/P/PY/PYTHIAN/DBD-Oracle-1.62.tar.gz ok
Scanning cache /root/.cpan/build for sizes
DONE
...
Working directory is /root/.cpan/build/DBD-Oracle-1.62-ZH6LNy
[root@localhost DBD-Oracle-1.62-ZH6LNy]# perl Makefile.PL
...
[root@localhost DBD-Oracle-1.62-ZH6LNy]# make
...
[root@localhost DBD-Oracle-1.62-ZH6LNy]# make install
...
cpan[2]> exit
Terminal does not support GetHistory.
Lockfile removed.
```

Sasa unatakiwa kuhariri faili Kernel/Config.pm kutoa ORACLE_HOME. Hatua inayofuata ni kusanidi OTRS kwa kutumia kisakinishi cha tovuti, kama ilivyoelezwa katika hiki kifungu .

1.3. Kusakinisha OTRS kwenye mfumo wa Debian au Ubuntu

Important

Tafadhali sakinisha OTRS kutoka kwenye chanzo, na usitumie vifurushi vya OTRS ambavyo vinatolewa na Debian/Ubuntu.

Usakinishaji wa moduli za Perl zinazotakiwa ni rahisi zaidi kama ukitumia vifurushi vilivyo:

```
apt-get install libapache2-mod-perl2 libdbd-mysql-perl libtimedate-perl libnet-dns-perl \
  libnet-ldap-perl libio-socket-ssl-perl libpdf-api2-perl libdbd-mysql-perl libsoap-lite-
perl \
  libgd-text-perl libtext-csv-xs-perl libjson-xs-perl libgd-graph-perl libapache-dbi-perl
```

1.4. Kusakinisha OTRS kwenye mfumo ya Microsoft Windows

1.4.1. Kutumia Kisakinishi cha Windows

Kusakinisha OTRS katika mfumo wa Microsoft Windows ni rahisi sana. Pakua kisakinishi cha hivi karibuni kwa ajili ya Win32 kutoka <http://www.otrs.com/try/> na hifadhi faili hilo kwenye mfumo wako wa ndani wa mafaili. Kisha kirahisi bofya mara mbili kwenye faili kutekeleza kisakinishi, na fuata hatua chache za usakinishaji kuseti mfumo. Sogora ya usakinishaji itashughulikia kusakinisha vijenzi vyote vya OTRS. Hatua inayofwata ni kusanidi OTRS kwa kutumia kisakinishi cha wavuti, kama ilivyoelezwa katika kifungu hiki.

Important

Kisakinishi cha Windows cha OTRS kina vijenzi vyote vinavyohitajika kwa ajili ya OTRS, mf. seva ya wavuti ya Apache, seva ya hifadhidata ya MySQL, Perl (yenye

moduli zote zinazohitajika) na cron kwa ajili ya Windows. Hata hivyo unaweza kutumia kuseti OTRS kwenye Seva ya Wavuti ya Microsoft IIS badala ya Apache. Pia unaweza kuchagua kutoiruhusu kusakinisha MySQL iliyo kwenye furushi, kwa mfano unataka kutumia kwenye hifadhidata ya kati ya MySQL; hifadhidata ya PostgreSQL, kwenye Seva ya Microsoft SQL au kwenye Oracle.

1.4.2. Usakinishaji wa kiendeshi cha hifadhidata ya Oracle kwenye Windows

Kama ukisakinisha OTRS kwa kutumia Kisakinishi cha Windows, ita sanidi moduli zote za Perl kiotomatiki ambazo utahitaji. Ila kama unahitaji kutumia OTRS katika hifadhidata ya Oracle, utahitaji kusakinisha kiendeshi cha Oracle baadaye. Hii inahitajika kwa sababu hakuna kiendeshi kutoka chanzo huru cha kwa ajili ya Oracle kinachopatikana; haturuhusiwi kukigawa upya katika kifurushi cha OTRS. Kuna perl za aina mbili ambazo tunaweza kutumia katika Windows; unaweza kuchagua Strawberry Perl, ambayo ni chaguo-msingi na inashauriwa mipangilio ya uthibitisho wa dhana; au unaweza kuchagua perl ya Hali Hai ambayo unapakua na kusakinisha kitofauti. Hili chaguo la mwisho linashuriwa kwa mipangilio ya uzalishaji.

1.4.2.1. Usakinishaji wa DBD::Oracle kwenye ActiveState Perl

Kama umesakinisha ActiveState Perl tayari inakuja na kiendeshi cha hifadhidata cha Perl DBD::Oracle hii tu ndiyo inatakiwa iunganishwe na programu Oracle C. OTRS inafanya kazi kwenye ActiveState Perl ya biti 32 tu. Hii inamaanisha unatakiwa pia kupakua programu ya Oracle ya biti 32. Nenda kwenye tovuti ya programu ya Oracle [Instant Client Downloads for Microsoft Windows \(32-bit\)](#) na chagua 'Instant Client Package - Basic'. Itakubidi kujiandikisha akaunti ya bure ya Tovuti ya Oracle ili kupakua programu hiyo. Dondoa kilichopakuliwa, faili la zip, kwenda kwenye mzizi wa kiendeshi chako, kwa mfano C:\instantclient_11_2.

Sasa unatakiwa kuongeza maktaba za mteja kwenye njia yako na kuseti kishika nafasi cha mazingira;'ORACLE_NYUMBANI'. Nenda kwenye Paneli Dhibiti > Mfumo na Ulinzi > Mfumo, chagua 'Kiwango cha Juu cha Mipangilio ya Mfumo', bofya kwenye 'Mpya' chini ya 'Vishika nafasi vya mfumo' ingiza 'ORACLE_NYUMBANI' kama Jina la Kishika nafasi na tumia 'C:\instantclient_11_2' kama Thamani ya Kishika nafasi. Chagua kishika nafasi cha 'NJIA', na ongeza mpangilio orodha 'C:\instantclient_11_2' kwenye njia. Kama sasa ukianzisha kipindi kipya cha cmd.exe na kuanzisha hati otrs.CheckModules.pl iliyo kwenye mpangilio orodha OTRS, unatakiwa kuona kwamba DBD::Kiendeshaji cha oracle kimesakinishwa kikamilifu. Baada ya hapa, unatakiwa kuanzisha upya mfumo ili programu-tumizi nyingine kutambua vishika nafasi vipya vya mazingira.

1.4.2.2. Usakinishaji wa DBD::Oracle kwenye Strawberry Perl

Ili kukusanya-zalisha moduli ya DBD::Oracle, unahitaji kuwa umesakinisha vijenzi vya kisakinishi cha wavuti cha OTRS katika njia isiyokuwa na nafasi. HAITAKIWI kuwa katika C:\Program Files\OTRS lakini katika C:\OTRSComponents au inayofanana.

Katika Perl ya Strawberry unatakiwa kukusanya-zalisha kiendeshi cha Oracle kwa mikono. Kisakinishi cha windows cha OTRS kinakusanya Strawberry perl ya biti 32. Hii inamaanisha unatakiwa pia kupakua programu ya Oracle ya biti 32. Nenda kwenye tovuti ya programu ya Oracle [Instant Client Downloads for Microsoft Windows \(32-bit\)](#) na pakua vifurushi 'Instant Client Package - Basic', 'Instant Client Package - SQL*Plus', na 'Instant Client Package - SDK'. Itabidi ufungue Akaunti ya tovuti ya Oracle ya bure ili kuoakua programu hiyo. Pata dondoo ya ulivyopakua, mafaili yote yaliyo kwenye zip, kwenda kwenye mzizi wa kiendeshi chako, kwa mfano C:\instantclient_11_2.

Sasa unatakiwa kuongeza maktaba za wateja kwenye njia yako na kuseti kishika nafasi cha mazingira;'ORACLE_NYUMBANI'. Nenda kwenye Paneli Dhibiti >Mfumo na Usalama >

Mfumo, chagua 'Kiwango cha juu cha Mipangilio ya Mfumo', bofya kwenye 'Mpya' chini ya 'vishika nafasi vya Mfumo', ingiza 'ORACLE_NYUMBANI' kama Jina la Kishika nafasi na tumia 'C:\instantclient_11_2' kama Thamani ya Kishika nafasi. Chagua kishika nafasi 'NJIA', na ongeza mpangilio orodha 'C:\instantclient_11_2' kwenye njia. Baada ya hapa unatakiwa kuanzisha upya mfumo ili programu-tumizi nyingine kutambua vishika nafasi vipya vya mazingira.

Sasa unaweza kukusanya-zalisha na kusakinisha moduli ya DBD::Oracle. Kwa hii, fungua dirisha la cmd.exe, na anzisha programu ya cpan. Pakua na kupata dondoo ya DBD::Oracle kupitia **look DBD::Oracle**, kisha andika **perl Makefile.PL**, **dmake** na **dmake install**. Matokeo ya mfano yapo chini hapa.

```
C:\Users\max>cpan

cpan shell -- CPAN exploration and modules installation (v1.9800)
Enter 'h' for help.

cpan> look DBD::Oracle
Database was generated on Thu, 16 May 2013 14:52:41 GMT
Running look for module 'DBD::Oracle'

Trying to open a subshell in the build directory...
....
C:\OTRSCO~1\StrawberryPerl\cpan\build\DBD-Oracle-1.62-kq6los>perl Makefile.PL
Using DBI 1.623 (for perl 5.016003 on MSWin32-x86-multi-thread) installed in C:/
OTRSCOMPONENTS/StrawberryPerl/perl/vendor/lib/auto/DBI/

Configuring DBD::Oracle for perl 5.016003 on MSWin32 (MSWin32-x86-multi-thread)

...
Checking if your kit is complete...
Looks good
LD_RUN_PATH=c:/instantclient_11_2/lib;c:/instantclient_11_2/rdbms/lib
Using DBD::Oracle 1.62.
Using DBD::Oracle 1.62.
Using DBI 1.623 (for perl 5.016003 on MSWin32-x86-multi-thread) installed in C:/
OTRSCOMPONENTS/StrawberryPerl/perl/vendor/lib/auto/DBI/
Writing Makefile for DBD::Oracle
Writing MYMETA.yml and MYMETA.json
...

C:\OTRSCO~1\StrawberryPerl\cpan\build\DBD-Oracle-1.62-kq6los>dmake
... lots of output and compiler warnings ...

C:\OTRSCO~1\StrawberryPerl\cpan\build\DBD-Oracle-1.62-kq6los>dmake install
Files found in blib\arch: installing files in blib\lib into architecture depende
nt library tree
Installing C:\OTRSCO~1\StrawberryPerl\perl\site\lib\auto\DBD\Oracle\dbdimp.h
...
Appending installation info to C:\OTRSCO~1\StrawberryPerl\perl\lib\perllocal.pod

C:\OTRSCO~1\StrawberryPerl\cpan\build\DBD-Oracle-1.62-kq6los>exit

cpan> quit
Lockfile removed.

C:\Users\max>
```

1.4.2.3. Sanidi OTRS kwa kutumia Kisakinishi cha Wavuti

Kisakinishi cha tovuti kinaweza kutumika kusanidi mipangilio ya msingi ya OTRS kama ilivyoelezewa katika kipengele hiki.

2. Usaninishaji kutoka kwenye chanzo (Linux, Unix)

2.1. Kuandaa usakinishaji kutoka kwenye chanzo

Kama unataka kusakinisha OTRS kutoka kwenye chanzo, kwanza pakua nyaraka kama faili .tar.gz, .tar.bz2, au .zip kutoka <http://www.otrs.com/try/>

Pakua nyaraka (kwa mfano, kwa kutumia **tar**) kwenda kwenye mpangilio orodha /opt, na upa mpangilio orodha jina jipya kutoka otrs-x.x.x kuwa otrs (ona Hati chini).

```
linux:/opt# tar xf /tmp/otrs-x.x.x.tar.gz
linux:/opt# mv otrs-x.x.x otrs
linux:/opt# ls
otrs
linux:/opt#
```

Hati: Hatua za kwanza kusakinisha OTRS.

OTRS HAITAKIWI kuendeshwa kwa kutumia haki za mzizi. Kifwatacho unatakiwa kuongeza mtumiaji mpya kwa ajili ya OTRS. Mpangilio orodha wa nyumbani wa huyu mtumiaji mpya unatakiwa kuwa /opt/otrs. Kama seva yako ya wavuti haifanyi kazi na haki za mtumiaji sawa na mtumiaji mpya wa 'otrs', ambayo ndiyo kawaida kwa mifumo mingi, utahitaji kuongeza mtumiaji mpya wa 'otrs' kwenye kundi la watumiaji wa seva ya wavuti (ona Hati chini).

```
linux:/opt# useradd -r -d /opt/otrs/ -c 'OTRS user' otrs
linux:/opt# usermod -G www otrs
linux:/opt#
```

(SUSE=www, Red Hat/CentOS/Fedora=apache, Debian/Ubuntu=www-data)

Hati: Kuongeza mtumiaji mpya 'otrs', na kumuongeza kwenye kundi.

Kisha, inabidi unakili baadhi ya mafaili ya usanidi. Mfumo baadae utatumia mafaili yaliyo nakiliwa. Mafaili yanapatikana kwenye /opt/otrs/Kernel na /opt/otrs/Kernel/Config na yana kiambishi tamati .dist (ona Hati chini).

```
linux:/opt# cd otrs/Kernel/
linux:/opt/otrs/Kernel# cp Config.pm.dist Config.pm
linux:/opt/otrs/Kernel# cd Config
linux:/opt/otrs/Kernel/Config# cp GenericAgent.pm.dist GenericAgent.pm
```

Hati: Kunakili mafaili ya mfano.

Hatua ya mwisho ya kuandaa usakinishaji wa OTRS ni kuseti haki sahihi za ufikivu za mafaili. Unaweza kutumia hati **otrs.SetPermissions.pl**, ambayo inapatikana kwenye mpangilio orodha bin, katika mpangilio orodha wa nyumbani wa mtumiaji wa 'otrs'. Unaweza kutekeleza hati na parameta zifuatazo:

```
otrs.SetPermissions.pl {Mpangilio orodha wa nyumbani wa mtumiaji wa OTRS} { --otrs-user= Mtumiaji wa OTRS} { --web-user= Mtumiaji wa seva ya tovuti} [ --otrs-group= Kundi la mtumiaji wa OTRS] [ --web-group= Kundi la mtumiaji wa seva ya tovuti]
```

Kama seva yako ya tovuti inafanya kazi na haki za mtumiaji sawa na za mtumiaji 'otrs', amri ya kuseti haki sahihi za ufikivu ni **otrs.SetPermissions.pl /opt/otrs --otrs-user=otrs --web-user=otrs**. Katika mifumo ya SUSE seva ya tovuti inafanya kazi na

haki za mtumiaji za 'wwwrun'. Katika mifumo iliyojikita kwenye Debian hii ni 'www-da-ta'. Ungeweza kutumia amri **otrs.SetPermissions.pl /opt/otrs --otrs-user=otrs --web-user=wwwrun --otrs-group=nogroup --web-group=www** kuseti haki sawa za ufikivu.

2.2. Usakinishaji wa moduli za perl

OTRS inahitaji baadhi ya moduli za Perl za ziada, kama ilivyoelezwa katika Jedwali 3-1. Kama ukisakinisha OTRS kutoka kwenye chanzo, utahitaji kusakinisha hizi moduli kwa mikono. Hii inaweza kufanyika aidha na meneja vifurushi wa usambazaji wako wa Linux (yast, apt-get) au, kama ilivyoelezwa katika kifungu hiki, kupitia sheli ya Perl na CPAN. Kama unatumia Perl ya HaliaHai, kwa mfano kwenye Windows, ungeweza kutumia RPM, Meneja Kifurushi wa Perl iliyojengwa kwa ndani. Tunashauri kutumia meneja vifurushi wako kama inawezekana.

Unaweza kuthibitisha moduli zipi unahitaji kusakinisha kwa **otrs.CheckModules.pl**. Hii hati inapatikana kwenye mpangilio orodha bin, katika mpangilio orodha wa nyumbani wa mtumiaji wa 'otrs' (ona Hati chini). Tafadhali tambua kwamba baadhi ya moduli ni za hiari.

```
linux:~# cd /opt/otrs/bin/
linux:/opt/otrs/bin# ./otrs.CheckModules.pl
  o CGI.....ok (v3.60)
  o Crypt::PasswdMD5.....ok (v1.3)
  o Crypt::SSLeay.....Not installed! (Optional - Required for Generic
Interface SOAP SSL connections.)
  o CSS::Minifier.....ok (v0.01)
  o Date::Format.....ok (v2.22)
  o Date::Pcalc.....ok (v1.2)

...
```

Hati: Kukagua moduli zinazotakiwa.

Unatakiwa kujitahidi kusakinisha moduli zinazokosekana kwenye mfumo wa usimamizi wa kifurushi chako cha usambazaji wa Linux. Kwa kufanya hivyo vifurushi vitasasishwa kiotomatiki wakati matoleo mapya yanapatikana au masuala ya usalama yakipatikana. Tafadhali rejea kwenye nyaraka za usambazaji wako kuhusu jinsi ya kusasisha vifurushi vya ziada. Kama moduli () haipatikani kwenye hifadhi ya kifurushi, unaweza pia kusakinisha CPAN, Comprehensive Perl Archive Network.

Kusakinisha moja ya moduli hapa juu kupitia CPAN, inabidi utekeleze amri **perl -e shell -MCPAN**. Sheli ya Perl itaanzishwa katika hali-tumizi ingiliani na moduli ya CPAN itapakikwa. Kama CPAN tayari imesanidiwa, unaweza kusanidi moduli kwa kutumia amri **install** inayofuatwa na jina la moduli. CPAN inashughulikia utegemezi wa moduli kwenye moduli nyingine za Perl na itakujulisha kama moduli nyingine zinahitajika.

Pia tekeleza amri **perl -cw bin/cgi-bin/index.plperl -cw bin/cgi-bin/customer.pl** na **perl -cw bin/otrs.PostMaster.pl** baada ya kuingia kwenye mpangilio orodha /opt/otrs. Kama matokeo ya amri zote ni "sintaksi SAWA", Perl yako imesetiwa sawa (ona Hati chini).

```
linux:~# cd /opt/otrs
linux:/opt/otrs# perl -cw bin/cgi-bin/index.pl
cgi-bin/installer.pl syntax OK
linux:/opt/otrs# perl -cw bin/cgi-bin/customer.pl
cgi-bin/customer.pl syntax OK
linux:/opt/otrs# perl -cw bin/otrs.PostMaster.pl
bin/otrs.PostMaster.pl syntax OK
linux:/opt/otrs#
```

hati: Kukagua sintaksi.

2.3. Kusanidi seva ya tovuti ya Apache

Kwanza kabisa, unatakiwa kusanidi seva ya wavuti ya Apache2 na mod_perl; utafanya hivi kutoka kwenye meneja kifurushi. Hapa chini utakuta amri zinazohitajika kuseti Apache kwenye usambazaji wa Linux maarufu.

```
# rhel / centos:
linux:# yum install httpd mod_perl

# suse:
linux:# zypper install apache2-mod_perl

# debian/ubuntu:
linux:# apt-get install apache2 libapache2-mod_perl2
```

Kufikia kiolesura cha wavuti cha OTRS kupitia URL fupi, maingizo ya Lakabu na HatiLakabu yanahitajika. Usakinishaji mwingi wa Apache una mpangilio orodha conf.d umejumuishwa. Kwenye mifumo ya Linux unaweza kukuta huu mpangilio orodha chini ya /etc/apache or /etc/apache2. Ingia kama mzizi, badilisha kwenda mpangilio orodha conf.d na nakili kiolezo husika katika /opt/otrs/scripts/apache2-httpd.include.conf kwenda kwenye faili liitwalo otrs.conf katika mpangilio orodha wa usanidi wa Apache.

Anzisha upya seva yako ya tovuti kupakia mipangilio mipya ya usanidi. Katika mifumo mingi unaweza kuanzisha/kuanzisha upya sevayako ya tovuti na agizo **/etc/init.d/apache2 restart** (ona Hati chini).

```
linux:/etc/apache2/conf.d# /etc/init.d/apache2 restart
Forcing reload of web server: Apache2.
linux:/etc/apache2/conf.d#
```

Hati: Kuanzisha upya seva ya tovuti.

Sasa seva yako ya wavuti inabidi iwe na usanidi wa OTRS.

2.4. Usanidi wa hifadhidata

2.4.1. Kusakinisha hifadhidata ya OTRS kwa mikono

Njia inayoshauriwa ya kusanidi hifadhidata ni kuanzisha Kisanikishi cha Tovuti. Kama huwezi kutumia njia hii kwa sababu fulani, unaweza pia kusanidi hifadhidata kwa mikono, kama ilivyoelezewa kwenye hii sura. Kama hutaweza kutumia kisanikishi cha tovuti kuseti hifadhidata ya OTRS, inabidi kuiseti kwa mikono. Hati zenye kauli za SQL za kutengeneza na kusanidi hifadhidata zinapatikana kwenye scripts/database, katika mpangilio orodha wa nyumbani wa mtumiaji wa 'otrs' (ona Hati chini).

```
linux:~# cd /opt/otrs/scripts/database/
linux:/opt/otrs/scripts/database# ls
otrs-initial_insert.db2.sql      otrs-schema.mysql.sql
otrs-schema.oracle.sql
otrs-initial_insert.mssql.sql    otrs-schema-post.db2.sql
otrs-initial_insert.mysql.sql    otrs-schema.postgresql.sql
otrs-initial_insert.oracle.sql
otrs-initial_insert.postgresql.sql otrs-schema-post.mssql.sql
otrs-initial_insert.xml          otrs-schema-post.mysql.sql
otrs-schema.db2.sql             otrs-schema-post.oracle.sql
otrs-schema-post.postgresql.sql
otrs-schema.mssql.sql          otrs-schema.xml
linux:/opt/otrs/scripts/database#
```

Hati: Mafaili yanayohitajika kutengeneza na kusanidi hifadhidata.

Kuseti hifadhidata kwa ajili ya mazingira ya nyuma tofauti ya hifadhidata, mafaili ya .sql lazima yachakatishwe katika mpangilio maalumu.

Tengeneza hifadhidata ya OTRS kwa mikono hatua kwa hatua

1. Kutengeneza DB: Tengeneza hifadhidata ambayo unataka kutumia kwa ajili ya OTRS, kwa kutumia programu yako ya hifadhidata au kiolesura chako cha hifadhidata.
2. Kutengeneza majedwali: Na mafaili ya `otrs-schema.DatabaseType.sql` (mf. `otrs-schema.oracle.sql`, `otrs-schema.postgresql.sql`) unaweza kutengeneza majedwali katika hifadhidata yako ya OTRS.
3. Kuingiza data za mwanzo za mfumo: OTRS inahitaji data za mwanzo za mfumo kuafanya kazi vizuri (mf. hali tofauti za tiketi, tiketi na aina za taarifa). Kutegemeana na aina ya hifadhidata unayotumia, utahitaji kutumia moja ya mafaili yafuatayo: `otrs-initial_insert.mysql.sql`, `otrs-initial_insert.oracle.sql`, `otrs-initial_insert.postgresql.sql` au `otrs-initial_insert.mssql.sql`.
4. Kutengeneza marejeo kati ya majedwali: Hatua ya mwisho ni kutengeneza marejeo kati ya majedwali tofauti katika hifadhidata ya OTRS. Tumia faili `otrs-schema-post.DatabaseType.sql` kutengeneza hizi (mf. `otrs-schema-oracle.post.sql`, `otrs-schema-post.postgresql.sql`).

Baada ya kumaliza kuseti hifadhidata, unatakiwa kukagua na kuseti haki sahihi za ufikivu kwa ajili ya hifadhidata ya OTRS. Zinatakiwa kuwa za kutosha kutoa ufikivu kwa mtumiaji mmoja. Kutegemeana na hifadhidata unayotumia, kuseti haki za ufikivu kunatofautiana, lakini inatakiwa kuwezekana aidha kwa programu ya hifadhidata au mazingira ya mbele ya michoro ya hifadhidata.

Kama hifadhidata yako na haki za ufikivu zimesanidiwa kwa usahihi, inabidi uiambie OTRS mazingira yapi ya nyuma ya hifadhidata unataka kutumia na jinsi mfumo wa tiketi unaweza kuunganishwa kwenye hifadhidata. Fungua faili `Kernel/Config.pm` linalopatikana katika mpangilio orodha wa nyumbani wa mtumiaji wa 'otrs' na badilisha parameta zilizoonyeshwa kwenye hati chini kuendana na mahitaji yako.

```
# DatabaseHost
# (The database host.)
$self->{'DatabaseHost'} = 'localhost';

# Database
# (The database name.)
$self->{Database} = 'otrs';

# DatabaseUser
# (The database user.)
$self->{DatabaseUser} = 'otrs';

# DatabasePw
# (The password of database user.)
$self->{DatabasePw} = 'some-pass';
```

Hati: Parameta za kugeuzwa kukufaa.

2.5. Kuanzisha kazi za mfumo zilizopangwa za OTRS

OTRS inahitaji baadhi ya kazi za mfumo zilizopangwa kufanya kazi kwa usahihi. Kazi za mfumo zilizopangwa zinatakiwa kuendeshwa na haki zawa za mtumiaji kama zilizowekwa bayana kwa ajili ya moduli za OTRS. Hii inamaanisha kazi za mfumo zilizopangwa lazima ziingizwe katika faili la kichupo cha cron cha mtumiaji wa 'otrs'.

Hati zote zenye kazi za mfumo zilizopangwa zinapatikana katika var/cron, katika mpangilio orodha wa nyumbani wa mtumiaji wa 'otrs' (ona Hati chini).

```
linux:~# cd /opt/otrs/var/cron
linux:/opt/otrs/var/cron# ls
aaa_base.dist          generic_agent.dist      rebuild_ticket_index.dist
cache.dist            pending_jobs.dist       session.dist
fetchmail.dist        postmaster.dist         unlock.dist
generic_agent-database.dist  postmaster_mailbox.dist
linux:/opt/otrs/var/cron#
```

hati: Mafaili yanayohitajika kutengeneza kazi za mfumo zilizopangwa.

Hizi hati zina kiambishi tamati cha '.dist'. Unatakiwa kuzinakili katika mafaili na kiambishi tamati kikiwa kimeondolewa. kama ukitumia bash, unaweza kuhitaji kutumia amri iliyoorodheshwa katika Hati chini.

```
linux:/opt/otrs/var/cron# for foo in *.dist; do cp $foo `basename $foo .dist`; done
linux:/opt/otrs/var/cron# ls
aaa_base          generic_agent-database.dist  rebuild_ticket_index
aaa_base.dist    generic_agent.dist          rebuild_ticket_index.dist
cache            pending_jobs                session
cache.dist      pending_jobs.dist          session.dist
fetchmail        postmaster                  unlock
fetchmail.dist  postmaster.dist            unlock.dist
generic_agent    postmaster_mailbox
generic_agent-database  postmaster_mailbox.dist
linux:/opt/otrs/var/cron#
```

Hati: Kunakili na kuyapa majina upya mafaili yote yanayohitajika kutengeneza kazi za mfumo zilizopangwa.

Jedwali 3-2 linafafanua kazi tofauti za mfumo zilizopangwa.

Table 2.1. Maelezo ya hati tofauti za kazi zilizopangwa za mfumo.

hati	Kazi
aaa_base	Inaseti vya msingi kwa ajili ya crontab ya mtumiaji wa 'otrs'.
Hifadhi muda	Inaondoa hifadhi muda iliyopitwa muda wake kwenye mfumo. Inasafisha hifadhi muda ya kupakia kwa ajili ya mafaili ya CSS na JavaScript.
tafutabarua	Inatumika tu kama barua pepe mpya zitatafutwa kwa tafutabarua pepe kwenda kwenye mfumo wa tiketi.
wakala_ujumla	Inatekeleza kazi za WakalaWaUjumla ambazo hazijahifadhiwa kwenye hifadhidata lakini katika mafaili yake ya config.
wakala-hifadhidata_ujumla	Inatekeleza kazi za WakalaWaUjumla ambazo zinahifadhiwa katika hifadhidata.
kazi_zinazosubiri	Inakagua mfumo kwa ajili ya tiketi zinazosubiri, na kuzifunga au kutuma vikumbusho kama inahitajika.
mkuu wa posta	Inakagua foleni ya ujumbe ya mfumo wa tiketi, na kuwasilisha ujumbe ambao bado uko kwenye foleni.
mkuuwaposta_kikashabarua	Inatafuta barua kutoka kwenye akaunti za POP3 ambazo ziliwekwa bayana kwenye

hati	Kazi
	eneo la msimamizi, katika kifungu cha "Akaunti za Barua za MkuuWaPosta".
tengenezaupya_tiketi_kielezo	Inatengeneza upya kielezo cha tiketi, ambayo inaboresha kasi ya MuonekanoFoleni.
kipindi	Inaondoa vitambulisho vya vipindi vya zamani au visivyohitajika.
fungua	Inafungua tiketi kwenye mfumo.

Kuseti kazi zote za mfumo zilizopangwa, hati bin/Cron.sh inayopatikana katika mpangilio orodha wa nyumbani wa mtumiaji wa 'otrs' inaweza kutumika. Wakati hati hii inatekelezwa, inahitaji parameta kuweka bayana kama unataka kusakinisha, kuondoa, au kusakinisha upya kazi za mfumo zilizopangwa. Parameta zifuatazo zinaweza kutumiaki:

Cron.sh {start} {stop} {restart} [OTRS user]

Kwa sababu kazi za mfumo zilizopangwa zinatakiwa kusakinishwa katika faili la crontab la mtumiaji wa 'otrs', unahitaji kuingia kwenye mfumo kama 'otrs'. Kama umeingia kama mzizi, unaweza kubadilisha kuwa 'otrs' kwa kutumia amri **su otrs**. Tekeleza maagizo yaliyowekwa bayana kwenye Hati chini kusakinisha kazi za mfumo zilizopangwa.

Warning

Tafadhali tambua maingizo mengine ya crontab ya mtumiaji wa 'otrs' ytaandikwa juu yake au kuondolewa na hati Cron.sh. Tafadhali badilisha hati Cron.sh kuacha maingizo mengine ya crontab kama inavyohitajika.

```
linux:/opt/otrs/var/cron# cd /opt/otrs/bin/
linux:/opt/otrs/bin# su otrs
linux:~/bin$ ./Cron.sh start
/opt/otrs/bin
Cron.sh - start/stop OTRS cronjobs
Copyright (C) 2001-2009 OTRS AG, http://otrs.org/
(using /opt/otrs) done
linux:~/bin$ exit
exit
linux:/opt/otrs/bin#
```

Hati: Kusakinisha kazi za mfumo zilizopangwa.

Amri **crontab -l -u otrs**, ambayo inaweza kutekelezwa kama mzizi, inaonyesha faili la crontab la mtumiaji wa 'otrs', na unaweza kukagua kama maingizo yote yamewekwa kwa usahihi (ona Kielelezo chini).

```
linux:/opt/otrs/bin# crontab -l -u otrs
# --
# cron/aaa_base - base crontab package
# Copyright (C) 2001-2014 OTRS AG, http://otrs.com/
# --
# This software comes with ABSOLUTELY NO WARRANTY.
# --
# Who gets the cron emails?
MAILTO="root@localhost"

# --
# cron/cache - delete expired cache
# Copyright (C) 2001-2014 OTRS AG, http://otrs.com/
# This software comes with ABSOLUTELY NO WARRANTY.
# --
# delete expired cache weekly (Sunday mornings)
20 0 * * 0 $HOME/bin/otrs.CacheDelete.pl --expired >> /dev/null
30 0 * * 0 $HOME/bin/otrs.LoaderCache.pl -o delete >> /dev/null
```

```
# --
# cron/fetchmail - fetchmail cron of the OTRS
# Copyright (C) 2001-2014 OTRS AG, http://otrs.com/
# --
# This software comes with ABSOLUTELY NO WARRANTY.
# --
# fetch every 5 minutes emails via fetchmail
#*/5 * * * * /usr/bin/fetchmail -a >> /dev/null

# --
# cron/generic_agent - otrs.GenericAgent.pl cron of the OTRS
# Copyright (C) 2001-2014 OTRS AG, http://otrs.com/
# --
# --
# This software comes with ABSOLUTELY NO WARRANTY.
# --
# start generic agent every 20 minutes
*/20 * * * * $HOME/bin/GenericAgent.pl >> /dev/null
# example to execute GenericAgent.pl on 23:00 with
# Kernel::Config::GenericAgentMove job file
#0 23 * * * $HOME/bin/otrs.GenericAgent.pl -c "Kernel::Config::GenericAgentMove" >> /dev/
null
# --
# cron/generic_agent - GenericAgent.pl cron of the OTRS
# Copyright (C) 2001-2014 OTRS AG, http://otrs.com/
# --
# This software comes with ABSOLUTELY NO WARRANTY.
# --
# start generic agent every 10 minutes
*/10 * * * * $HOME/bin/otrs.GenericAgent.pl -c db >> /dev/null
# --
# cron/pending_jobs - pending_jobs cron of the OTRS
# Copyright (C) 2001-2014 OTRS AG, http://otrs.com/
# --
# This software comes with ABSOLUTELY NO WARRANTY.
# --
# check every 120 min the pending jobs
45 */2 * * * $HOME/bin/otrs.PendingJobs.pl >> /dev/null
# --
# cron/postmaster - postmaster cron of the OTRS
# Copyright (C) 2001-2014 OTRS AG, http://otrs.com/
# --
# This software comes with ABSOLUTELY NO WARRANTY.
# --
# check daily the spool directory of OTRS
10 0 * * * $HOME/bin/otrs.ReprocessMails.pl >> /dev/null
# --
# cron/postmaster_mailbox - postmaster_mailbox cron of the OTRS
# Copyright (C) 2001-2014 OTRS AG, http://otrs.com/
# --
# This software comes with ABSOLUTELY NO WARRANTY.
# --
# fetch emails every 10 minutes
*/10 * * * * $HOME/bin/otrs.PostMasterMailbox.pl >> /dev/null
# --
# cron/rebuild_ticket_index - rebuild ticket index for OTRS
# Copyright (C) 2001-2014 OTRS AG, http://otrs.com/
# --
# This software comes with ABSOLUTELY NO WARRANTY.
# --
# just every day
01 01 * * * $HOME/bin/otrs.RebuildTicketIndex.pl >> /dev/null

# --
# cron/session - delete old session ids of the OTRS
# Copyright (C) 2001-2014 OTRS AG, http://otrs.com/
# --
# This software comes with ABSOLUTELY NO WARRANTY.
# --
# delete every 120 minutes old/idle session ids
55 */2 * * * $HOME/bin/otrs.DeleteSessionIDs.pl --expired >> /dev/null
```

```
# --
# cron/unlock - unlock old locked ticket of the OTRS
# Copyright (C) 2001-2014 OTRS AG, http://otrs.com/
# --
# This software comes with ABSOLUTELY NO WARRANTY.
# --
# unlock every hour old locked tickets
35 * * * * $HOME/bin/otrs.UnlockTickets.pl --timeout >> /dev/null

linux:/opt/otrs/bin#
```

Hati: Faili la Crontab.

2.6. Huduma ya Mratibu wa OTRS

OTRS inakuja na huduma ya mratibu inayotumika kufanya kazi solandanifu.


RPM za OTRS zita seti Huduma ya Mratibu kiotomatiki. Kama ukisakinisha kutoka kwenye chanzo, unaweza kusakinisha huduma hiyo kwa kunakili faili `scripts/otrs-scheduler-linux` kwenda `/etc/init.d` na kulipa ruhusa sahihi. Hii itahakikisha huduma ya mratibu inaanza pale mfumo unapoanza.

3. Kutumia kisakinishi cha wavuti

Unaweza kutumia Kisakinishi cha Wavuti cha OTRS, baada ya kusakinisha programu ya OTRS, kuseti na kusanidi hifadhidata ya OTRS. Kisakinishi cha Wavuti ni ukurasa wa tovuti ambayo unaweza kuitembelea kwenye kivinjari chako. URL ya hicho kisakinishi cha wavuti ni <http://localhost/otrs/installer.pl> .

Pale kisakinishi cha wavuti kinapoanza, tafadhali fuata hatua zifuatazo kuseti mfumo wako:

1. Angalia taarifa kuhusu ofisi za OTRS na bofya kwenye inayofuata kuendelea (ona kielelezo chini).

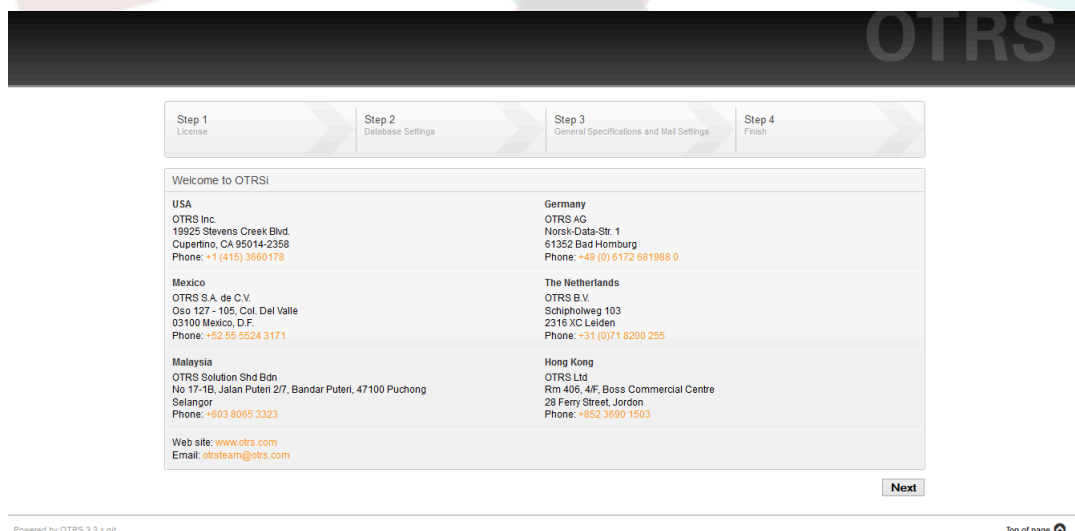


The screenshot shows the OTRS installer interface. At the top, there is a progress bar with four steps: Step 1 License, Step 2 Database Settings, Step 3 General Specifications and Mail Settings, and Step 4 Finish. Below the progress bar, the text "Welcome to OTRS!" is displayed. The main content area is divided into two columns, each containing contact information for different regions:

USA OTRS Inc. 19925 Stevens Creek Blvd. Cupertino, CA 95014-2358 Phone: +1 (415) 3500178	Germany OTRS AG Norsk-Data-Str. 1 61352 Bad Homburg Phone: +49 (0) 6172 681989 0
Mexico OTRS S.A. de C.V. Oso 127 - 105, Col. Del Valle 03100 Mexico, D.F. Phone: +52 55 5524 3171	The Netherlands OTRS B.V. Schipholweg 103 2316 XC Leiden Phone: +31 (0)71 8200 255
Malaysia OTRS Solution Shd Bdn No 17-1B, Jalan Puteri 2/7, Bandar Puteri, 47100 Puchong Selangor Phone: +603 8065 3323	Hong Kong OTRS Ltd Rm 406, 4/F, Boss Commercial Centre 28 Ferry Street, Jordan Phone: +852 31690 1503

At the bottom of the contact information, there is a "Next" button. Below the main content area, there is a footer that reads "Powered by OTRS 3.3.x git" on the left and "Top of page" with a circular arrow icon on the right.


Kielelezo: Skrini ya kukukaribisha.

2. Soma GNU Affero General Public License (ona Kielelezo chini) na ikubali, kwa kubofya kitufe husika upande wa chini wa kurasa.

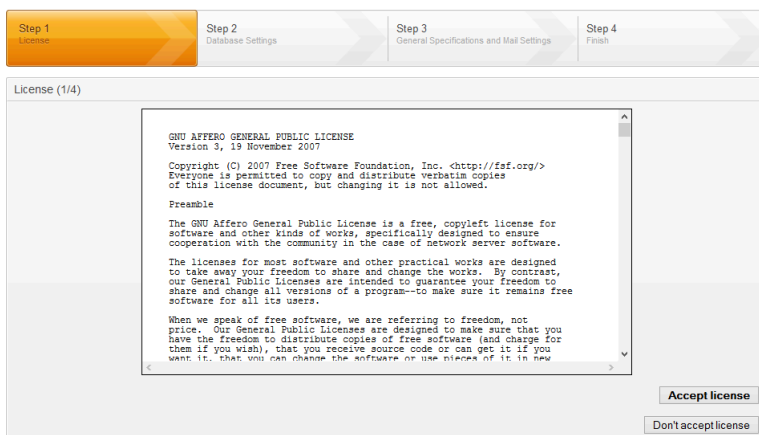


Kielelezo: GNU Affero General Public License.

3. Chagua hifadhidata utakayotaka kutumia na OTRS. Kama ukichagua MySQL, PostgreSQL au Microsoft SQL kama Seva za hifadhidata, unaweza kuchagua kama utataka kisakinishi cha wavuti kikutengenezee hifadhidata yako au msimamizi wa hifadhidata wako ameshatengeneza hifadhidata tupu kwa ajili ya wewe kutumia. Baada ya hapo, bonyeza kitufe kuwndelea (ona kielelezo chini).

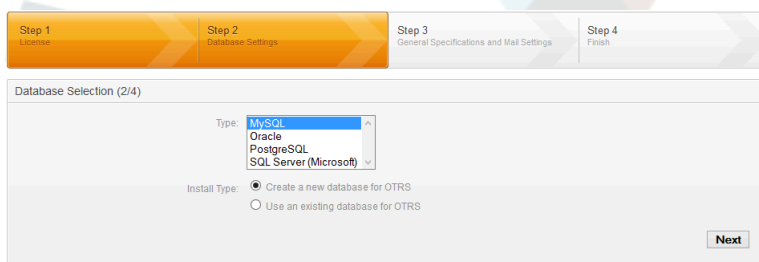

Kielelezo: Uchaguzi wa Hifadhidata.

4. Hii skrini inaweza kuwa tofauti kidogo kutegemeana na hifadhidata uliyochagua na kama ulitaka kisakinishi cha mtandao kutengeneza hifadhidata au kutumia iliyopo katika hatua iliyopita. Ingiza hati tambulishi za hifadhidata kwenye hii skrini.

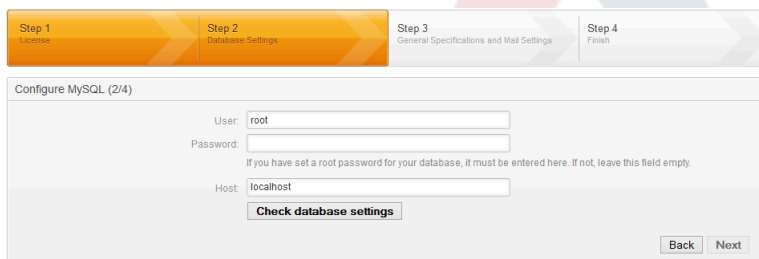

Kielelezo: Hati tambulishi za hifadhidata.

5. Tengeneza mtumiaji mpya wa hifadhidata, chagua jina la hifadhidata na bofya kitufe cha kuendelea (ona Kielelezo chihi).

Warning

OTRS itatengeneza nywila imara kwa ajili yako. Inawezekana kuweka nywila yako mwenyewe kama ukitaka. Nywila itaandikwa kwenye faili la usanidi Kernel/Config.pm kwahiyo hakuna haja ya kukumbuka nywila hii.

Step 1 License | Step 2 Database Settings | Step 3 General Specifications and Mail Settings | Step 4 Finish

Configure MySQL (2/4)

User:

Password:

Host:

If you have set a root password for your database, it must be entered here. If not, leave this field empty.

Result of database check

✔ Database check successful.

Database User (New)

User:

A new database user with limited permissions will be created for this OTRS system.

Password:

Repeat Password:

Generated password: nOyDVP9Dau6XHKtV

Database

Database name:

Back Next

Kielelezo: Mipangilio ya hifadhidata.

6. Hifadhidata itatengenezwa kama itahitajika, na kujazwa, kama ilivyoonyeshwa kwenye hii taswira. Bofya kitufe cha kuendelea kwenda kwenye skrini inayofuata.

Step 1 License | Step 2 Database Settings | Step 3 General Specifications and Mail Settings | Step 4 Finish

Create Database (2/4)

- ✔ CREATE DATABASE 'otrs'
- ✔ GRANT ALL PRIVILEGES
- ✔ FLUSH PRIVILEGES
- ✔ Processing otrs-schema
- ✔ Processing otrs-initial_insert
- ✔ Processing post statements

Database setup successful!

Next

Kielelezo: Uanzishaji hifadhidata kwa mafanikio.

7. Toa mipangilio yote ya mfumo na bofya kwenye kitufe cha kuendelea (ona Kielelezo chini).

Step 1 License | Step 2 Database Settings | Step 3 General Specifications and Mail Settings | Step 4 Finish

System Settings (3/4)

SystemID:

The identifier of the system. Each ticket number and each HTTP session ID contain this number.

System FQDN:

Fully qualified domain name of your system.

AdminEmail:

Email address of the system administrator.

Organization:

Log

LogModule:

Log backend to use.

Webfrontend

Default language:

Default language.


CheckMXRecord:

Email addresses that are manually entered are checked against the MX records found in DNS. Don't use this option if your DNS is slow or does not resolve public addresses.

Next

Kielelezo: Mipangilio ya mfumo.

8. Kama ikihitajika, unaweza kutoa data zinazotakiwa kusanidi barua zinazoingia na zinazotoka, au kuruka hatua hii kwa kubonyeza kitufe cha kulia upande wa chini wa skrini (ona Kielelezo chini).

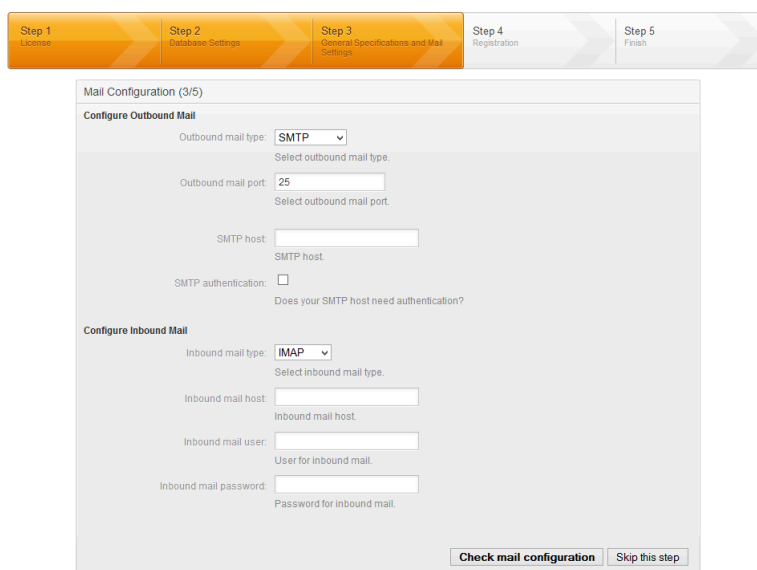


Kielelezo: Usanidi wa barua.

9. Hongera! Sasa usakinishaji wa OTRS umemalizika na unatakiwa kuweza kufanya kazi na mfumo (ona Kielelezo chini). Kuingia kwenye kilesura cha mtumiaji wa OTRS, tumia anwani <http://localhost/otrs/index.pl> kutoka kwenye kivinjari wavuti chako. Ingia kama msimamizi wa OTRS, kwa kutumia jina la mtumiaji 'root@localhost' na nywila iliyozalishwa. Baada ya hapo, unaweza kusanidi mfumo kufikia mahitaji yako.

Warning

Tafadhali andika nywila iliyozalishwa kwa ajili ya akaunti ya 'root@localhost'.

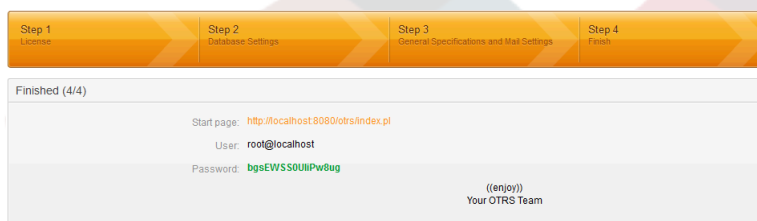

Kielelezo: Skrini ya mwisho ya kisanishaji cha wavuti.

4. Kuboresha kiunzi cha OTRS

Haya maelekezo ni kwa ajili ya watu wanaoboresha OTRS kutoka toleo la 3.2 kwenda 3.3, na kuzitumia zote kwa ajili ya RPM na uboreshaji wa kanuni chanzo (tarball).

Note

Tafadhali tambua OTRS 3.3 inahitaji japo toleo la 5.10.0 la perl. Hakikisha seva yako inatumia toleo hili kabla ya kupanga uboreshaji wako. Unaweza kukagua toleo na amri **perl -v** katika tungo amri. Usambazaji wa Linux unaojulikana ambao unatumia perl 5.8 na bado una msaada kwa muuzaji wake ni Red Hat Enterprise Linux (RHEL) 5 na mwenzake CentOS 5. Kama upo kwenye moja wapo ya haya majukwaa na una mpango wa uboreshaji kwenda OTRS 3.3 pia unahitaji kupanga kuhamisha mfumo endeshi wako kwenda toleo lenye perl yenye msaada kama RHEL 6 or CentOS 6.

Kama unatumia toleo la nyuma la OTRS inabidi ufuate njia ya kusasisha kwenda kwenye 3.1 kwanza (1.1->1.2->1.3->2.0->2.1->2.2->2.3->2.4->3.0->3.1->3.2->3.3 ...)! Unahi-

taji kufanya uboreshaji kamili kwenda kila toleo katikati, kujumuisha mabadiliko ya hifadhidata na kusasisha hati ya perl.

Tafadhali tambua ukioresha kutoka OTRS 2.2 au chini, unatakiwa kuchukua hatua ya ziada; tafadhali soma http://bugs.otrs.org/show_bug.cgi?id=6798.

Ndani ya toleo dogo moja unaweza kuruka matoleo ya ngazi ya kiraka kama ukitaka kusasisha. Kwa mfano unaweza kuboresha moja kwa moja kutoka OTRS 3.3.1 kwenda toleo 3.3.4. Kama unataka kufanya "uboreshaji ngazi ya kiraka", unatakiwa kuruka hatua 9 na 13-16.

Tafadhali tambua kama ukifanya usasishaji wa ngazi ya viraka kutoka OTRS 3.3.6 au chini ya hapo, unahitaji kuamilisha kazi mpya ya mfumo iliyopangwa ambayo inadhibiti mchakato wa mratibu. Tafadhali nakili mafaili /opt/otrs/var/cron/scheduler_watchdog.dist kwenda /opt/otrs/var/cron/scheduler_watchdog na sasisha kichupo cha cron na /opt/otrs/bin/Cron.sh start (kama mtumiaji wa "otrs", sio mzizi).

1. Sitisha huduma zote husika.

mf. (inategemeana na huduma zilizotumika):

```
shell> /etc/init.d/cron stop
shell> /etc/init.d/postfix stop
shell> /etc/init.d/apache stop
```

2. Weka chelezo ya kila kitu chini ya \$OTRS_HOME (chaguo-msingi: OTRS_HOME=/opt/otrs):

- Kernel/Config.pm
- Kernel/Config/GenericAgent.pm
- Kernel/Config/Files/ZZZAuto.pm
- var/*
- pia na hifadhidata

3. Hakikisha umeweka cheleza ya kila kitu ;-)

4. Anzisha mfumo mpya (hiari)

Kama inawezekana, jaribu usakinishaji huu kwenye mfumo tofauti kwanza kwa majaribio.

5. Sakinisha toleo jipya (tar au RPM).

- Na tarball:

```
shell> cd /opt
shell> mv otrs otrs-old
shell> tar -xzf otrs-x.x.x.tar.gz
shell> mv otrs-x.x.x otrs
```

Rejeshwa usanidi wa ma faili ya zamani

- Kernel/Config.pm
- Kernel/Config/GenericAgent.pm
- Kernel/Config/Files/ZZZAuto.pm

Rudisha TicketCounter.log

Ili kuwezesha OTRS kuendelea na nambari ya tiketi sahihi, rudisha TicketCounter.log kuwa `$OTRS_HOME/var/log/` (chaguo-msingi: `OTRS_HOME=/opt/otrs`). Hii ni muhimu kama ukitumia nambari za tiketi zinazo ongezeka.

Rejesha data za makala

Kama ulisanidi OTRS kuhifadhi data za makala kwenye mfumo wa mafaili inabidi urudishe kabrasha la makala kuwa `$OTRS_HOME/var/` (chaguo-msingi: `OTRS_HOME=/opt/otrs`).

- Na RPM:

```
shell> rpm -Uvh otrs-x.x.x.-01.rpm
```

Kwa kesi hii usasishaji wa RPM unarudisha kiotomatiki mafaili ya usanidi ya zamani.

6. Maudhui binafsi

Kumbuka: Maudhui ya OTRS kati ya 3.2 na 3.3 siyo tangamanifu, kwa hiyo usitumie maudhui ya zamani.

Mandhari yanapatikana chini ya `$OTRS_HOME/Kernel/Output/HTML/*/*.dtl` (chaguo-msingi: `OTRS_HOME=/opt/otrs`).

Tafadhali tambua pia mafaili ya dtl lazima yawe katika umbizo la utf-8 kutoka OTRS 3.3 na kuendelea.

7. Seti ruhusa za mafaili.

Kama tarball imetumika, tekeleza:

```
shell> cd /opt/otrs/  
shell> bin/otrs.SetPermissions.pl
```

kwa ruhusa zinazohitajika na mfumo wako.

8. Kagua moduli za Perl zinazohitajika

Hakikisha kwamba moduli zote za perl zinazohitajika zimesakinishwa kwenye mfumo wako na sakinisha moduli zozote ambazo zinakosekana.

```
shell> /opt/otrs/bin/otrs.CheckModules.pl
```

9. Sasisha mpango:

Kumbuka: majedwali mapya yanayotengenezwa katika mchakato wa KUBORESHA MySQL yatatengenezwa na jedwali injini la utunzaji la kawaida lililosekiwa katika seva ya MySQL. Katika MySQL 5.5 aina mpya ya chaguo-msingi ni InnoDB. Kama majedwali yaliyopo, mfano "watumiaji", yana injini ya uhifadhi wa jedwali, mfano. MyISAM, basi kosa litaonyeshwa wakati wa kutengeneza vizuizi muhimu vya nje.

Una machaguo mawili: (1) unaweza kubadilisha injini chaguo-msingi ya uhifadhi ya MySQL kurudi kuwa ya MyISAM ili majedwali mapya yawe na injini sawa na majedwali yaliyopo, au (2) badili majedwali yaliyopo kutumia InnoDB kama injini ya uhifadhi.

Matatizo yoyote yanayohusiana na injini ya uhifadhi yataripotiwa kwa kutumia hati ya `otrs.CheckDB.pl`, kwa hiyo tafadhali anzisha kukagua kama kuna masuala yoyote.

```
shell> cd /opt/otrs/  
  
# MySQL:  
shell> bin/otrs.CheckDB.pl  
shell> cat scripts/DBUpdate-to-3.3.mysql.sql | mysql -p -f -u root otrs  
  
# PostgreSQL 8.2+:  
shell> cat scripts/DBUpdate-to-3.3.postgresql.sql | psql --set ON_ERROR_STOP=on --single-transaction otrs otrs  
  
# PostgreSQL, older versions:  
shell> cat scripts/DBUpdate-to-3.3.postgresql_before_8_2.sql | psql --set ON_ERROR_STOP=on --single-transaction otrs otrs
```

Kumbuka: Kama ukitumia PostgreSQL 8.1 au toleo kabla ya hapo, unahitaji kuamilisha viendeshaji vipya vya urithi kwa matoleo haya ya zamani. Fanya hivi kwa kuongeza mstari mpya kwa `Kernel/Config.pm` yako kama hivi:

```
$Self->{DatabasePostgresqlBefore82} = 1;
```

Anzisha hati ya uhamiaji (kama mtumiaji wa 'otrs', SIO kama mzizi):

```
shell> scripts/DBUpdate-to-3.3.pl
```

Usiendelee na mchakato wa uboreshaji kama hii hati haifanyi kazi vizuri kwako. Lasivyoyote uweze data unaweza kutokea.

10 Onesha upya usanidi na futa hifadhi muda. Tafadhali anzisha (kama mntumiaji wa 'otrs' SIO kama 'mzizi'):

```
shell> bin/otrs.RebuildConfig.pl  
shell> bin/otrs.DeleteCache.pl
```

11 Anzisha upya huduma zako.

mf. (inategemeana na huduma zilizotumika):

```
shell> /etc/init.d/cron start  
shell> /etc/init.d/postfix start  
shell> /etc/init.d/apache start
```

Sasa unaweza kuingia kwenye mfumo wako.

12 Kagua vifurushi vilivyosakinishwa.

Katika meneja kifurushi, kagua kama vifurushi vyote vina alama isemayo vimesakinishwa kwa usahihi au kama chochote kinahitaji usakinishaji mpya au hata uboreshaji wa kifurushi.

Vifurushi vifuatavyo vinasakinushwa kiotomatiki baada ya mchakato wa uboreshaji (kama zilisakinishwa kabla):

- OTRSMkuuWaPostaChujaViendelezi

- OTRSNakalaHuruKutokKwaMtejaMtumiaji
- OTRSUtambuziNambariTiketiNje
- OTRSDashibodiFoleniMapitio
- OTRSMakalaMuhimu
- OTRSMakalaMuhimuTSM
- OTRSDashibodiTiketiKalenda
- OTRSchaguaHudumaNyingi
- OTRSchaguaFoleniNyingi
- OTRSSehemuInayobadilikaUchaguziNgaziNyingi
- OTRSVitendoTiketiVilivyojikitaTukio
- OTRSTiketiAcIMhariri
- OTRSUchaguziMchakatoMteja
- OTRSACLViendelezi
- ViolezoVyaKawaidaVyaUjumlaVyaOTRS
- OTRSTafutaSehemuTareheInayobadilikaliyopanuliwa
- OTRSDashibodiTiketiiMapitioVichujio

13Kagua mipangilio ya usanidi wa OTRSNakalaHuruKutokKwaMtejaMtumiaji

Kumbuka: Hii itatumika kama umetumia kifurushi cha OTRSNakalaHuruKutokaKwaMtejaMtumiaji kabla.

Kama ulitumia moduli hii kabli, unahitaji kuisanidi upya. Moduli inasakinushwa kiotomatiki na hati ya uboreshaji kwa kuwa sasa ni sehemu ya kiunzi cha OTRS.

Kama unataka kuendelea kuitumia, tafadhali wezesha mpangilio "Tiketi::TukioModuliTuma###930-SehemuInayobadilikaKutokakwaMtejaMtumiaji" kuamilisha sifa hii na fanya usanidi wa muunganiko katika mpangilio "SehemuInayobadilikaKutokaKwaMtejaMtumiaji::Kuunganisha"

14Agiza ACL zako kwenda kwenye kihariri cha ACL mpya (hiari)

Katika OTRS 3.3, kuna kihariri michoro kwa ajili ya ACL katika kiolesura cha usimamizi. Utahitaji kuagiza ACL zako zilizopo (mf. katika mafaili ya Config.pm au ya nyongeza) kwenda kwenye kihariri kwa kutumia bin/otrs.ImportACLsFromConfig.pl ili kufanya zipatikane kwenye kihariri. Tafadhali hakikisha unafuta ACL zote kutoka kwenye Config.pm (au mafaili mengine) baada ya kumaliza kwa mafanikio mchakatowa kuagiza. Pia utahitaji kutumia kitufe cha kutumia katika mazingira ya mbele ya usimamizi wa ACL ili kutumia upya ACL zilizoagizwa kwenye mfumo wako.

15Sasisha usanidi wako wa seva ya wavuti

Tambua: hii inafanya kazi kama ukitumia seva ya tovuti ya Apache, na usipotumia faili la usanidi moja kwa moja kutoka kwenye mpangilio orodha wa usanidi wa OTRS (mf. kwa symlink kutoka kwenye mpangilio orodha wa usanidi wa Apache) .

Tafadhali sasisha usanidi wa faili la Apache kwa ajili ya OTRS kwa kuwa kumekuwa na mabadiliko mengi (ona `scripts/apache2-httpd.include.conf`).

16 Sasisha na amilisha kazi za mfumo zilizopangwa

Kuna kazi tofauti za mfumo zilizopangwa chaguo-msingi za OTRS katika `$OTRS_HOME/var/cron/*.dist`. Zinaweza kuamilishwa kwa kuzinakili bila kiendelezi ".dist" cha jina la faili. Fanya hivi kuhakikisha unapata matoleo ya hivi karibuni ya kazi zilizopangwa za mfumo na matoleo mapya pia.

```
shell> cd var/cron
shell> for foo in *.dist; do cp $foo `basename $foo .dist`; done
```

Tafadhali kagua mafaili yaliyonakiliwa na kufanya upya mageuzi yoyote ya kukufaa ambayo uliwahi kufanya.

Kuweka ratiba ya hizi kazi za mfumo zilizopangwa kwenye mfumo wako, unaweza kutumia hati Cron.sh. Hakikisha unaitokeleza kama mtumiaji wa mfumo wa OTRS!

```
shell> /opt/otrs/bin/Cron.sh start
```

17 Umefanya vizuri!

5. Kuboresha Kisakinishi cha Windows

Kama ulisakinisha OTRS kwenye Windows, inawezekana kuboresha kwa urahisi kwa kupakua Kisakinishi kipya cha Windows na kukianzisha. Kisakinishi hicho kitatambua usakinishaji wa OTRS kiotomatiki na kuufanyia uboreshaji. Kisakinishi kitasitisha huduma za OTRS na kuzianzisha baada ya usakinishaji kukamilika, kwa hiyo watumiaji wako watakosa huduma za mfumo kwa muda. Hakikisha unapanga muda wa uboreshaji. Hakikisha una chelezo cha seva yako wakati wote kabla ya kuanza utaratibu wa kuboresha.

5.1. Kufanya uboreshaji wa kiwango cha viraka kwenye Windows

Kama ukitaka kusakinisha uboreshaji wa 'ngazi ya kiraka' (mf. kutoka OTRS 3.3.1 kwenda OTRS 3.3.2) katika Windows unachohitaji ni kupakua na kuanzisha kisakinishi kipya. Bila shaka unatakiwa kuhakikisha una chelezo kabla ya kuanza uboreshaji!

5.2. Kufanya uboreshaji wa kiwango kidogo kwenye Windows

Uboreshaji mdogo (kutoka OTRS 3.2 kwenda OTRS 3.3) unachukua muda kidogo zaidi kwa kuwa pia kuna hatua ya uboreshaji wa hifadhidata inayohusika. Kisakinishi kitatambua hili na kufanya uboreshaji kiotomatiki kwa ajili yako. Baada ya usakinishaji unatakiwa bado kufanya hatua 12, 13 na 14 za kifungu cha uboreshaji wa kawaida.

Tafadhali tambua kwamba kama una vifurushi vyovyote vya ziada kama Vifaa vya nyongeza vya vipengele katika mfumo wako wa OTRS, utahitaji kuboresha na hivi pia. Hakikisha unavipata hivi kabla hujaanza uboreshaji. Baada ya uboreshaji kumalizika unaweza kuboresha hivi vifurushi kupitia Kisakinishi cha Vifurushi cha Kiolesura michoro cha mtumiaji wa Tovuti. Vifurushi kutoka kwenye hifadhi za 'kawaida' kama utafiti, Maswali yanayoulizwa mara kwa mara na ITSM vinaweza kuboreshwa kutoka kwenye Meneja Vifurushi baada ya uboreshaji wa kiunzi kukamilika.

6. Programu-tumizi za ziada

Unaweza kusakinisha vifurushi vya ziada vya programu tumizi kupanua sifa za kiunzi cha OTRS. Hii inaweza kufanyika kupitia meneja vifurushi kutoka kwenye kurasa ya Msimamizi, ambayo inapakua programu tumizi kutoka kwenye hifadhi ya mtandaoni na kusimamia utegemezi wa vifurushi. Pia inawezekana kusakinisha vifurushi kutoka kwenye mafaili ya ndani.

6.1. Maswali yanasoulizwa mara kwa mara

Maswali Yanayoulizwa Mara kwa Mara ni kijenzi cha msingi wa maarifa. Inaruhusu kuhariri na kuona makala za Maswali Yanayoulizwa Mara kwa Mara. Makala yanaweza kuonwa na kuzuiwa kwa wakala, wateja watumiaji, au watumiaji wasiojulikana. Hizi pia zinaweza kupangwa katika makundi, na kusomwa katika lugha tofauti.




Chapter 3. Hatua za mwanzo

Lengo la sura hii ni kutoa mapitio mafupi ya OTRS na muundo wa kiolesura chake cha tovuti. Misemo 'mawakala', 'wateja', na 'wasimamizi' imetambulishwa. Pia tunaingia kama msimamizi wa OTRS na kuangalia kwa karibu mapendeleo ya mtumiaji yanayopatikana kwenye kila akaunti.

1. Kiolesura cha tovuti cha wakala

Kiolesura cha tovuti cha wakala kinamruhusu wakala kujibu maombi ya wateja, kutengeneza tiketi mpya za wateja au mawakala wengine, kuandika tiketi kuhusu simu zilipigwa na wateja, kuandika maingizo ya maswali yaliyoulizwa mara kwa mara, kuhariri data za wateja, na kadh.

Tuseme mwenyeji wa OTRS yako anapatikana kupitia URL <http://www.example.com>, kisha skrini ya kuingia ya OTRS inaweza kufikiwa kwa kutumia anwani ya wavuti <http://www.example.com/otrs/index.pl> katika kivinjari wavuti (ona Kielelezo chini).

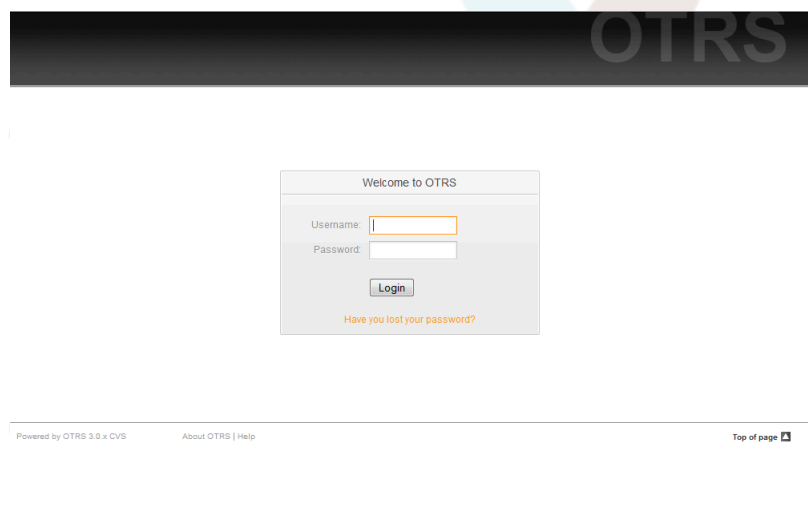

Kielelezo: Skrini ya kuingia ya kiolesura cha wakala.

2. Kiolesura cha tovuti cha mtumiaji

Wateja wana violesura tofauti vya tovuti katika OTRS ambavyo wanaweza kutengeneza akaunti mpya, kubadilisha mipangilio yao ya akaunti, tengeneza na kuhariri tiketi, kupata mapitio ya tiketi walizotengeneza, na kadh.

Mwendelezo wa mfano juu, skrini ya kuingia ya mteja inaweza kufikiwa kwa kutumia URL <http://www.example.com/otrs/customer.pl> na kivinjari wavuti (ona Kielelezo chini).

Company Support

Login

[Forgot password?](#)

 Not yet registered? [Sign up now.](#)


Powered by OTRS 3.0.x CVS

Kielelezo: Skrini ya kuingia ya kiolesura cha mteja.

3. Kiolesura cha tovuti cha uma

Kwa nyongeza kwenye violesura vya wavuti kwa ajili ya mawakala na wateja. OTRS pia ina kiolesura cha umma ambacho kinapatikana kupitia moduli ya maswali yanayoulizwa mara kwa mara. Hii moduli inahitaji kusakinishwa pekeyake. Inatoa ufikivu wa umma kwa mfumo wa maswali yanayoulizwa mara kwa mara na inaruhusu wageni kutafuta kwenye maingizo ya maswali yanayoulizwa mara kwa mara bila uidhinishaji wowote maalumu.

Katika mfano wetu, kiolesura cha tovuti cha umma kinaweza kufikiwa kwa kupitia aidha ya URL zifuatazo: <http://www.example.com/otrs/faq.pl> , <http://www.example.com/otrs/public.pl>

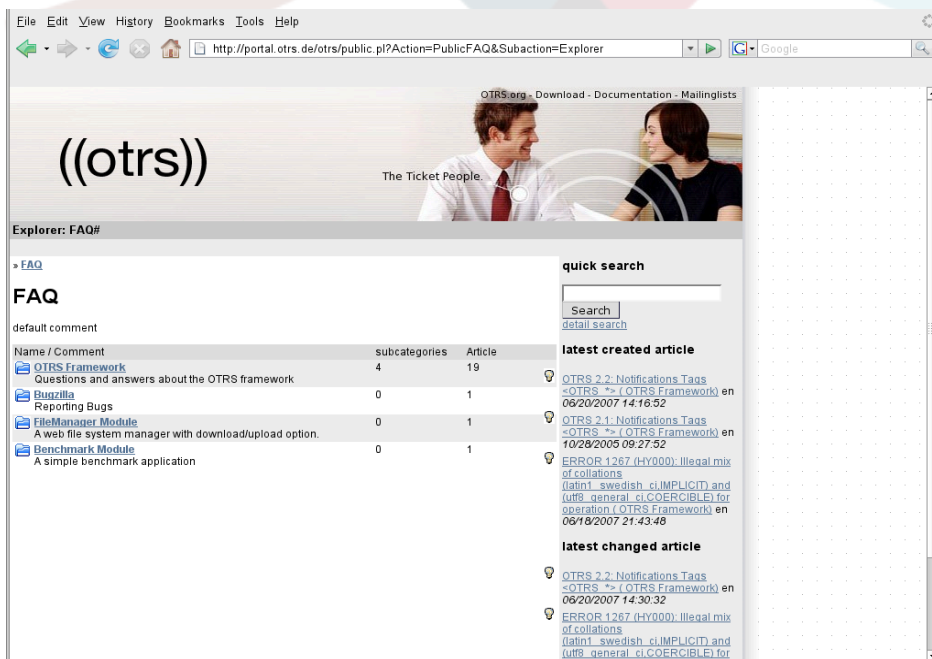

Kielelezo: Kiolesura cha umma cha wavuti.

4. Kuingia kwa mara ya kwanza


Fikia kwenye skrini ya kuingia kama ilivyoelezwa katika kifungu Kiolesura cha tovuti cha wakala. Ingiza jina ka mtumiaji na nywila. Kwa kuwa mfumo ndio kwanza umesakinishwa na hakuna mtumiaji aliyetengenezwa, ingia kama msimamizi wa OTRS kwanza, kwa kutumia 'root@localhost' kama jina la mtumiaji na 'root' kama nywila.

Warning

Hii data ya akaunti ni halali kwa kila usakinishaji mpya wa mfumo wa OTRS. Unatakiwa kubadilisha nywila ya msimamizi wa OTRS mapema iwezekanavyo! Hii inaweza kufanyika kupitia skrini ya mapendeleo kwa ajili ya akaunti ya msimamizi wa OTRS.

Kama hutaki kuingia kama msimamizi wa OTRS, ingiza jina la mtumiaji na nywila za akaunti yako ya kawaida ya wakala.


Ikitokea umesahau nywila yako, unaweza kuuomba mfumo nywila mpya. Bonyeza kirahisi kiungo chini ya kitufe cha kuingia, ingiza anuani yako ya barua pepe iliyosajiliwa kwenye akaunti yako ya OTRS kwenye sehemu ya maingizo, na kisha bonyeza kitufe cha kuwasilisha. (ona Kielelezo).

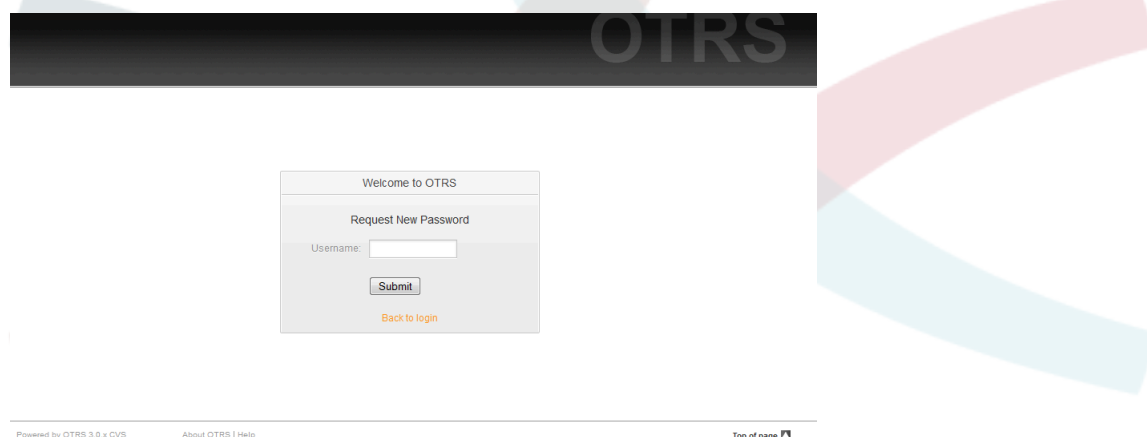

Kielelezo: Omba nywila mpya

5. Kiolesura cha tovuti - mapitio

Baada ya kuingia kwa mafanikio kwenye mfumo, unakutana na kurasa ya Dashi bodi (ona Kielelezo chini). Inaonyesha tiketi zako zilizofungwa, inaruhusu ufikivu wa moja kwa moja kupitia menyu kwenda kwenye foleni, hali na muonekano wa kupanda, na pia inashikilia uchaguzi wa kutengeneza simu mpya na tiketi za barua pepe. Pia inatoa ufupisho wa haraka wa tiketi kwa kutumia vigezo tofauti.

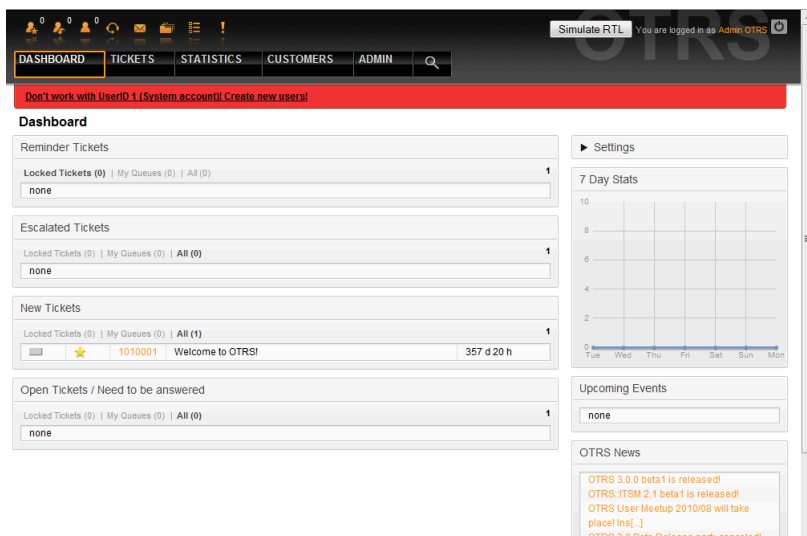

Kielelezo: Dashibodi ya kiolesura cha wakala.

Kuboresha uwazi, kiolesura cha wavuti cha ujumla kimegawanywa katika sehemu tofauti. Safu mlalo ya juu ya kila kurasa inaonyesha baadhi ya taarifa za ujumla kama jina la mtumiaji la sasa, kitufe cha kutoka, ikoni zinazoorodhesha nambari ya tiketi zilizofungwa zenye ufikivu kamili kwao, viungo vya kutengeneza simu/tiketi za barua pepe mpya, na kadh. Pia kuna ikoni za kwenda kwenye foleni, hali, na muonekano wa upandaji.

Chini ya safu mlalo za ikoni kuna mwambaa wa uabiri. Inaonyesha menyu ambayo inakuwezesha kwenda sehemu tofauti au kuona moduli tofauti za mfumo, ikikuruhusu kutekeleza baadhi ya vitendo vya ujumla. Kubofya kwenye kitufe cha Dashibodi inakupeleka kwenye dashibodi. Kama ukibofya kwenye kitufe cha Tiketi utapata menyu ndogo yenye machaguo ya kubadilisha muonekano wa tiketi, tengeneza tiketi mpya (simu/barua pepe) au tafuta tiketi fulani. Kitufe cha Takwimu kinakupa menyu inayokuruhusu kuchagua kutoka kwenye mapitio ya takwimu zilizosajiliwa, kutengeneza mpya au kuagiza iliyopo. Kitufe cha Wateja kinakupeleka kwenye skrini ya Usimamizi wa Mteja. Kwa kubofya kitufe cha Msimamizi, unaweza kufikia moduli zote za msimamizi, ambazo zinakuruhusu kutengeneza mawakala wapya, foleni na kadh. Pia kuna kitufe cha kutafuta tiketi.

Kama programu-tumizi zozote zinazohusika zimesakinishwa pia, mf. maswali yanayoulizwa mara kwa mara au Utafiti, vitufe kufikia hizi programu-tumizi pia vinaonyeshwa.

Mwambaa mwekundu chini ya mwambaa wa uabiri unaonyesha ujumbe tofauti wa mfumo. Kama umeingia kama msimamizi wa OTRS, utapata ujumbe wa tahadhari ya kutofanya kazi kwa kutumia akaunti ya mfumo.

Chini ya kichwa cha habari cha kifungu ulichopo sasa, kuna vifungu vidogo tofauti vyenye taarifa husika kuhusu skrini unayofanya kazi, kila moja katika kisanduku tofauti.

Haya maboksi yana sehemu muhimu ya kila skrini, kwa kawaida yanaonyeshwa katika safuwima moja au tofauti, kila boksi linaweza kuhifadhi taarifa husika kuhusu skrini ya sasa kwa mfano maelekezo, ushauri, mapitio, na kadh. Pia inaonyeshwa fomu au kifaa muhimu cha kutekeleza kitendo kinachohusika kwa kila skrini, kama kwa mfano, ongeza, sasisha au futa rekodi, kagua batli, badilisha mipangilio ya mabadiliko, na kadh.

Mwisho katika upande wa chini wa ukurasa, kijachini cha tovuti kinaonyeshwa (ona Kielelezo chini). Ina viungo ili kufikia moja kwa moja tovuti rasmi ya OTRS, au kwenda upande wa juu wa kurasa.

Kwa kawaida safu mlalo ya ikoni, mwambaa wa uabiri na kijachini ziko hivyo hivyo katika skrini zote kwenye kiolesura cha tovuti.

Kielelezo: Kijachini.

6. Dashibodi

Dashi bodi ndiyo kurasa kuu ya mfumo, hapa unaweza kupata kitufe cha mapitio ya tiketi na vitu vingine vyenye uhusiano na shughuli za tiketi. Inafikiria kuwa sehemu ya kuanzia kazi za kila siku za wakala, kwa kawaida inatoa ufupisho wa haraka wa tiketi ambazo zinasubiri, zimepandishwa, mpya na zilizofunguliwa, kuachana nataarifa nyingine.

Moja ya sifa kubwa za Dashibodi ni kwamba inaweza kugeuzwa kabisa kukufaa. Hii inaamaanisha unaweza kusanidi kila upande kadri utakavyo, kuonyesha au kuficha elementi. Pia inawezekana kuhamisha makazi ya hizi elementi katika safuwima moja kwa kubofya na kukokota kichwa cha elementi, na kuzidondosha mahali pengine. Kila elementi ina jina "Kifaa", mfumo una baadhi ya vifaa vya kutumia nje ya boksi, lakini usanifu uliojikitwa kwenye moduli wa skrini ya dashibodi umeandaliwa kuunganisha vifaa vingine vya kawaida kwa urahisi.

Maudhui ya hii skrini imepangwa katika safuwima mbili kuu muhimu, kwenye safuwima ya kushoto unaweza kuona taarifa kuhusu tiketi zilizopangwa kwa hali zake kama: kikumbusho, iliyopandishwa, mpya, na wazi. Katika kila kifaa unaweza kuchuja matokeo kuona tiketi zote ambazo unaruhusiwa kufikia, tiketi ulizofunga, zile ambazo zipo kwenye foleni iliyofafanuliwa na wakala, pamoja na vichujio vingine. Pia kuna aina nyingine za vifaa katika hii safuwima na vimefafanuliwa chini.

Vifaa vya dashibodi vya safuwima ya kushoto.

- Vifaa vya Orodha ya Tiketi

Vifaa ndani ya hii kategori vina tabia za ujumla zinazofanana, muonekano na hisia. Hivi vifaa vinaonyesha orodha ya tiketi katika hali iliyoamuliwa. Idadi ya tiketi zilizoonyeshwa katika kila orodha zinaweza kusanidiwa katika machaguo ya vifaa (zinatokea ukiambaa juu na kipanya juu ya upande wa juu kulia wa kifaa). Hiki kifaa kina usaidizi kwa vichujio vifwatavyo:

- Tiketi zangu zilizofungwa

Tiketio ambazo wakala aliyeingia amezifunga.

- Tiketi zangu zinazoangaliwa

Tiketi ambazo wakala aliyeingia kwenye mfumo anazo kwenye orodha yake ya zilizo chini ya uangalizi, zinahitaji mpangilio wa Tiketi::Muangalizi kuwashwa ili kuonyeshwa.

- Majukumu yangu

Tiketi ambazo wakala aliye kwenye mfumo amewekwa kama mhusika, mpangilio Tiketi::Jukumu unatakiwa kuwashwa ili kufanya hiki kichujio kuonekana.

- Tiketi kwenye Foleni Yangu

Tiketi ambazo zipo kwenye foleni ambazo wakala amefafanua kama "Foleni Zangu".

- Tiketi zote

Tiketi zote ambazo wakala ana ufikivu.

Vifaa hivi ni:

- Tiketi za kumbukumbu

Tiketi zilizosetiwa kama zinazosubiri na tarehe ya kikumbusho imefikiwa.

- Tiketi zilizopandishwa

Tiketi zilizopandishwa

- Tiketi Mpya

Tiketi zenye hali "Mpya".

- Tiketi Wazi / Zinahitaji kujibiwa


Tiketi zenye hali "Wazi" na ziko tayari kufanya nazo kazi.

- Matukio Tiketi Kalenda

Tukio la kalenda (kwa kifaa hiki) linafanuliwa pale tiketi mpya inatengenezwa, kipengele cha Matukio Tiketi Kalenda inabidi kiwezeshe, na kinahitaji sehemu mpya mbili kuonyeshwa kwenye skrini za kutengeneza tiketi, moja kwa ajili ya muda wa kuanza tukio la tiketi na nyingine kwa ajili ya muda wa kumaliza, hii mida inaelezea muda unao-tumiwa na tukio.

Hiki kifaa kina muonekanao ufwatao: mwezi, wiki na siku, mawakala wanaweza ku-biringiza kwenye kurasa kwa kutumia vishale vya kushoto na kulia.

Kama ilivyosemwa kabla kulemaza tuu vifaa haitoshi, baadhi ya sehemu zinazobadilika za "Tarehe/Muda" kwa ajili ya tiketi inabidi ziongezwe kwenye mfumo (kupitia kiungo cha Sehemu Zinazobadilika katika paneli ya "Msimamizi") na kuziseti katika SysConfig kwa ajili ya hiki kifaa, Sehemu Zinazobadilika zote mbili lazima zisanidiwe ili zionyeshwe katika skrini za kutengeneza tiketi, zinatakiwa zijazwe wakati wa kutengeneza tiketi au katika skrini ya vitendo nyingine yoyote (mf. Sehemu Huru) kuelezea itakaochukua muda wa tukio la kalenda (muda wa kuanza na kumaliza), skrini ya kuza tiketi inaweza kusanidiwa kuonyesha hii sehemu inayobadilika pia, kama ukiifikiria kama muhimu.

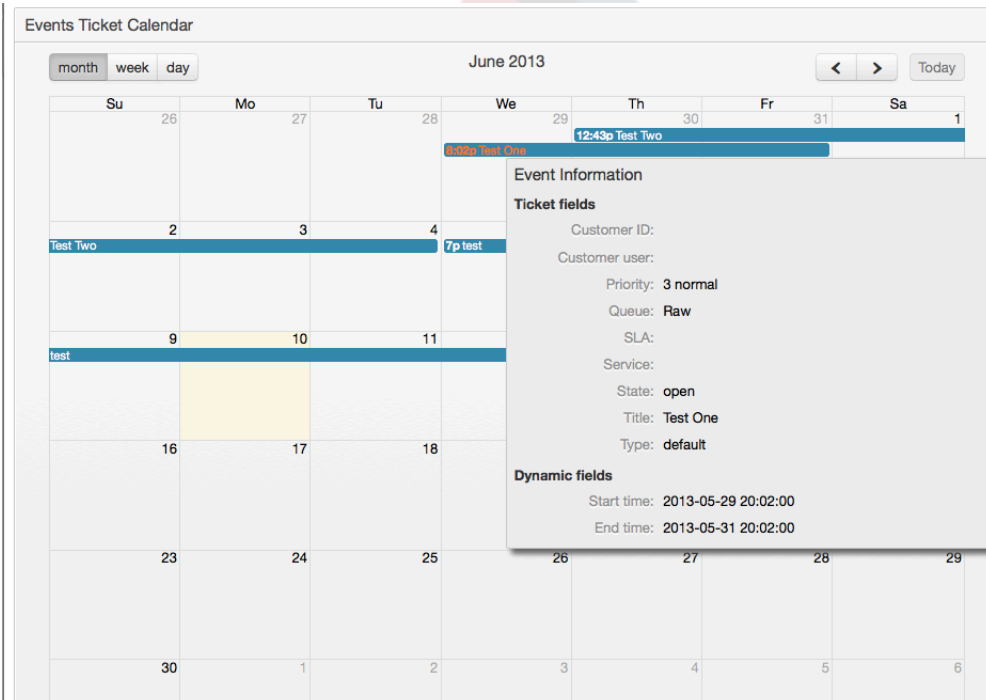

The screenshot shows the 'Events Ticket Calendar' interface for June 2013. The calendar grid displays events as horizontal bars across days. A modal window titled 'Event Information' is open, showing details for an event. The 'Ticket fields' section includes Customer ID, Customer user, Priority (3 normal), Queue (Raw), SLA, Service, State (open), Title (Test One), and Type (default). The 'Dynamic fields' section shows Start time: 2013-05-29 20:02:00 and End time: 2013-05-31 20:02:00.

Zaidi usanidi wa hiki kifaa unaweza kupatikana chini ya "Mazingirayambele::Wakala::Dashibodi::MatukioTiketiKalenda" KundiDogo katika SysConfig:

- UpanaWaKalenda

Inafafanua upana wa kalenda kwa asilimia. Chaguo-msingi ni 95%.

- SehemulnayobadilikaMudaKuanza

Inafafanua jina la sehemu inayobadilika kwa ajili ya muda wa kuanza.

- SehemulnayobadilikaMudaKumaliza

Inafafanua jina la sehemu inayobadilika kwa ajili ya muda wa kumaliza.

- Foleni

Tiketi za kwenye foleni zilizobainishwa kwenye huu mpangilio tu ndiyo zitawekwa maanani kwenye muonekano wa kalenda.

- SehemuZinazobadilikaKwaajiliyaMatukio

Inafafanua sehemu zinazobadilika ambazo zitaonyeshwa katika madirisha ya kufunika ya kalenda ya matukio.

- SehemuZaTiketiKwaajiliyaMatukio

Inafafanua sifa za tiketi ambazo zitaonyeshwa katika jalada la windows la tukio la kalenda.

- Mapitio ya Foleni ya Tiketi


Hiki kifaa kinaonyesha katika matriki ya idadi ya tiketi wapi safu mlalo zinawakilisha foleni na safuwima zinawakilisha hali za tiketi, kisha katika kila seli idadi ya tiketi katika hali iliyofafanuliwa ambayo ni ya foleni fulani imeonyeshwa.

Kifaa pia kinaonyesha Jumla ya safumlalo na Jumla ya safuwima, Jumla ya safumlalo inaonyesha jumla ya tiketi kwa kila hali kwenye foleni zote zilizoonyeshwa, wakati Jumla ya safuwima inawakilisha jumla ya tiketi kwa kila foleni kwenye foleni zote zilizoonyeshwa.

Foleni na hali ambazo zimeonyeshwa zinaweza kubadilishwa kupitia Sysconfig.

Kwa kubofya kwenye yoyote kati ya nambari ya idadi ya tiketi ukurasa wa matokeo ya utafutaji watiketi yatafunguliwa kuwezesha mawakala kuwa kuona undani wake zaidi .

Kwenye safuwima ya kulia kuna kifaa maalumu kinachokuruhusu kudhibiti vifaa unavyotaka kuonyesha au kuficha, Hiki ni kifaa cha Mipangilio. Bofya kwenye kichwa chake kupanua kifungu na kuona vifaa vyote vinavyopatikana, kama ilivyoonyeshwa kwenye Kielelezo. Kila jina la kifaa lina kisanduku tiki, Tumia hiki kisanduku tiki kufafanua muonekano wa vifaa katika dashibodi (vifaa visivyotikiwa havitaonyeshwa) baada ya kufafanua machaguo ya muonekano na kubofya "Hifadhi" kuhifadhi mabadiliko. Hiki kifungu kimefungwa sehemu moja katika skrini, hii inamaanisha huwezi kukikokota na kukiweka sehemu nyingine, au kukifunga.

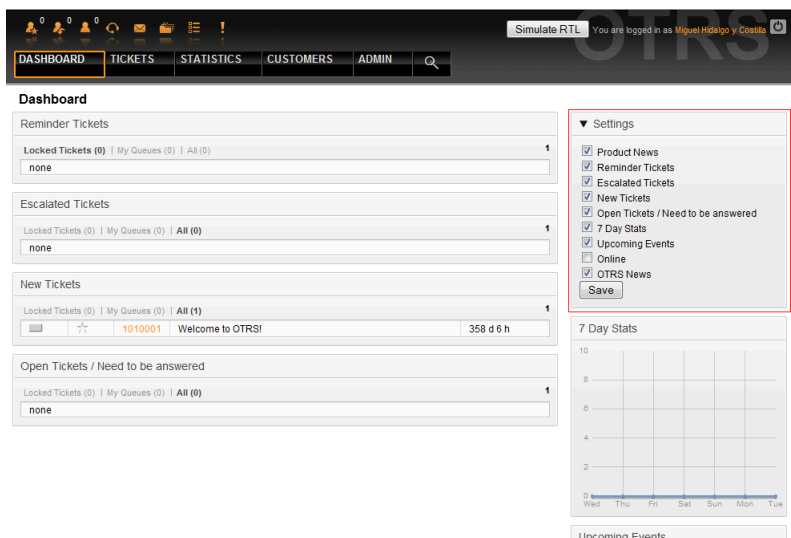

Kielelezo: Mipangilio ya Dashibodi.

Vifaa vya dashibodi ya safuwima ya kulia.

- Takwimu za siku 7

Inaonyesha grafu ya shughuli za tiketi kwa siku 7 zilizopita ambayo inajumuisha mistari 2. Mmoja ambao kwa kawaida ni rangi ya bluu, unawakilisha idadi ya tiketi zilizotengenezwa kwa siku na ya pili, kwa kawaida rangi ya machungwa na unawakilisha tiketi zilizofungwa kwa siku.

- Matukio Yajayo

Tiketi kwa ajili ya kupandishwa au tayari zilizopandishwa zinaorodheshwa hapa, taarifa kutoka kwenye hiki kifaa ni ya muhimu sana kwa kuwa una nafasi ya kujua kuhusu tiketi inahitaji umakini wako na unaweza kuamua ni zipi unataka kuweka bidii yako, seti vipaumbele au angalia kirahisi kinachokuja.

- OTRS Habari

Orodha kamili ya shughuli za OTRS na taarifa muhimu kuhusu matoleo mapya ya bidhaa au viraka.

- Mtandaoni

Hapa ni ufupisho ulioonyeshwa kuhusu mawakala walioingia kwenye mfumo kwa sasa, pia inajumuisha kifungu cha wateja walio mtandaoni, tafadhali tambua hiki kifaa kinafichwa kwa kawaida, kinaweza kuonyeshwa kwa kutumia kifaa cha Mipangilio kili-choelezwa hapo juu.

7. Nini maana ya foleni?

Katika mifumo mingi ya barua, ni kawaida kwa ujumbe wowote kuingia kwenye faili la kisanduku pokezi, ambapo zinabaki zimehifadhiwa. Ujumbe mpya unaongezwa mwishoni mwa faili la Kisanduku pokezi. Programu ya barua ya mteja inayotumika kusoma na kuandika barua inasoma hili faili la Kisanduku pokezi na kupeleka maudhui kwa mtumiaji.

Foleni katika OTRS ni karibu inafanana na faili la kisanduku pokezi, kwa kuwa yenyewe nayo inahifadhi ujumbe wa aina nyingi. Foleni pia ina vipengele kuzidi vile vya faili la kisanduku pokezi cha barua. Kama mtumiaji au wakala wa OTRS, mtu inabidi akumbuke foleni

gani tiketi imehifadhiwa. Mawakala wanaweza kufungua na kuhariri tiketi katika foleni, na pia kuhamisha tiketi kutoka foleni moja kwenda nyingine. Lakini kwanini zihamishe tiketi?

Kuelezea kwa vitendo zaidi, kumbuka mfano wa Kampuni ya Max iliyoelezewa katika mfano wa mfumo wa tiketi. Max alisakinisha OTRS ili kuruhusu timu yake kusimamia vizuri usaidizi wa wateja wa kampuni wanaonunua rekoda za video.

Foleni moja inayoshikilia maombi yote inatosha kwa hii hali. Hata hivyo, baada ya muda Max anaamua pia kuuza rekoda za DVD. Sasa, wateja wana maswali sio tu kuhusu rekoda za video, lakini pia kuhusu bidhaa mpya. Barua pepe zaidi na zaidi zinaingia kwenye foleni moja ya OTRS ya Max na ni ngumu kupata picha kamili ya kinachoendelea.

Max anaamua kuunda upya mfumo wake wa usaidizi, na kuongeza foleni mpya mbili. Kwa hiyo sasa foleni tatu zinatumiwa. Ujumbe mpya unaoingia katika mfumo wa tiketi unahifadhiwa kwenye foleni ya zamani iitwayo "mbichi". Kati ya foleni mpya mbili, moja inaitwa "rekoda ya video" ni kwa ajili ya maombi ya rekoda za video tu, wakati nyingine "rekoda ya dvd" ni kwa ajili ya maombi ya rekoda za dvd tu.

Max anamuomba Sandra kuangalia foleni "mbichi" na kupanga (kupeleka) ujumbe aidha kwenda kwenye foleni ya "rekoda za video" au "rekoda za dvd", kutegemeana na maombi ya mteja. John ana ufikivu kwa foleni ya "rekoda za video" tu, wakati Joe anaweza kujibu tiketi katika foleni ya "rekoda ya dvd" tu. Max anaweza kuhariri tiketi katika foleni zote.


OTRS ina msaada kwa usimamizi wa ufikivu kwa watumiaji, makundi, na majukumu, na ni rahisi kuseti foleni ambazo zinaweza kufikiwa na baadhi ya akaunti za watumiaji. Max angeweza pia kutumia njia nyingine kufikisha maombi yake kwenye foleni tofauti, kwa sheria za kuchuja. Vinginevyo, kama anwani mbili tofauti za barua pepe zimetumiwa, Sandra anaweza kutuma zile barua pepe kwenye foleni nyingine mbili, ambazo haziwezi kutumwa kiotomatiki.

Kupanga ujumbe wako unaoingia kwenye foleni tofauti inakusaidia kufanya mfumo wa msaada kuwa msafi na wenye mpangilio. Kwa sababu mawakalawako wamepangwa katika makundi tofauti wakiwa na haki tofauti za ufikivu kwenye tiketi, mfumo unaweza kusadifishwa zaidi. Foleni zinaweza kutumiwa kufafanua michakato ya mtiririko wa kazi au kutengeneza muundo wa kampuni. Max anaweza kutengeneza kwa mfano, foleni nyingine iitwayo "mauzo", ambayo inaweza kuwa na foleni ndogo "maombi", "ofa", "oda", "bili", na kadhi. Muundo kama huu wa foleni unaweza kumsaidia Max kusadifisha mpangilio wa miamala yake.

Muundo wa mfumo ulioboreshwa, kama kupitia usanifu mzuri wa foleni, inaweza kupelekea kuokowa muda na pesa nyingi. Foleni zinasaidia kusadifisha michakato kwenye kampuni yako.

8. Nini maana ya mapitio ya foleni?

Mapitio ya foleni yanatoa muonekano wa foleni zote ambamo tiketi zipo, na ambamo mtumiaji ana haki za kusoma na kuandika.

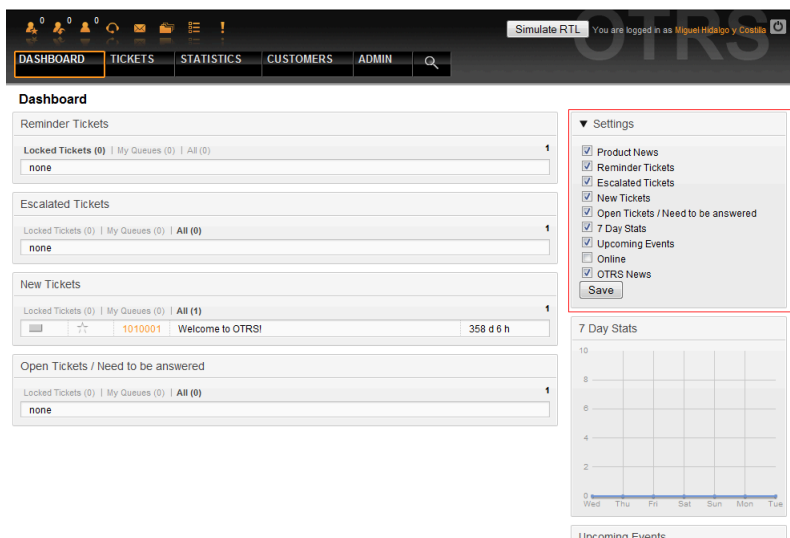

Mapitio ya foleni yanatoa machaguo mbali mbali kwa kazi za kila siku na OTRS. Ya kwanza ni Foleni Yangu. Kwenye Mapendeleo ya Wakala, au wakati wa usimamizi wa mawakala, seti ya foleni zinaweza kufafanuliwa ambazo wakala anafanya kazi ndani yake. Tiketi zote zitatokea katika huu muonekano wa kawaida, wakati wakufikia Tiketi -> Foleni Ona Menyu.

Chaguo la pili linalotolewa na Muonekano wa Foleni ni kuchimba hini uabiri kwenda kwenye foleni binafsi na foleni ndogo zenye tiketi za kufanyiwa kazi.

Katika aina zote mbili za muonekano, mtumiaji pia ana uwezo ulioongezwa wa kuona aidha tiketi zote zilizofunguliwa (hiki ni kichujio chaguo-msingi), au mtumiaji anaweza kuchagua kuona tiketi zote zinazopatikana. Tiketi lazima ziwe katika moja ya hali zinazonekana ili kuonyeshwa katika muonekano wa foleni. Kwa chaguo-msingi hizi ni 'wazi, mpya, kikumbusho kinachosubiri, inayosubiri kiotomatiki'.

Kuna kengele zinazoonekana, kumsaidia mtumiaji.

My Queues (0) Junk (1) Postmaster (1) Raw (1)


Kengele Zinazoonekana

- Angaza Umri 1: Inaseti umri katika dakika (ngazi ya kwanza) kwa ajili ya kuangaza foleni zenye tiketi ambazo hazijaguswa. Imeonekana juu kwenye foleni "Mbichi".
- Angaza Umri 2: Inaseti umri katika dakika (ngazi ya pili) kwa ajili ya kuangaza foleni zenye tiketi ambazo hazijaguswa. Imeonekana juu katika foleni ya "Mkuu wa posta".
- Konyeza: Ina amilisha utaratibu wa kukonyeza wa foleni ambayo ina tiketi ya zamani kuzidi zote. Haina msaada kwa vivinjari vyote. Kwa hali hii itaonekana nyekundu, kama inavyoonekana juu katika foleni "Taka".
- Kwa herufi nzito: Foleni ya sasa itakuwa na herufi nzito, kama inavyoonekana juu kwenye "Foleni Zangu".

9. Mapendeleo ya Mtumiaji

Watumiaji wa OTRS kama wateja, mawakala na msimamizi wa OTRS wanaweza kusanidi mapendeleo ya akaunti zao kwa mahitaji yao. Wakala anaweza kufikia skrini ya usanidi

kwa kubofya kwenye majina yao ya kuingia kwenye mfumo katika kona ya juu ya kulia ya kiolesura cha wavuti (ona Kielelezo chini), na wateja lazima wabofye kwenye kiungo cha "Mapendeleo" (ona Kielelezo chini).

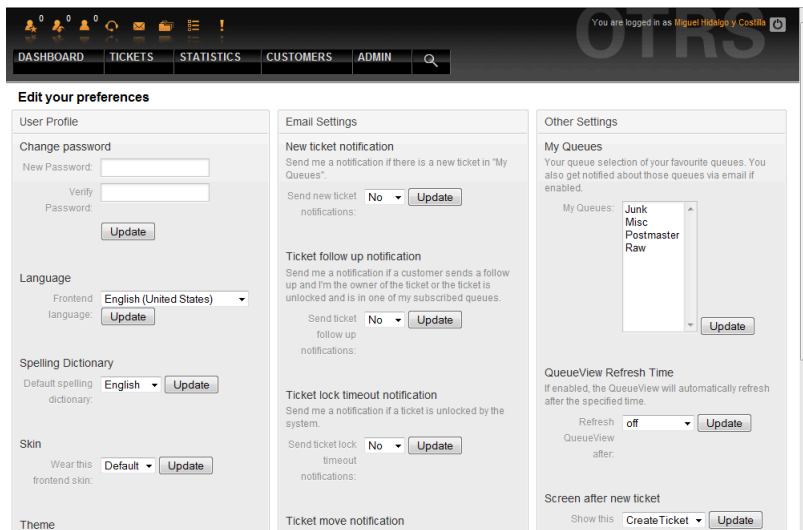

Kielelezo: Mapendeleo binafsi ya wakala

Wakala anaweza kusanidi kategori 3 za mapendeleo: umbo wa mtumiaji, mipangilio ya barua pepe, na mipangilio mingine. Vinavyowezekana kwa kawaida ni:

Umbo wa Mtumiaji

- Badili nywila ya sasa.
- Rekebisha lugha ya kiolesura.
- Badili gamba la mazingira ya mbele.
- Hamisha mandhari ya mazingira ya mbele.
- Amilisha na kusanidi muda wa nje ya ofisi.

Mipangilio ya barua pepe

- Chagua matukio yanayochochea taarifa kupitia barua pepe kwenda kwa wakala

Mipangilio mingine

- Chagua foleni unazotaka kufuatilia katika "Foleni Zangu".
- Seti muda wa kuonesha upya kwa ajili ya muonekano wa foleni.
- Seti skrini ya kuonyeshwa baada ya tiketi kutengenezwa.

Company Personal Support Simulate RTL

New Ticket | My Tickets | Company Tickets | Search Preferences Logout

Interface language

Your language: English (United States)

Number of displayed tickets

Max. displayed tickets: 25

Ticket overview

Refresh interval: off

Change password

New Password:

Verify Password:

SIMME Certificate

SIMME Certificate Upload:

Powered by OTRS 3.0.x CVS [About OTRS Help](#)

Kielelezo: Mapendeleo binafsi ya mteja.

Mteja anaweza kuchagua lugha ya kiolesura cha tovuti, kuseti muda wa kuonesha upya mapitio ya tiketi, na kuchagua kikomo cha idadi ya tiketi zinazoonyeshwa. Pia inawezekana kuseti nywila mpya.


Chapter 4. Utawala

1. Eneo la MSIMAMIZI wa OTRS

1.1. Misingi

Mipangilio ifuatayo ya usanidi wa mfumo inapatikana kwa wasimamizi wa OTRS kwa kufikia kurasa ya Msimamizi ya kiolesura cha tovuti cha OTRS - kuongeza mawakala, wateja na foleni, tiketi na mipangilio ya barua, kusakinisha vifurushi vya ziada kama FAQ na ITSM na nyingine nyingi.

Mawakala ambao ni wanachama wa kundi la *msimamizi* wanaweza kufikia eneo la Msimamizi kwa kubofya kiungo cha *msimamizi* katika mwambaa wa uabiri (ona Kielelezo chini). Mawakala bila haki za ufikivu za juu hawataweza kufikia kiungo hiki.

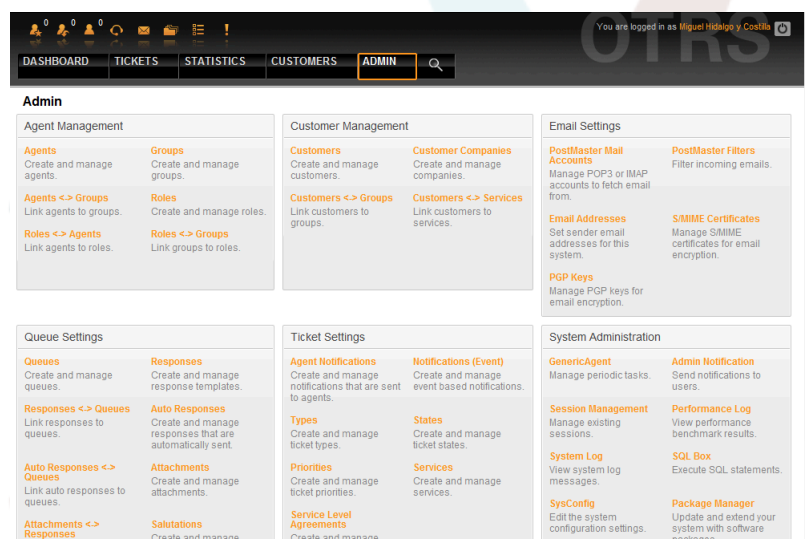

Kielelezo: Skrini ya Msimaizi wa OTRS.


1.2. Mawakala, Makundi na Majukumu

1.2.1. Mawakala

Kwa kubofya kiungo *Mawakala*, unapata ufikivu kwenye skrini ya OTRS ya usimamizi wa wakala (ona Kielelezo chini). Wasimamizi wanaweza kuongeza, kubadilisha au kulemaza akaunti za wakala. Kwa zaidi wanaweza kusimamia mapendeleo ya wakala, ikijumuisha lugha na mipangilio ya taarifa kwa kila kiolesura cha wakala.

Note

Akaunti ya wakala wa OTRS inaweza kulemazwa lakini sio kufutwa. Kulemaza kunafanywa kwa kuseti alma ya Halali kuwa *batili* au *batili-kwa muda*.

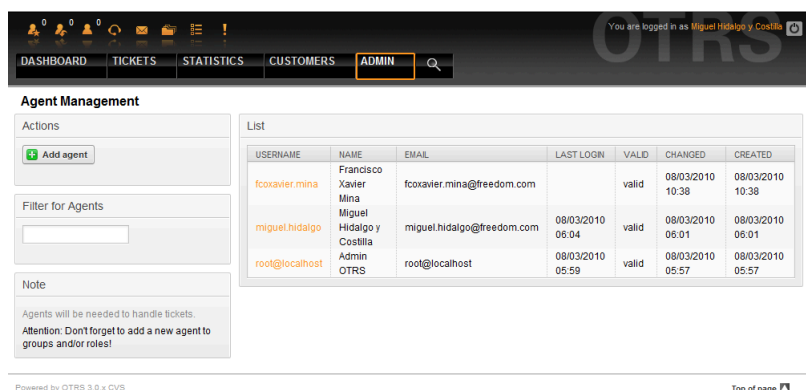

Agent Management

Actions

Filter for Agents


Note
 Agents will be needed to handle tickets.
Attention: Don't forget to add a new agent to groups and/or roles!

USERNAME	NAME	EMAIL	LAST LOGIN	VALID	CHANGED	CREATED
fcoxavier.mina	Francisco Xavier Mina	fcoxavier.mina@freedom.com		valid	08/03/2010 10:38	08/03/2010 10:38
miguel.hidalgo	Miguel Hidalgo y Costilla	miguel.hidalgo@freedom.com	08/03/2010 05:04	valid	08/03/2010 05:01	08/03/2010 05:01
root@localhost	Admin OTRS	root@localhost	08/03/2010 05:59	valid	08/03/2010 05:57	08/03/2010 05:57

Powered by OTRS 3.0.x CVS Top of page

Kielelezo: Usimamizi wa wakala.

Kusajili wakala, bofya kwenye kitufe cha "Ongeza wakala", ingiza data inayotakiwa na bonyeza kitufe cha Wasilisha upande wa chini wa skrini, kama ilivyoonyeshwa kwenye Kielelezo.

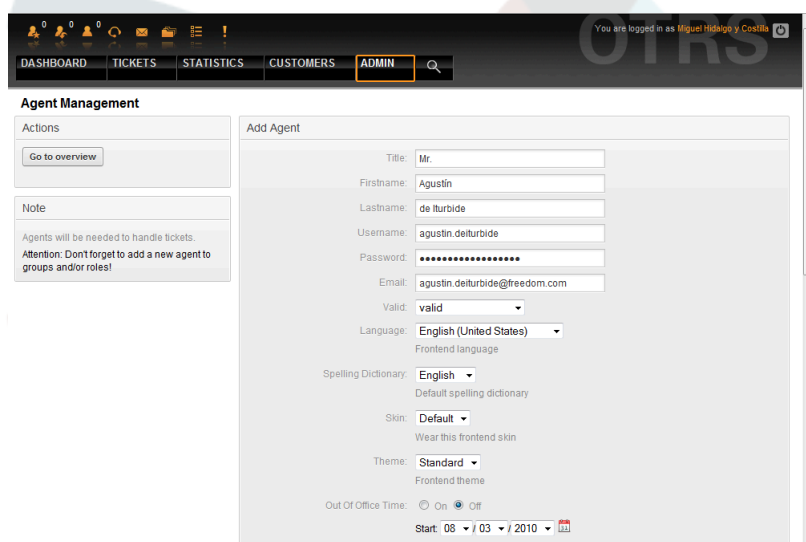

Agent Management

Actions

Note
 Agents will be needed to handle tickets.
Attention: Don't forget to add a new agent to groups and/or roles!

Add Agent

Title:

Firstname:

Lastname:

Username:

Password:

Email:

Valid:

Language:

Spelling Dictionary:

Skin:

Theme:

Out Of Office Time: On Off

Start: 08 / 03 / 2010

Kielelezo: Kuongeza wakala mpya.

Baada ya akaunti mpya ya wakala kutengenezwa, unatakiwa kumfanya wakala mwanachama wa kundi moja au zaidi au majukumu. Taarifa kuhusu majukumu au makundi zinapatikana katika vifunguMakundi na Majukumu vya sura hii.

1.2.2. Makundi

Kila akaunti ya wakala inatakiwa iwe kwenye japo kundi moja au jukumu. Katika usakinishaji mpya, kuna makundi matatu yanapatikana yaliyofafanuliwa tayari, kama ilivyoonyeshwa kwenye Jedwali 5-1.


Table 4.1. Makundi chaguo-msingi yanayopatikana katika usakinishaji mpya wa OTRS

Kundi	Maelezo
msimaizi	Ruhusa ya kufanya kazi za usimamizi wa mfumo.
takwimu	Fuzu kufikia kwenye moduli ya takwimu ya OTRS na kutengeneza takwimu.
watumiaji	Mawakala wapo kwenye hili kundi, wakiwa na ruhusa za kusoma na kuandika. Wanaweza kufikia programu-tumizi zote za mfumo wa tiketi.

Note

Katika usakinishaji mpya wa OTRS, kundi la *watumiaji* halina mwanachama yoyote mwanzoni. Wakala 'root@localhost' ni mwanachama wa makundi msimaizi na takwimu kwa chaguo-msingi.

Unaweza kufikia kurasa ya usimamizi wa kundi (ona Kielelezo chini) kwa kubofya kiungo *Makundi* katika eneo la msimamizi.

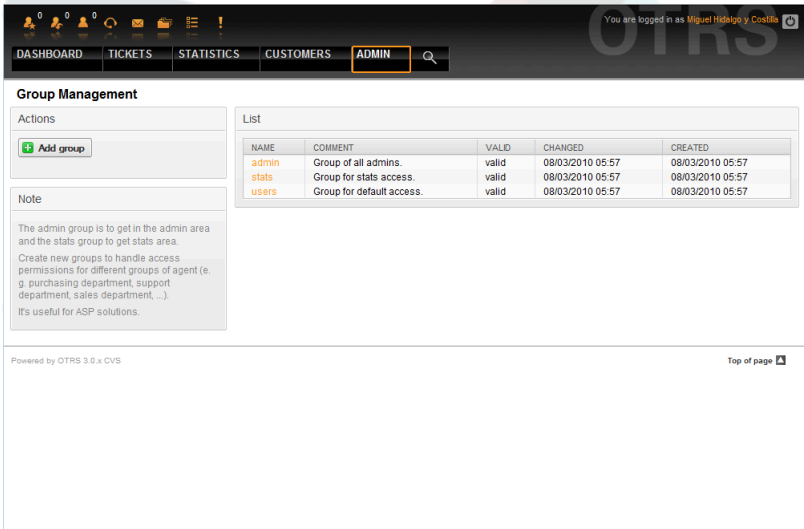

Group Management

Actions

[Add group](#)

Note

The admin group is to get in the admin area and the stats group to get stats area.
 Create new groups to handle access permissions for different groups of agent (e.g. purchasing department, support department, sales department, ...).
 It's useful for ASP solutions.

List

NAME	COMMENT	VALID	CHANGED	CREATED
admin	Group of all admins	valid	08/03/2010 05:57	08/03/2010 05:57
stats	Group for stats access	valid	08/03/2010 05:57	08/03/2010 05:57
users	Group for default access	valid	08/03/2010 05:57	08/03/2010 05:57


Powered by OTRS 3.0.x CVS Top of page

Kielelezo: Usimamizi wa kundi.

Note

Kama ilivyo kwa mawakala, kundi la OTRS linaweza kulemazwa lakini si kufutwa. Kulemazwa kunafanywa kwa kuseti alama Halali kuwa *batili* au *batili-kwa muda*.


Kuongeza wakala kwenye kundi, au kubadilisha mawakala ambao wapo kwenye kundi, unaweza kutumia kiungo *Mawakala* ↔ *Makundi* kutoka kwenye kurasa ya Msimamizi (ona Kielelezo chini).

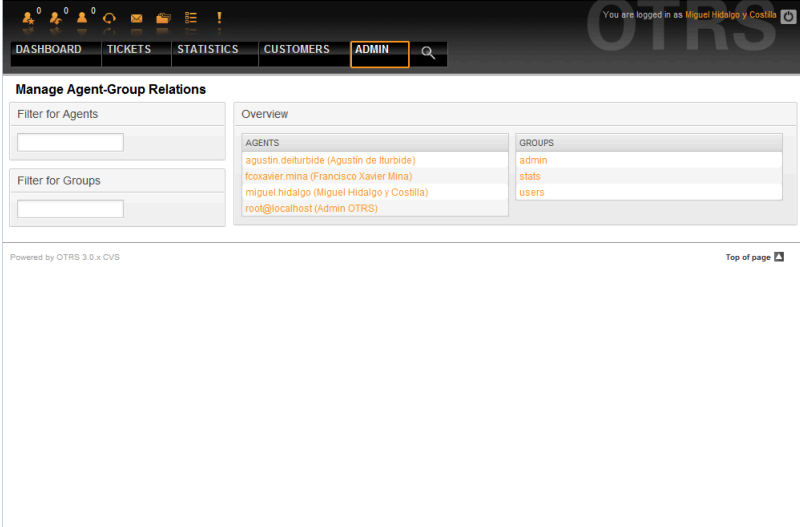

The screenshot shows the 'Manage Agent-Group Relations' overview page in OTRS. The top navigation bar includes 'DASHBOARD', 'TICKETS', 'STATISTICS', 'CUSTOMERS', and 'ADMIN'. The page title is 'Manage Agent-Group Relations'. There are two filter boxes: 'Filter for Agents' and 'Filter for Groups'. The 'Overview' section is divided into two columns: 'AGENTS' and 'GROUPS'. The 'AGENTS' column lists: agustin.dellurbide (Agustin de Ilurbide), foxavier.mina (Francisco Xavier Mina), miguel.hidalgo (Miguel Hidalgo y Costilla), and root@localhost (Admin OTRS). The 'GROUPS' column lists: admin, stats, and users. At the bottom, it says 'Powered by OTRS 3.0.x CVS' and 'Top of page'.


Kielelezo: Usimamizi wa kundi.

Mapitio ya makundi yote na mawakala wote wa mfumo yanaonyeshwa katika ukurasa huu. Pia unaweza kutumia vichujio vilivyopo kutafuta chombo fulani maalumu. Kama ukitaka kubadilisha makundi ambayo wakala ni mwanachama, bofya kwenye jina la wakala (ona Kielelezo chini). Kubadilisha mawakala wanaohusika na kundi fulani, bofya kwenye kundi unalotaka kuhariri (ona Kielelezo chini).

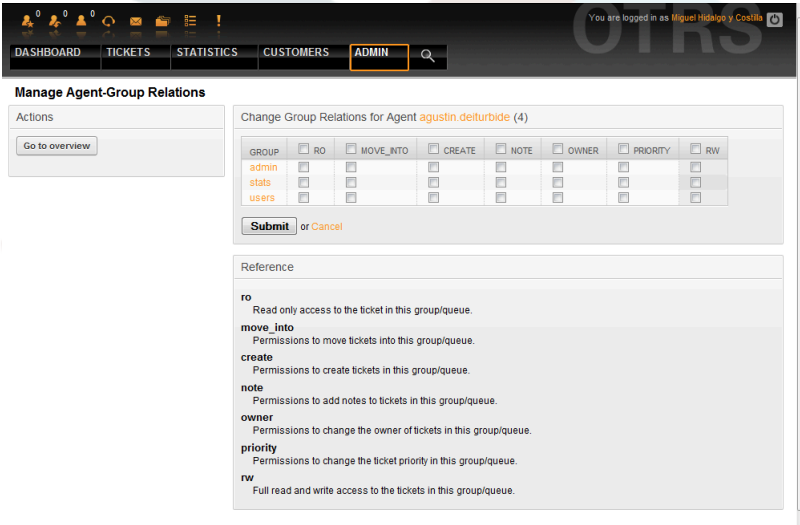

The screenshot shows the 'Manage Agent-Group Relations' actions page in OTRS. The top navigation bar is the same as the previous screenshot. The page title is 'Manage Agent-Group Relations'. There is an 'Actions' section with a 'Go to overview' button. The main section is titled 'Change Group Relations for Agent agustin.dellurbide (4)'. It contains a table with columns: GROUP, RO, MOVE_INT, CREATE, NOTE, OWNER, PRIORITY, and RW. The rows are: admin, stats, and users. Below the table are 'Submit' and 'Cancel' buttons. A 'Reference' section lists permissions: ro (Read only access to the ticket in this group/queue), move_into (Permissions to move tickets into this group/queue), create (Permissions to create tickets in this group/queue), note (Permissions to add notes to tickets in this group/queue), owner (Permissions to change the owner of tickets in this group/queue), priority (Permissions to change the ticket priority in this group/queue), and rw (Full read and write access to the tickets in this group/queue).

Kielelezo: Badilisha kundi alilopo wakala.

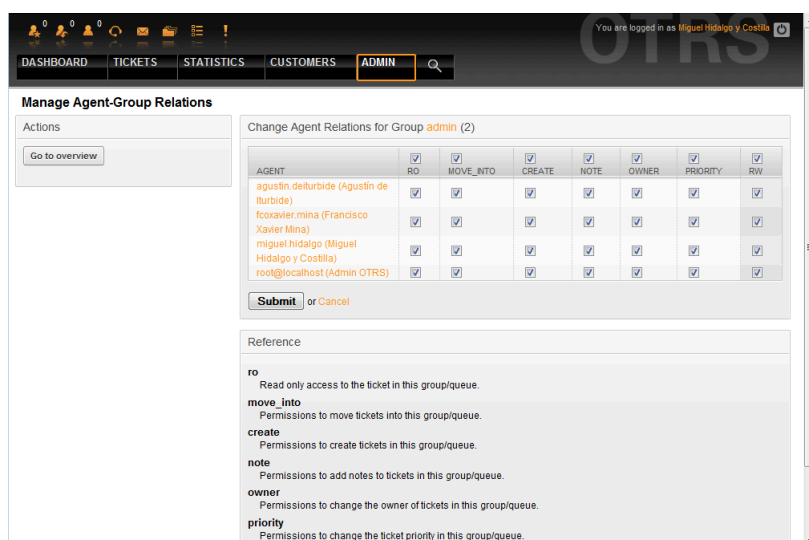

Kielelezo: Badilisha mawakala waliopo kwenye makundi maalumu.

Kila kundi lina seti ya haki zinazohusishwa nalo, na kila mwanachama (wakala) wa kundi anaweza kuwa na mjumuisho wa haki hizi kwa ajili yake mwenyewe. Orodha ya haki / ruhusa imeonyeshwa kwenye Jedwali 5-2.

Table 4.2. Haki zinazohusishwa na makundi ya OTRS

Haki	Maelezo
ro	Uwezo wa kusoma tiketi, maingizo na foleni tu kwa hili kundi.
hamia kwenye	Haki ya kuhamisha tiketi au maingizo katikati ya foleni au maeneo yaliyo kwenye hili kundi.
tengeneza	Haki ya kutengeneza tiketi au maingizo kwenye foleni au maeneo ya hili kundi.
mmiliki	Haki za kusasisha mmiliki wa tiketi au maingizo katika foleni au maeneo ambayo yapo kwenye hili kundi.
kipaumbele	Haki ya kubadilisha kipaumbele cha tiketi au maingizo au maeneo yaliyo kwenye hili kundi.
soma andikwa	Haki kamili ya kusoma na kuandika kwa tiketi au maingizo ya foleni au maeneo yaliyopo kwenye hili kundi.

Note

Kwa chaguo-msingi, MuonekanoWaFoleni unaorodhesha tiketi katika foleni pale wakala ana ufikivu wa *kusoma na kuandika*, ikimaanisha tiketi ambazo wakala anahitaji kuzifanyia kazi. Ukitaka kubadilisha hii tabia, unaweza kuseti Tiketi::Mazingirayambe::WakalaTiketiFoleni###OnaTiketiZoteZinazowezezana kwa *Ndiyo*.

Sio ruhusa zote zinazopatikana zinaonyeshwa kwa chaguo-msingi. Hizi ruhusa za ziada zinaweza kuongezwa.

Table 4.3. Makundi ya ruhusa ya ziada

Haki	Maelezo
takwimu	Kupewa ruhusa ya kurasa ya takwimu.
dunda	Haki ya kudundisha ujumbe wa barua pepe (na kitufe cha kudunda katika Kuzatiketi).
tunga	Haki ya ku tunga jibu la tiketi.
mteja	Haki ya kubadilisha mteja wa tiketi.
tuma mbele	Haki ya kutuma mbele meseseji (kwa kitufe cha kutuma mbele).
inasubiri	Haki ya kuseti tiketi isubirie.
simu	Haki ya kuongeza kupiga simu kwa tiketi.
wajibika	Haki ya kubadilisha wakala anayewajibika kwa tiketi.

Note

Hizi ruhusa zinaweza kuongezwa kwa kubadilisha Mfumo::Ruhusa

1.2.3. Jukumu

Majukumu ni kiengele chenye nguvu cha kusimamia haki za ufikivu za mawakala wengi katika njia rahisi na ya haraka. Zina manufaa zaidi kwa mifumo mikubwa na changamano yenye mawakala wengi, makundi na foleni. Mfano chini unaelezea wakati gani zitumike.

Tuseme una mfumo wenye mawakala 100, 90 kati yao na wana ufikivu kwenye foleni moja itwayo "msaada" ambapo maombi yote ya msaada yanashughulikiwa. Foleni "msaada" ina foleni ndogo nyingi ndani yake. Mawakala wengine 10 wana ruhusa ya kufikia foleni zote za mfumo. Hawa mawakala 10 wanatoa tiketi, wanaangalia foleni mbichi na kuhamisha ujumbe taka kwenda kwenye foleni "taka".


Kampuni sasa inafungua idara mpya inayouza bidhaa. Maombi na mapokezi ya oda, uthibitishaji wa oda, bili, na kadh. lazima zichakatishwe, na baadhi ya mawakala wa kampuni wanatakiwa kufanya hivi kwa kutumia OTRS. Mawakala tofauti wanatakiwa waweze kufikia kwenye foleni mpya ambazo lazima zitengenezwe.

Kwa sababu itatumia muda mwingi kubadilisha haki za ufikivu za kila wakala mmoja kwa mikono, majukumu ambayo yanafafanua ngazi tofauti za ufikivu yanaweza kutengenezwa. Kisha mawakala wanaweza kuongezwa kwenye jukumu moja au zaidi, na haki zao za ufikivu zitabadilika kiotomatiki. Kama akaunti mpya ya wakala itatengenezwa, pia inawezekana kuongeza akaunti hii kwa jukumu moja au zaidi.

Note

Majukumu ni muhimu ukihusika na mashirika makubwa na ukisimamia usakinishaji mkubwa wa OTRS. Umakini mkubwa unashauriwa. Kuchanganya miunganiko ya Wakala kwa Kundi na Wakala kwa Jukumu unaweza kutengeneza mpango mgumu wa kudhibiti ufikivu, ambao ni mgumu kuelewa na kudumisha. Kama ukiamua kutumia majukumu tu na kulemaza Mawakala <-> chaguo la Makundi kwenye eneo la Msimamizi, unaweza kufanya hiyo kwa kurekebisha Mazingira ya mbele::Moduli###MsimamiziMtumiajiKundi katika SysConfig. Fahamu hii haitaondoa kazi zilizopo za Mawakala kwa Makundi!

Unaweza kufikia kifungu cha usimamizi wa majukumu (ona Kielelezo chini) kwa kubofya kiungo cha *Majukumu* kwenye kurasa ya Msimamizi.

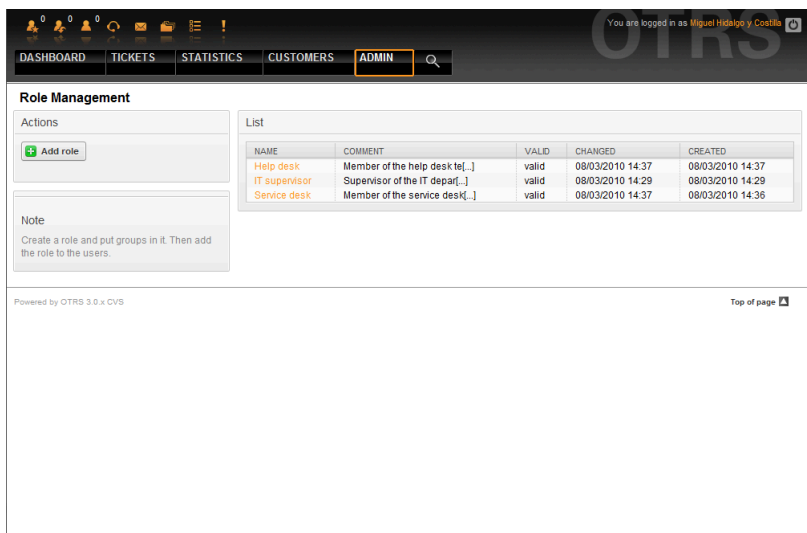

Dashboard | TICKETS | STATISTICS | CUSTOMERS | **ADMIN**

You are logged in as Miguel Hidalgo y Costilla

Role Management

Actions: [Add role](#)

Note: Create a role and put groups in it. Then add the role to the users.

NAME	COMMENT	VALID	CHANGED	CREATED
Help desk	Member of the help desk tel_1	valid	08/03/2010 14:37	08/03/2010 14:37
IT supervisor	Supervisor of the IT depart_1	valid	08/03/2010 14:29	08/03/2010 14:29
Service desk	Member of the service desk_1	valid	08/03/2010 14:37	08/03/2010 14:36


Powered by OTRS 3.0.x CVS Top of page

Kielelezo: Usimamizi wa jukumu.

Note

Kama ilivyo kwa wakala na makundi, majukumu yakishatengenezwa yanaweza kulemazwa na si kufutwa. Kulemaza, seti chaguo Halali kuwa *batili* au *batili-kwa muda*.

Mapitio ya majukumu yote kwenye mfumo yanaonyeshwa. Kuhariri mipangilio ya jukumu, bofya jina la jukumu. Kwenye usakinishaji mpya wa OTRS, hakuna majukumu yaliyofafanuliwa kama chaguo-msingi. KUsajili moja, bofya kitufe cha "Ongeza jukumu", toa data zinazotakiwa kisha wasilisha. (ona Kielelezo chini).

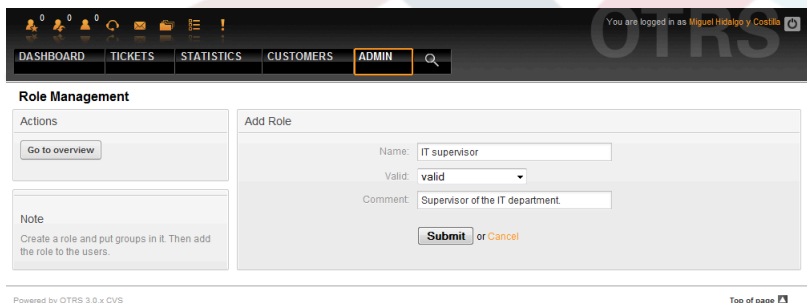

Dashboard | TICKETS | STATISTICS | CUSTOMERS | **ADMIN**

You are logged in as Miguel Hidalgo y Costilla

Role Management

Actions: [Go to overview](#)

Note: Create a role and put groups in it. Then add the role to the users.

Add Role

Name:

Valid:


Comment:

or

Powered by OTRS 3.0.x CVS Top of page

Kielelezo: Kuongeza jukumu jipya.

Kupata mapitio ya majukumu yote na mawakala katika mfumo, bofya kwenye kitufe Majukumu <-> Mawakala kwenye kurasa ya Msimamizi. Pia unaweza kutumia vichujio kutafuta elementi maalumu. Ukitaka kubadilisha majukumu ya wakala husika, bofya kwenye jina la wakala (ona Kielelezo chini). Kubadilisha mawakala wanaohusika na jukumu, bofya kwenye jukumu unalotaka kuhariri (ona Kielelezo chini).

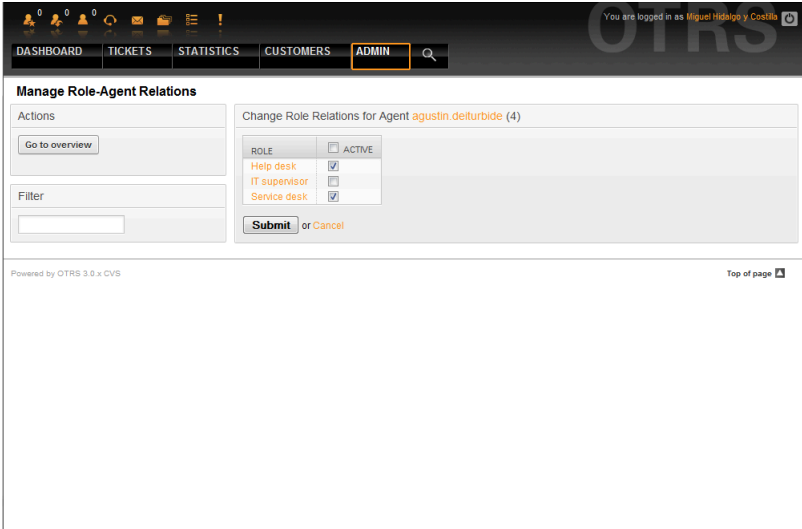

Dashboard: DASHBOARD TICKETS STATISTICS CUSTOMERS ADMIN

You are logged in as Miguel Hidalgo y Costilla

Manage Role-Agent Relations

Actions: [Go to overview](#)


Change Role Relations for Agent **agustin.deiturbide** (4)

ROLE	ACTIVE
Help desk	<input checked="" type="checkbox"/>
IT supervisor	<input checked="" type="checkbox"/>
Service desk	<input checked="" type="checkbox"/>

[Submit](#) or [Cancel](#)

Powered by OTRS 3.8.x CVS Top of page

Kielelezo: Badilisha majukumu yanayomhusu wakala.

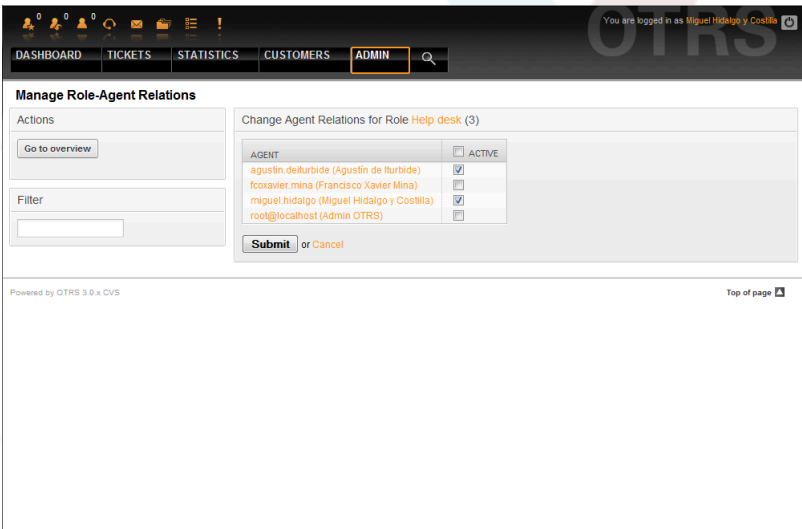

Dashboard: DASHBOARD TICKETS STATISTICS CUSTOMERS ADMIN

You are logged in as Miguel Hidalgo y Costilla

Manage Role-Agent Relations

Actions: [Go to overview](#)

Change Agent Relations for Role **Help desk** (3)


AGENT	ACTIVE
agustin.deiturbide (Agustin de Iturbide)	<input checked="" type="checkbox"/>
foxavier.mina (Francisco Xavier Mina)	<input checked="" type="checkbox"/>
miguel.hidalgo (Miguel Hidalgo y Costilla)	<input checked="" type="checkbox"/>
root@localhost (Admin OTRS)	<input type="checkbox"/>

[Submit](#) or [Cancel](#)

Powered by OTRS 3.8.x CVS Top of page

Kielelezo: Badilisha mawakala wanaohusika na jukumu maalumu.


Kupata mapitio ya majukumu yote na makundi kwenye mfumo, bofya kwenye Majukumu <-> Makundi kwenye ukurasa wa Msimamizi. Utaona skrini inayofanana na iliyoonyeshwa kwenye Kielelezo. Unaweza pia kutumia vichujio kutafuta chombo fulani.

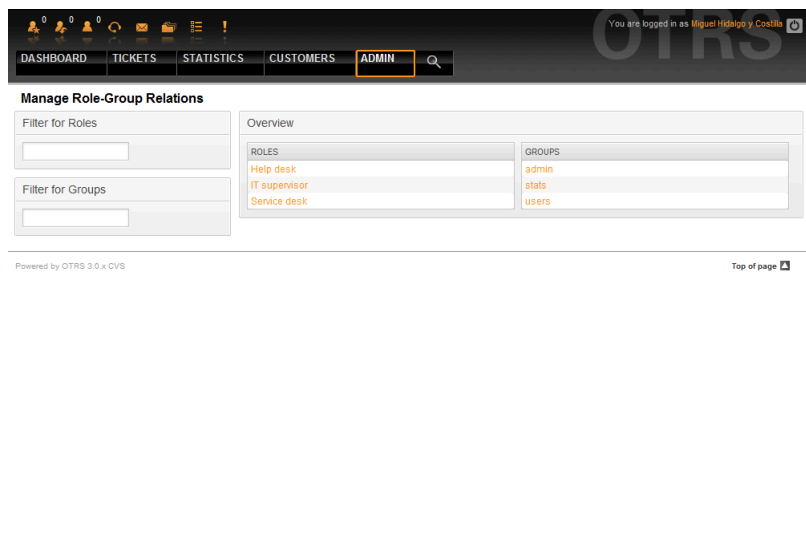

The screenshot shows the OTRS Admin interface. At the top, there is a navigation bar with 'ADMIN' selected. Below it, the page title is 'Manage Role-Group Relations'. There are two filter boxes: 'Filter for Roles' and 'Filter for Groups'. The main content area is titled 'Overview' and contains two columns: 'ROLES' and 'GROUPS'. The 'ROLES' column lists 'Help desk', 'IT supervisor', and 'Service desk'. The 'GROUPS' column lists 'admin', 'stats', and 'users'. At the bottom, there is a footer with 'Powered by OTRS 3.0.x CVS' and a 'Top of page' link.


Kielelezo: Simamia mahusiano ya Makundi-Majukumu.

Kufafanua haki tofauti za ufikivu kwa jukumu, bofya kwenye jina la jukumu au kundi (ona chini Vielelezo 5.13 na 5.14, kwa mtiririko).

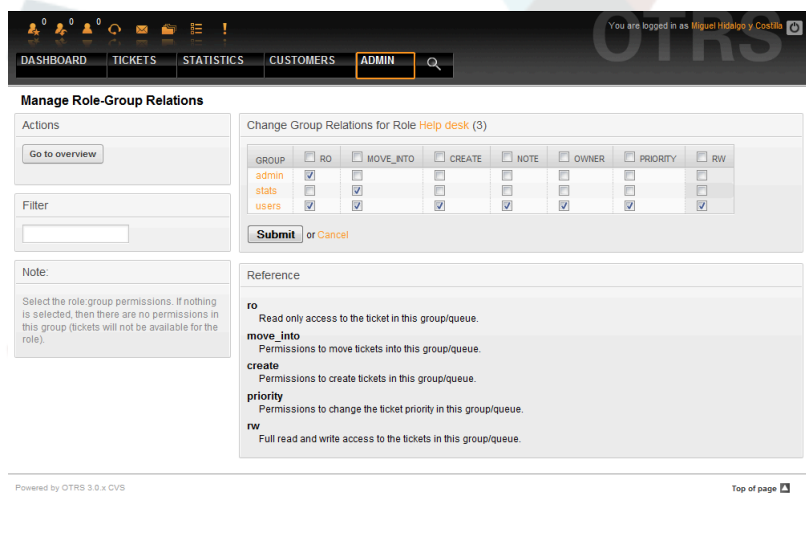

The screenshot shows the OTRS Admin interface for configuring role permissions. The page title is 'Manage Role-Group Relations'. There is an 'Actions' section with a 'Go to overview' button. A 'Filter' box is present. A 'Note' section explains that selecting a role/group combination will set permissions. The main content area is titled 'Change Group Relations for Role Help desk (3)'. It contains a table with columns: GROUP, RO, MOVE_INTO, CREATE, NOTE, OWNER, PRIORITY, and RW. The table has three rows: 'admin', 'stats', and 'users'. Each row has checkboxes for 'RO', 'MOVE_INTO', 'CREATE', 'NOTE', 'OWNER', 'PRIORITY', and 'RW'. Below the table are 'Submit' and 'Cancel' buttons. A 'Reference' section lists permissions: 'ro' (Read only access to the ticket in this group/queue), 'move_into' (Permissions to move tickets into this group/queue), 'create' (Permissions to create tickets in this group/queue), 'priority' (Permissions to change the ticket priority in this group/queue), and 'rw' (Full read and write access to the tickets in this group/queue). At the bottom, there is a footer with 'Powered by OTRS 3.0.x CVS' and a 'Top of page' link.

Kielelezo: Badilisha mahusiano ya Makundi kwa Jukumu.

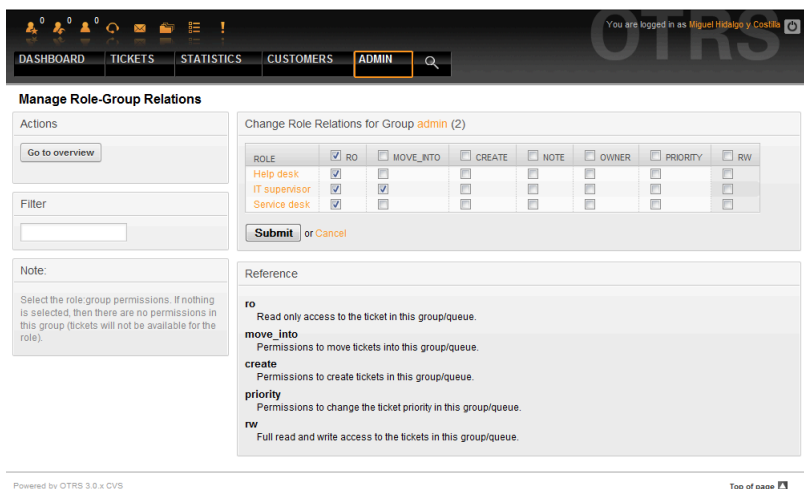

Manage Role-Group Relations

Change Role Relations for Group **admin** (2)

ROLE	<input checked="" type="checkbox"/> RO	<input type="checkbox"/> MOVE_INTO	<input type="checkbox"/> CREATE	<input type="checkbox"/> NOTE	<input type="checkbox"/> OWNER	<input type="checkbox"/> PRIORITY	<input type="checkbox"/> RW
Help desk	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
IT supervisor	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Service desk	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Submit or **Cancel**

Note: Select the role group permissions. If nothing is selected, then there are no permissions in this group (tickets will not be available for the role).

Reference

- ro** Read only access to the ticket in this group/queue.
- move_into** Permissions to move tickets into this group/queue.
- create** Permissions to create tickets in this group/queue.
- priority** Permissions to change the ticket priority in this group/queue.
- rw** Full read and write access to the tickets in this group/queue.


Powered by OTRS 3.0.x CVS Top of page

Kielelezo: Badilisha mahusiano ya Majukumu kwa Kundi.

1.3. Wateja na Makundi ya Wateja

1.3.1. Wateja

OTRS ina msaada kwa watumiaji wa aina nyingi. Kwa kutumia kiungo "Wateja" (kupitia mwambaa wa uabiri, au kurasa ya Msimamizi), unaweza kusimamia akaunti za wateja (ona Kielelezo chini), ambao wanaweza kuingia kwenye mfumo kupitia kiolesura cha Wateja (mteja.pl). Kupitia kiolesura hiki, wateja wako hawataweza tu kutengeneza tiketi laki-ni pia kupitia tiketi zao za nyuma kwa usasisho mpya. Ni muhimu kujua kwamba mteja anahitajika kwa ajili ya historia ya tiketi kwenye mfumo.

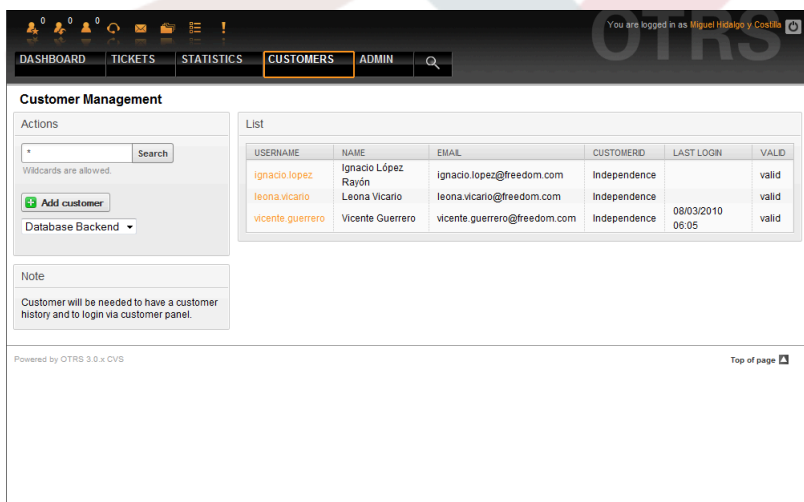

Customer Management

List

USERNAME	NAME	EMAIL	CUSTOMERID	LAST LOGIN	VALID
ignacio.lopez	Ignacio López	ignacio.lopez@freedom.com	Independence		valid
leona.vicario	Leona Vicario	leona.vicario@freedom.com	Independence		valid
vicente.guerrero	Vicente Guerrero	vicente.guerrero@freedom.com	Independence	09/03/2010 06:05	valid


Note: Customer will be needed to have a customer history and to login via customer panel.

Powered by OTRS 3.0.x CVS Top of page

Kielelezo: Usimamizi wa Mteja.

Unaweza kutafuta mteja aliyesajiliwa, au kuhariri miangilio yake kwa kubofya jina lake. Pia una uwezo wa kubadilisha mazingira ya nyuma ya mteja, kwa maelezo zaidi tafadhali rejea kwenye sura kuhusu mazingira ya nyuma ya nje.

Kutengeneza akaunti mpya ya mteja, bofya kitufe cha "Ongeza mteja" (Ona kielelezo chini). Baadhi ya maeneo ni ya lazima, mf. inabidi ziwe na thamani, kwahiyo ukiziacha bila kujaza zitaonyeshwa kwa rangi nyekundu.

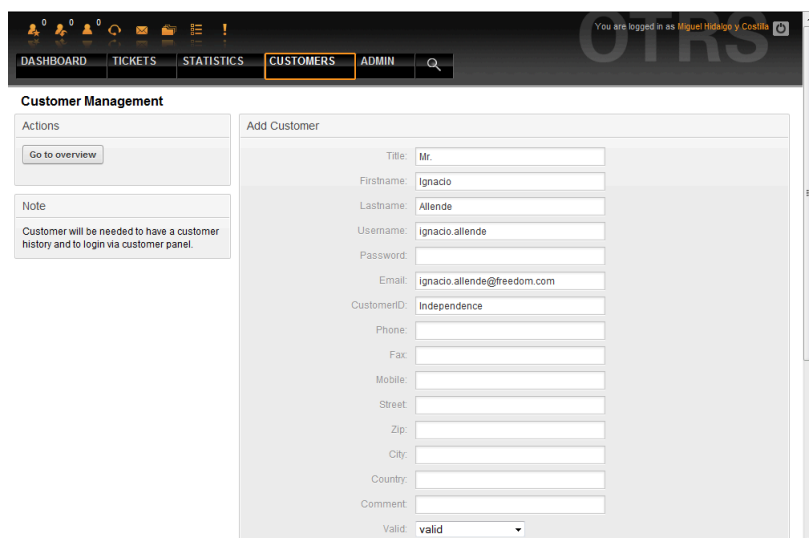

The screenshot shows the OTRS web interface. At the top, there is a navigation bar with tabs for DASHBOARD, TICKETS, STATISTICS, CUSTOMERS (selected), and ADMIN. Below the navigation bar, the 'Customer Management' section is visible. On the left, there are 'Actions' (Go to overview) and a 'Note' box stating: 'Customer will be needed to have a customer history and to login via customer panel.' The main area is titled 'Add Customer' and contains a form with the following fields: Title (Mr.), Firstname (Ignacio), Lastname (Allende), Username (Ignacio.allende), Password, Email (Ignacio.allende@freedom.com), CustomerID (Independence), Phone, Fax, Mobile, Street, Zip, City, Country, Comment, and a 'Valid' dropdown menu set to 'valid'.

Kielelezo: Kuongeza mteja.

Wateja wanaweza kufikia mfumo kwa kutoa jina la mtumiaji na nywila. Kitambulisho cha Mteja kinahitajika na mfumo kutambua mtumiaji na tiketi zinazohusika. Kwa kuwa anwani ya barua pepe ni ya kipekee, inaweza kutumika kama kitambulisho.

Note


Kama ilivyo kwa mawakala, makundi na majukumu, wateja hawawezi kufutwa kwenye mfumo, wanaweza kulemazwa kwa kuseti chaguo Halali kuwa *batili* au *batili-kwa muda*.

1.3.2. Makundi ya Wateja

Wateja watumiaji wanaweza pia kuongezwa kwenye kundi, ambayo itakuwa na manufaa kama ukitaka kuongeza wateja wa kampuni moja wenye ufikivu kwa foleni moja au zaidi. Kwanza tengeneza kundi ambalo wateja wako watakuwa wanachama, kupitia Moduli ya kusimamia kundi. Kisha ongeza foleni na chagua kundi jipya la foleni.

Hatua inayofwata ni kuamilisha msaada wa kundi la mteja. Hii inaweza kufanywa na parameta ya usanidi MsaadaKundiLaMteja, kutoka kwenye chaguo la Msimamizi la SysConfig. Kutumia parameta MtejaKundiDaimaMakundi, unaweza kubainisha makundi chaguo-msingi kwa mteja mpya aliyeongezwa, ili kila akaunti mpya iongezwe kiotomatiki kwenye haya makundi.

Kupitia kiungo "Wateja <-> Makundi" unaweza kusimamia mteja yupi atakuwa kwenye makundi yapi (ona Kielelezo chini).

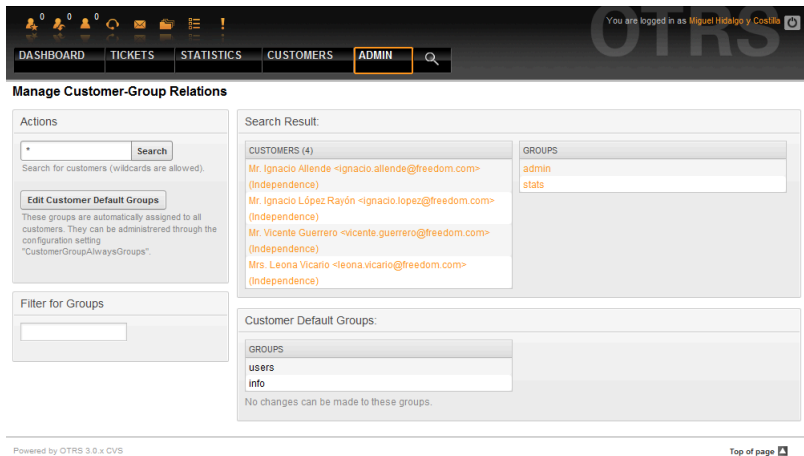

Manage Customer-Group Relations

Actions

*

Search for customers (wildcards are allowed).

These groups are automatically assigned to all customers. They can be administered through the configuration setting "CustomerGroupAlwaysGroups".

Filter for Groups

Search Result:

CUSTOMERS (4)

- Mr. Ignacio Allende <ignacio.allende@freedom.com> (Independence)
- Mr. Ignacio López-Rayón <ignacio.lopez@freedom.com> (Independence)
- Mr. Vicente Guerrero <vicente.guerrero@freedom.com> (Independence)
- Mrs. Leona Vicario <leona.vicario@freedom.com> (Independence)

GROUPS

- admin
- stats

Customer Default Groups:

GROUPS


- users
- info

No changes can be made to these groups.

Powered by OTRS 3.0.x CVS Top of page

Kielelezo: Usimamizi wa mahusiano ya Mteja-Kundi.

Kufafanua makundi tofauti ambayo mteja anatakiwa kuwapo na vinginevyo, bofya jina la mtumiaji la mteja au kundi (ona chini vielelezo 5.16 na 5.17 kwa mtiririko)

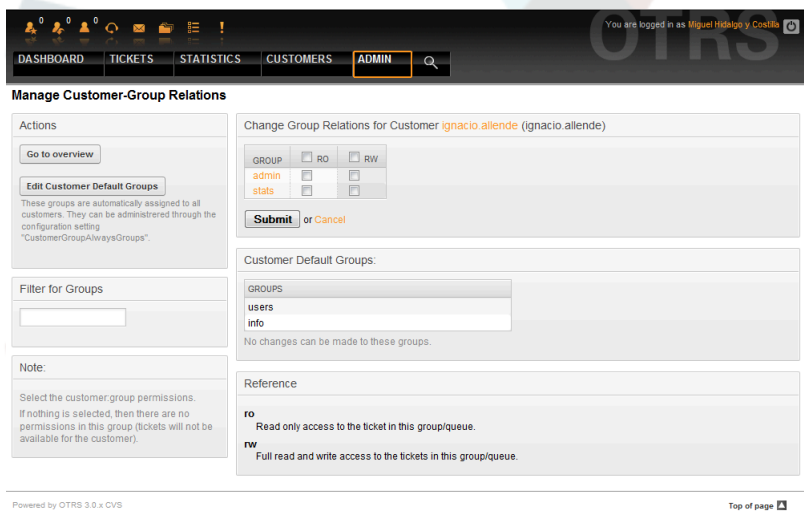

Manage Customer-Group Relations

Actions

These groups are automatically assigned to all customers. They can be administered through the configuration setting "CustomerGroupAlwaysGroups".

Filter for Groups

Note:

Select the customer group permissions. If nothing is selected, then there are no permissions in this group (tickets will not be available for the customer).

Change Group Relations for Customer ignacio.allende (ignacio.allende)

GROUP	RD	RW
admin	<input type="checkbox"/>	<input type="checkbox"/>
stats	<input type="checkbox"/>	<input type="checkbox"/>

or

Customer Default Groups:

GROUPS

- users
- info

No changes can be made to these groups.

Reference

ro Read only access to the ticket in this group/queue.

rw Full read and write access to the tickets in this group/queue.

Powered by OTRS 3.0.x CVS Top of page

Kielelezo: Badilisha mahusiano ya Makundi kwa Mteja.

OTRS

You are logged in as Miguel Hidalgo y Costilla

DASHBOARD TICKETS STATISTICS CUSTOMERS ADMIN

Manage Customer-Group Relations

Actions

Go to overview

Search for customers (wildcards are allowed).

Note:

Select the customer.group permissions. If nothing is selected, then there are no permissions in this group (tickets will not be available for the customer).

Change Customer Relations for Group admin (2)

CUSTOMER (4)	RO	RW
Mr. Ignacio Allende <ignacio.allende@freedom.com> (Independence)	<input type="checkbox"/>	<input type="checkbox"/>
Mr. Ignacio López Rayón <ignacio.lopez@freedom.com> (Independence)	<input type="checkbox"/>	<input type="checkbox"/>
Mr. Vicente Guerrero <vicente.guerrero@freedom.com> (Independence)	<input type="checkbox"/>	<input type="checkbox"/>
Mrs. Leona Vicario <leona.vicario@freedom.com> (Independence)	<input type="checkbox"/>	<input type="checkbox"/>

Submit or Cancel

Reference

ro
Read only access to the ticket in this group/queue.

rw
Full read and write access to the tickets in this group/queue.

Powered by OTRS 3.0.x CVS Top of page

Kielelezo: Badilisha mahusiano ya Mteja kwa Kundi.

1.4. Foleni

Kubofya kwenye kiungo "Foleni" cha kurasa ya Msimamizi, unaweza kusimamia foleni za mfumo wako (ona Kielelezo chini). Katika usakinishaji mpya wa OTRS kuna foleni 4: Mbichi, Barua taka, Mchanganyiko na Mkuu wa posta. Ujumbe wowote unaoingia utahifadhiwa kwenye foleni "Mbichi" kama hakuna sheria ya kuchuja iliyofafanuliwa. Foleni ya "Barua taka" inaweza kutumika kuhifadhi barua taka.

OTRS

You are logged in as Miguel Hidalgo y Costilla

DASHBOARD TICKETS STATISTICS CUSTOMERS ADMIN

Manage Queues

Actions

Add queue

List

NAME	GROUP	COMMENT	VALID	CHANGED	CREATED
Junk	users	All junk tickets.	valid	08/03/2010 05:57	08/03/2010 05:57
Misc	users	All misc tickets.	valid	08/03/2010 05:57	08/03/2010 05:57
Postmaster	users	Post master queue.	valid	08/03/2010 05:57	08/03/2010 05:57
Raw	users	All default incoming ticke[...]	valid	08/03/2010 05:57	08/03/2010 05:57

Powered by OTRS 3.0.x CVS Top of page

Kielelezo: Usimamizi wa foleni.

Hapa unaweza kuongeza foleni (ona kielelezo chini) na kuzirekebisha. Unaweza kuweka bayana kundi ambalo litatumia hiyo foleni. Unaweza ku seti foleni kama sehemu ya foleni nyingine.

The screenshot shows the OTRS Admin interface. The top navigation bar includes 'DASHBOARD', 'TICKETS', 'STATISTICS', 'CUSTOMERS', and 'ADMIN'. The 'ADMIN' section is active, showing the 'Manage Queues' page. On the left, there are 'Actions' with a 'Go to overview' button. The main area is the 'Add Queue' form, which includes the following fields and options:

- Name:** Support
- Sub-queue of:** (dropdown menu)
- Group:** admin
- Unlock timeout minutes:** 1220
- Escalation - first response time (minutes):** 60 (Notify by dropdown)
- Escalation - update time (minutes):** 180 (Notify by dropdown)
- Escalation - solution time (minutes):** 300 (Notify by dropdown)

Kielelezo: Kuongeza foleni mpya.

Unaweza kufafanua muda wa mwisho wa kufungua foleni - kama wakala akifunga tiketi na hajaifunga kabla ya muda wa mwisho wa kufungua kuisha, tiketi itafunguliwa kiotomatiki na kufanywa ipatikane kwa mawakala wengine kuifanyia kazi.

Kuna mipamgilio ya muda wa kupanda mitatu inahusishwa katika ngazi ya foleni:

Kupanda - Muda wa kwanza wa kujibu

- Baada ya utengenezaji wa tiketi, kama muda uliofafanuliwa hapa ukiisha bila ya mawasiliano na mteja, ama kwa simu au barua pepe, tiketi inapandishwa.

Kupanda - Rekebisha Muda

- Kama kuna ufwatiliaji wa mteja aidha kwa barua pepe au mlango wa mteja, ambao unarekodiwa kwenye tiketi, usasishaji wa muda wa kupanda unasetiwa upya. Kama hakuna mawasiliano ya mteja kabla muda uliofafanuliwa hapa haujaisha, tiketi inapandishwa.

Kupanda - Muda wa Suluhu

- Kama tiketi haitafungwa kabla ya muda uliofafanuliwa kuisha, tiketi inapandishwa.

Na 'Funga tiketi baada ya ufwatiliaji', unaweza kufafanua kama tiketi isetiwe kuwa 'imefungwa' kwa mtumiaji wa zamani kama tiketi imefungwa na baadaye kufunguliwa upya. Hii inahakikisha ufwatiliaji wa tiketi unachakatishwa na wakala ambaye alishughulikia tiketi mwanzoni.

Parameta ya anwani za mfumo inabainisha anwani za barua pepe ambazo zitatumika kwa ajili ya tiketi zinazotoka za foleni hii. Hakuna uwezekano wa kuhusisha foleni na salamu na saina, kwa majibu ya barua pepe. Kwa taarifa za undani zaidi, tafadhali tembelea vifungu anwani za barua pepe, salamu na saina.


Note

Kama ilivyo kwa mawakala, makundi na wateja, foleni haziwezi kufutwa, zinalemazwa tu, kwa kuseti chaguo Halali kuwa *batili* au *batili-kwa muda*.

1.5. Salamu, saini, viambatanisho na violezo

1.5.1. Salamu


Salamu ni moduli ya nakala ya kiolezo. Salamu inaweza kuunganishwa na foleni moja au zaidi, kama inavyoelezewa katika kifungu kuhusu foleni. Salamu inatumika pale tu tiketi kutoka kwenye foleni ambayo salamu imeunganishwa, imejibiwa. Kusimamia salamu to-fauti za mfumo wako, tumia kiungo cha "Salamu" cha eneo la msimamizi (ona Kielelezo chini).

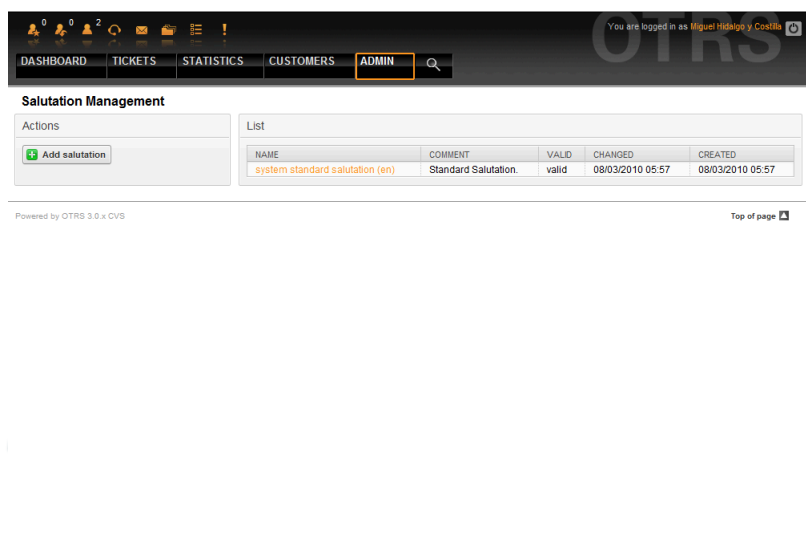

Kielelezo: Usimamizi wa Salamu.

Baada ya usanikishaji wa kawaida tayari kuna salamu inapatikana, "salamu ya kawaida ya mfumo (en)".

Kutengeneza salamu mpya bofya kitufe "Ongeza salamu", weka data inayotakiwa kisha wasilisha (ona kielelezo chini).

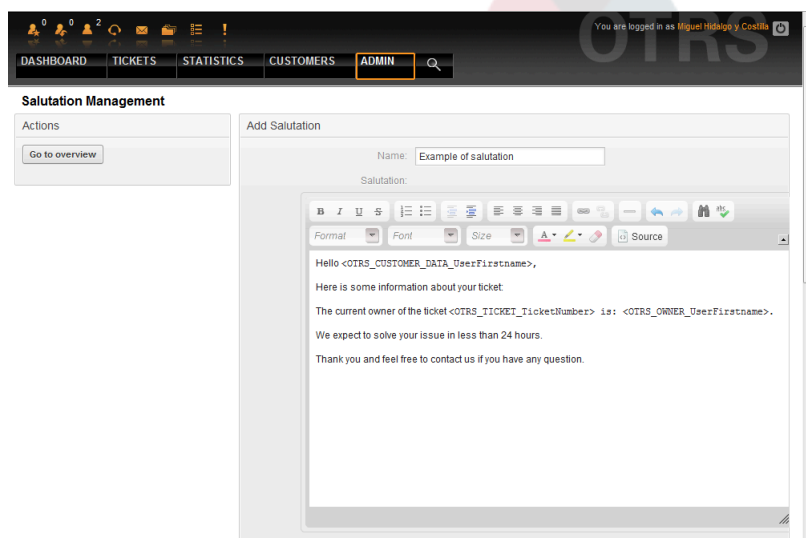

Kielelezo: Kuongeza salamu mpya.

Inawezekana kutumia vishika nafasi katika salamu. Ukitoa majibu kwenye tiketi, majina ya vishika nafasi yatabadilishwa na thamani zake.


Vishika nafasi tofauti unavyoweza kutumia kwenye violezo vimeorodheshwa kwenye upande wa chini wa skrini ya salamu. Kama ukitumia kwa mfano, kishika nafasi <OTRS_LAST_NAME> jina la mwisho la mtumaji wa tiketi litajumuishwa kwenye majibu yako.

Note

Kama ilivyo kwa vyombo vingine vya OTRS, salamu haziwezi kufutwa, zinalemazwa tu kwa kuseti chaguo Halali kuwa *batili* au *batili-kwa muda*.

1.5.2. Saini

Moduli nyingine ya nakala kwa kiolezo ni saini. Saini zinaweza kuunganishwa na foleni, kama ilivyoelezwa kwenye kifungu kuhusu foleni. Tafadhali tambua saini itaunganishwa kwenye nakala ya kiolezo, kama kabla ya hapo iliunganishwa na foleni. Unaweza kusimamia saini katika mfumo wako kwa kufikia kiungo cha "Saini" cha kurasa ya Msimamizi, (ona Kielelezo chini) .

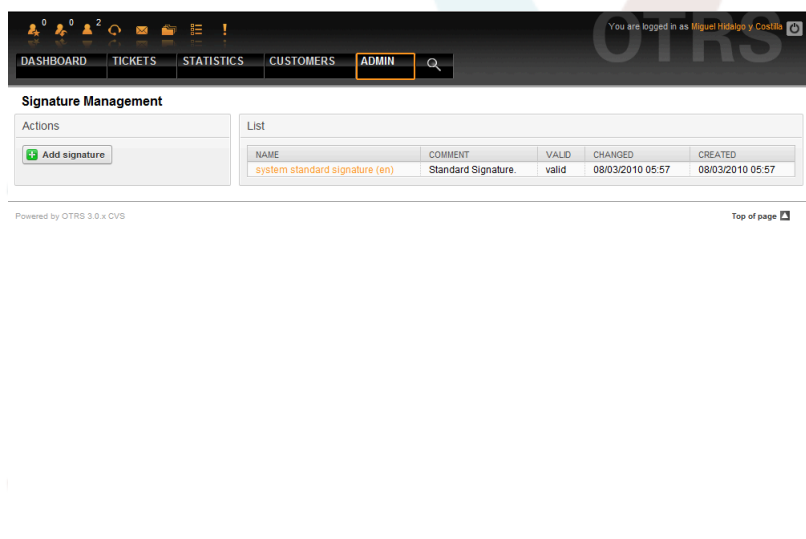


The screenshot shows the OTRS Admin interface. At the top, there is a navigation menu with 'ADMIN' highlighted. Below the menu, the 'Signature Management' section is visible. It contains an 'Actions' panel with an 'Add signature' button and a 'List' table. The table has the following data:

NAME	COMMENT	VALID	CHANGED	CREATED
system standard signature (en)	Standard Signature.	valid	08/03/2010 05:57	08/03/2010 05:57

Kielelezo: Usimamizi wa saini.

Baada ya usanikishaji mpya wa OTRS, kuna saini iliyofafanuliwa tayari imewekwa kwenye mfumo, "saini ya kawaida ya mfumo (en)".

Kutengeneza saini mpya, bofya kitufe "Ongeza saini", weka data inayohitajika kisha wasilisha (ona kielelezo chini).

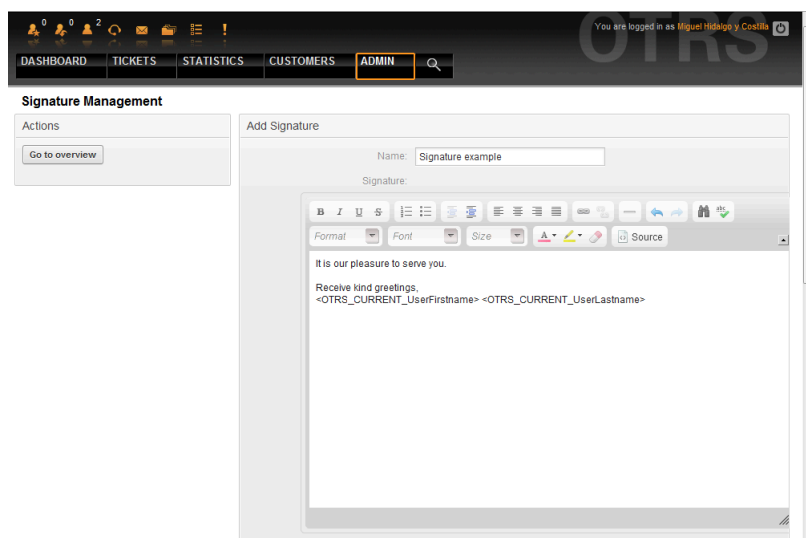

Kielelezo: Kuongeza saini mpya.

Kama salamu, saini pia zinaweza kuwa na maudhui yanayobadilika, kama jina la kwanza na la mwisho la wakala anayejibu tiketi. Hapa pia vishika nafasi vinaweza kutumika kubadilisha maudhui ya nakala ya saini kwa kila tiketi. Ona sehemu ya chini ya skrini ya saini kwa vishika nafasi vinyoweza kutumika. Kama ukijumuisha kishika nafasi <OTRS_LAST_NAME> katika saini kwa mfano, jina la mwisho la wakala anayejibu tiketi itabadilisha kishika nafasi


Note

Kama ilivyo kwa salamu, saini pia haziwezi kufutwa, zinalemazwa tu kwa kuseti chaguo Halali kuwa *batili* au *batili-kwa muda*.

1.5.3. Viambatanisho


Unaweza kuongeza kiambatanisho kimoja au zaidi kwa kiolezo kwa hiari. Kama kiolezo kimechaguliwa, viambatanisho vita ambatanishwa kwenye dirisha la uundaji wa ujumbe. Kama kuna ulazima wakala anaweza kuondoa kiambatanisho kutoka kwenye kiolezo kabla ya kutuma kwenda kwa mteja.

Kupitia kiungo cha "Kiambatanisho" kwenye ukurasa wa Msimamizi, Unaweza kupakia viambatanisho kwenye hifadhidata ya mfumo (ona kielelezo chini).

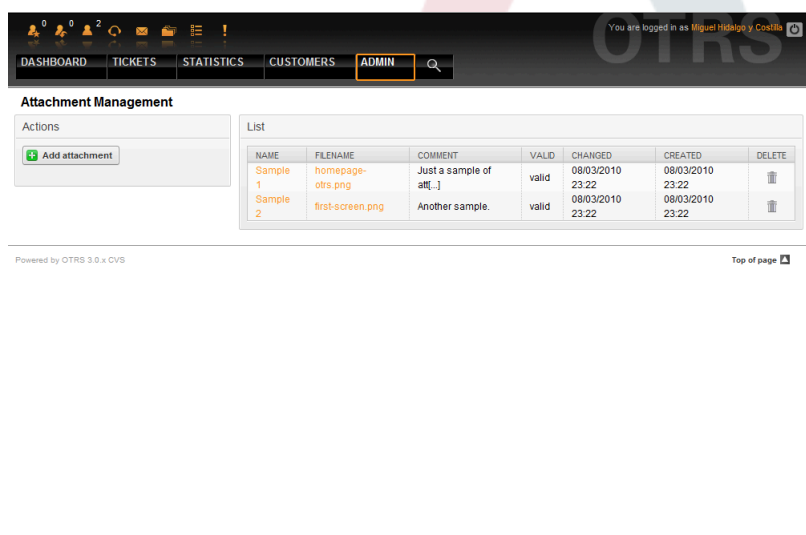

Kielelezo: Usimamizi wa Viambatanisho.


Kutengeneza kiambatanisho kipya, bofya kitufe "Ongeza kiambatanisho", weka data inayotakiwa kisha wasilisha (ona kielelezo chini).

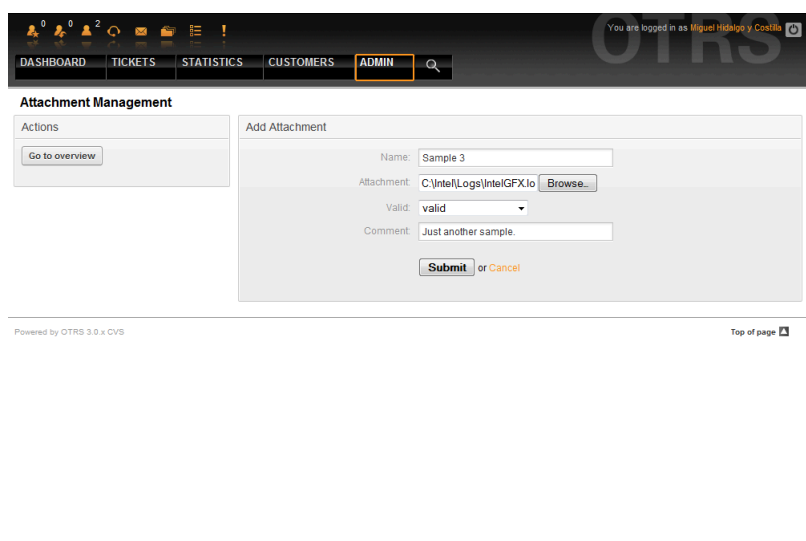

The screenshot shows the OTRS Admin interface for Attachment Management. At the top, there is a navigation bar with tabs for DASHBOARD, TICKETS, STATISTICS, CUSTOMERS, and ADMIN. The ADMIN tab is selected. Below the navigation bar, there is a header with the text "You are logged in as Miguel Hidalgo y Costilla". The main content area is titled "Attachment Management" and contains an "Add Attachment" form. The form has the following fields: Name (Sample 3), Attachment (C:\Intel\Logs\IntelGFX.log), Valid (valid), and Comment (Just another sample). There are "Go to overview", "Submit", and "Cancel" buttons. At the bottom, it says "Powered by OTRS 3.0.x CVS" and "Top of page".

Kielelezo: Kuongeza kiambatanisho kipya.


Kama kiambatanisho kimehifadhiwa kinaweza kuunganishwa na kiolezo kimoja au zaidi. Bofya kwenye kiungo "Kiambatanisho <-> Kiolezo" katika kurasa ya Msimamizi (ona Kielelezo chini).

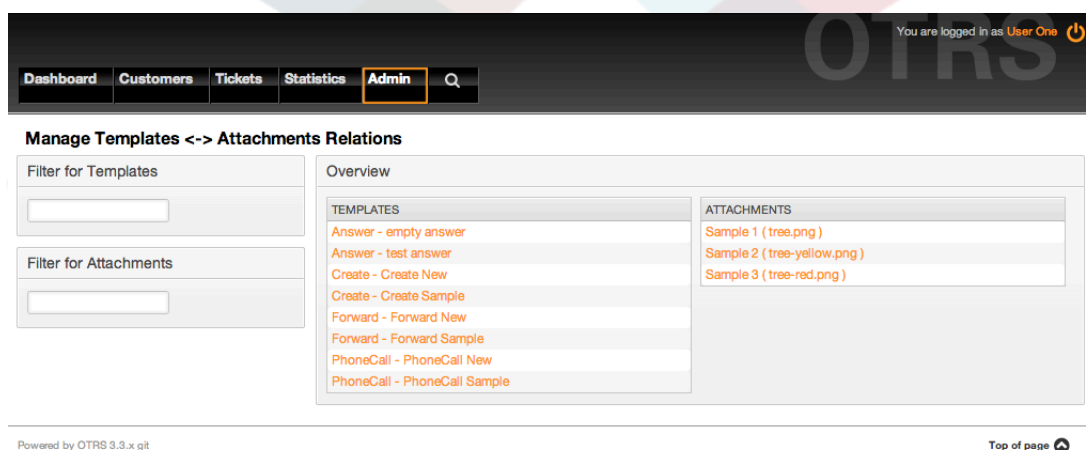


The screenshot shows the OTRS Admin interface for Manage Templates <-> Attachments Relations. At the top, there is a navigation bar with tabs for Dashboard, Customers, Tickets, Statistics, and Admin. The Admin tab is selected. Below the navigation bar, there is a header with the text "You are logged in as User Onia". The main content area is titled "Manage Templates <-> Attachments Relations" and contains an "Overview" section. The Overview section has two columns: TEMPLATES and ATTACHMENTS. The TEMPLATES column lists: Answer - empty answer, Answer - test answer, Create - Create New, Create - Create Sample, Forward - Forward New, Forward - Forward Sample, PhoneCall - PhoneCall New, and PhoneCall - PhoneCall Sample. The ATTACHMENTS column lists: Sample 1 (tree.png), Sample 2 (tree-yellow.png), and Sample 3 (tree-red.png). There are "Filter for Templates" and "Filter for Attachments" input fields on the left. At the bottom, it says "Powered by OTRS 3.3.x git" and "Top of page".

Kielelezo: Kuunganisha Viambatanisho kwa Violezo.

Kuhusisha viambatanisho mbali mbali na violezo maalumu na kinyume chake, bofya kwenye jina la kiolezo au kiambatanisho husika (ona violezo 5.27 na 5.28 kwa mtiririko).

You are logged in as **User One** 

Dashboard **Customers** **Tickets** **Statistics** **Admin** 

Manage Templates <-> Attachments Relations

Actions


[Go to overview](#)

Filter


Change Attachment Relations for Template **Answer - empty answer**


ATTACHMENT	ACTIVE
Sample 1 (tree.png)	<input checked="" type="checkbox"/>
Sample 2 (tree-yellow.png)	<input checked="" type="checkbox"/>
Sample 3 (tree-red.png)	<input type="checkbox"/>

[Submit](#) or [Cancel](#)

Powered by OTRS 3.3.x git Top of page 

Kielelezo: Badilisha mahusiano ya Kiambatanisho kwa Kiolezo.

You are logged in as **User One** 

Dashboard **Customers** **Tickets** **Statistics** **Admin** 

Manage Templates <-> Attachments Relations

Actions


[Go to overview](#)

Filter

Change Template Relations for Attachment **Sample 1**

TEMPLATE	ACTIVE
Answer - empty answer	<input checked="" type="checkbox"/>
Answer - test answer	<input checked="" type="checkbox"/>
Create - Create New	<input checked="" type="checkbox"/>
Create - Create Sample	<input checked="" type="checkbox"/>
Forward - Forward New	<input type="checkbox"/>
Forward - Forward Sample	<input checked="" type="checkbox"/>
PhoneCall - PhoneCall New	<input checked="" type="checkbox"/>
PhoneCall - PhoneCall Sample	<input type="checkbox"/>

[Submit](#) or [Cancel](#)

Powered by OTRS 3.3.x git Top of page 

Kielelezo: Badilisha mahusiano ya Kiolezo kwa Kiambatanisho.

1.5.4. Violezo

Kuongeza kasi ya mchakato wa tiketi na kufanya muonekano wa majibu kuwa kawaida, unaweza kufananua violezo katika OTRS. Kiolezo kinaweza kuunganishwa na foleni moja au zaidi.

Kuna violezo tofauti vinavyotumika katika pande tofauti za OTRS na zina nia tofauti, ifwatayo ni orodha ya aina za violezo ziwezekanazo:

- Jibu: Kutumika kama jibu la tiketi
- Tengeneza: Kutumika katika simu au barua pepe mpya
- Tuma mbele: Kutumika kupeleka makala kwa mtu mwengine
- PigaSimu: Kutumika katika skrini ya simu zinazolingia na kutoka

Violezo vya majibu vinapatikana kwa njia mbili, kutoka kwenye skrini ya kukuza tiketi kwenye menu ya makala, au kwa njia ya haraka: kutoka kwenye skrini kubwa ya mapitio ya tiketi kama Muonekano wa Hali au Muonekano wa Tiketi. Kwa usanikishaji mpya wa OTRS, kiolezo(jibu) "jibu wazi" kina setiwa kama chaguo-msingi kwa kila foleni.

Mara tu violezo vilivyopelekwa mbele kuongezwa na kuwekwa kwenye foleni, kitufe cha "Peleka mbele" katika kuza tiketi (ambayo mara nyingi inatupeleka kwenye skrini ya kupeleka mbele yanakala tupu) kitabadilika kuwa cha kudhibiti uchaguzi, uchaguzi unajazwa na violezo vilivyopelekwa mbele vilivyoongezwa, kwa kuchagua moja ya violezo, skrini ya kupeleka mbele itaonyeshwa ikiwa imejazwa na nakala ya kiolezo na viambatanisho (sawa na kisanduku majibu cha uchaguzi na violezo vya Majibu).

Kutengeneza violezo vya aina Tengeneza na PigaSimu vitafanya boksi la uchaguzi la "Nakala Kiolezo" kuonekana katika skrini husika, kuchagua kiolezo kwa ajili ya orodha itajaza sehemu za "Nakala" na "Kiambatanisho" (kama zinapatikana kwenye kiolezo). Tambua kwamba mabadiliko yoyote ya kabla kwenye Nakala au kiambatanisho yataandikwa upya kwa kuchagua kiolezo.

Kubofya kiungo cha "Violezo" kwenye kurasa ya Msimamizi inakuleta kwenye skrini ya usimamizi wa Kiolezo (ona kielelezo chini).

Manage Templates

Actions

[+ Add template](#)

Filter

Hint

A template is a default text which helps your agents to write faster tickets, answers or forwards.

Attention: Don't forget to add new templates to queues.

List

TYPE	NAME	ATTACHMENTS	COMMENT	VALIDITY	CHANGED	CREATED	DELETE
Answer	empty answer	2		valid	08/07/2013 13:47	08/06/2013 16:45	
Answer	test answer	1		valid	08/13/2013 15:01	08/06/2013 16:45	
Create	Create New	2		valid	09/27/2013 10:06	08/07/2013 15:01	
Create	Create Sample	1	My comment	valid	09/27/2013 10:06	08/08/2013 10:02	
Forward	Forward New	0	test	valid	08/12/2013 08:03	08/08/2013 10:06	
Forward	Forward Other	4		invalid	09/27/2013 10:07	08/09/2013 16:53	
Forward	Forward Sample	2		valid	09/27/2013 10:07	08/07/2013 15:20	
PhoneCall	PhoneCall New	2		valid	09/27/2013 10:08	08/15/2013 14:35	
PhoneCall	PhoneCall Sample	1		valid	09/27/2013 10:08	08/15/2013 12:18	

Kielelezo: Usimamizi wa kiolezo.

Kutengeneza kiolezo kipya, bofya kitufe cha "Ongeza kiolezo", weka data zinazotakiwa (hakikisha unachagua aina sahihi ya kiolezo) na kuiwasilisha (ona kielelezo chini).

OTRS You are logged in as User One

Dashboard Customers Tickets Statistics Admin

Manage Templates

Actions

[Go to overview](#)

Hint

A template is a default text which helps your agents to write faster tickets, answers or forwards.

Attention: Don't forget to add new templates to queues.

Add Template

* Type: Answer

* Name:

Template:

B I U S


Format - Font - Size -

Attachments:

Sample 1 (tree.png)
Sample 2 (tree-yellow.png)

Kielelezo: Kuongeza kiolezo.


Kuongeza/kuondoa violezo kwenye foleni moja au zaidi, bofya kwenye kiungo "Violezo <- > Foleni" katika kurasa ya Msimamizi (ona Kielelezo chini). Unaweza pia kutumia vichujio kupata taarifa kuhusu chombo fulani.

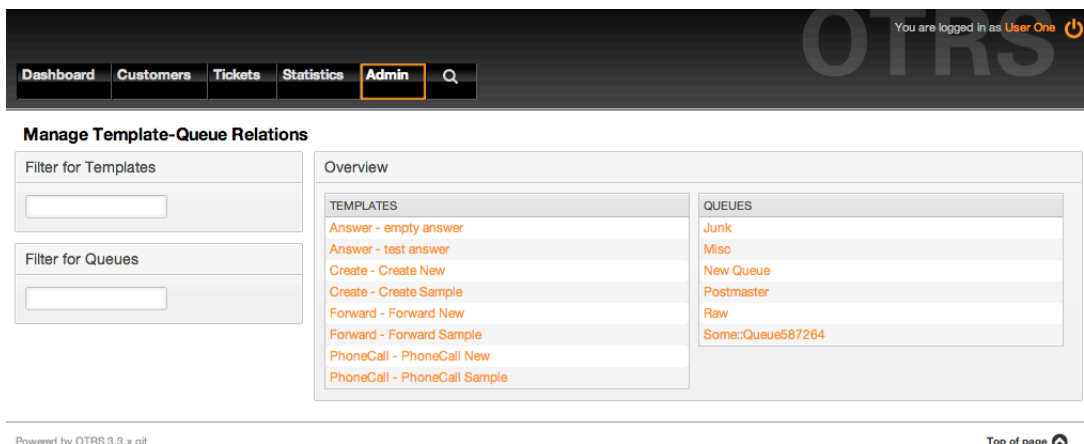


The screenshot shows the OTRS Admin interface. At the top, there is a navigation bar with tabs for Dashboard, Customers, Tickets, Statistics, and Admin (which is highlighted). A search icon is also present. Below the navigation bar, the main content area is titled "Manage Template-Queue Relations". On the left side, there are two filter boxes: "Filter for Templates" and "Filter for Queues", each with an input field. The main content area is divided into two columns: "TEMPLATES" and "QUEUES". The "TEMPLATES" column lists several items: Answer - empty answer, Answer - test answer, Create - Create New, Create - Create Sample, Forward - Forward New, Forward - Forward Sample, PhoneCall - PhoneCall New, and PhoneCall - PhoneCall Sample. The "QUEUES" column lists: Junk, Misc, New Queue, Postmaster, Raw, and Some:Queue587264. At the bottom left of the screenshot, it says "Powered by OTRS 3.3.x git". At the bottom right, there is a "Top of page" link with a circular arrow icon.

Kielelezo: Usimamizi wa mahusiano ya Kiolezo-Foleni.

Kufafanua violezo mbali mbali vinavyopatikana kwa foleni na kinyume chake, bofya kwenye kiolezo au foleni husika (ona vielelezo 5.32 na 5.33 chini kwa mtiririko).

You are logged in as **User One** 

Dashboard **Customers** **Tickets** **Statistics** **Admin** 

Manage Template-Queue Relations

Actions


[Go to overview](#)

Filter


Change Queue Relations for Template **Answer - empty answer**


QUEUE	ACTIVE
Junk	<input checked="" type="checkbox"/>
Misc	<input checked="" type="checkbox"/>
New Queue	<input type="checkbox"/>
Postmaster	<input checked="" type="checkbox"/>
Raw	<input checked="" type="checkbox"/>
Some:Queue587264	<input type="checkbox"/>

[Submit](#) or [Cancel](#)

Powered by OTRS 3.3.x git Top of page 

Kielelezo: Badilisha mahusiano ya Foleni kwa Kiolezo.

You are logged in as **User One** 

Dashboard **Customers** **Tickets** **Statistics** **Admin** 

Manage Template-Queue Relations

Actions


[Go to overview](#)

Filter

Change Template Relations for Queue **Junk**

TEMPLATE	ACTIVE
Answer - empty answer	<input checked="" type="checkbox"/>
Answer - test answer	<input type="checkbox"/>
Create - Create New	<input checked="" type="checkbox"/>
Create - Create Sample	<input checked="" type="checkbox"/>
Forward - Forward New	<input type="checkbox"/>
Forward - Forward Sample	<input checked="" type="checkbox"/>
PhoneCall - PhoneCall New	<input checked="" type="checkbox"/>
PhoneCall - PhoneCall Sample	<input checked="" type="checkbox"/>

[Submit](#) or [Cancel](#)

Powered by OTRS 3.3.x git Top of page 

Kielelezo: Badilisha mahusiano ya Kiolezo kwa Foleni.

Wakati wa kuchagua kiolezo, taarifa zaidi zinaweza kuongezwa kwenye nakala ya kiolezo, hii inategemea aina ya kiolezo:


PigaSimu na Tengeneza violezo haiongezi maudhui yoyote kwenye nakala ya kiolezo, bali skrini Mpya ya Barua pepe za Tiketi inaongeza saini iliyogawiwa kwa foleni kwenye kiini cha barua pepe (hii skrini ina boksi lililowekwa pembeni ili kupata taswira ya saini).

Nakala za violezo majibu zikichaguliwa pia zinajumuisha salamu inayohusika na foleni, kisha nakala ya kiolezo, baada ya hapo nukuu ya nakala ya tiketi, na mwisho saini inayohusika na foleni.

Violezo vya kupeleka mbele ni sawa Violezo vya majibu, lakini hazi na sehemu ya salamu.

1.6. Majibu otomatiki

OTRS inakuruhusu kutuma majibu otomatiki kwa wateja kutegemeana na kuonekana kwa matukio fulani, kama utengenezaji wa tiketi katika foleni maalumu, upokeaji wa ujumbe wa ufwatiliaji kuhusu tiketi, ufungaji au ukataliwaji wa tiketi, na kadh. Kusimamia majibu haya, bofya kiungo "Majibu otomatiki" kwenye kurasa ya Msimamizi (ona Kielelezo chini).

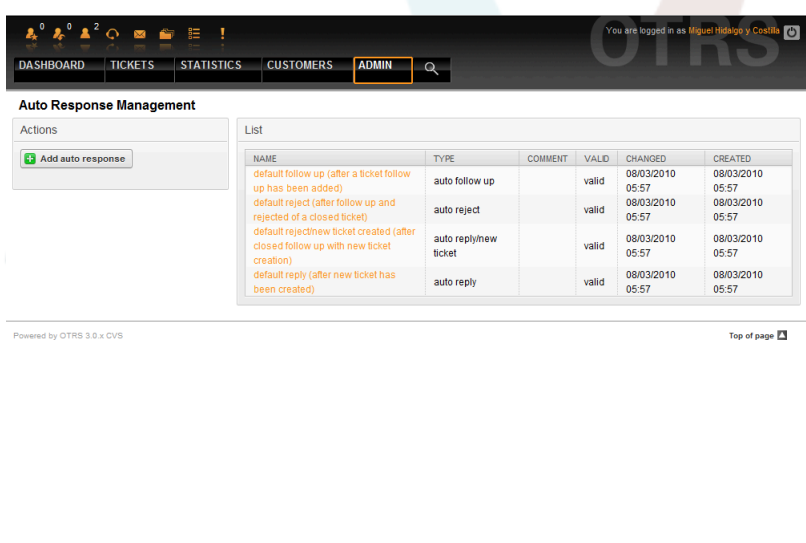


The screenshot shows the OTRS Admin interface for Auto Response Management. The top navigation bar includes DASHBOARD, TICKETS, STATISTICS, CUSTOMERS, and ADMIN. The main content area is titled "Auto Response Management" and contains a "List" table with the following data:

NAME	TYPE	COMMENT	VALID	CHANGED	CREATED
default follow up (after a ticket follow up has been added)	auto follow up		valid	08/03/2010 05:57	08/03/2010 05:57
default reject (after follow up and rejected of a closed ticket)	auto reject		valid	08/03/2010 05:57	08/03/2010 05:57
default rejectnew ticket created (after closed follow up with new ticket creation)	auto reply/new ticket		valid	08/03/2010 05:57	08/03/2010 05:57
default reply (after new ticket has been created)	auto reply		valid	08/03/2010 05:57	08/03/2010 05:57

Kielelezo: Usimamizi wa Majibu Otomatiki.

Kutengeneza jibu otomatiki, bofya kitufe "Ongeza jibu otomatiki", weka data zinazotakiwa kisha wasilisha (ona kielelezo chini).

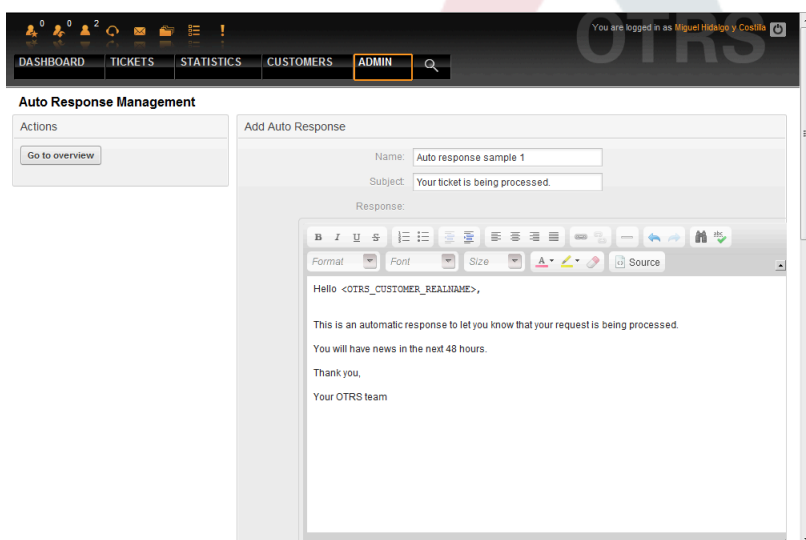

The screenshot shows the OTRS Admin interface for adding a new auto response. The form is titled "Add Auto Response" and includes the following fields:

- Name: Auto response sample 1
- Subject: Your ticket is being processed.
- Response: A rich text editor containing the following text:


```

      Hello <OTRS_CUSTOMER_REALNAME>,

      This is an automatic response to let you know that your request is being processed.
      You will have news in the next 48 hours.

      Thank you,
      Your OTRS team
      
```

Kielelezo: Kuongeza Jibu Otomatiki.

Mada na nakala ya majibu otomatiki yanaweza kuzalishwa na vishika nafasi, kama sai-ni na salamu. Kama ukiingiza, kwa mfano, kishika nafasi <OTRS_CUSTOMER_EMAIL[5]> kwenye kiini cha jibu otomatiki, mistari 5 ya kwanza ya barua ya mteja itaingizwa kwenye jibu otomatiki. Utapata undani zaidi kuhusu vishika nafasi halali ambavyo vinaweza kutumika upande wa chini wa skrini iliyoonyeshwa kwenye Kielelezo.

Kwa kila jibu otomatiki, unaweza kuweka bayana tukio la kulichochea. Matukio ya mfumo ambayo yanapatikana baada ya usakinishaji wa kawaida yameelezwa katika jedwali 5-3.


Table 4.4. Matukio kwa majibu Otomatiki

Jina	Maelezo
jibu otomatiki	Utengenezaji wa tiketi katika foleni fulani
jibu otomatiki/tiketi mpya	Ufunguzi wa tiketi iliyofungwa, mf. mteja akijibu hiyo tiketi.
ufwatiliaji otomatiki	Upokeaji wa ufwatiliaji wa tiketi.
kukataa kiotomatiki	Ukataaji otomatiki wa tiketi, unafanywa na mfumo.
ondoa kiotomatiki	Ufutaji wa tiketi, unafanywa na mfumo.

Note

Kama ilivyo kwa vyombo vingine vya OTRS, majibu otomatiki pia haiwezi kufutwa, inalemazwa tu kwa kuseti chaguo Halali kuwa *batili* au *batili-kwa muda*.


Kuongeza majibu otomatiki kwenye foleni, tumia kiungo "Majibu Otomatiki <-> Foleni" kwenye kurasa ya Msimamizi (ona Kielelezo chini). Matukio yote ya mfumo yameorodheshwa kwa kila foleni, na jibu otomatiki kwa tukio hilo hilo linaweza kuchaguliwa au kuondolewa kupitia kisanduku cha orodha.

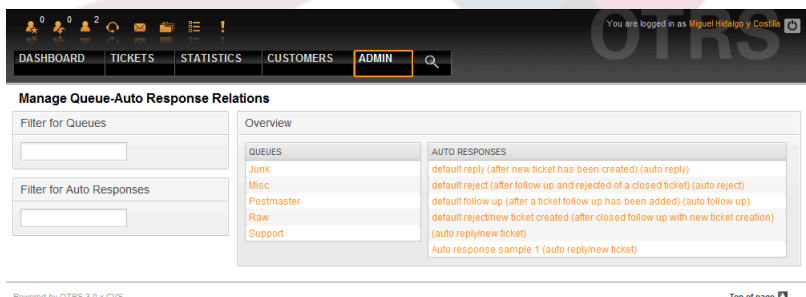

The screenshot shows the OTRS Admin interface. At the top, there is a navigation bar with tabs for DASHBOARD, TICKETS, STATISTICS, CUSTOMERS, and ADMIN. Below the navigation bar, the page title is "Manage Queue-Auto Response Relations". There are two filter boxes: "Filter for Queues" and "Filter for Auto Responses". The main content area is divided into two columns: "QUEUES" and "AUTO RESPONSES". The "QUEUES" column lists: Junk, Misc, Postmaster, Raw, and Support. The "AUTO RESPONSES" column lists: default reply (after new ticket has been created) (auto reply), default reject (after follow up and rejected of a closed ticket) (auto reject), default follow up (after a ticket follow up has been added) (auto follow up), default reject/new ticket created (after closed follow up with new ticket creation) (auto reply/new ticket), and Auto response sample 1 (auto reply/new ticket). At the bottom left, it says "Powered by OTRS 3.0.x CVS" and at the bottom right, "Top of page".

Kielelezo: Usimamizi wa mahusiano ya Foleni-Majibu Otomatiki.

Kufafanua majibu otomatiki mbali mbali yatakatikana kwa ajili ya foleni, bofya jina la foleni linalohusika (ona kielelezo chini). Pia inawezekana kurekebisha jibu otomatiki lililopo kufanya hivyo, bofya majibu na hariri kwa njia ile ile kama ya kuhariri jibu otomatiki jipya.

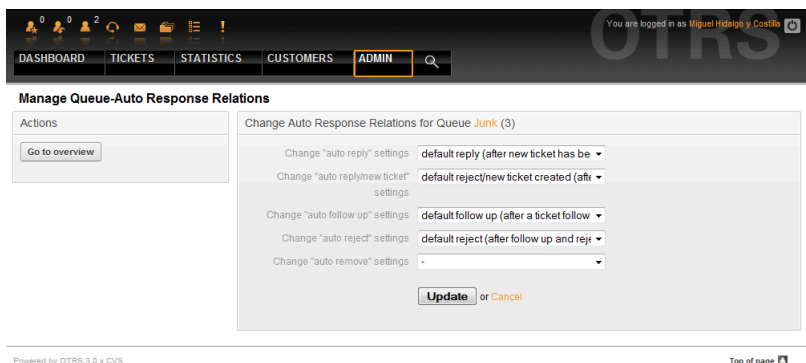

Dashboard | TICKETS | STATISTICS | CUSTOMERS | **ADMIN** | Search

You are logged in as Miguel Hidalgo y Costilla

Manage Queue-Auto Response Relations

Actions: [Go to overview](#)

Change Auto Response Relations for Queue **Junk (3)**

- Change "auto reply" settings: default reply (after new ticket has be
- Change "auto reply/new ticket" settings: default reject/new ticket created (aft
- Change "auto follow up" settings: default follow up (after a ticket follow
- Change "auto reject" settings: default reject (after follow up and rej
- Change "auto remove" settings:


[Update](#) or [Cancel](#)

Powered by OTRS 3.0.x CVS | [Top of page](#)

Kielelezo: Badilisha mahusiano ya MAjibu Otomatiki kwa Foleni.

1.7. Anwani za barua pepe

Kuwezesha OTRS kutuma barua pepe, unahitaji anwani halali ya barua pepe ya kutumika na mfumo. OTRS ina uwezo wa kufanya kazi na barua pepe zaidi ya moja, kwa kuwa usakinishaji mwingi wa msaada unahitaji kutumia zaidi ya moja. Foleni inaweza kuunganishwa na anwani nyingi za baua pepe, na kinyume chake. Anwani inayotumika kwa ujumbe unaotoka kutoka kwenye foleni inaweza kusetiwa wakati foleni inatengenezwa. Tumia kiungo cha "Anwani za Barua pepe" kutoka kwenye kurasa ya Msimamizi kusimamia barua pepe zote za mfumo (ona Kielelezo chini).

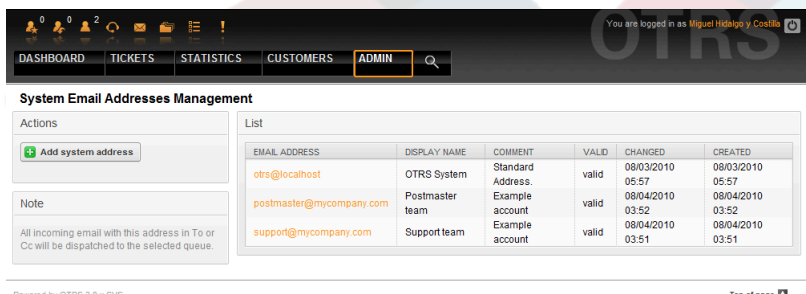

Dashboard | TICKETS | STATISTICS | CUSTOMERS | **ADMIN** | Search

You are logged in as Miguel Hidalgo y Costilla

System Email Addresses Management

Actions: [Add system address](#)


Note: All incoming email with this address in To or Cc will be dispatched to the selected queue.

EMAIL ADDRESS	DISPLAY NAME	COMMENT	VALID	CHANGED	CREATED
otrs@localhost	OTRS System	Standard Address.	valid	08/03/2010 05:57	08/03/2010 05:57
postmaster@mycompany.com	Postmaster team	Example account	valid	08/04/2010 03:52	08/04/2010 03:52
support@mycompany.com	Support team	Example account	valid	08/04/2010 03:51	08/04/2010 03:51

Powered by OTRS 3.0.x CVS | [Top of page](#)

Kielelezo: Usimamizi wa Anwani za Barua pepe za mfumo.

Ukitengeneza anwani mpya ya barua pepe (ona kielelezo chini), unaweza kuchagua foleni au sehemu ya foleni ya kuunganishwa nayo. Hiki kiungo kinawezesha mfumo kupanga meseji zinazolingia kwa kupitia anwani katika sehemu ya Kwa: ya barua kwenye foleni sahihi.

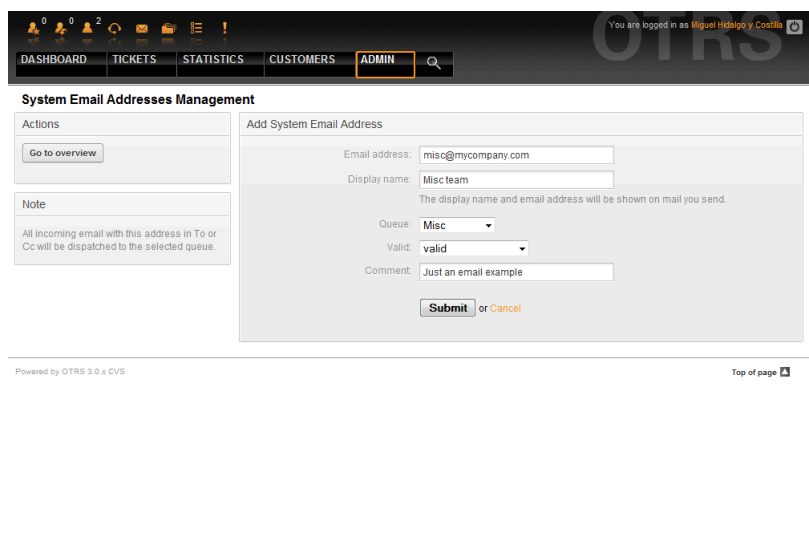

DASHBOARD TICKETS STATISTICS CUSTOMERS **ADMIN**

You are logged in as Miguel Hidalgo y Costas

System Email Addresses Management

Actions
[Go to overview](#)

Note
 All incoming email with this address in To or Cc will be dispatched to the selected queue.

Add System Email Address
 Email address:
 Display name:
The display name and email address will be shown on mail you send.
 Queue:
 Valid:
 Comment:
 or

Powered by OTRS 3.0 x CVS Top of page

Kielelezo: Kuongeza Anwani ya Barua pepe ya mfumo.


Note

Kama ilivyo kwa vyombo vingine vya OTRS, anwani za barua pepe haziwezi kufutwa, zinalemazwa tu kwa kuseti chaguo Halali kuwa *batili* au *batili-kwa muda*.

1.8. Taarifa

OTRS inaruhusu taarifa kutumwa kwa mawakala na wateja, kwa kutegemea matukio mbali mbali. Mawakala wanaweza kuseti matukio ya mfumo kwa taarifa zao binafsi kupitia kiungo cha mapendeleo.

Kupitia kiungo cha "Taarifa za Wakala" kwenye kurasa ya Msimamizi, unaweza kusimamia taarifa za mfumo wako (ona Kielelezo chini). Unaweza kutumia vichujio kuorodhesha baadhi ya taarifa.

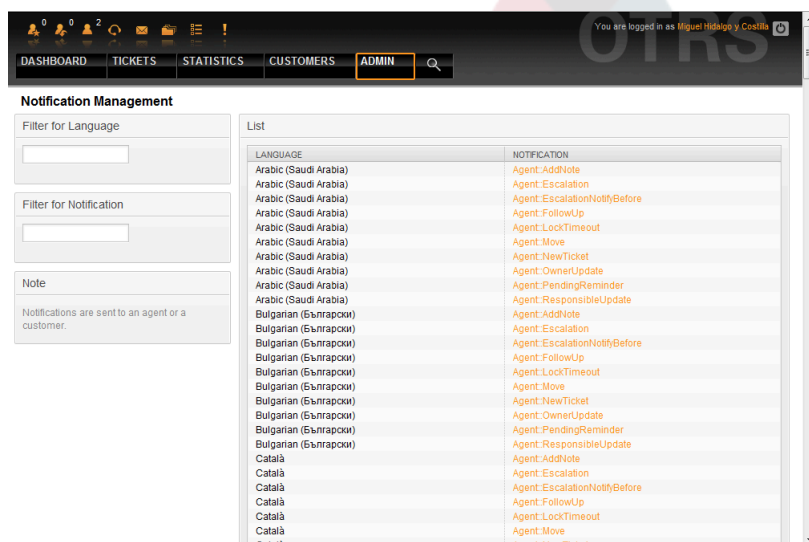

DASHBOARD TICKETS STATISTICS CUSTOMERS **ADMIN**

You are logged in as Miguel Hidalgo y Costas

Notification Management

Filter for Language

Filter for Notification


Note
 Notifications are sent to an agent or a customer.

LANGUAGE	NOTIFICATION
Arabic (Saudi Arabia)	Agent: AddNote
Arabic (Saudi Arabia)	Agent: Escalation
Arabic (Saudi Arabia)	Agent: EscalationNotifyBefore
Arabic (Saudi Arabia)	Agent: FollowUp
Arabic (Saudi Arabia)	Agent: LockTimeout
Arabic (Saudi Arabia)	Agent: Move
Arabic (Saudi Arabia)	Agent: NewTicket
Arabic (Saudi Arabia)	Agent: OwnerUpdate
Arabic (Saudi Arabia)	Agent: PendingReminder
Arabic (Saudi Arabia)	Agent: ResponsibleUpdate
Bulgarian (Български)	Agent: AddNote
Bulgarian (Български)	Agent: Escalation
Bulgarian (Български)	Agent: EscalationNotifyBefore
Bulgarian (Български)	Agent: FollowUp
Bulgarian (Български)	Agent: LockTimeout
Bulgarian (Български)	Agent: Move
Bulgarian (Български)	Agent: NewTicket
Bulgarian (Български)	Agent: OwnerUpdate
Bulgarian (Български)	Agent: PendingReminder
Bulgarian (Български)	Agent: ResponsibleUpdate
Català	Agent: AddNote
Català	Agent: Escalation
Català	Agent: EscalationNotifyBefore
Català	Agent: FollowUp
Català	Agent: LockTimeout
Català	Agent: Move
Català	Agent: NewTicket

Kielelezo: Usimamizi wa taarifa.

Unaweza kugeuza somo na nakala za taarifa kukufaa. Bofya kwenye taarifa unayotaka kubadilisha kutoka kwenye orodha, na yaliyomo kwenye taarifa yatawekwa tayari

kuhariwa (ona Kielelezo). Tafadhali tambua kuna taarifa zenye majina sawa kwa kila lugha inayopatikana.

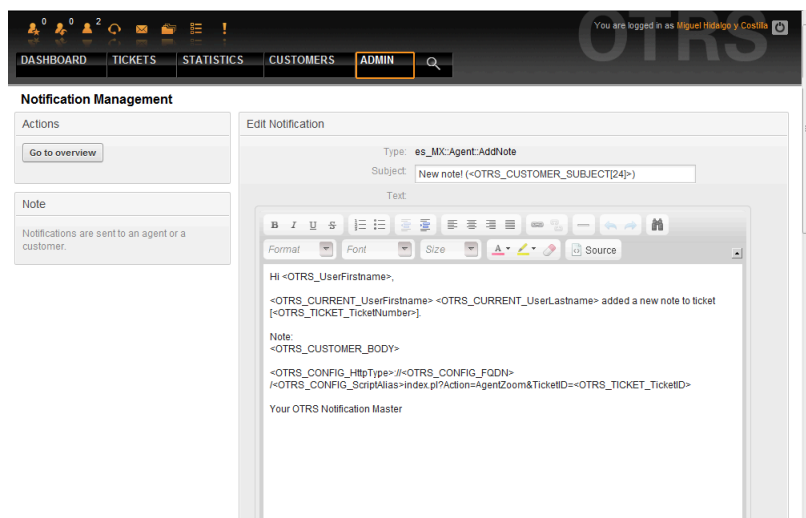


Kielelezo: Kugeuza Taarifa kukufaa.

Kama ilivyo kwa saina na salamu, inawezekana kutengeneza maudhui ya taarifa, kwa kutumia vishika nafasi maalumu. Unaweza kutafuta orodha ya vishika nafasi katika upande wa chini wa skrini iliyoonyeshwa kwenye Kielelezo.


Pia inawezekana kutengeneza taarifa zitokanazo na matukio. Unaweza kubainisha kwa undani wakati gani na kwa nani taarifa hiyo itumwe. Unaweza kuchagua kutokea kwenye parameta nyingi, kama: makundi ya wapokeaji, mawakala, majukumu, anuani za barua pepe, aina ya matukio yanayochochea taarifa, aina-tiketi, hali, kipaumbele, foleni, funga, huduma, SLA, na kadhalika.

Ili kuona orodha ya taarifa zote zinazojikita kwenye tukio, bofya kwenye kiungo "Taarifa (Tukio)" kwenye ukurasa wa Msimamizi (ona Kielelezo).

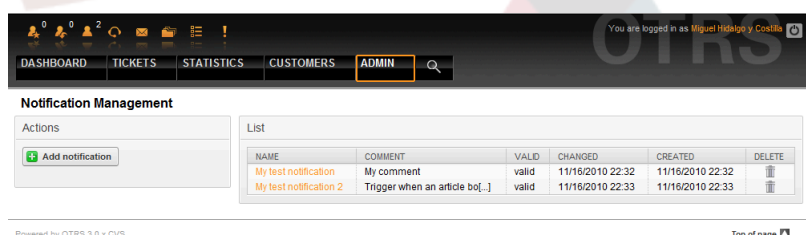

Kielelezo: Kusimamia Taarifa zinazohusika na Matukio.

Kama ilivyo onyeshwa kwenye kielelezo, unaweza kutengeneza taarifa mpya kwa kubofya kitufe cha kuongeza (ona kielelezo).

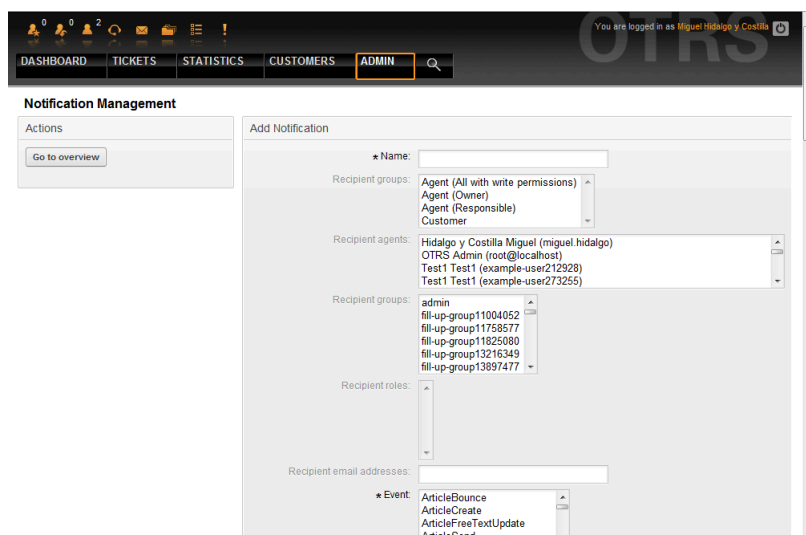


Kielelezo: Kuandikisha usimamizi wa taarifa unaotegemea matukio.

Tafadhali tambua kwamba maudhui ya taarifa zinazotegemea matukio zinaweza kutengenezwa kwa kutumia vishika mahali maalumu vilivyo orodheshwa upande wa chini wa skrini iliyoonyeshwa kwenye Kielelezo.

1.9. SMIME

OTRS inaweza kuchakatisha ujumbe unaoingia wa S/MIME uliofanyiwa usimbaji na kusaini barua zinazotoka. Kabla ya kuweza kutumia hiki kipengele, unahitaji kukiamilisha na kubadilisha baadhi ya parameta za usanidi katika SysConfig.

Kiungo cha "Hati za S/MIME" katika ukurasa wa Msimamizi kinakusaidia kusimamia hati zako za S/MIME (ona Kielelezo chini). Unaweza kuongeza au kuondoa hati, na kutafuta kwenye data za SMIME.

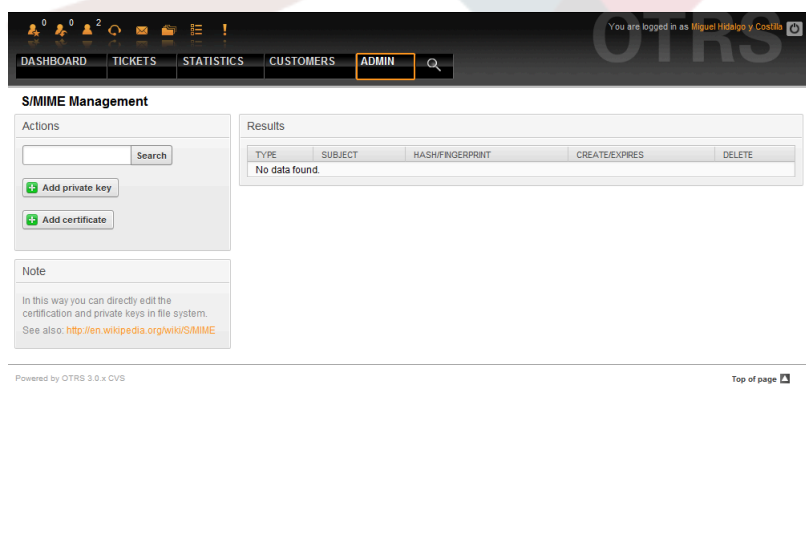


Kielelezo: Usimamizi wa S/MIME.

1.10. PGP

OTRS inashughulikia funguo za PGP, ambazo zinakuruhusu kusimba/kusimbua fiche ujumbe na kusaini ujumbe unaotoka nje. Kabla ya hiki kipengele kutumika, unahitaji kukiamilisha na kubadilisha baadhi ya parameta za usanidi katika SysConfig.


Kupitia kiungo cha "Fungo za PGP" kwenye ukurasa wa Msimamizi, inawezekana kusimamia pete ya ufunguo wa mtumiaji atakayetumika kwa ajili ya PGP kwa OTRS (ona Kielelezo chini), mf. mtumiaji wa OTRS wa ndani au mtumiaji wa seva ya wavuti. Inawezekana kuongeza au kuondoa funguo na saina, na unaweza kutafuta kwenye data zako zote katika pete yako ya funguo.

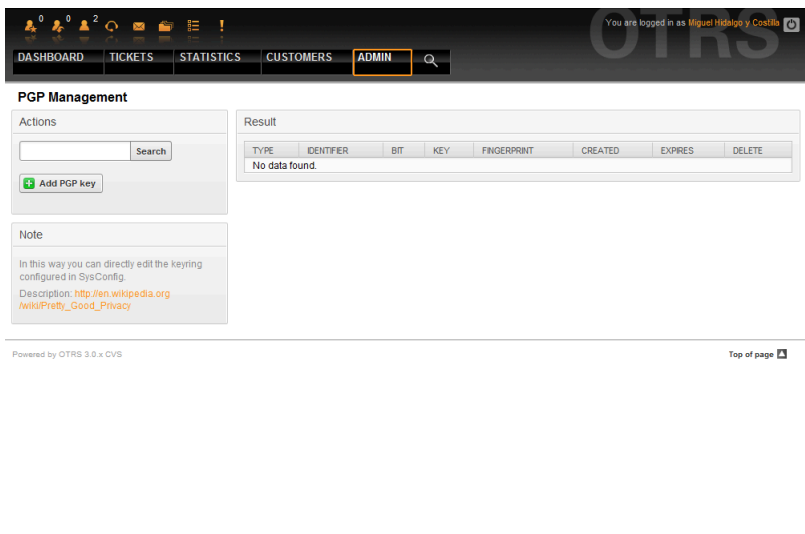

Kielelezo: Usimamizi wa PGP.

1.11. Hali

Kupitia kiungo cha "Hali" kwenye kurasa ya Msimamizi, unaweza kusimamia hali za tiketi mbali mbali unazotaka kutumia katika mfumo.

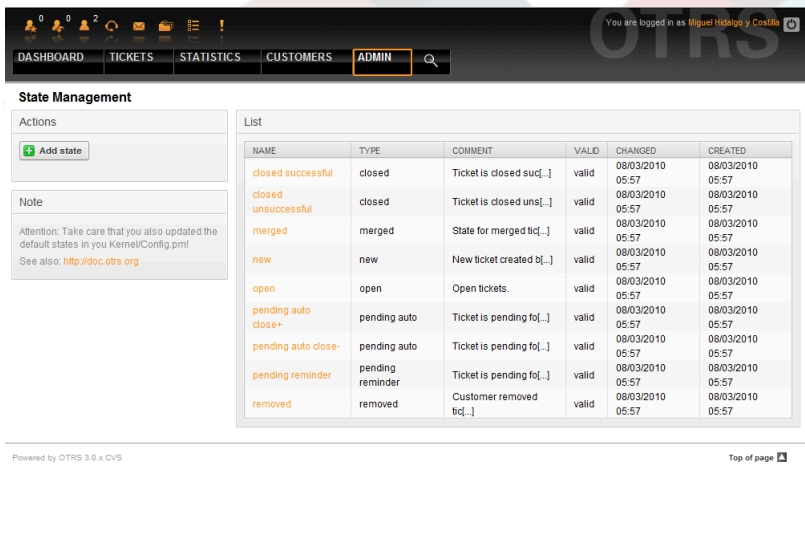

NAME	TYPE	COMMENT	VALD	CHANGED	CREATED
closed successful	closed	Ticket is closed suc[...]	valid	08/03/2010 05:57	08/03/2010 05:57
closed unsuccessful	closed	Ticket is closed uns[...]	valid	08/03/2010 05:57	08/03/2010 05:57
merged	merged	State for merged tic[...]	valid	08/03/2010 05:57	08/03/2010 05:57
new	new	New ticket created b[...]	valid	08/03/2010 05:57	08/03/2010 05:57
open	open	Open tickets.	valid	08/03/2010 05:57	08/03/2010 05:57
pending auto close+	pending auto	Ticket is pending fo[...]	valid	08/03/2010 05:57	08/03/2010 05:57
pending auto close-	pending auto	Ticket is pending fo[...]	valid	08/03/2010 05:57	08/03/2010 05:57
pending reminder	pending reminder	Ticket is pending fo[...]	valid	08/03/2010 05:57	08/03/2010 05:57
removed	removed	Customer removed tic[...]	valid	08/03/2010 05:57	08/03/2010 05:57

Kielelezo: Usimamizi wa hali.

Baada ya mpangilio wa kawaida, kuna hali zilizofafanuliwa:

- imefungwa kwa mafanikio
- imefungwa pasipo mafanikio
- unganishwa
- mpya

- wazi
- inasubiri kufunga kiotomatiki+
- inasubiri kufunga kiotomatiki-
- kikumbusho kinachosubiri
- ondolewa


Kila hali imeunganishwa na aina, inayohitaji kuwekwa bayana endapo hali mpya itatengenezwa. Kwa kawaida aina za hali ni:

- imefungwa
- unganishwa
- mpya
- wazi
- inasubiri kiotomatiki
- kikumbusho kinachosubiri
- ondolewa

1.12. SysConfig

Kiungo cha SysConfig kinaelekeza kwenye kifungu ambacho machaguo mengi ya usanidi wa OTRS yanadumishwa.

Kiungo cha SysConfig katika kurasa ya Msimamizi inapakia kiolesura michoro cha usanidi wa mfumo (ona Kielelezo chini). Unaweza kupakia mafaili yako binafsi ya usanidi kwa ajili ya mfumo, na pia kuweka cheleza ya mipangilio yako ya sasa kwenye faili. Karibu parameta zote za usanidi wa kiunzi cha OTRS na programu-tumizi zilizosakinishwa zinaweza kuonekana na kubadilishwa kupitia hiki kiolesura. Kwa sababu parameta zote za usanidi zinaweza kupangwa kwenye makundi na makundi madogo, inawezekana kupitia kwa urahisi idadi kubwa ya parameta zilizopo. Pia inawezekana kufanya utafutaji wa nakalakamili kwenye parameta zote za usanidi.

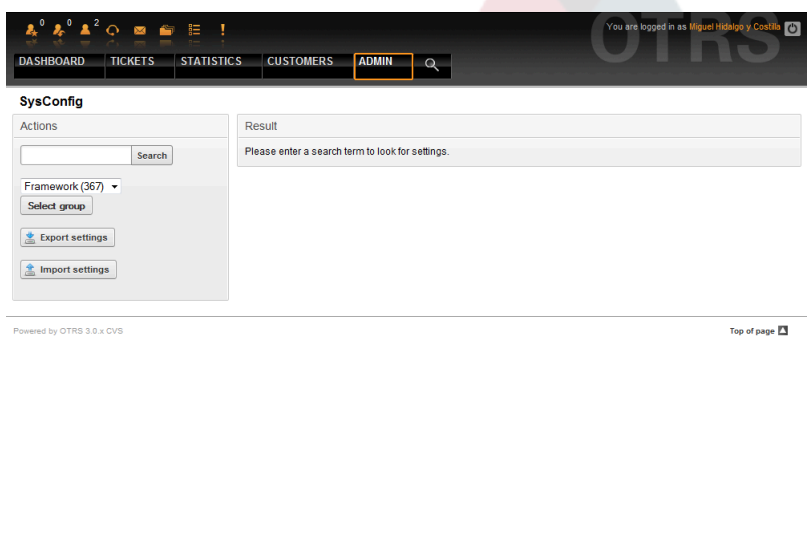


Kielelezo: Kiolesura michoro kwa ajili ya usanidi wa mfumo (SysConfig).

Kiolesura michoro cha usanidi wa mfumo kinaelezewa kuwa undani zaidi katika sura "Kusanidi mfumo kupitia kiolesura cha tovuti".

1.13. Kutumia akaunti zote za barua

Kuna njia nyingi za kusafirisha barua pepe mpya kuingia kwenye mfumo wa tiketi. Njia mojawapo ni kutumia MTA ya ndani na `otrs.PostMaster.pl` script ambayo inapitisha barua moja kwa moja ndani kwenye mfumo. Njia nyingine ni kutumia akaunti za barua ambazo zinaweza kusimamiwa kupitia kiolesura cha tovuti. Kiungo cha "Akaunti za Barua za MkuuWaPosta" katika kurasa ya Msimamizi kinapakia kiweko simamizi kwa ajili ya akaunti za barua (ona Kielelezo chini). OTRS ina msaada kwa itifaki z za barua: POP3, POP3S, IMAP na IMAPS.

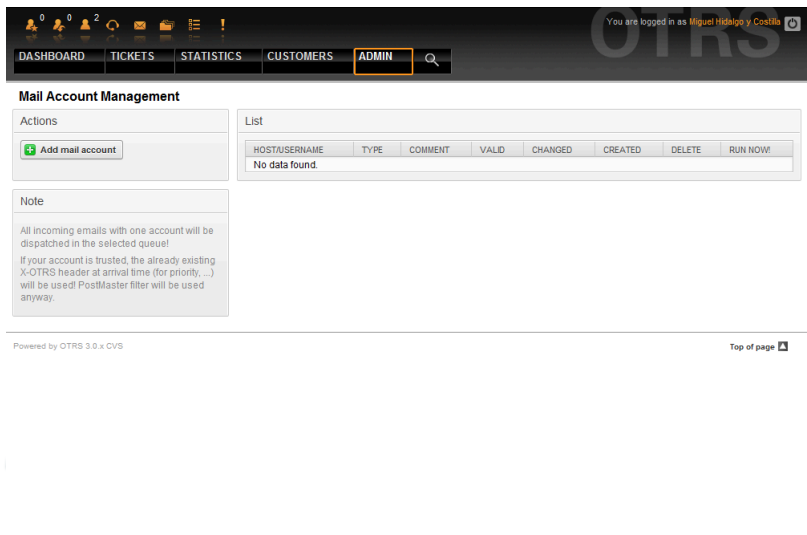


The screenshot shows the OTRS Admin interface for Mail Account Management. The top navigation bar includes DASHBOARD, TICKETS, STATISTICS, CUSTOMERS, and ADMIN. The main content area has a sidebar with 'Add mail account' and a 'List' table with columns: HOST/USERNAME, TYPE, COMMENT, VALID, CHANGED, CREATED, DELETE, and RUN NOW!. The table is currently empty with the message 'No data found.'. A 'Note' section provides instructions on email dispatching and X-OTRS headers. The footer indicates 'Powered by OTRS 3.0.x CVS' and a 'Top of page' link.

Kielelezo: Usimamizi wa akaunti za barua.

Ona kifungu kuhusu Akaunti za Posta za MkuuWaPosta kwa maelezo zaidi.

1.14. Inachuja barua pepe zinazolingia

OTRS ina uwezo wa kuchuja barua pepe zinazolingia. Kwa mfano, inawezekana kuweka barua pepe zinazolingia kwenye foleni fulani kiotomatiki, au kuseti hali fulani au aina ya tiketi kwa baadhi ya barua. Vichujio vinafanya kazi kwa barua zote zinazolingia. Unaweza kusimamia vichujio vyako kupitia kiungo "Kichujio cha MkuuWaPosta" katika kurasa ya Msimamizi (ona Kielelezo chini).

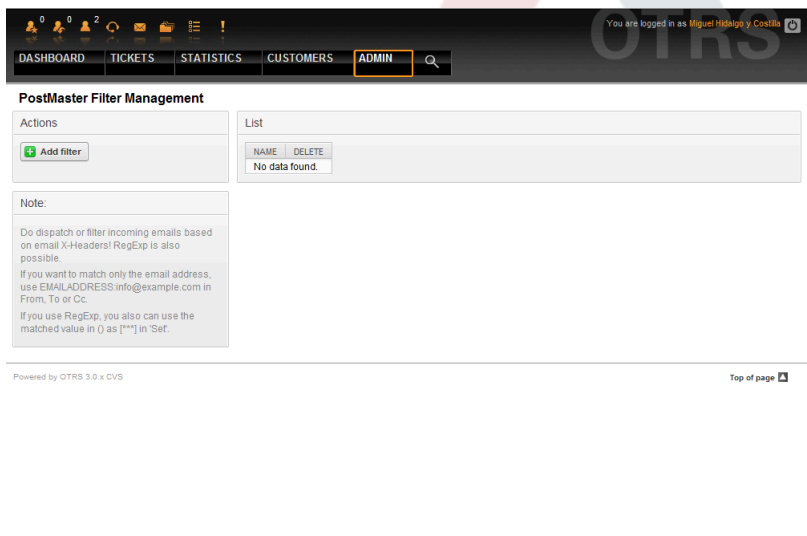

The screenshot shows the OTRS Admin interface for PostMaster Filter Management. The top navigation bar is the same as in the previous screenshot. The main content area has a sidebar with 'Add filter' and a 'List' table with columns: NAME and DELETE. The table is currently empty with the message 'No data found.'. A 'Note' section provides instructions on dispatching or filtering emails based on X-Headers and RegEx. The footer indicates 'Powered by OTRS 3.0.x CVS' and a 'Top of page' link.

Kielelezo: Usimamizi wa kichujio cha MkuuWaPosta.

Kichujio kina kigezo kimoja au zaidi ambacho lazima kitimizwe ili vitendo vilivyofafanuliwa vitekelezwe kwenye barua pepe. Vigezo vya uchujaji vinaweza kufafanuliwa kwa ajili ya vichwa au kiini cha barua pepe, mf. tafuta maingizo maalumu ya vichwa, kama anwani ya mtumaji, au kuhusu tungo kwenye kiini. Hata semi za kawaida zinaweza kutumika kwa ulinganishaji ruwaza uliopanuliwa. Kama kichujio chako kikilingana, unaweza kuseti sehemu kwa kutumia vichwa vya X-OTRS katika GUI. Hizi thamani zitatumika wakati wa kutengeneza tiketi au ufwatiliaji ujumbe katika OTRS. Jedwali 5-4 linaorodhesha vichwa tofauti vya X-OTRS na maana zake.


Kumbuka: Unaweza pia kutumia vichwa vya X-OTRS-Ufwatiliaji* kuseti thamani za barua pepe za ufwatiliaji.

Table 4.5. Kazi za vichwa-vya-X-OTRS tofauti

Jina	Thamani ziwezekanazo	Maelezo
Kipaumbele cha-X-OTRS:	1 chini sana, 2 chini, 3 kawaida, 4 juu, 5 juu sana	Inaseti kipaumbele cha tiketi.
Foleni ya-X-OTRS:	Jina la foleni kwenye mfumo.	Inaseti foleni ambapo tiketi itapangwa. Kama imesetiwa kwenye kichwa cha X-OTRS, sheria zote nyingine zinazotaribu kupanga tiketi kwenye foleni fulani zinapuzwa. Kama ukutumia foleni ndogo, ibainishe kama "Parent::Sub".
Kitasa cha-X-OTRS:	fungua, fungua	Inaseti hali ya kitasa cha tiketi.
X-OTRS-Puuza:	Ndio au Kweli	Kama hiki kichwa cha OTRS kimesetiwa kuwa "Ndio", ujumbe unaoingia utapuzwa na hautapokelewa na mfumo.
Hali ya-X-OTRS:	mpya, fungua, imefungwa kwa mafanikio, imefungwa pasipo mafanikio, ...	Inaseti hali inayofwata ya tiketi.
X-OTRS-Hali-Muda Inasubiri:	mf. 2010-11-20 00:00:00	Inaseti muda wa kusubiri wa tiketi (pia lazima utume hali ya kusubiri kupitia X-OTRS-Hali). Unaweza kubainisha tarehe halisi kama "2010-11-20 00:00:00" au tarehe inayohusika, kutegemeana na muda wa kuwasili wa barua pepe. Au tumia mfumo "+ \$Namba\$Kizio", ambapo \$Kizio inaweza kuwa 's' (sekunde), 'm' (dakika), 'h' (masaa) au 'd' (siku). Kizio kimoja tu kinaweza kubainishwa. Mfano wa mipangilio halali: "+50s" (inasubiri kwa sekunde 50), "+30m" (dakika 30), "+12d" (siku 12). Tambua kwamba mipangilio

Jina	Thamani ziwezekanazo	Maelezo
		kama "+1d 12h" haiwezekani. Unaweza kubainisha "+36" badala yake.
X-OTRS-Aina:	chaguo-msingi (inategemea mpangilio wako)	Inaseti aina ya tiketi (kama Tketi::Aina imeamilishwa).
X-OTRS-Huduma:	(inategemea na mpangilio wako)	Inaseti huduma ya tiketi (kama Tiketi::Huduma iko hai). Kama ukitaka kuseti huduma-ndogo unatakiwa kuibainisha kama "Parent::Sub".
X-OTRS-SLA:	(inategemea na mpangilio wako)	Inaseti SLA ya tiketi (kama Tiketi::Usaidizi wa huduma umeamilishwa)
X-OTRS-MtejaMtumiaji:	MtejaMtumiaji	Inaseti mteja mtumiaji wa tiketi.
X-OTRS-Nambari ya Mteja:	Nambari ya Mteja	Inaseti kitambulisho cha mteja kwa hii tiketi.
X-OTRS-AinaMtumaji:	wakala, mfumo, mteja	Inaseti aina ya mtumaji wa tiketi.
X-OTRS-AinaMakala:	Barua pepe-nje, Barua pepe-ndani, Barua pepe-taari-fa-nje, Barua pepe-taari-fa-ndani, simu, faksi, ujumbe mfupi wa maneno, maombi ya wavuti, notisi-ndani, notisi-nje, notisi-ripoti	Inaseti aina ya makala kwa tiketi inayoingia.
X-OTRS-Sehemulnayobadilika-<Sehemulnayobadilikajina>:	Inategemeana na usanidi wa Sehemu Zinzobadilika (Nakala: Daftari, Tarehe: 2010-11-20 00:00:00, Nambari kamili: 1)	Inahifadhi taarifa ya thamani ya ziada kwa ajili ya tiketi kwenye <Sehemulnayobadilikajina> Sehemu Inayobadilika.
X-OTRS-Kitanzi:	Kweli	Kama hiki kichwa cha X-OTRS kimesetiwa, hakuna majibu otomatiki yanayo pokelewa na mtumaji wa ujumbe (ulinzi wa barua kitanzi).

Unatakiwa kuweka bayana jina kwa kila sheria ya kuchuja. Kigezo cha kuchuja kinaweza kuweka bayana katika kifungu "Masharti ya Kuchuja". Chagua kupitia visanduku vya orodha "Kichwa1", "Kichwa2" na kuendelea kwa zile sehemu za ujumbe ambazo ungependa kutafuta, na weka bayana upande wa kulia thamani unazotaka kuchuja. Katika kifungu "Seti Vichwa vya Barua pepe", unaweza kuchagua vitendo vitakavyo chochewa kama sheria za uchujaji zitafanana. Unaweza kuchagua kwa "Kichwa1", "Kichwa2" na kuendelea ili kuchagua Kichwa cha X-OTRS na kuseti thamani zinazohusika (ona kielelezo chini). Sheria za kuchuja zinatathminiwa kwa kufuata oda ya alfabeti, na zinatekelezwa zote isipokuwa kama mipangilio ya "Sitisha Baada ya Kufananisha" imesetiwa kuwa "Ndio" katika moja ya sheria (kwa kesi hii utathmini wa vichujio vingine unaitishwa).

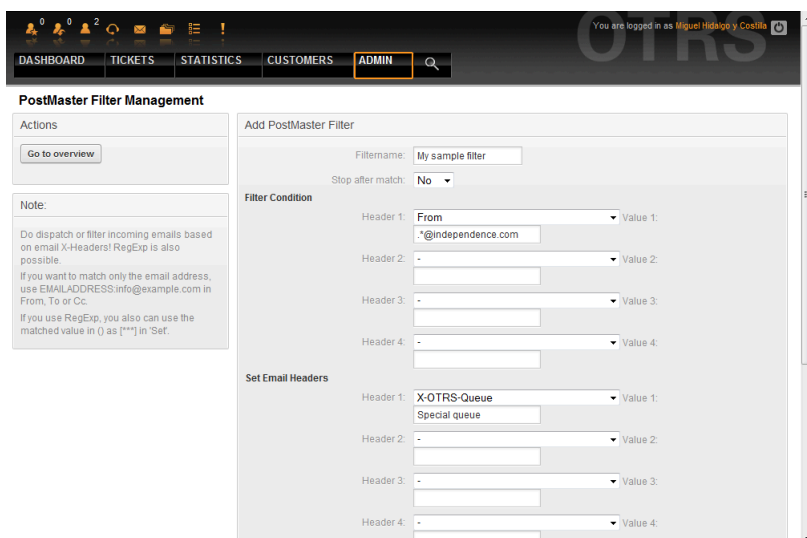

The screenshot shows the 'PostMaster Filter Management' interface in OTRS. It includes a navigation bar with 'ADMIN' selected. The main form is titled 'Add PostMaster Filter' and contains the following fields:

- Filename:** My sample filter
- Stop after match:** No
- Filter Condition:**
 - Header 1: From (Value 1: *@independence.com)
 - Header 2: (Value 2:)
 - Header 3: (Value 3:)
 - Header 4: (Value 4:)
- Set Email Headers:**
 - Header 1: X-OTRS-Queue (Value 1: Special queue)
 - Header 2: (Value 2:)
 - Header 3: (Value 3:)
 - Header 4: (Value 4:)

There is also a 'Note' section on the left with instructions on how to use filters and regular expressions.

Kielelezo: Ongeza kichujio cha MkuuWaPosta.

Example 4.1. Inapanga barua taka katika foleni maalumu

Sheria yenye manufaa ya kuchuja itakuwa kuruhusu OTRS kuhamisha kiotomatiki barua pepe zenye alama barua taka, kwa kutumia kifaa cha kutambua barua taka kama SpamAssassin, kwenda kwenye foleni "Taka". SpamAssassin inaongeza kichwa "X-Barua taka-Bendera" kwenye kila barua pepe iliyokaguliwa. Pale barua pepe inawekwa alama kama barua taka, Kichwa kinasetiwa kuwa "Ndiyo". Kwa hiyo kigezo cha kuchuja kitakuwa "X-Barua taka-Bendera: Ndiyo". Kutengeneza sheria ya kuchuja kwa kutumia hiki kigezo unaweza kuingiza jina kama, kwa mfano "barua taka-barua". Katika kipengele cha "Masharti ya Kuchuja", chagua "X-Barua taka-Bendera:" kwa ajili ya "Kichwa 1" kutoka kwenye boksi la orodha. Ingiza "Ndiyo" kama thamani kwa hiki kichwa. Sasa kigezo cha kuchuja kimebainishwa. Kuhakikisha kwamba barua taka zote zinawekwa kwenye foleni "Taka", chagua kwenye kipengele cha "Seti vichwa vya Barua pepe", ingizo la "X-OTRS-Foleni:" kwa ajili ya "Kichwa 1". Bainisha "Taka" kama thamani ya hiki kichwa. Mwisho ongeza chujio jipya kuamilisha kwa ajili ya ujumbe mpya kwenye mfumo.

Kuna moduli za ziada, ambazo zinaweza kutumika kuchuja ujumbe unaolingia kwa umaalumu zaidi. Hizi moduli zinaweza kuwa na manufaa wakati wa kushughulika na mifumo mikubwa na tangamanifu zaidi.

1.15. Kutekeleza kazi za kiotomatiki na WakalaWaUjumla

KiolesuraChaUjumla ni kifaa cha kutekeleza kazi kiotomatiki. KiolesuraChaUjumla, kwa mfano, kinaweza kufunga au kuhamisha tiketi, kutuma taarifa kwa tiketi zilizopandishwa, na kadh.

Bofya kiungo "WakalaWaUjumla" katika kurasa ya Msimamizi (ona Kielelezo chini). Jedwali lenye kazi zote za kiotomatiki za mfumo litaonyeshwa. Hizi kazi zinaweza kuhaririwa, kuanzishwa kwa mikono au kuondolewa kabisa.

13 24 5 You are logged in as Miguel Hidalgo y Costas

DASHBOARD TICKETS STATISTICS CUSTOMERS ADMIN

Generic Agent

Actions
Add job

List

NAME	LAST RUN	VALID	DELETE	RUN NOW
Sample job 1		valid		Run this task
Sample job 2		valid		Run this task
Sample job 3		valid		Run this task

Powered by OTRS 3.0.x CVS Top of page

Kielelezo: Orodha ya kazi kwa WakalaWaUjumla.

Bofya kitufe cha "Ongeza Kazi" kutengeneza kazi mpya. Kwanza unahitaji kutoa jina. Kisha utaweka bayana jinsi kazi itakavyofanyika: kiotomatiki katika mida iliyopangwa (kama kazi iliyopangwa, moduli hii itafanya kazi kwa tiketi zote zitakazopatikana na kichujio cha tiketi) au kutegemeana na matukio ya tiketi (baada ya tiketi moja tu kubadilishwa, kama itafanana na kichujio cha tiketi). Tambua kwamba kama ukianzisha kazi kwa mikono zinazotegemea matukio kutoka kwenye skrini ya mapitio, zitafanya kazi kwenye tiketi zote zilizopatikana na kichujio cha tiketi.

13 24 5 You are logged in as Admin OTRS

DASHBOARD CUSTOMERS TICKETS STATISTICS ADMIN

Generic Agent

Actions
Go to overview

Job Settings

★ Job name:

Validity: Yes

▼ Automatic execution (multiple tickets)

SCHEDULE MINUTES	SCHEDULE HOURS	SCHEDULE DAYS
00	00	Sun
10	01	Mon
20	02	Tue
30	03	Wed
40	04	Thu
50	05	Fri
		Sat

Currently this generic agent job will not run automatically.
To enable automatic execution select at least one value from minutes, hours and days!

▼ Event based execution (single ticket)

Event Triggers:

TYPE	EVENT	DELETE

Additionally or alternatively to a periodic execution, you can define ticket events that will trigger this job. If a ticket event is fired, the ticket filter will be applied to check if the ticket matches. Only then the job is run on that ticket.

Add Event Trigger: Ticket EscalationResponseTimeNotifyBefore +

To add a new event select the event object and event name and click on the "+" button.

Kielelezo: Kutengeneza kazi za WakalaWaUjumla.

Kwa kila kazi, unaweza kuweka bayana kichujio cha tiketi, kwa mfano kufanya kazi kwa tiketi kwenye foleni fulani tu. Vigezo vyote vya tiketi lazima vifikiwe kwa kazi kufanyika kwenye tiketi.

Hatimaye, tiketi inaweza kubadilishwa kwa kuseti sehemu mbali mbali za tiketi kama foleni au hali mpya. Inawezekana kuambatanisha noti kwenye tiketi (moja au nyingi) au kuanzisha utekelezaji wa moduli iliyogeuzwa kukufaa. Pia una chaguo la kufuta tiketi (moja au nyingi) kutoka kwenye hifadhidata. Hii inakuwa na manufaa kuondoa data zilizopitwa na wakati au zilizobatili kutoka kwenye mfumo.


Warning

Kama ukitumia fomula-saidizi ya kufuta tiketi, tiketi zote zitakazoathirika na viambatanisho vyake vitaondolewa kwenye hifadhidata na haviwezi kurudishwa!

Baada ya kuhariri kazi, OTRS itarudi kwenye skrini ya mapitio. Huko utakuwa na uwezo wa kuanzisha kazi yoyote kwa mikono. Kama ukichagua kuanzisha kazi, kwanza utaona tiketi zote zitakazoathirika pale kazi itakapoanzishwa. Hii orodha itakusaidia kuthibitisha kwamba kazi inafnywa kama ilivyokusudiwa. Katika pointi hii hakuna mabadiliko yaliyofanywa kwenye tiketi hizi. Kama tu utathibitisha kwenye skrini kazi itafanyika.

1.16. Barua pepe ya msimamizi

Wasimamizi wa OTRS wanaweza kutuma ujumbe kwa watumiaji au makundi maalumu. Kiungo cha "Taarifa za Msimamiaji" kwenye kurasa ya msimamiaji inafungua skrini ambayo wakala na makundi ya kutumiwa taarifa yanachaguliwa (ona kielelezo chini).

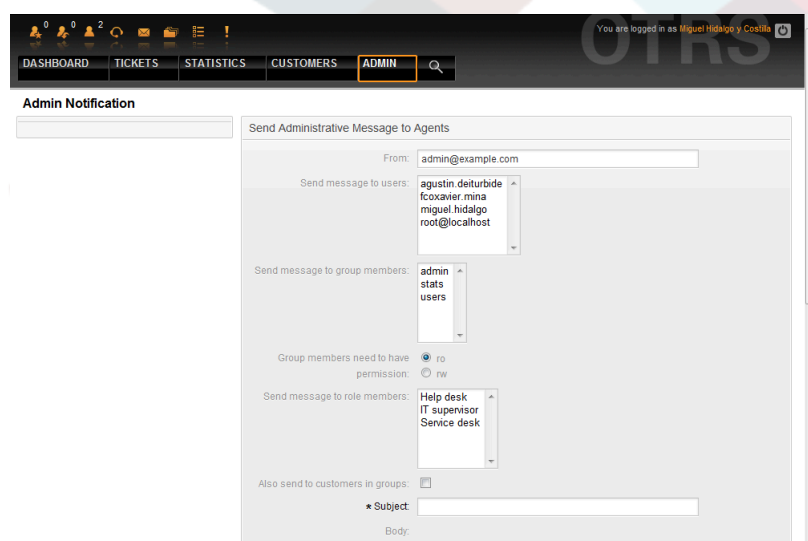


Kielelezo: Taarifa za msimamizi.

Inawezekana kuweka bayana mtumaji, mada na nakala ya kiini cha taarifa. Unaweza pia kuchagua mawakala, makundi na kazi za nani atakayepokea ujumbe.

1.17. Usimamizi wa kipindi

Unaweza kuona watumiaji wote walioingia kwenye mfumo na undani wa vipindi vyao kwa kubofya kiungo "Usimamizi wa Vipindi" katika eneo la msimamizi (ona Kielelezo chini).

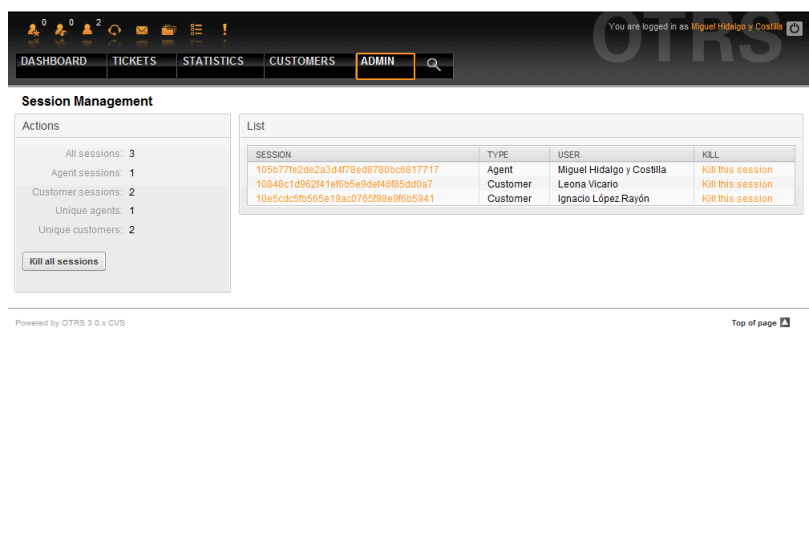

Session Management

Actions

- All sessions: 3
- Agent sessions: 1
- Customer sessions: 2
- Unique agents: 1
- Unique customers: 2


List

SESSION	TYPE	USER	KILL
105b77fe2de2a3d47f9e8780bc6817717	Agent	Miguel Hidalgo y Costilla	Kill this session
10948c1d962041ef6b5e9de4f895d0a7	Customer	Leona Vicario	Kill this session
10e5cdc5fb555e19ac0765958e9f6b5941	Customer	Ignacio López Rayón	Kill this session

Powered by OTRS 3.0 x CVS Top of page

Kielelezo: Usimamizi wa kipindi.

Baadhi ya takwimu kuhusu vipindi vyote vilivyo hai inaonyeshwa, mf. mawakala na wateja watumiaji wangapi wameingia kwenye mfumo na idadi ya vipindi vilivyo hai. Kila kipindi kimoja kinaweza kuondolewa kwa kubofya kiungo *Ua kipindi hiki* kilicho upande wa kulia wa orodha. Pia una chaguo la *Ua vipindi vyote*, ambayo inakuwa na manufaa kama utataka kuupeleka mfumo nje ya mtandao. Taarifa za undani wa kila kipindi unapatikana pia (ona Kielelezo chini).

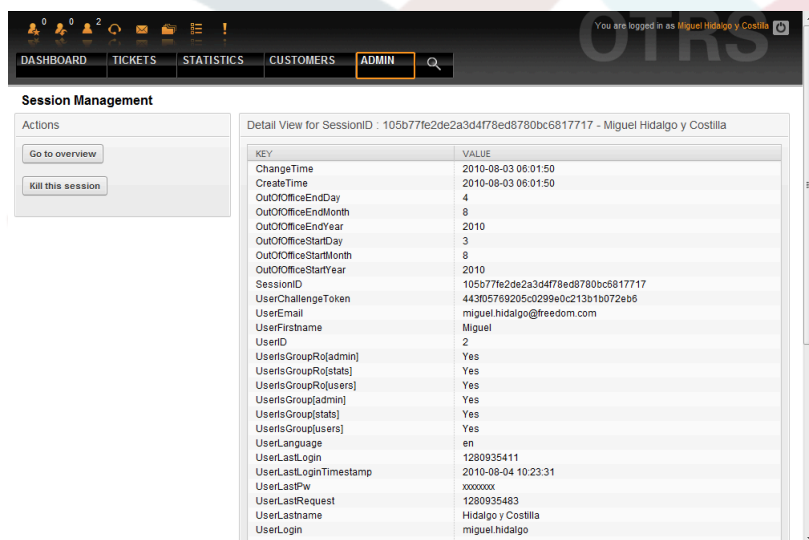

Session Management


Detail View for SessionID : 105b77fe2de2a3d47f9e8780bc6817717 - Miguel Hidalgo y Costilla

KEY	VALUE
ChangeTime	2010-08-03 06:01:50
CreateTime	2010-08-03 06:01:50
OutOfficeEndDay	4
OutOfficeEndMonth	8
OutOfficeEndYear	2010
OutOfficeStartDay	3
OutOfficeStartMonth	8
OutOfficeStartYear	2010
SessionID	105b77fe2de2a3d47f9e8780bc6817717
UserChallengeToken	443057f9205c0299e0c213b1b072eb6
UserEmail	miguel.hidalgo@freedom.com
UserFirstname	Miguel
UserID	2
UsersGroupRo(admin)	Yes
UsersGroupRo(stats)	Yes
UsersGroupRo(users)	Yes
UsersGroup(admin)	Yes
UsersGroup(stats)	Yes
UsersGroup(users)	Yes
UserLanguage	en
UserLastLogin	1280935411
UserLastLoginTimestamp	2010-08-04 10:23:31
UserLastPw	xxxxxxx
UserLastRequest	1280935483
UserLastname	Hidalgo y Costilla
UserLogin	miguel.hidalgo
UserPw	xxxxxxx

Kielelezo: Maelezo ya kipindi.

1.18. Batli ya mfumo

Kiungo cha "Batli ya Mfumo" katika ukurasa wa Msimamizi kinaonyesha maingizo ya batli ya mfumo, yaliyopangwa kinyume na muda uliofika ikiwa na za hivi karibuni kwanza (ona Kielelezo chini).

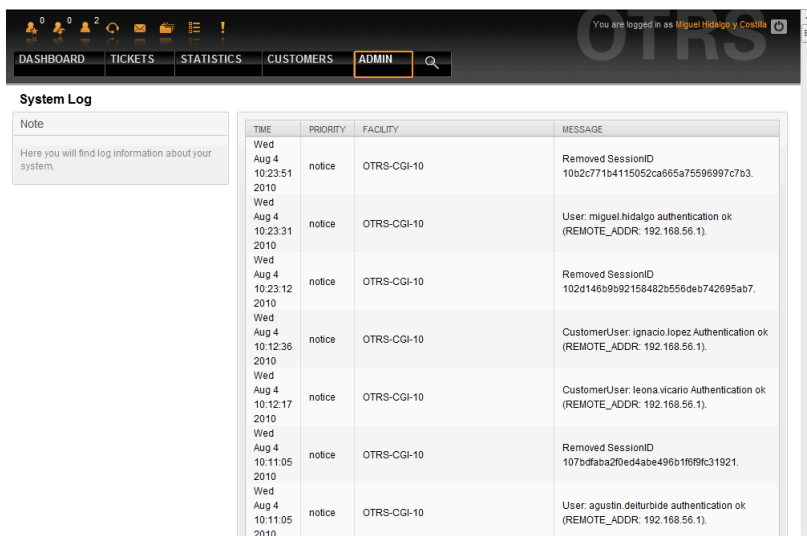

The screenshot shows the OTRS Admin interface with the 'System Log' tab selected. The log table contains the following entries:

TIME	PRIORITY	FACILITY	MESSAGE
Wed Aug 4 10:23:51 2010	notice	OTRS-CGI-10	Removed SessionID 10b2c771b4115052ca665a75596997c7b3.
Wed Aug 4 10:23:31 2010	notice	OTRS-CGI-10	User: miguel.hidalgo authentication ok (REMOTE_ADDR: 192.168.56.1).
Wed Aug 4 10:23:12 2010	notice	OTRS-CGI-10	Removed SessionID 102d146b9b92158482b556deb742695ab7.
Wed Aug 4 10:12:36 2010	notice	OTRS-CGI-10	CustomerUser: ignacio.lopez Authentication ok (REMOTE_ADDR: 192.168.56.1).
Wed Aug 4 10:12:17 2010	notice	OTRS-CGI-10	CustomerUser: leona.vicario Authentication ok (REMOTE_ADDR: 192.168.56.1).
Wed Aug 4 10:11:05 2010	notice	OTRS-CGI-10	Removed SessionID 107bdfaba2f0ed4abe496b1f8f9c31921.
Wed Aug 4 10:11:05 2010	notice	OTRS-CGI-10	User: agustin.delurbide authentication ok (REMOTE_ADDR: 192.168.56.1).

kielelezo: Batli ya mfumo.


Kila mstari kwenye batli una mhuri wa muda, kipaumbele cha batli, kijenzi cha mfumo na ingizo la batli yenyewe.

Note

Batli za mfumo zinapatikana kupitia kiolesura cha mfumo tu katika mifumo ya Linux / Unix. Katika mifumo ya Windows unaweza kuona batli kwa kutumia kihariri cha nakala kwa kufungua faili [install_dir]otrs\var\log\otrs.log.

1.19. Maulizo ya SQL kupitia boksi la SQL

Kiungo cha "Boksi la SQL" kwenye kurasa ya msimamizi inafungua skrini ambayo inakuruhusu kufanya maulizo kwenye maudhui ya majedwali ya hifadhidata ya OTRS (ona kielelezo chini). Haiwezekani kubadilisha maudhui ya majedwali, chagua maulizo yanayolkubalika tu.

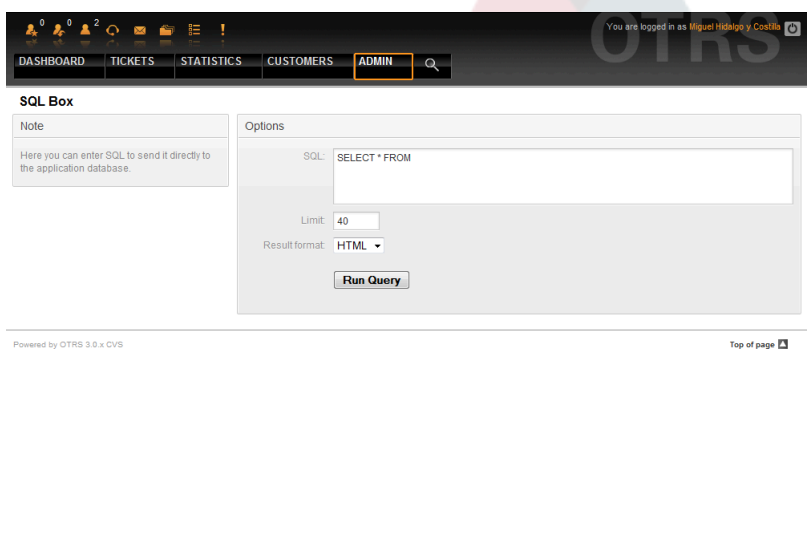


The screenshot shows the OTRS Admin interface with the 'SQL Box' tab selected. The interface includes a text input field for SQL queries, a 'Limit' dropdown set to 40, and a 'Result format' dropdown set to HTML. A 'Run Query' button is located below the input fields.

Kielelezo: Boksi la SQL.

1.20. Msimaizi wa kifurushi

Kwa kutumia kiungo cha "Meneja Kifurushi" katika kurasa ya Msimamizi, unaweza kusakinisha na kusimamia vifurushi ambavyo vina panua kazi za OTRS (ona Kielelezo chini). Ona kifungu Programu-tumizi za ziada kupata mjadala kuhusu viendelezi ambavyo vinapatikana kwenye hifadhi za OTRS.

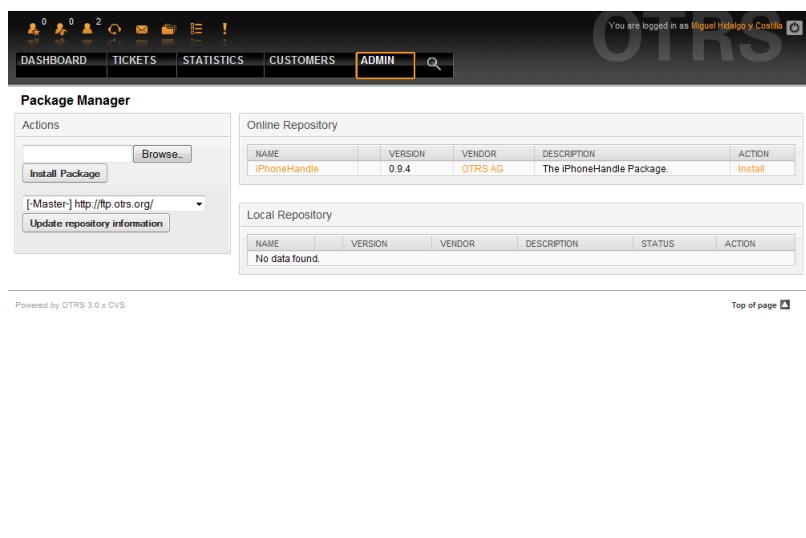

Kielelezo: Msimamizi wa Kifurushi.

Meneja kifurushi anaonyesha OTRS vifurushi vya nyongeza ambavyo umesakinisha kwenye seva yako kwa sasa, pamoja na nambari zake za matoleo.

Unaweza kusakinisha vifurushi kutoka kwa mwenyeji wa mbali kwa kuchagua hifadhi kwenye kifungu cha *Hifadhi ya Mtandao*, na kubofya kitufe cha *Sasisha taarifa za hifadhi*. Vifurushi vilivyopo vinaonyeshwa kwenye jedwali husika. Upane wa kulia wa skrini unaonyesha vifurushi vilivyopo. Kusakinisha kifurushi, bofya kwenye *Sakinisha*. Baada ya usakinishaji, kifurushi kinaonyeshwa kwenye kifungu cha *Hifadhi ya Ndani*.

Kuboresha kifurushi kilichosakinishwa, orodha ya vifurushi vilivyopo kwenye hifadhi ya mtandao itaonyesha *Boresha* katika safuwima ya Vitendo kwa kifurushi chochote chenye toleo jipya zaidi ya lile lililosakinishwa kwa ndani. Bofya *Boresha* na itasakinisha toleo jipya la kifurushi kwenye mfumo wako.

Katika baadhi ya kesi, mfano mfumo wako wa OTRS haujaunganishwa na mtandao, unaweza kusakinisha vifurushi ambavyo umepakua kwenye diski ya ndani. Bofya kitufe cha *Vinjari* kwenye mwambaa upande wa vitendo, na chagua faili la .opm la kifurushi kwenye diski yako. Bofya *Fungua* na kisha *Sakinisha Kifurushi*. Baada ya usakinishaji kukamilika, kifurushi kinaonyeshwa kwenye kifungu *Hifadhi ya Ndani*. Unaweza kutumia hatua hizo hizo kusakisha kifurushi ambacho tayari kimesakinishwa.


Katika kesi maalumu, unaweza kutaka kusanidi Meneja Vifurushi, mf., kutumia seva mbadala au kutumia hifadhi ya ndani. Tazama kwenye machaguo yaliyopo kwenye SysConfig chini ya Kiunzi:Kiini::Kifurushi.

1.21. Huduma za Tovuti

Kiungo cha Huduma za Tovuti kinaelekeza kwenye kiolesura mchoro ambapo huduma za tovuti (kwa ajili ya Kiolesura cha Ujumla cha OTRS) zinatengenezwa na kudumishwa (ona Kielelezo chini).

GenericInterface Web Service Management - Overview» **Web Services**

Actions

 **Add web service**

Web Service List

NAME	DESCRIPTION	REMOTE SYSTEM	PROVIDER TRANSPORT	REQUESTER TRANSPORT	VALIDITY
No data found.					

Kielelezo: Kiolesura mchoro cha huduma za tovuti.

Kiolesura michoro cha huduma za wavuti kinaelezwa kwa undani zaidi katika kifungu "Kiolesura Michoro cha Huduma ya Tovuti".

1.22. Sehemu zinazobadilika

Sehemu Zinazobadilika ni sehemu ambayo unaseti n akusimamia sehemu zilizogeuzwa kukufaa kwa ajili ya tiketi n amakala (on akielelezo chini).

DASHBOARD
TICKETS
STATISTICS
CUSTOMERS
ADMIN
You are logged in as...

Dynamic Fields Management - Overview

Actions

Article

----- ▾

Add new field for object: Article

Ticket

----- ▾

Add new field for object: Ticket

Hint

To add a new field, select the field type form one of the object's list, the object defines the boundary of the field and it can't be changed after the field creation.

Dynamic Fields List

NAME	LABEL	ORDER	TYPE	OBJECT	VALIDITY
Field1	My Field 1	1	Text	Ticket	valid
Field2	My Field 2	2	Textarea	Ticket	valid
Field3	My Field 3	3	Checkbox	Ticket	valid
Field4	My Field 4	4	Dropdown	Ticket	valid
Field5	My Field 5	5	Multiselect	Ticket	valid
Field6	My Field 6	6	Date	Ticket	valid
Field7	My Field 7	7	Date / Time	Ticket	valid

Powered by OTRS 3.1.x CVS

Kielelezo: Skrini ya mapitio ya sehemu zinazobadilika na baadhi ya sehemu zinazobadilika.

Usanidi wa sehemu zinazobadilika unaelezewa kwa undani zaidi katika kifungu "Usanidi wa Sehemu Zinazobadilika".

Kila aina ya sehemu zinazobadilika ina usanidi wa mpangilio wake na hivyo skrini yake pekee ya usanidi.

Note

Katika kiunzi cha OTRS, sehemu zinazobadilika zinaweza kuunganishwa tu kwenye tiketi na makala kama chaguo-msingi, lakini zinaweza kupanuliwa kwenda kwenye vitu vingine.

2. Usanidi wa Mfumo

2.1. Mafaili ua usanidi wa OTRS

Mafaili yote ya usanidi ya OTRS yanahifadhiwa katika mpangilio orodha Kernel na katika sehemu zake ndogo. Hakuna haja ya kubadilisha kwa mikono faili jingine zaidi ya Kernel/Config.pm, kwa sababu mafaili yaliyobaki yatabadilishwa mfumo ukiboreshwa. Nakili parameta za usanidi kutoka mafaili mengine kwenda Kernel/Config.pm na zibadilishke kutegemeana na mahitaji yako. Hili faili halitaguswa wakati wa mchakato wa kuboreshwa, kwahiyo mipangilio yako ya mikono iko salama.


Katika mpangilio orodha Kernel/Config/Files kuna mafaili mengine ambayo yanachanganuliwa wakati kurasa ya kuigia ya OTRS inafikiwa. Kama programu-tumizi za ziada kama Maswali yanayoulizwa mara kwa mara au Meneja Mafaili zimesakinishwa, mafaili ya usanidi ya hizi pia yanaweza kupatikana katika njia iliyotajwa.

Kama kiolesura cha tovuti cha OTRS kimefikiwa, mafaili yote ya .xml katika mpangilio orodha wa Kernel/Config/Files yanachanganuliwa katika mpangilio wa alfabeti, na

mipangilio ya kiunzi cha kati na programu-tumizi za ziada zitapakiwa. Baada ya hapo, mipangilio ya kwenye mafaili Kernel/Config/Files/ZZZAAuto.pm, Kernel/Config/Files/ZZZAuto.pm na Kernel/Config/Files/ZZZProcessManagement.pm (kama lipo) yata tathminiwa. Haya mafaili yanatumiwa na kiolesura michoro kwa ajili ya kuhifadhi kwa muda usanidi wa mfumo na hayatakiwi kubadilishwa kwa mikono kamwe. Mwisho, faili Kernel/Config.pm lenye mipangilio yako na parameta zilizobadilishwa kwa mikono, litachanganuliwa. Kusoma mafaili ya usanidi kwa mpangilio huu inahakikisha kwamba mipangilio yako maalumu inatumiwa na mfumo.

2.2. Usanidi wa mfumo kupitia kiolesura cha mtandao

Tangu OTRS 2.0, karibu parameta zote za usanidi za kiunzi cha kati au vya programu-tumizi za ziada zilizosakinishwa, zinaweza kubadilishwa kirahisi na kiolesura michoro cha mfumo. Ingia kama msimamizi wa OTRS na fuata kiungo cha SysConfig katika kurasa ya Msimamizi kutekeleza kifaa kipya cha usanidi (ona Kielelezo chini).

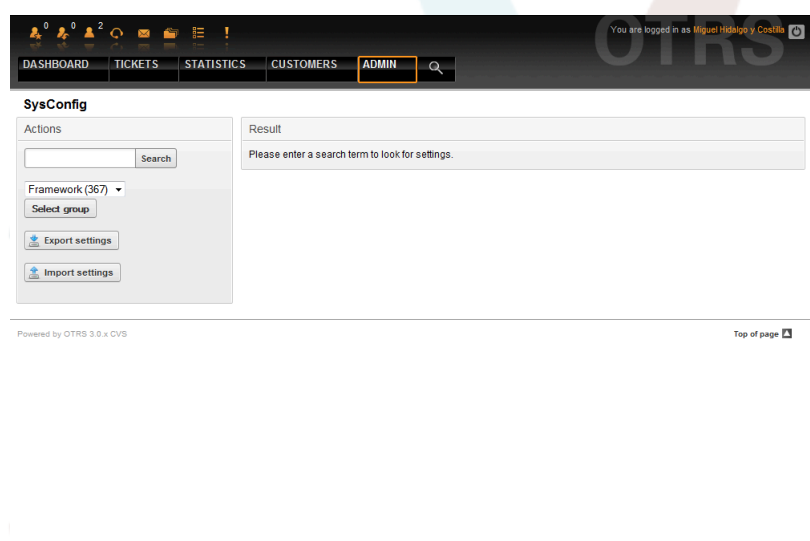

Kielelezo: Kiolesura mchoro cha usanidi wa mfumo.

OTRS kwa sasa ina zaidi ya parameta za usanidi 600, na kuna njia tofauti za kufikia kila moja kirahisi. Kwa utafutaji wa nakala kamili, parameta zote za usanidi zinaweza kutafutwa kwa kutumia herufi moja au mbili za muhimu. Utafutaji wa nakala huru hautafuti tu kwenye majina ya parameta za usanidi, bali pia kwenye maelezo ya parameta. Hii inafanya elementi kupatikana kirahisi hata kama jina lake halijulikani.

Kwa zaidi, parameta zote za usanidi zinapangwa katika makundi muhimu na makundi madogo. Makundi muhimu yanawakilisha programu-tumizi ambazo parameta za usanidi zipo ndani yake, mf. "Kiunzi" kwa ajili ya kiunzi cha kati cha OTRS, "Tiketi" kwa ajili ya mfumo wa tiketi, "Maswali yanayoulizwa Mara kwa Mara" kwa ajili ya mfumo wa Maswali yanayoulizwa Mara kwa Mara, na kadhalika. Makundi madogo yanaweza kufikiwa kama programu-tumizi imechaguliwa kutoka kwenye boksi la orodha ya makundi na kitufe cha "Chagua kundi" kimebonyezwa.

Kila parameta ya usanidi inaweza kuwashwa au kuzimwa kwa kupitia kisanduku tiki. Kama parameta imezimwa, mfumo utapuuza hii parameta au kutumia chaguo-msingi. Inawezekana kurudisha parameta ya usanidi iliyobadilishwa kuwa chaguo-msingi la mfumo kwa kutumia kiungo cha kuseti upya. Kitufe cha Kusasisha kinawasilisha mabadiliko yote kwenye parameta za usanidi wa mfumo.

Kama unataka kuhifadhi mabadiiko yote uliyofanya kwenye usanidi wa mfumo wako, kuanzisha usakinishaji mpya kwa haraka, unaweza utumia kitufe "Hamisha mipangilio",

ambacho kitatengeneza faili la .pm. Kurudisha mipangilio yako, bonyeza "Agiza mipangilio" na chagua .pm iliyotengenezwa kabla.

Note

Kwa sababu za kiusalama, parameta za usanidi wa miunganiko ya hifadhidata haziwezi kubadilishwa katika kifungu SysConfig. Inabidi zisetiwe kwa mikono kati-ka Kernel/Config.pm.

3. Kuweka nakala za dharura ya mfumo

Hii sura inaelezea chelezo na urejeshaji wa data za OTRS.

3.1. Chelezo

Kuna aina mbili za data za kuweka kwenye chelezo: mafaili ya programu-tumizi (mf. mafaili ya kwenye /opt/otrs), na data zilizohifadhiwa kwenye hifadhidata.

Kurahisisa chelezo, hati scripts/backup.pl imejumuishwa katika kila usakinishaji wa OTRS. Inaweza kuanzishwa ili kuweka chelezo la kila data muhimu (ona Hati chini).

```
linux:/opt/otrs# cd scripts/  
linux:/opt/otrs/scripts# ./backup.pl --help  
backup.pl <Revision 1.1> - backup script  
Copyright (c) 2001-2005 Martin Edenhofer <martin@otrs.org>  
usage: backup.pl -d /data_backup/ [-c bzip2|gzip] [-r 30] [-t nofullbackup]  
linux:/opt/otrs/scripts#
```

Hati: Kupata usaidizi wa utaratibu wa chelezo la OTRS.

Tekeleza amri zilizowekwa bayana kwenye hati hapo chini kutengeneza chelezo:

```
linux:/opt/otrs/scripts# ./backup.pl -d /backup/  
Backup /backup//2010-09-07_14-28/Config.tar.gz ... done  
Backup /backup//2010-09-07_14-28/Application.tar.gz ... done  
Dump MySQL rdbms ... done  
Compress SQL-file... done  
linux:/opt/otrs/scripts#
```

Hati: Kutengeneza chelezo.

Data zote zimehifadhiwa kwenye mpangilio orodha /chelezo/2010-09-07_14-28/ (ona hati hapo chini). Kwa zaidi, data zilihifadhiwa kwenye faili la .tar.gz

```
linux:/opt/otrs/scripts# ls /backup/2010-09-07_14-28/  
Application.tar.gz Config.tar.gz DatabaseBackup.sql.gz  
linux:/opt/otrs/scripts#
```

Hati: Kukagua mafaili ya chelezo.

3.2. Rejeshwa

Kurejeshwa chelezo, data zilizohifadhiwa za programu-tumizi zina andikwa upya kwenye mpangilio orodha wa usanikishaji, mf. /opt/otrs. Pia hifadhidata inabidi irejeshwe.

Hati hati/rejeshwa.pl (ona hati chini), ambayo inarahisisha mchakato wa kurejeshwa, inasambazwa na kila usanikishaji wa OTRS. Ina usaidizi kwa MySQL na PostgreSQL.


```
linux:/opt/otrs/scripts# ./restore.pl --help
restore.pl <Revision 1.1> - restore script
Copyright (c) 2001-2005 Martin Edenhofer <martin@otrs.org>
usage: restore.pl -b /data_backup/<TIME>/ -d /opt/otrs/
linux:/opt/otrs/scripts#
```

Hati: Kupata usaidizi wa utaratibu wa urejeshaji.

Data ambazo zimehifadhiwa, kwa mfano, kwenye mpangilio orodha /chelezo/2010-09-07_14-28/, inaweza kurejeshwa na amri zilizo kwenye hati hapa chini, kwa kuamini usanikishaji wa OTRS upo kwenye /opt/otrs.

```
linux:/opt/otrs/scripts# ./restore.pl -b /backup/2010-09-07_14-28 -d /opt/otrs/
Restore /backup/2010-09-07_14-28//Config.tar.gz ...
Restore /backup/2010-09-07_14-28//Application.tar.gz ...
create MySQL
decompresses SQL-file ...
cat SQL-file into MySQL database
compress SQL-file...
linux:/opt/otrs/scripts#
```

Hati: Kurejeshwa data za OTRS .

4. Mpangilio wa barua pepe

4.1. Kutuma/Kupokea barua pepe

4.1.1. Kutuma barua pepe

4.1.1.1. Kupitia TumaBaruapepe (chaguo-msingi)

OTRS inaweza kutuma nje barua pepe kupitia [Tumabarua](#), [Postfix](#), [Qmail](#) or [Exim](#)). Usanidi chaguo-msingi ni kutumia Tumabarua na inatakiwa kufanya kazi nje-ya-boksi.

Unaweza kusanidi mipangilio ya tumabarua kupitia mazingira ya mbele ya usanidi michoro (Kiunzi::Kiini::Tumabarua)

4.1.1.2. Kupitia SMTP au smarthost

OTRS inaweza kutuma barua pepe kupitia SMTP ([Simple Mail Transfer Protocol / RFC 821](#)) au SMTP iliyo salama. Utataka kutumia hii kwenye majukwaa yasiyo ya UNIX (mf. Windows).

Mipangilio ya SMTP seva inaweza kusanidiwa kupitia SysConfig (Kiunzi::Kiini::Tumabarua). Kama huoni SMTP inayopatikana kama chaguo, moduli za perl zinazotakiwa hazipo. Katika kesi hiyo tafadhali tembelea "Usakinishaji wa moduli za Perl zinazohitajika kwa aili ya OTRS" kwa maelekezo.

4.1.2. Kupokea barua pepe


4.1.2.1. Akaunti za barua pepe zilizo sanidiwa kupitia kiolesura michoro cha mtumiaji cha OTRS.

OTRS inaweza kupokea barua pepe kutoka akaunti za POP3, POP3S, IMAP, na IMAPS.

Sanidi akaunti zako za posta kupitia kiungo cha Akaunti za Posta za MkuuWaPosta kwenye ukurasa wa Msimamizi.

Kama akaunti mpya ya barua inatakiwa kutengenezwa (ona Kielelezo chini), basi jina lake la seva ya barua, jina la kuingilia na nywila lazima ziwekwe bayana. Pia, unahitaji kuchagua aina ya seva ya barua, ambayo inaweza kuwa POP3, POP3S, IMAP au IMAPS. Kama huoni aina yako ya seva kuwepo kama chaguo, moduli za Perl zinazotakiwa hazipo

katika mfumo wako. Katika kesi hiyo, tafadhali nenda kwenye "Usakinishaji wa moduli za Perl zinazohitajika na OTRS" kwa maelekezo.

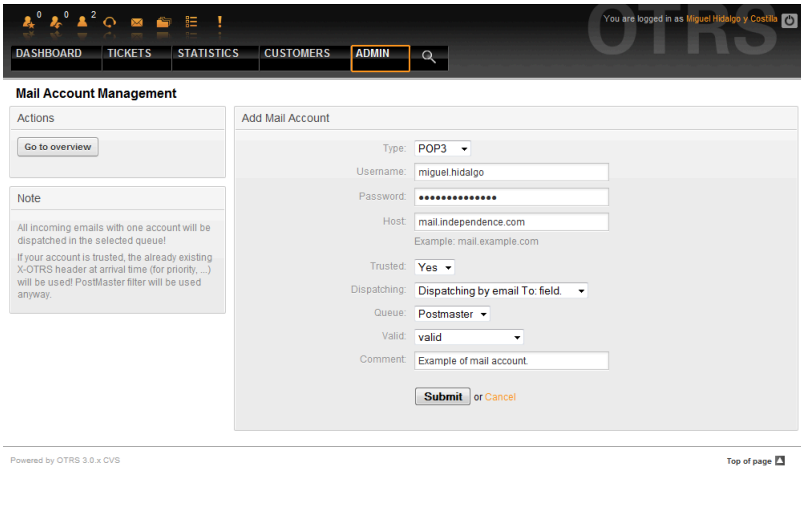

The screenshot shows the OTRS Admin interface. At the top, there is a navigation bar with tabs for DASHBOARD, TICKETS, STATISTICS, CUSTOMERS, and ADMIN. The ADMIN tab is selected. Below the navigation bar, there is a header indicating the user is logged in as Miguel Hidalgo y Costilla. The main content area is titled "Mail Account Management" and contains a "Add Mail Account" form. The form fields include: Type (POP3), Username (miguel.hidalgo), Password (masked with dots), Host (mail.independencia.com), Trusted (Yes), Dispatching (Dispatching by email To: field), Queue (Postmaster), Valid (valid), and Comment (Example of mail account). There are "Submit" and "Cancel" buttons at the bottom of the form. On the left side, there is a "Note" section with text about email dispatching and X-OTRS headers.

Kielelezo: Kuongeza akaunti ya barua pepe.

Kama ukichagua Ndiyo kwa thamani ya chaguo linaloaminiwa, kichwa chochote cha X-OTRS kilichoambatanishwa na ujumbe unaoingia kinatathminiwa na kutekelezwa. Kwa sababu kichwa cha X-OTRS kinaweza kutekeleza baadhi ya vitendo katika mfumo wa tiketi, unatakiwa kuseti chaguo la kuamini kuwa Ndiyo kwa watumaji wanaojulikana tu. Vichwa vya OTRS vinatumika na moduli ya kuchuja katika OTRS. Vichwa vya OTRS vinaelezwa katika jedwali hili kwa undani zaidi. Sheria zote za mkuu wa posta zilizotengenezwa zinatekelezwa, bila kujali mipangilio ya mchaguo linaloaminiwa.

Usambazaji wa ujumbe unaoingia unaweza kudhibitiwa kama inahitajika kupangwa kwa foleni au kwa maudhui ya sehemu "Kwa:". Kwa sehemu ya kutuma, kama "Utumaji kwa foleni iliyochaguliwa" imechaguliwa, ujumbe unaoingia utapangwa kwenye foleni maalumu. Anuani ambako barua ilitumwa inapuzwa kwa sasa. Kama "Utumaji kwa barua pepe sehemu Kwa: " imechaguliwa, mfumo unakagua kama foleni imeunganishwa na anuani ya kwenye sehemu Kwa: ya barua inayoingia. Unaweza kuunganisha anuani kwenye foleni katika kifungu cha Usimamizi wa anuani ya barua pepe cha ukurasa wa Msimamizi. Kama anuani ya sehemu Kwa: imeunganishwa na foleni, ujumbe mpya utapangwa kwenye foleni zilizounganishwa. Kama hakuna kiungo kilichopatikana kati ya anuani kwenye sehemu Kwa: na foleni yoyote, basi ujumbe utaingia kwenye foleni "Mbichi" katika mfumo, ambayo ni FoleniChaguo-msingiYaMkuuwaposta baada ya usakinishaji wa kawaida.

Data zote za akaunti za barua zinahifadhiwa kwenye hifadhidata ya OTRS. Hati ya `otrs.PostMasterMailbox.pl`, ambayo inapatikana kwenye mpangilio orodha wa bin wa usakinishaji wa OTRS, inatumia mipangilio ya hifadhidata na kutafuta hiyo barua. Unaweza kutekeleza `./bin/otrs.PostMasterMailbox.pl` kwa mikono ili kukagua kama mipangilio yako yote ya barua inafanya kazi kwa usahihi.

Katika usakinishaji wa kawaida, barua itatafutwa kila dakika 10 kwa kutumia kazi za mfumo zilizopangwa za `postmaster_mailbox`. Kwa taarifa zaidi kuhusu kuboresha kazi za mfumo zilizopangwa, tafadhali rejea kwenye kifungu "Kuanzisha kazi za mfumo zilizopangwa za OTRS"

Note

Wakati wa kutafuta barua pepe, OTRS inafuta barua hiyo kutoka kwenye seva ya POP au IMAP. Hakuna njia ya kuweka nakala kwenye seva. Kama unataka kubakiwa na nakala kwenye seva, unatakiwa utengeneze sheria za kupeleka mbele katika seva yako ya barua. Tafadhali tembelea nyaraka zako za seva ya barua kwa undani.

4.1.2.2. Kupitia programu ya tungo amri na procmail (otrs.PostMaster.pl)

Kama huwezi kutumia akaunti za barua kuingiza barua pepe kwenye OTRS, programu ya tungo amri `bin/otrs.PostMaster.pl` inaweza kuwa njia ya kutatua tatizo. Inazichukua barua kupitia STDIN na kuziingiza kwenye OTRS. Hii ina maanisha barua pepe zitapatikana kwenye mfumo wako wa OTRS kama MDA (wakala usambazaji wa barua mf. procmail) ikitekeleza programu hii.

Kujaribu `bin/otrs.PostMaster.pl` bila MDA, tekeleza maagizo ya hati ifuatayo.

```
linux:/opt/otrs# cd bin
linux:/opt/otrs/bin# cat ../doc/sample_mails/test-email-1.box | ./otrs.PostMaster.pl
linux:/opt/otrs/bin#
```

Hati: Kujaribisha MkuuWaPosta bila MDA.

Kama barua pepe imeonyeshwa kwenye MuonekanoFoleni, basi mpangilio wako unafanya kazi.

Procmail ni kichujio cha barua pepe kinachojulikana sana katika mazingira ya Linux. Inasakinishwa katika mifumo mingi. Kama siyo, angalia katika [ukurasa wa nyumbani wa procmail](#).

Kusanidi procmail kwa ajili ya OTRS (kutegemeana na MTA iliyosanidiwa na procmail kama sendmail, postfix, exim au qmail), tumia faili `~otrs/.procmailrc.dist` na nakili kwenda kwenye `.procmailrc` na ongeza mistari ya hati chini.

```
SYS_HOME=$HOME
PATH=/bin:/usr/bin:/usr/local/bin
# --
# Pipe all email into the PostMaster process.
# --
:0 :
| $SYS_HOME/bin/otrs.PostMaster.pl
```

Hati: Kusanidi procmail kwa ajili ya OTRS.

Barua pepe zote zitakazotumwa kwenye OTRS ya ndani zitapelekwa kwenye `bin/otrs.PostMaster.pl` na kisha kuonyeshwa kwenye MuonekanoFoleni wako.

4.1.2.3. Kutafuta barua pepe kupitia POP3 au IMAP na kutafuta otrs.PostMaster.pl

Ili kupata barua pepe kutoka kwenye seva yako ya barua, kupitia kikasha barua cha POP3 au IMAP, kwenda kwenye OTRS akaunti ya OTRS ya machine/local na kwenye procmail, tumia [tafutabarua](#).

Note

Usanidi wa SMTP unaofanya kazi unahitajika kwenye mashine ya OTRS.

Unaweza kutumia `.fetchmailrc.dist` katika mpangilio orodha wa nyumbani wa OTRS na kuunakili kwenda `.fetchmailrc`. Iboreshe/lbadilisha kwa mahitaji yako (ona Mfano 7-1 chini).

Example 4.2. .fetchmailrc

```
#poll (mailserver) protocol POP3 user (user) password (password) is (localuser)
poll mail.example.com protocol POP3 user joe password mama is otrs
```

Usisahau kuseti `.fetchmailrc` kuwa 710 ("`chmod 710 .fetchmailrc`")!

Na `.fetchmailrc` kutoka kwenye Mfano 7-1 hapo juu, barua pepe zote zitapelekwa mbele kwenye akaunti ya ndani ya OTRS, kama agizo **fetchmail -a** limetekelezwa. Seti kazi ya mfumo iliyopangwa na agizo hili kama ukitaka kutafuta barua mara kwa mara.

4.1.2.4. Kuchuja/kutuma kwa moduli za OTRS/MkuuWaPosta (kwa ajili ya utumaji changamano)

Kama ukitumia njia ya `bin/otrs.PostMaster.pl` au `bin/otrs.PostMasterMailbox.pl`, unaweza kuingiza au kubadilisha maingizo ya vichwa vya X-OTRS kwa kutumia moduli za kuchuja za MkuuWaPosta. Na vichwa vya X-OTRS mfumo wa tiketi unaweza kutekeleza baadhi ya vitendo kwa barua zinazolingia, kuzipanga kwenye foleni maalumu, kubadili kipaumbele au kubadili kitambulisho cha mteja, kwa mfano. Taarifa zaidi kuhusu vichwa vya X-OTRS zinapatikana katika kifungu kuhusu kuongeza akaunti za baruakutoka kwenye kurasa ya Msimamizi wa OTRS.

Kuna baadhi ya moduli chaguo-msingi za kuchuja:

Note

Jina la kazi (mf. `$Self->{'MkuuWaPosta::ModuliUchujaji'}->{'JinaKazi'}`) linahitaji kuwa la kipekee!

Kiini::Mfumo::MkuuWaPosta::Kichujio::Fananisha ni moduli chaguo-msingi kwa ajili ya kufananisha baadhi ya vichwa vya barua pepe (mf. Kutoka, Kwenda, Kichwa cha habari, ...). Inaweza kuseti vichwa vipya vya barua pepe (mf. X-OTRS-puuza:ndiyo au X-OTRS-Foleni:barua taka) kama sheria ya kuchuja imefanana. Kazi za Mfano 7-2 unaweza kuingizwa katika `Kernel/Config.pm`

Example 4.3. Kazi za mfano kwa moduli ya kuchuja Kiini::Mfumo::MkuuWaPosta::Kichujio::Fananisha

```
# Job Name: 1-Match
# (block/ignore all spam email with From: noreply@)
$self->{'PostMaster::PreFilterModule'}->{'1-Match'} = {
  Module => 'Kernel::System::PostMaster::Filter::Match',
  Match => {
    From => 'noreply@',
  },
  Set => {
    'X-OTRS-Ignore' => 'yes',
  },
};

# Job Name: 2-Match
# (sort emails with From: sales@example.com and Subject: **ORDER**
# into queue 'Order')
$self->{'PostMaster::PreFilterModule'}->{'2-Match'} = {
  Module => 'Kernel::System::PostMaster::Filter::Match',
  Match => {
    To => 'sales@example.com',
    Subject => '**ORDER**',
  },
  Set => {
    'X-OTRS-Queue' => 'Order',
  },
};
```

Kiini::Mfumo::MkuuWaPosta::Chuja::CMD ni moduli chaguo-msingi ya kupeleka barua pepe kwenda kwenye amri ya nje. Matokeo yanapewa kwa `STDOUT` na kama majibu ni kweli, kisha seti kichwa kipya cha barua pepe (mf. X-OTRS-puuza: ndiyo au X-OTRS-Foleni: barua taka). Mfano 7-3 unaweza kutumika katika `Kernel/Config.pm`

Example 4.4. Kazi ya mfano kwa moduli ya kuchuja Kiini::Mfumo::MkuuWaPosta::Kichujio::CMD

```
# Job Name: 5-SpamAssassin
# (SpamAssassin example setup, ignore spam emails)
$self->{'PostMaster::PreFilterModule'}->{'5-SpamAssassin'} = {
  Module => 'Kernel::System::PostMaster::Filter::CMD',
  CMD => '/usr/bin/spamassassin | grep -i "X-Spam-Status: yes"',
  Set => {
    'X-OTRS-Ignore' => 'yes',
  },
};
```

Kiini::Mfumo::MkuuWaPosta::Chuja::UtambuziWaNambariYaTiketiYaNje ni moduli ya chaguo-msingi ambayo inaongeza uwezekano wa kuchanganua vitambulishi vya nje, katika somo la barua pepe, kiini au zote kwa kutumia semi za kawaida. Kisha inahifadhi thamani hii katika sehemu inayobadilika iliyofafanuliwa. Pale barua pepe inapoingia, OTRS kwanza itatafuta kitambulishi cha nje na ikikipata, uliza OTRS kuhusu sehemu inayobadilika iliyofafanuliwa kabla. Kama ikipata tiketi iliyopo, ita sasisha tiketi hii, la sivyo itatengeneza tiketi mpya yenye namba ya kumbukumbu ya nje katika sehemu tofauti.

OTRS SysConfig tayari inatoa mipangilio mi 4 tofauti kuseti namba za tiketi za nje. Kama mipangilio zaidi itahitajika itabidi iongezwe kwa mikono. Mfano ufuatao unaweza kutumika katika Kernel/Config.pm kuendeleza mipangilio ya SysConfig.

Example 4.5. Kazi za mfano kwa moduli ya kuchuja Kiini::Mfumo::MkuuWaPosta::Chuja::UtambuziTiketiNambariNje

```
# Job Name: ExternalNumber
# External Ticket Number Recognition, check for Incident-<number> in incoming mails
subject and
# body from the addresses <sender>@externalticket.com, if number is found it will be
stored in
# the dynamic field 'ExternalNumber' (that need to be setup in the Admin Panel).
$self->{'PostMaster::PreFilterModule'}->{'000-ExternalTicketNumberRecognition5'} = {
  'FromAddressRegExp' => '\\s*@externalticket.com',
  'NumberRegExp' => 'Incident-(\\d.*)',
  'SearchInSubject' => '1',
  'SearchInBody' => '1',
  'TicketStateTypes' => 'new;open'
  'DynamicFieldName' => 'ExternalNumber',
  'Module' =>
'Kernel::System::PostMaster::Filter::ExternalTicketNumberRecognition',
  'Name' => 'Test External Ticket Number',
  'SenderType' => 'system',
};
```

Machaguo ya Usanidi

- KutokaAnwaniRegExp

Huu ni mpangilio wa hiari. Barua zinazofanana na hii anwani "Kutoka:" ndiyo zitatumika kwa kichujio hiki. Unaweza kubadilisha huu mpangilio kuwa anwani ya mtumaji mfumo wako wa nje inayotumia kwa ujumbe unaotoka. Ikiwa hii anwani ianatofautiana, unaweza kuseti hili chaguo kuwa tupu. OTRS kwa kesi hii haitakagua anwani ya mtumaji.

- NambaRegExp

Huu ni mpangilio wa lazma. Huu mpangilio una semi za kawaida ambazo OTRS itatumia kupata nambari ya tiketi kutoka kwenye somo na/au kiini cha tiketi. Usemi wa kawaida utafanana na matukio ya kwa mfano 'Tukio-12354' na itaweka sehemu iliyo kwenye mabano katika sehemu inayobadilika, kwa kesi hii '12354'.

- TafutaInSomo

Kama hii imesetiwa kuwa '1', mada ya barua pepe inatafutwa kwa ajili ya nambari ya tiketi.

- Tafuta katika Kiini

Kama hii imesetiwa kuwa '1', kiini cha barua pepe kinatafutwa kwa ajili ya nambari ya tiketi.

- TiketiHaliAina

Huu ni mpangilio wa hiari. Kama imetolewa, itatafuta OTRS kwa ajili ya tiketi za nje zilizo wazi tu kwa aina fulani ya hali. Aina za hali zinagawanywa na nukta mkato.

- Sehemulnayobadilika

Huu ni mpangilio unaohitajika. Unafafanua sehemu inayobadilika ambayo inatumika kuhifadhi nambari ya nje (jina la sehemu lazima liwepo kwenye mfumo na inabidi liwe halali).

- AinaYaMtumaji

Hii inafafanua aina ya mtumaji wa makala zilizotengenezwa katika OTRS.

Pia inawezekana kutengeneza moduli zako za kuchuja za MkuuWaPosta.

4.2. Linda barua pepe na PGP

OTRS ina uwezo wa kusaini au kusimba fiche ujumbe unaotoka kwa PGP. Zaidi, ujumbe unaoingia ulio simbwa fiche unaweza kusimbua fiche. Kusimba na kusimbua fiche unafanyika na kifaa cha GPL GnuPG. Kuseti GnuPG kwa ajili ya OTRS, hatua zifwatazo inabidi zifanyike:

1. Sakinisha GnuPG, kupitia meneja kifurushi wa mfumo endeshi wako.
2. Sanidi GnuPG ili utumie pamoja na OTRS. Mipangilio orodha ya lazima ya GnuPG na ufunguo binafsi lazima vitengenezwe. Amri iliyoonyeshwa chini lazima itekelezwe kama mtumiaji 'otrs' kutoka kwenye sheli.

```
linux:~# su otrs
linux:/root$ cd
linux:~$ pwd
/opt/otrs
linux:~$ gpg --gen-key
gpg (GnuPG) 1.4.2; Copyright (C) 2005 Free Software Foundation, Inc.
This program comes with ABSOLUTELY NO WARRANTY.
This is free software, and you are welcome to redistribute it
under certain conditions. See the file COPYING for details.

gpg: directory `/opt/otrs/.gnupg' created
gpg: new configuration file `/opt/otrs/.gnupg/gpg.conf' created
gpg: WARNING: options in `/opt/otrs/.gnupg/gpg.conf' are not yet active during t
his run
gpg: keyring `/opt/otrs/.gnupg/secring.gpg' created
gpg: keyring `/opt/otrs/.gnupg/pubring.gpg' created
Please select what kind of key you want:
  (1) DSA and Elgamal (default)
  (2) DSA (sign only)
  (5) RSA (sign only)
Your selection? 1
DSA keypair will have 1024 bits.
ELG-E keys may be between 1024 and 4096 bits long.
```

```

What keysize do you want? (2048)
Requested keysize is 2048 bits
Please specify how long the key should be valid.
  0 = key does not expire
  <n> = key expires in n days
  <n>w = key expires in n weeks
  <n>m = key expires in n months
  <n>y = key expires in n years
Key is valid for? (0)
Key does not expire at all
Is this correct? (y/N) y

You need a user ID to identify your key; the software constructs the user ID
from the Real Name, Comment and Email Address in this form:
    "Heinrich Heine (Der Dichter) <heinrichh@duesseldorf.de>"

Real name: Ticket System
Email address: support@example.com
Comment: Private PGP Key for the ticket system with address support@example.com
You selected this USER-ID:
"Ticket System (Private PGP Key for the ticket system with address support@examp
le.com) <support@example.com>"

Change (N)ame, (C)omment, (E)mail or (O)kay/(Q)uit? 0
You need a Passphrase to protect your secret key.

Passphrase: secret
Repeat passphrase: secret

We need to generate a lot of random bytes. It is a good idea to perform
some other action (type on the keyboard, move the mouse, utilize the
disks) during the prime generation; this gives the random number
generator a better chance to gain enough entropy.
+++++++.....+++++++.....+++++++.....+++++++.....+++++++.....+++++++.....+++++++.....+++++++.....+++++++.....
+++++++.....+++++++.....+++++++.....+++++++.....+++++++.....+++++++.....+++++++.....+++++++.....+++++++.....
.....>+++++<+++++.....+++++++
.....>+++++<+++++.....+++++++

Not enough random bytes available. Please do some other work to give
the OS a chance to collect more entropy! (Need 280 more bytes)

+++++++.....+++++++.....+++++++.....+++++++.....+++++++.....+++++++.....+++++++.....+++++++.....+++++++.....
+++++++.....+++++++.....+++++++.....+++++++.....+++++++.....+++++++.....+++++++.....+++++++.....+++++++.....
..+++++>.....>+++++.....>+++++<+++++.....>+++++<+++++.....>+++++<+++++.....>+++++<+++++.....>+++++<+++++.....
.....+++++^^^

gpg: /opt/otrs/.gnupg/trustdb.gpg: trustdb created
gpg: key 7245A970 marked as ultimately trusted
public and secret key created and signed.

gpg: checking the trustdb
gpg: 3 marginal(s) needed, 1 complete(s) needed, PGP trust model
gpg: depth: 0 valid: 1 signed: 0 trust: 0-, 0q, 0n, 0m, 0f, 1u
pub 1024D/7245A970 2006-02-03
    Key fingerprint = 2ED5 BC36 D2B6 B055 7EE1 5833 1D7B F967 7245 A970
    uid                Ticket System (Private gpg key for ticket system with addre
ss support@example.com) <support@example.com>
sub 2048g/52B97069 2006-02-03

linux:~$

```

Hati: Kusanidi GnuPG.

Kama ilivyoonyeshwa kwenye hati chini, mipangilio chaguo-msingi inaweza kutumika kwa parameta nyingi zinazotakiwa. Thamani za mmiliki wa ufunguo tu ndio zinatakiwa kuingizwa kwa usahihi, na nywila sahihi kuwekwa kwa ajili ya funguo.

3. Kwenye skrini kwa ajili ya mipangilio ya PGP, PGP lazima iamilishwe kwa ajili ya OTRS (chaguo la kwanza). Pia, njia ya kwenda kwenye programu ya gpg lazima isetiwe na kukaguliwa.

Mpangilio unaofwata wa config (PGP::Options) unaweza kuhitaji mabadiliko pia. Kupitia mpangilio huu wa config, parameta ambazo zinatumiwa kwa kila utekelezaji wa gpg kwa mtumiaji wa 'otrs' unaweza kuwekwa bayana. Hasa, mpangilio orodha wa mafaili ya config ya GnuPG ya mtumiaji wa 'otrs' ni muhimu. Kwenye mfano /opt/otrs/.gnupg imetumiwa. Huu mpangilio orodha ulitengenezwa mapema wakati wa usanidi wa PGP.

Kwa kupitia chaguo linalofwata la usanidi (PGP::Ufunguo::Nywila) inawezekana kubainisha jozi ya Vitambulisho vya funguo na nywila zake kwa ajili ya funguo binafsi. Kwa sababu mawasiliano ya wabia kutoka nje wanaandika kwenye mfumo wa tiketi na ujumbe wao kufanyiwa usimbaji fiche kwa kutumia funguo zako za umma, OTRS inaweza kusimbua fiche huu ujumbe kwa kutumia Kitambulisho/nywila zilizobainishwa hapa.

Jinsi ya kupata kitambulisho cha ufunguo wako binafsi? Kitambulisho cha ufunguo wako binafsi tayari kinaonyeshwa wakati wa uzalishaji funguo (ona hatua 1 hapo juu). Pia inawezekana kupata Kitambulisho kama amri itakayoonyeshwa kwenye hati ifuatayo itatekelezwa kama mtumiaji 'otrs':

```
linux:~# su otrs
linux:/root$ cd
linux:~$ pwd
/opt/otrs
linux:~$ gpg --list-keys
/opt/otrs/.gnupg/pubring.gpg
-----
pub   1024D/7245A970 2006-02-03
uid           Ticket System (Private gpg key for ticket system with
address support@example.com) <support@example.com>
sub   2048g/52B97069 2006-02-03

linux:~$
```

Hati: Kupata Kitambulisho cha ufunguo wako binafsi.

Kitambulisho cha ufunguo binafsi kinaweza kupatikana katika mstari uanoanza na "sub". Ni tungo iliyo katika hexadecimal ambayo ina urefu wa herufi nane, katika mfano juu ni "52B97069". Nywila unayotakiwa kuweka bayana kwa ajili ya huu ufunguo katika mfumo wa tiketi ni sawa na uliotolewa wakati wa uzalishaji ufunguo.

Baada ya hii data kuingizwa, kitufe cha ku "sasisha" kinaweza kutumika kuhifadhi mipangilio. OTRS iko tayari kupokea na kusimbua fiche ujumbe uliofanyiwa usimbaji.

4. Hatimaye, agiza ufunguo wa umma wa mteja. Hii inahakikisha kwamba ujumbe uliofanyiwa usimbaji fiche unaweza kutumwa nje kwa huyu mteja. Kuna njia mbili za kugiza ufunguo wa umma wa mteja.

Njia ya kwanza ni kubainisha ufunguo wa umma wa mteja katika kiolesura cha usimamizi wa mteja.

Njia ya pili ni kuweka bayana ufunguo kupitia mipangilio ya PGP, inafikika kutoka kwenye kurasa ya Msimamizi. Katika upande wa kulia wa hii skrini, funguo za umma za wateja zilizoagizwa kutoka nje zinaonyeshwa. Baada ya PGP kuamilishwa na kusanidiwa kwa ajili ya OTRS, funguo yako mwenyewe ya umma itaorodheshwa hapa. Kwenye upande wa kushoto wa skrini ya mipangilio ya PGP inawezekana kutafuta funguo. Pia ufunguo mpya wa umma unaweza kupakiwa kwenye mfumo kutoka kwenye faili.

Mafaili yenye ufunguo wa umma ambayo yanahitaji kuagizwa kwenye OTRS inabidi yawe tangamanifu na mafaili ya ufunguo ya GnuPG. Katika kesi nyingi, ufunguo uliohifadhiwa katika faili ni "ufunguo unaolindwa na ASCII". OTRS inaweza kushughulika na umbizo hili.

4.3. Linda barua pepe na S/MIME

Kwa muonekano wa kwanza, usimbaji fiche kwa S/MIME unaonekana mgumu kulinganisha na PGP. Kwanza inabidi uanzishe Mamlaka ya Uhalalishaji (CA) kwa ajili ya mfumo wa OTRS. Hatua zinazofuata ni kama zile zinazohitajika na PGP: sanidi OTRS, sakinisha hati yako mwenyewe, agiza hati nyingine za umma kama zinavyohitajika, na kadh.

Usanidi wa S/MIME unafanyika nje ya kiolesura cha tovuti cha OTRS kwa asilimia kubwa, na unatakiwa ufanyike kwenye sheli na mtumiaji wa 'otrs'. Usanidi wa MIME chini ya Linux unajikita katika SSL (OpenSSL). Kwahiyo kwanza kabisa kagua kama kifurudhi cha OpenSSL kimesakinishwa kwenye mfumo wako. Kifurushi cha OpenSSL kinajumuisha hati iitwayo CA.pl, ambamo ndani yake hatua za muhimu za utengenezaji wa hati zinaweza kufanyika. Kurahisisha mchakato, tafuta wapi kwenye mfumo wa mafaili hati ya CA.pl imehifadhiwa na ingiza mahali inapopatikana katika kishika nafasi NJIA cha sheli (ona Hati chini).

```
otrs@linux:~> rpm -ql openssl | grep CA
/usr/share/ssl/misc/CA.pl
otrs@linux:~> export PATH=$PATH:/usr/share/ssl/misc
otrs@linux:~> which CA.pl
/usr/share/ssl/misc/CA.pl
otrs@linux:~> mkdir tmp; cd tmp
otrs@linux:~/tmp>
```

Hati: Usanidi wa S/MIME.

Hati hapo juu inaonyesha kwamba mpangilio orodha mpya wa muda ~/tmp umetengenezwa, ambapo ndani yake hati itazalishwa.

Kutengeneza hati, fanya operesheni zifuatazo katika tungo amri (tunaamini msimamizi wa OTRS inabidi atengeneze hati ya SSL kwa ajili ya kujaribisha na kujifunza. Kama tayari una hati ya SL iliyothibitishwa kwa ajili ya usimbaji fiche, itumie na ruka hizi hatua):

1. Anzisha Mamlaka yako ya Uhalalishaji kwa ajili ya SSL. unahitaji kuthibitisha maombi ya hati yako ya SSL (ona Hati chini).

```
otrs@linux:~/tmp> CA.pl -newca
CA certificate filename (or enter to create)

Making CA certificate ...
Generating a 1024 bit RSA private key
...+++++
.....+++++
writing new private key to './demoCA/private/akey.pem'
Enter PEM pass phrase:
Verifying - Enter PEM pass phrase:
-----
You are about to be asked to enter information that will be incorporated
into your certificate request.
What you are about to enter is what is called a Distinguished Name or a DN.
There are quite a few fields but you can leave some blank
For some fields there will be a default value,
If you enter '.', the field will be left blank.
-----
Country Name (2 letter code) [AU]:DE
State or Province Name (full name) [Some-State]:OTRS-state
Locality Name (eg, city) []:OTRS-town
Organization Name (eg, company) [Internet Widgits Pty Ltd]:Your company
Organizational Unit Name (eg, section) []:
Common Name (eg, YOUR name) []:OTRS Admin
Email Address []:otrs@your-domain.tld
otrs@linux:~/tmp> ls -la demoCA/
total 8
-rw-r--r--  1 otrs otrs 1330 2006-01-08 17:54 cacert.pem
```

```
drwxr-xr-x 2 otrs otrs 48 2006-01-08 17:53 certs
drwxr-xr-x 2 otrs otrs 48 2006-01-08 17:53 crl
-rw-r--r-- 1 otrs otrs 0 2006-01-08 17:53 index.txt
drwxr-xr-x 2 otrs otrs 48 2006-01-08 17:53 newcerts
drwxr-xr-x 2 otrs otrs 80 2006-01-08 17:54 private
-rw-r--r-- 1 otrs otrs 17 2006-01-08 17:54 serial
otrs@linux:~/tmp>
```

Hati: Kuweka Mamlaka ya Uhalalishaji kwa ajili ya SSL.

2. Zalisha maombi ya cheti (ona Hati chini).

```
otrs@linux:~/tmp> CA.pl -newreq
Generating a 1024 bit RSA private key
.....+++++
....+++++
writing new private key to 'newreq.pem'
Enter PEM pass phrase:
Verifying - Enter PEM pass phrase:
-----
You are about to be asked to enter information that will be incorporated
into your certificate request.
What you are about to enter is what is called a Distinguished Name or a DN.
There are quite a few fields but you can leave some blank
For some fields there will be a default value,
If you enter '.', the field will be left blank.
-----
Country Name (2 letter code) [AU]:DE\keyreturn
State or Province Name (full name) [Some-State]:OTRS-state
Locality Name (eg, city) []:OTRS-town
Organization Name (eg, company) [Internet Widgits Pty Ltd]:Your company
Organizational Unit Name (eg, section) []:
Common Name (eg, YOUR name) []:OTRS admin
Email Address []:otrs@your-domain.tld

Please enter the following 'extra' attributes
to be sent with your certificate request
A challenge password []:
An optional company name []:
Request (and private key) is in newreq.pem
otrs@linux:~/tmp> ls -la
total 4
drwxr-xr-x 6 otrs otrs 232 2006-01-08 17:54 demoCA
-rw-r--r-- 1 otrs otrs 1708 2006-01-08 18:04 newreq.pem
otrs@linux:~/tmp>
```

Hati: Kutengeneza maombi ya cheti.

3. Kusaini maombi ya hati. Maombi ya hati yanaweza kusainiwa na kuthibitishwa na Mamlaka yako ya Uhalalishaji, au ili kuaminika zaidi kwa kusainiwa na Mamlaka nyingine ya Uhalalishaji iliyothibitishwa. (ona chini).

```
otrs@linux:~/tmp> CA.pl -signreq
Using configuration from /etc/ssl/openssl.cnf
Enter pass phrase for ./demoCA/private/cakey.pem:
Check that the request matches the signature
Signature ok
Certificate Details:
  Serial Number:
    fd:85:f6:9f:14:07:16:c8
  Validity
    Not Before: Jan  8 17:04:37 2006 GMT
    Not After : Jan  8 17:04:37 2007 GMT
  Subject:
    countryName           = DE
    stateOrProvinceName  = OTRS-state
    localityName         = OTRS-town
```

```

organizationName      = Your Company
commonName            = OTRS administrator
emailAddress          = otrs@your-domain.tld
X509v3 extensions:
X509v3 Basic Constraints:
  CA:FALSE
Netscape Comment:
  OpenSSL Generated Certificate
X509v3 Subject Key Identifier:
  01:D9:1E:58:C0:6D:BF:27:ED:37:34:14:D6:04:AC:C4:64:98:7A:22
X509v3 Authority Key Identifier:
  keyid:10:4D:8D:4C:93:FD:2C:AA:9A:B3:26:80:6B:F5:D5:31:E2:8E:DB:A8
  DirName:/C=DE/ST=OTRS-state/L=OTRS-town/O=Your Company/
  CN=OTRS admin/emailAddress=otrs@your-domain.tld
  serial:FD:85:F6:9F:14:07:16:C7

```

```

Certificate is to be certified until Jan  8 17:04:37 2007 GMT (365 days)
Sign the certificate? [y/n]:y

```

```

1 out of 1 certificate requests certified, commit? [y/n]y
Write out database with 1 new entries
Data Base Updated
Signed certificate is in newcert.pem
otrs@linux:~/tmp>

```

Hati: Kusaini maombi ya cheti.

- Zalisha hati yako mwenyewe, na data zote zinaoendana nazo, kwa kutumia maombi ya hati yaliyosainiwa (ona Hati chini).

```

otrs@linux:~/tmp> CA.pl -pkcs12 "OTRS Certificate"
Enter pass phrase for newreq.pem:
Enter Export Password:
Verifying - Enter Export Password:
otrs@linux:~/tmp> ls -la
total 12
drwxr-xr-x  6 otrs otrs  328 2006-01-08 18:04 demoCA
-rw-r--r--  1 otrs otrs 3090 2006-01-08 18:13 newcert.p12
-rw-r--r--  1 otrs otrs 3791 2006-01-08 18:04 newcert.pem
-rw-r--r--  1 otrs otrs 1708 2006-01-08 18:04 newreq.pem
otrs@linux:~/tmp>

```

Hati: Kuzalisha cheti kipya.

Sasa kwa kuwa hizi operesheni zimefanyika, kuseti S/MIME lazima kukamilike katika OTRS.

hiki kipande cha kuseti kinafanyika katika ukurasa wa Msimamizi, kuchagua kiungo "SMIME". Ikiwa msaada wa S/MIME wa kawaida kwenye OTRS haujawezeshwa, barakoa itanbainisha hii kwa msimamizi na kutoa kiungo cha kuiwezesha.

Na kundi la SysConfig "Crypt::SMIME", unaweza kuwezesha na kusanidi msaada wa ujumla wa S/MIME.

Hana unweza kuamilisha msaada wa S/MIME, na kufafanua njia za anri ya OpenSSL na mpangilio orodha wa hati. Faili la ufunguo lililo tengenezwa hapo juu lazima lihifadhiwe kwenye mpangilio orodha ulioonyeshwa hapa. La sivyoo OpenSSL haiwezi kulitumia.

Hatua inayofwata inafanywa kwenye usanidi wa S/MIME katika ukurasa wa Msimamizi wa OTRS. Hapa unaweza kuagiza ufunguo binafsi wa (za) mfumo wa OTRS na funguo za umma za mawasiliano ya wabia wengine. Ingiza ufunguo wa umma ambao umetengenezwa mwanzoni mwa kifungu hiki na kuongezwa kwenye OTRS.

Kwa kawaida, funguo zote za umma za S/MIME za mawasiliano ya washiriki zinaweza kuagizwa kwa kutumia kifaa cha usimamizi wa mteja pia.

5. Kutumia mazingira ya nyuma ya nje

5.1. Data za mteja

OTRS inafanya kazi na sifa nyingi za data za mteja kama jina la mtumiaji, anuani ya barua pepe, nambari ya simu, na kadh. Hizi sifa zinaonyeshwa katika mazingira ya mbele ya Wakala na Mteja, na pia inatumika kwenye uthibitisho wa mteja.

Data za mteja zinazotumika au kuonyeshwa kwenye OTRS zinauwezekano mkubwa wa kugeuzwa kukufaa. Taarifa ifuatayo hata hivyo inahitajika muda wote kwa ajili ya uthibitisho wa mteja:

- Mtumiaji ingia
- Anwani ya barua pepe
- Kitambulisho cha mteja

Tumia parameta zifuatazo za SysConfig kama unataka kuonyesha taarifa za mteja katika kiolesura cha wakala wako.

```
# Ticket::Frontend::CustomerInfo*
# (show customer info on Compose (Phone and Email), Zoom and
# Queue view)
$self->{'Ticket::Frontend::CustomerInfoCompose'} = 1;
$self->{'Ticket::Frontend::CustomerInfoZoom'} = 1;
```

Hati: parameta za usanidi za SysConfig.

5.2. Mazingira ya nyuma ya Mtumiaji mteja

Unaweza kutumia aina mbili za mazingira ya nyuma ya mtumiaji, DB na LDAP. Kama tayari una mazingira mengine ya nyuma ya mteja (mf. SAP), inawezekana pia kuandika moduli ambayo inaitumia.

5.2.1. Hifadhidata (Chaguo-msingi)

Mfano 11-1 unaonyesha usanidi wa mazingira ya nyuma ya DB ya mteja, ambayo inatumia data za mteja zilizohifadhiwa kwenye hifadhidata ya OTRS.

Example 4.6. Usanidi wa hifadhidata ya mazingira ya nyuma ya mteja

```
# CustomerUser (customer database backend and settings)
$self->{CustomerUser} = {
  Name => 'Database Datasource',
  Module => 'Kernel::System::CustomerUser::DB',
  Params => {
    # if you want to use an external database, add the required settings
    DSN => 'DBI:odbc:yourdsn',
    Type => 'mssql', # only for ODBC connections
    DSN => 'DBI:mysql:database=customerdb;host=customerdbhost',
    User => '',
    Password => '',
    Table => 'customer_user',
    # if your frontend is unicode and the charset of your
    # customer database server is iso-8859-1, use these options.
    SourceCharset => 'iso-8859-1',
    DestCharset => 'utf-8',

    # CaseSensitive will control if the SQL statements need LOWER()
    # function calls to work case insensitively. Setting this to
```

```

    # 1 will improve performance dramatically on large databases.
    CaseSensitive => 0,
  },
# customer unique id
CustomerKey => 'login',

# customer #
CustomerID => 'customer_id',
CustomerValid => 'valid_id',
  CustomerUserListFields => ['first_name', 'last_name', 'email'],
  CustomerUserSearchFields => ['login', 'last_name', 'customer_id'],
  CustomerUserSearchPrefix => '',
  CustomerUserSearchSuffix => '*',
  CustomerUserSearchListLimit => 250,
  CustomerUserPostMasterSearchFields => ['email'],
  CustomerUserNameFields => ['title', 'first_name', 'last_name'],
  CustomerUserEmailUniqCheck => 1,
# # show not own tickets in customer panel, CompanyTickets
# CustomerUserExcludePrimaryCustomerID => 0,
# # generate auto logins
# AutoLoginCreation => 0,
# AutoLoginCreationPrefix => 'auto',
# # admin can change customer preferences
# AdminSetPreferences => 1,
# # cache time to live in sec. - cache any database queries
# CacheTTL => 0,
# # just a read only source
# ReadOnly => 1,
Map => [
  # note: Login, Email and CustomerID needed!
  # var, frontend, storage, shown (1=always,2=lite), required, storage-type, http-
link, readonly, http-link-target
  [ 'UserTitle', 'Title', 'title', 1, 0, 'var', '', 0 ],
  [ 'UserFirstname', 'Firstname', 'first_name', 1, 1, 'var', '', 0 ],
  [ 'UserLastname', 'Lastname', 'last_name', 1, 1, 'var', '', 0 ],
  [ 'UserLogin', 'Username', 'login', 1, 1, 'var', '', 0 ],
  [ 'UserPassword', 'Password', 'pw', 0, 0, 'var', '', 0 ],
  [ 'UserEmail', 'Email', 'email', 1, 1, 'var', '', 0 ],
# [ 'UserEmail', 'Email', 'email', 1, 1, 'var', '$Env{"CGIHandle"}?
Action=AgentTicketCompose&ResponseID=1&TicketID=$Data{"TicketID"}&ArticleID=
$Data{"ArticleID"}', 0 ],
  [ 'UserCustomerID', 'CustomerID', 'customer_id', 0, 1, 'var', '', 0 ],
# [ 'UserCustomerIDs', 'CustomerIDs', 'customer_ids', 1, 0, 'var', '', 0 ],
  [ 'UserPhone', 'Phone', 'phone', 1, 0, 'var', '', 0 ],
  [ 'UserFax', 'Fax', 'fax', 1, 0, 'var', '', 0 ],
  [ 'UserMobile', 'Mobile', 'mobile', 1, 0, 'var', '', 0 ],
  [ 'UserStreet', 'Street', 'street', 1, 0, 'var', '', 0 ],
  [ 'UserZip', 'Zip', 'zip', 1, 0, 'var', '', 0 ],
  [ 'UserCity', 'City', 'city', 1, 0, 'var', '', 0 ],
  [ 'UserCountry', 'Country', 'country', 1, 0, 'var', '', 0 ],
  [ 'UserComment', 'Comment', 'comments', 1, 0, 'var', '', 0 ],
  [ 'ValidID', 'Valid', 'valid_id', 0, 1, 'int', '', 0 ],
],
# default selections
Selections => {
  UserTitle => {
    'Mr.' => 'Mr.',
    'Mrs.' => 'Mrs.',
  },
},
};

```

Ukitaka kugeuza data za mteja kukufaa, badili vichwa vya safuwima au ongeza mpya kwenye jedwali la mteja_mtumiaji kwenye hifadhidata ya OTRS. Kama mfano, hati hapa chini inaonyesha jinsi ya kuongeza sehemu mpya kwa ajili ya nambari ya chumba.

```

linux:~# mysql -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.

```

```
Your MySQL connection id is 116 to server version: 5.0.18-Debian_7-log
Type 'help;' or '\h' for help. Type '\c' to clear the buffer.

mysql> use otrs;
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
mysql> ALTER TABLE customer_user ADD room VARCHAR (250);
Query OK, 1 rows affected (0.01 sec)
Records: 1 Duplicates: 0 Warnings: 0

mysql> quit
Bye
linux:~#
```

Hati: Kuongeza sehemu ya chumba katika jedwali la mteja_mtumiaji.

Sasa ongeza safuwima mpya kwenye mkusanyiko wa RAMANI katika Kernel/Config.pm, kama inavyoonyeshwa katika hati inayofuata.

```
# var, frontend, storage, shown (1=always,2=lite), required, storage-type, http-link,
readonly
[...]
[ 'UserRoom',      'Room',      'room',      0, 1, 'var', '', 0 ],
```

Hati: Kuongeza sehemu ya chumba kweye faili Kernel/Config.pm.

Pia inawezekana kuhariri taarifa zote za mteja kupitia kiungo cha mteja kwenye kiolesura cha Wakala.

5.2.1.1. Mteja mwenye vitambulisho vya mteja vingi (Tiketi za Kampuni)

Inawezekana kugawia zaidi ya kitambulisho cha mteja kimoja kwa mteja. Hii inakuwa na manufaa kama mteja anatakiwa kufikia tiketi za wateja wengine, mf. msimamizi anataka kuangalia tiketi za wasaidizi wake. Kama mteja anaweza kufikia tiketi za mteja mwingine, kipengele cha tiketi za kampuni cha OTRS kinatumika. Tiketi za kampuni zinaweza kufikiwa kupitia kiungo "Tiketi za Kampuni" katika paneli ya wateja.

Kutumia tiketi za kampuni, safuwima mpya yenye Vitambulisho ambavyo vinaweza kufikiwa na mteja, inabidi viongezwe kwenye jedwali la mteja_mtumiaji katika hifadhidata ya OTRS (ona Hati chini).

```
linux:~# mysql -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 124 to server version: 5.0.18-Debian_7-log

Type 'help;' or '\h' for help. Type '\c' to clear the buffer.

mysql> use otrs;
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
mysql> ALTER TABLE customer_user ADD customer_ids VARCHAR (250);
Query OK, 1 rows affected (0.02 sec)
Records: 1 Duplicates: 0 Warnings: 0

mysql> quit
Bye
linux:~#
```

Hati: Kuongeza sehemu ya mteja_vitambulisho kwenye jedwali la mteja_mtumiaji.

Sasa safuwima mpya inabidi iongezwe kwenye mkusanyiko wa RAMANI katika Kernel/Config.pm, kama ilivyoonyeshwa kwenye hati chini.

```
# var, frontend, storage, shown (1=always,2=lite), required, storage-type, http-link,
readonly
[...]
[ 'UserCustomerIDs', 'CustomerIDs', 'customer_ids', 1, 0, 'var', '', 0 ],
```

Hati: Kuongeza sehemu ya Vitambulisho vya MtumiajiMteja kwenye faili Kernel/Config.pm.

Sasa safuwima mpya kwa ajili ya Vitambulisho vingi vya mteja inaweza kuhaririwa kupitia kiolesura cha Wakala, katika kifungu cha usimamizi wa mteja.

Kuhakikisha mteja mmoja anaweza kufikia tiketi za wateja wengine, ongeza vitambulisho vya hawa watumiaji wengine katika sehemu mpya kwa ajili ya vitambulisho vingi vya mteja. Kila kitambulisho lazima kitenganishwe na alama yanuktamkato (ona Mfano 11-2 chini).

Example 4.7. Kutumia tiketi za kampuni na mazingira ya nyuma ya DB

Wateja A,B na C wapo kwenye mfumo wako, na A anataka kufikia tiketi za B na C kupitia paneli ya mteja. B na C hawatakiwi kufikia tiketi za watumiaji wengine.

Kutambua mpangilio huu, badilisha jedwali la mteja_mtumiaji na miunganiko katika Kernel/Config.pm kama ilivyoielezwa hapo juu. Kisha pakia mipangilio ya mteja A kupitia kiungo cha Mteja katika kiolesura cha Wakala au kupitia kurasa ya Msimamizi. Kama mipangilio imeonyeshwa, ongeza kwenye sehemu ya Vitambulisho vya Wateja thamani "B;C".

5.2.2. LDAP

Kama una mpangilio orodha wa LDAP na data za mteja wako, unaweza kuitumia kama mazingira ya nyuma ya mteja na OTRS, kama ilivyo onyeshwa kwenye mfano 11-3.

Example 4.8. Usanidi wa LDAP ya mazingira yanyuma ya mteja

```
# CustomerUser
# (customer ldap backend and settings)
$self->{CustomerUser} = {
  Name => 'LDAP Data Source',
  Module => 'Kernel::System::CustomerUser::LDAP',
  Params => {
    # ldap host
    Host => 'bay.csuhayward.edu',
    # ldap base dn
    BaseDN => 'ou=seas,o=csuh',
    # search scope (one|sub)
    SSCOPE => 'sub',
    # The following is valid but would only be necessary if the
    # anonymous user does NOT have permission to read from the LDAP tree
    UserDN => '',
    UserPw => '',
    # in case you want to add always one filter to each ldap query, use
    # this option. e. g. AlwaysFilter => '(mail=*)' or AlwaysFilter =>
    '(objectclass=user)'
    AlwaysFilter => '',
    # if both your frontend and your LDAP are unicode, use this:
    SourceCharset => 'utf-8',
    DestCharset => 'utf-8',
    # if your frontend is unicode and the charset of your
    # ldap server is iso-8859-1, use these options.
```

```

# SourceCharset => 'iso-8859-1',
# DestCharset => 'utf-8',
# Net::LDAP new params (if needed - for more info see perldoc Net::LDAP)
Params => {
    port => 389,
    timeout => 120,
    async => 0,
    version => 3,
},
},
# customer unique id
CustomerKey => 'uid',
# customer #
CustomerID => 'mail',
CustomerUserListFields => ['cn', 'mail'],
CustomerUserSearchFields => ['uid', 'cn', 'mail'],
CustomerUserSearchPrefix => '',
CustomerUserSearchSuffix => '*',
CustomerUserSearchListLimit => 250,
CustomerUserPostMasterSearchFields => ['mail'],
CustomerUserNameFields => ['givenname', 'sn'],
# show not own tickets in customer panel, CompanyTickets
CustomerUserExcludePrimaryCustomerID => 0,
# add an ldap filter for valid users (expert setting)
# CustomerUserValidFilter => '(! (description=locked))',
# administrator can't change customer preferences
AdminSetPreferences => 0,
# # cache time to live in sec. - cache any database queries
# CacheTTL => 0,
# Map => [
#   # note: Login, Email and CustomerID are mandatory!
#   # var, frontend, storage, shown (1=always,2=lite), required, storage-type, http-
#   link, readonly
#   [ 'UserTitle',      'Title',      'title',          1, 0, 'var', '', 0 ],
#   [ 'UserFirstname', 'Firstname', 'givenname',     1, 1, 'var', '', 0 ],
#   [ 'UserLastname',  'Lastname',  'sn',            1, 1, 'var', '', 0 ],
#   [ 'UserLogin',     'Username',  'uid',           1, 1, 'var', '', 0 ],
#   [ 'UserEmail',     'Email',     'mail',          1, 1, 'var', '', 0 ],
#   [ 'UserCustomerID', 'CustomerID', 'mail',          0, 1, 'var', '', 0 ],
#   [ 'UserCustomerIDs', 'CustomerIDs', 'second_customer_ids', 1, 0, 'var', '', 0 ],
#   [ 'UserPhone',     'Phone',     'telephonenumber', 1, 0, 'var', '', 0 ],
#   [ 'UserAddress',   'Address',   'postaladdress',  1, 0, 'var', '', 0 ],
#   [ 'UserComment',   'Comment',   'description',    1, 0, 'var', '', 0 ],
# ],
# ];

```

Kama sifa za ziada za mteja zimehifadhiwa kwenye mpangilio orodha wa LDAP yako, kwa mfano jina la meneja, namba ya simu ya mkononi, au idara, na kama unataka kuonyesha taarifa hizi kwenye OTRS, panua mkusanyiko wa RAMANI kwenye Kernel/Config.pm na maingizo kwa sifa hizi, kama ilivyoonyeshwa kwenye hati ifuatayo.

```

# var, frontend, storage, shown (1=always,2=lite), required, storage-type, http-link,
# readonly
# [...]
# [ 'UserPhone',      'Phone',      'telephonenumber', 1, 0, 'var', '', 0 ],

```

Hati: Kuongeza sehemu mpya kwenye Kernel/Config.pm file.

5.2.2.1. Mteja mwenye vitambulisho vya mteja vingi (Tiketi za Kampuni)

Inawezekana kugawia zaidi ya Kitambulisho kimoja cha Mteja kwa mteja, ukiwa unatumia mazingira ya nyuma ya LDAP. Kutumia tiketi za kampuni, sehemu mpya inabidi iongezwe kwenye mpangilio orodha wa LDAP ambayo ina vitambulisho vinavyofikika na mteja.

Kama sehemu mpya kwenye mpangilio orodha wa LDAP imetengenezwa, ingizo jipya inabidi liongezwe kwenye mkusanyiko wa RAMANI katika Kernel/Config.pm, kama ilivyoonyeshwa kwenye hati chini.


```
# var, frontend, storage, shown (1=always,2=lite), required, storage-type, http-link,
readonly
[...]
[ 'UserCustomerIDs', 'CustomerIDs', 'customer_ids', 1, 0, 'var', '', 0 ],
```

Hati: Kuunganisha sehemu mpya kwenye Kernel/Config.pm file.

Sehemu kwa ajili ya vitambulisho vingi vya mteja inabidi kuhaririwa moja kwa moja katika mpangilio orodha wa LDAP. OTRS inaweza kusoma tu kutoka kwenye LDAP, sio kuandika.

Kuhakikisha ufikivu wa mteja kwenye tiketi za wateja wengine, ongeza Vitambulisho vya wateja ambao tiketi zao zinatakiwa kufikiwa kwenye sehemu mpya katika mpangilio orodha wako wa LDAP. Kila kitambulisho lazima kigawanywe kwa alama nuktamkato (ona Mfano 11-4 chini) .

Example 4.9. Kutumia tiketi za Kampuni na mazingira ya nyuma ya LDAP

Wateja A, B na C wapo kwenye mfumo wako na A anataka kuwa na ufikivu wa tiketi za B na C kupitia paneli ya mteja. B na C hawatakiwi kuwa na ufikivu wa tiketi za wateja wengine.

Kutambua mpangilio huu, badilisha mpangilio orodha wa LDAP na miunganiko katika Kernel/Config.pm kama ilivyoelezwa juu. Kisha ongeza kwenye sehemu ya Vitambulisho vya wateja thamani "B;C" kwa mteja A katika mpangilio orodha wa LDAP.

5.2.3. Kutumia zaidi ya mazingira ya nyuma ya mteja ya aina moja na OTRS

Kama ukitaka kutumia zaidi ya chanzo kimoja cha data za mteja zinazotumika na OTRS (mf. mazingira ya nyuma ya LDAP na hifadhidata), parameta ya usanidi ya MtejaMtumiaji lazima ipanuliwe na nambari, mf. "MtejaMtumiaji 1", "MtejaMtumiaji2" (ona Mfano 11-5 chini).

Example 4.10. Kutumia zaidi ya mazingira ya nyuma ya mteja ya aina moja na OTRS

Mfano unaofuata wa usanidi unaonyesha matumizi ya mazingira ya nyuma ya mteja ya LDAP na hifadhidata katika OTRS.

```
# 1. Customer user backend: DB
# (customer database backend and settings)
$self->{CustomerUser1} = {
  Name => 'Customer Database',
  Module => 'Kernel::System::CustomerUser::DB',
  Params => {
    # if you want to use an external database, add the
    # required settings
    # DSN => 'DBI:odbc:yourdsn',
    # Type => 'mssql', # only for ODBC connections
    # DSN => 'DBI:mysql:database=customerdb;host=customerdbhost',
    # User => '',
    # Password => '',
    Table => 'customer_user',
  },
  # customer unique id
  CustomerKey => 'login',
  # customer #
  CustomerID => 'customer_id',
  CustomerValid => 'valid_id',
  CustomerUserListFields => ['first_name', 'last_name', 'email'],
  CustomerUserSearchFields => ['login', 'last_name', 'customer_id'],
  CustomerUserSearchPrefix => '',
  CustomerUserSearchSuffix => '*',
```

```

CustomerUserSearchListLimit => 250,
CustomerUserPostMasterSearchFields => ['email'],
CustomerUserNameFields => ['title','first_name','last_name'],
CustomerUserEmailUniqCheck => 1,
# # show not own tickets in customer panel, CompanyTickets
# CustomerUserExcludePrimaryCustomerID => 0,
# # generate auto logins
# AutoLoginCreation => 0,
# AutoLoginCreationPrefix => 'auto',
# # admin can change customer preferences
# AdminSetPreferences => 1,
# # cache time to live in sec. - cache any database queries
# CacheTTL => 0,
# # just a read only source
# ReadOnly => 1,
Map => [

    # note: Login, Email and CustomerID needed!
    # var, frontend, storage, shown (1=always,2=lite), required, storage-type, http-
link, readonly, http-link-target
    [ 'UserTitle',      'Title',      'title',      1, 0, 'var', '', 0 ],
    [ 'UserFirstname', 'Firstname', 'first_name', 1, 1, 'var', '', 0 ],
    [ 'UserLastname',  'Lastname',  'last_name',  1, 1, 'var', '', 0 ],
    [ 'UserLogin',     'Username',  'login',     1, 1, 'var', '', 0 ],
    [ 'UserPassword',  'Password',  'pw',        0, 0, 'var', '', 0 ],
    [ 'UserEmail',     'Email',     'email',     1, 1, 'var', '', 0 ],
    [ 'UserCustomerID', 'CustomerID', 'customer_id', 0, 1, 'var', '', 0 ],
    [ 'UserPhone',     'Phone',     'phone',     1, 0, 'var', '', 0 ],
    [ 'UserFax',       'Fax',       'fax',       1, 0, 'var', '', 0 ],
    [ 'UserMobile',    'Mobile',    'mobile',    1, 0, 'var', '', 0 ],
    [ 'UserStreet',    'Street',    'street',    1, 0, 'var', '', 0 ],
    [ 'UserZip',       'Zip',       'zip',       1, 0, 'var', '', 0 ],
    [ 'UserCity',      'City',      'city',      1, 0, 'var', '', 0 ],
    [ 'UserCountry',   'Country',   'country',   1, 0, 'var', '', 0 ],
    [ 'UserComment',   'Comment',   'comments',  1, 0, 'var', '', 0 ],
    [ 'ValidID',       'Valid',     'valid_id',  0, 1, 'int', '', 0 ],
],
# default selections
Selections => {
    UserTitle => {
        'Mr.' => 'Mr.',
        'Mrs.' => 'Mrs.',
    },
},
};

# 2. Customer user backend: LDAP
# (customer ldap backend and settings)
$self->{CustomerUser2} = {
    Name => 'LDAP Datasource',
    Module => 'Kernel::System::CustomerUser::LDAP',
    Params => {
        # ldap host
        Host => 'bay.csuhayward.edu',
        # ldap base dn
        BaseDN => 'ou=seas,o=csuh',
        # search scope (one|sub)
        SSCOPE => 'sub',
# # The following is valid but would only be necessary if the
# # anonymous user does NOT have permission to read from the LDAP tree
        UserDN => '',
        UserPw => '',
        # in case you want to add always one filter to each ldap query, use
        # this option. e. g. AlwaysFilter => '(mail=*)' or AlwaysFilter =>
        '(objectclass=user)'
        AlwaysFilter => '',
        # if both your frontend and your LDAP are unicode, use this:
        SourceCharset => 'utf-8',
        DestCharset => 'utf-8',
        # if your frontend is e. g. iso-8859-1 and the character set of your
        # ldap server is utf-8, use these options:
        SourceCharset => 'utf-8',

```

```
#      DestCharset => 'iso-8859-1',

# Net::LDAP new params (if needed - for more info see perldoc Net::LDAP)
Params => {
    port => 389,
    timeout => 120,
    async => 0,
    version => 3,
},
},
# customer unique id
CustomerKey => 'uid',
# customer #
CustomerID => 'mail',
CustomerUserListFields => ['cn', 'mail'],
CustomerUserSearchFields => ['uid', 'cn', 'mail'],
CustomerUserSearchPrefix => '',
CustomerUserSearchSuffix => '*',
CustomerUserSearchListLimit => 250,
CustomerUserPostMasterSearchFields => ['mail'],
CustomerUserNameFields => ['givenname', 'sn'],
# show not own tickets in customer panel, CompanyTickets
CustomerUserExcludePrimaryCustomerID => 0,
# add a ldap filter for valid users (expert setting)
# CustomerUserValidFilter => '(!(description=locked))',
# admin can't change customer preferences
AdminSetPreferences => 0,
Map => [
    # note: Login, Email and CustomerID needed!
    # var, frontend, storage, shown (1=always,2=lite), required, storage-type, http-
link, readonly
    [ 'UserTitle',          'Title',          'title',          1, 0, 'var', '', 0 ],
    [ 'UserFirstname',     'Firstname',      'givenname',     1, 1, 'var', '', 0 ],
    [ 'UserLastname',      'Lastname',      'sn',            1, 1, 'var', '', 0 ],
    [ 'UserLogin',         'Username',       'uid',            1, 1, 'var', '', 0 ],
    [ 'UserEmail',         'Email',          'mail',          1, 1, 'var', '', 0 ],
    [ 'UserCustomerID',    'CustomerID',    'mail',          0, 1, 'var', '', 0 ],
#    [ 'UserCustomerIDs',   'CustomerIDs',   'second_customer_ids', 1, 0, 'var', '', 0 ],
    [ 'UserPhone',         'Phone',          'telephonenumber', 1, 0, 'var', '', 0 ],
    [ 'UserAddress',       'Address',        'postaladdress',  1, 0, 'var', '', 0 ],
    [ 'UserComment',       'Comment',        'description',    1, 0, 'var', '', 0 ],
],
};
```

Inawezekana kuunganisha mpaka mazingira ya nyuma 10 tofauti ya mteja. Tumia kiolesura cha usimamizi cha mteja katika OTRS kuona au kuhariri (tukiamini utawala data umewezeshwa) data zote za mteja.

5.2.4. Kuhifadhi data za MtejaMtumiaji katika sehemu zinazobadilika.

Mara nyingine inaweza kuwa na manufaa kuhifadhi data za MtejaMtumiaji katika sehemu zinazobadilika za tiketi, kwa fano kutengeneza takwimu muhimu kwenye data hizi.

Thamani za sehemu zinazobadilika zinasetiwa tiketi inapotengenezwa au pale mteja wa tiketi anapobadilishwa. Thamani za sehemu zinazobadilika zinachukuliwa kutoka kwenye data za mteja. Hii inafanya kazi kwa mazingira yoye ya nyuma, lakini ni ya manufaa zaidi kwa mazingira aya nyuma ya LDAP.

Kuamilisha hiki kipengele cha hiari cha OTRS, tafadhali amilisha mipangilio "Tiketi::ModuliTukioTuma###930-SehemuInayobadilikaKutokaKwaMtejaMtumiaji" na "SehemuInayobadilikaKutokaKwaMtejaMtumiaji::Kuunganisha". Mpangilio wa mwisho una usanidi ambao ingizo la sehemu ya MtumiajiMteja linatakiwa kuhifadhiwa katika sehemu inayobadilika ya tiketi. Sehemu inabidi ziwepo kwenye mfumo na zinatakiwa kuwezesha kwa ajili ya WakalaTiketiHuruNakala, ili zisetiwe kwa mikono. Hazitakiwa kuwezesha kwa ajili ya WakalaTiketiSimu, WakalaTiketiBaruapepe na WakalaTiketiMteja. Kama zilikuwa, inabidi zitangulie thamani zilizosetiwa kiotomatiki.

5.3. Mazingira ya nyuma ya kuthibitisha Mawakala na Wateja

OTRS inatoa chaguo la kuthibitisha mawakala na wateja katika mazingira tofauti ya nyuma.

5.3.1. Mazingira ya nyuma ya kuthibitisha Mawakala

5.3.1.1. DB (Chaguo-msingi)

Mazingira ya nyuma yatumikayo kwa kawaida ni hifadhidata ya OTRS. Unaweza kuongeza au kuhariri mawakala kupitia kiolesura cha usimamizi wa mteja katika Kurasa ya Msimamizi (ona Mfano 11-6 chini).

Example 4.11. Thibitisha mawakala katika mazingira ya nyuma ya DB.

```
$Self->{'AuthModule'} = 'Kernel::System::Auth::DB';
```

5.3.1.2. LDAP

Kama mpangilio orodha wa LDAP una data zote zilizohifadhiwa za wakala wako, unaweza kutumia moduli ya LDAP kuthibitisha watumiaji wako katika OTRS (ona Mfano 11-7 chini). Hii moduli ina ufikivu wa kusoma tu kwenye matawi ya LDAP, inamaanisha huwezi kuhariri data zako za mtumiaji kupitia kiolesura cha usimamizi wa mteja.

Example 4.12. Thibitisha mawakala katika mazingira ya nyuma ya LDAP.

```
# This is an example configuration for an LDAP auth. backend.
# (Make sure Net::LDAP is installed!)
$Self->{'AuthModule'} = 'Kernel::System::Auth::LDAP';
$Self->{'AuthModule::LDAP::Host'} = 'ldap.example.com';
$Self->{'AuthModule::LDAP::BaseDN'} = 'dc=example,dc=com';
$Self->{'AuthModule::LDAP::UID'} = 'uid';

# Check if the user is allowed to auth in a posixGroup
# (e. g. user needs to be in a group xyz to use otrs)
$Self->{'AuthModule::LDAP::GroupDN'} = 'cn=otrsallow,ou=posixGroups,dc=example,dc=com';
$Self->{'AuthModule::LDAP::AccessAttr'} = 'memberUid';
# for ldap posixGroups objectclass (just uid)
# $Self->{'AuthModule::LDAP::UserAttr'} = 'UID';
# for non ldap posixGroups objectclass (with full user dn)
# $Self->{'AuthModule::LDAP::UserAttr'} = 'DN';

# The following is valid but would only be necessary if the
# anonymous user do NOT have permission to read from the LDAP tree
$Self->{'AuthModule::LDAP::SearchUserDN'} = '';
$Self->{'AuthModule::LDAP::SearchUserPw'} = '';

# in case you want to add always one filter to each ldap query, use
# this option. e. g. AlwaysFilter => '(mail=*)' or AlwaysFilter => '(objectclass=user)'
$Self->{'AuthModule::LDAP::AlwaysFilter'} = '';

# in case you want to add a suffix to each login name, then
# you can use this option. e. g. user just want to use user but
# in your ldap directory exists user@domain.
# $Self->{'AuthModule::LDAP::UserSuffix'} = '@domain.com';

# Net::LDAP new params (if needed - for more info see perldoc Net::LDAP)
$Self->{'AuthModule::LDAP::Params'} = {
  port => 389,
```

```

timeout => 120,
async => 0,
version => 3,
};

```

Mipangilio ya usanidi iliyoonyeshwa kwenye hati hapo chini inaweza kutumika kulanishia data zote za mtumiaji kutoka kwenye mpangilio orodha wako wa LDAP kwenda kwenye hifadhidata yako ya OTRS ya ndani. Hii inapunguza idadi ya maombi kwenda kwenye seva yako ya LDAP na inaongeza kasi ya uthibitisho na OTRS. Ulandanishi wa data unafanyika pale wakala anapojithibitisha kwa mara ya kwanza. Hata hivyo hiyo data inaweza kulandanishwa na hifadhidata ya ndani ya OTRS, mpangilio orodha wa LDAP ni mfano wa mwisho wa uthibitisho, kwa hiyo mtumiaji aliye lemaa aliye katika matawi ya LDAP hawezi kujithibitisha kwenye OTRS, hata kama data za akaunti tayari zimehifadhiwa kwenye hifadhidata ya OTRS. Data za wakala kwenye mpangilio orodha wa LDAP haziwezi kuhaririwa kupitia kiolesura cha tovuti cha OTRS, kwa hiyo data inabidi isimamiwe moja kwa moja katika matawi ya LDAP.

```

# defines AuthSyncBackend (AuthSyncModule) for AuthModule
# if this key exists and is empty, there won't be a sync.
# example values: AuthSyncBackend, AuthSyncBackend2
$self->{'AuthModule::UseSyncBackend'} = 'AuthSyncBackend';

# agent data sync against ldap
$self->{'AuthSyncModule'} = 'Kernel::System::Auth::Sync::LDAP';
$self->{'AuthSyncModule::LDAP::Host'} = 'ldap://ldap.example.com/';
$self->{'AuthSyncModule::LDAP::BaseDN'} = 'dc=otrs, dc=org';
$self->{'AuthSyncModule::LDAP::UID'} = 'uid';
$self->{'AuthSyncModule::LDAP::SearchUserDN'} = 'uid=sys, ou=user, dc=otrs, dc=org';
$self->{'AuthSyncModule::LDAP::SearchUserPw'} = 'some_pass';
$self->{'AuthSyncModule::LDAP::UserSyncMap'} = {
  # DB -> LDAP
  UserFirstname => 'givenName',
  UserLastname  => 'sn',
  UserEmail     => 'mail',
};
[...]

# AuthSyncModule::LDAP::UserSyncInitialGroups
# (sync following group with rw permission after initial create of first agent
# login)
$self->{'AuthSyncModule::LDAP::UserSyncInitialGroups'} = [
  'users',
];

```

Hati: Kulandanisha data za mtumiaji kutoka kwenye mpangilio orodha wa LDAP kwenda kwenye hifadhidata ya OTRS.

5.3.1.3. HTTPBasicAuth za Wakala

Kama unataka kutekeleza suluhisho la "saini moja kwenye" kwa mawakala wako wote, unaweza kutumia uthibitisho msingi wa HTTP (kwa mifumo yako yote) na moduli ya HTTP-BasicAuth ya OTRS (ona Mfano 11-8 chini).

Example 4.13. Halalisha Wakala kwa kutumia HTTPBasic

```

# This is an example configuration for an apache ($ENV{REMOTE_USER})
# auth. backend. Use it if you want to have a single login through
# apache http-basic-auth
$self->{'AuthModule'} = 'Kernel::System::Auth::HTTPBasicAuth';

# Note:
#
# If you use this module, you should use as fallback
# the following configuration settings if the user is not authorized
# apache ($ENV{REMOTE_USER})

```

```
$Self->{LoginURL} = 'http://host.example.com/not-authorized-for-otrs.html';
$Self->{LogoutURL} = 'http://host.example.com/thanks-for-using-otrs.html';
```

5.3.1.4. Nusukipenyo

Parameta za usanidi zilizoonyeshwa kwenye Mfano 11-9 zinaweza kutumika kuthibitisha mawakala katika seva ya Radius.

Example 4.14. Thibitisha mawakala katika mazingira ya nyuma ya Radius.

```
# This is example configuration to auth. agents against a radius server
$Self->{'AuthModule'} = 'Kernel::System::Auth::Radius';
$Self->{'AuthModule::Radius::Host'} = 'radiushost';
$Self->{'AuthModule::Radius::Password'} = 'radiussecret';
```

5.3.2. Mazingira ya nyuma ya kuthibitisha Wateja

5.3.2.1. Hifadhidata (Chaguo-msingi)

Chaguo-msingi la kithibitisho cha mtumiaji cha mazingira ya nyuma katika OTRS ni hifadhidata ya OTRS. Kwa mazingira haya ya nyuma, unaweza kuhariri data zote za mteja kupitia kiolesura cha wavuti cha OTRS (ona Mfano 11-10 chini).

Example 4.15. Uthibitisho wa mtumiaji mteja katika mazingira ya nyuma ya DB

```
# This is the auth. module against the otrs db
$Self->{'Customer::AuthModule'} = 'Kernel::System::CustomerAuth::DB';
$Self->{'Customer::AuthModule::DB::Table'} = 'customer_user';
$Self->{'Customer::AuthModule::DB::CustomerKey'} = 'login';
$Self->{'Customer::AuthModule::DB::CustomerPassword'} = 'pw';
#$Self->{'Customer::AuthModule::DB::DSN'} =
  "DBI:mysql:database=customerdb;host=customerdbhost";
#$Self->{'Customer::AuthModule::DB::User'} = "some_user";
#$Self->{'Customer::AuthModule::DB::Password'} = "some_password";
```

5.3.2.2. LDAP

Kama una mpangilio orodha wa LDAP wenye data zako zote za mteja, unaweza kutumia moduli ya LDAP kuthibitisha wateja wako katika OTRS (ona Mfano 11-11 chini). Kwa kuwa moduli hii ina uwezo wa kusoma tu kwa mazingira ya nyuma ya LDAP, haiwezekani kuhariri data za mteja kupitia kiolesura cha wavuti cha OTRS.

Example 4.16. Uthibitisho wa mtumiaji mteja katika mazingira ya nyuma ya LDAP

```
# This is an example configuration for an LDAP auth. backend.
# (make sure Net::LDAP is installed!)
$Self->{'Customer::AuthModule'} = 'Kernel::System::CustomerAuth::LDAP';
$Self->{'Customer::AuthModule::LDAP::Host'} = 'ldap.example.com';
$Self->{'Customer::AuthModule::LDAP::BaseDN'} = 'dc=example,dc=com';
$Self->{'Customer::AuthModule::LDAP::UID'} = 'uid';

# Check if the user is allowed to auth in a posixGroup
# (e. g. user needs to be in a group xyz to use otrs)
$Self->{'Customer::AuthModule::LDAP::GroupDN'} =
  'cn=otrsallow,ou=posixGroups,dc=example,dc=com';
$Self->{'Customer::AuthModule::LDAP::AccessAttr'} = 'memberUid';
# for ldap posixGroups objectclass (just uid)
$Self->{'Customer::AuthModule::LDAP::UserAttr'} = 'UID';
```

```
# for non ldap posixGroups objectclass (full user dn)
#$Self->{'Customer::AuthModule::LDAP::UserAttr'} = 'DN';

# The following is valid but would only be necessary if the
# anonymous user does NOT have permission to read from the LDAP tree
$Self->{'Customer::AuthModule::LDAP::SearchUserDN'} = '';
$Self->{'Customer::AuthModule::LDAP::SearchUserPw'} = '';

# in case you want to add always one filter to each ldap query, use
# this option. e. g. AlwaysFilter => '(mail=*)' or AlwaysFilter => '(objectclass=user)'
$Self->{'Customer::AuthModule::LDAP::AlwaysFilter'} = '';

# in case you want to add a suffix to each customer login name, then
# you can use this option. e. g. user just want to use user but
# in your ldap directory exists user@domain.
#$Self->{'Customer::AuthModule::LDAP::UserSuffix'} = '@domain.com';

# Net::LDAP new params (if needed - for more info see perldoc Net::LDAP)
$Self->{'Customer::AuthModule::LDAP::Params'} = {
    port => 389,
    timeout => 120,
    async => 0,
    version => 3,
};
```

5.3.2.3. HTTPBasicAuth za wateja

Kama unataka kutekeleza suluhisho la "saini moja kwenye" kwa wateja watumiaji wako wote, unaweza kutumia uthibitisho wa HTTPBasic (kwa mifumo yako yote) na kutumia moduli ya HTTPBasicAuth na OTRS (hakuna kuingia kunakohitajika na OTRS tena). Ona Mfano 11-12 chini.

Example 4.17. Uthibitisho wa Mteja kwa kutumia HTTPBasic

```
# This is an example configuration for an apache ($ENV{REMOTE_USER})
# auth. backend. Use it if you want to have a single login through
# apache http-basic-auth
$Self->{'Customer::AuthModule'} = 'Kernel::System::CustomerAuth::HTTPBasicAuth';

# Note:
# If you use this module, you should use the following
# config settings as fallback, if user isn't login through
# apache ($ENV{REMOTE_USER})
$Self->{'CustomerPanelLoginURL'} = 'http://host.example.com/not-authorized-for-otrs.html';
$Self->{'CustomerPanelLogoutURL'} = 'http://host.example.com/thanks-for-using-otrs.html';
```

5.3.2.4. Nusukipenyo

Mipangilio iliyoonyeshwa kwenye Mfano 11-13 inaweza kutumika kuthibitisha wateja wako dhidi ya seva ya Radius.

Example 4.18. Uthibitisho wa mtumiaji mteja katika mazingira ya nyuma ya Radius

```
# This is a example configuration to auth. customer against a radius server
$Self->{'Customer::AuthModule'} = 'Kernel::System::Auth::Radius';
$Self->{'Customer::AuthModule::Radius::Host'} = 'radiushost';
$Self->{'Customer::AuthModule::Radius::Password'} = 'radiussecret';
```

5.4. Kugeuza kukufaa usajili binafsi wa mteja

Inawezekana kugeuza kukufaa usajili binafsi kwa ajili ya wateja wapya, inafikika kupitia paneli ya customer.pl. Sehemu mpya za hiari au zinazohitajika, kama nambari ya chumba, anwani au hali zinaweza kuongezwa.

Mfano ufwatao unaonyesha jinsi unaweza kubainisha sehemu inayohitajika katika hifadhi data ya mteja, katika kesi hii hifadhi nambari ya chumba cha mteja.

5.4.1. Kugeuza kiolesura cha wavuti kukufaa

Kuonyesha sehemu mpya ya nambari ya chumba katika kiolesura cha tovuti cha customer.pl, faili la .dtl ambalo lina jukumu la muonekano katika hiki kiolesura lazima libadilishwe. Hariri faili la Kernel/Output/HTML/Standard/CustomLogin.dtl, ongeza sehemu mpya maeneo ya mstari wa 80 (ona Hati chini).

```
[...]
<div class="NewLine">
  <label for="Room">$Text{"Room{CustomerUser}}</label>
  <input title="$Text{"Room Number"}" name="Room" type="text" id="UserRoom"
  maxLength="50" />
</div>
[...]
```

Hati: Kuonyesha sehemu mpya katika kiolesura cha wavuti.

5.4.2. Kuunganisha mteja

Katika hatua inayofuata, muunganiko wa mteja inabidi upanuliwe na ingizo jipya kutoka kwenye nambari mpya. Kuhakikisha kwamba mabadiliko hayapotei baada ya usasishaji, weka mipangilio ya "MtumiajiMteja" kutoka kwenye Kernel/Config/Defaults.pm kwenye Kernel/Config.pm. Sasa badilisha mkusanyiko wa RAMANI na ongeza sehemu mpya ya nambari ya chumba, kama ilivyoonyeshwa kwenye hati chini.

```
# CustomerUser
# (customer database backend and settings)
$self->{CustomerUser} = {
  Name => 'Database Backend',
  Module => 'Kernel::System::CustomerUser::DB',
  Params => {
    # if you want to use an external database, add the
    # required settings
    # DSN => 'DBI:odbc:yourdsn',
    # Type => 'mssql', # only for ODBC connections
    # DSN => 'DBI:mysql:database=customerdb;host=customerdbhost',
    # User => '',
    # Password => '',
    Table => 'customer_user',
  },
  # customer unique id
  CustomerKey => 'login',
  # customer #
  CustomerID => 'customer_id',
  CustomerValid => 'valid_id',
  CustomerUserListFields => ['first_name', 'last_name', 'email'],
  # CustomerUserListFields => ['login', 'first_name', 'last_name', 'customer_id', 'email'],
  CustomerUserSearchFields => ['login', 'last_name', 'customer_id'],
  CustomerUserSearchPrefix => '',
  CustomerUserSearchSuffix => '*',
  CustomerUserSearchListLimit => 250,
  CustomerUserPostMasterSearchFields => ['email'],
  CustomerUserNameFields => ['title', 'first_name', 'last_name'],
  CustomerUserEmailUniqCheck => 1,
  # # show not own tickets in customer panel, CompanyTickets
  # CustomerUserExcludePrimaryCustomerID => 0,
  # generate auto logins
  # AutoLoginCreation => 0,
  # AutoLoginCreationPrefix => 'auto',
  # # admin can change customer preferences
  # AdminSetPreferences => 1,
  # # cache time to live in sec. - cache database queries
  # CacheTTL => 0,
```



```
# # just a read only source
# ReadOnly => 1,
# Map => [
    # note: Login, Email and CustomerID needed!
    # var, frontend, storage, shown (1=always,2=lite), required, storage-type, http-
link, readonly, http-link-target
    [ 'UserTitle',      'Title',      'title',      1, 0, 'var', '', 0 ],
    [ 'UserFirstname', 'Firstname',  'first_name', 1, 1, 'var', '', 0 ],
    [ 'UserLastname',  'Lastname',  'last_name',  1, 1, 'var', '', 0 ],
    [ 'UserLogin',     'Username',  'login',      1, 1, 'var', '', 0 ],
    [ 'UserPassword',  'Password',  'pw',         0, 0, 'var', '', 0 ],
    [ 'UserEmail',     'Email',     'email',      1, 1, 'var', '', 0 ],
    [ 'UserCustomerID', 'CustomerID', 'customer_id', 0, 1, 'var', '', 0 ],
    [ 'UserPhone',     'Phone',     'phone',      1, 0, 'var', '', 0 ],
    [ 'UserFax',       'Fax',       'fax',        1, 0, 'var', '', 0 ],
    [ 'UserMobile',    'Mobile',    'mobile',     1, 0, 'var', '', 0 ],
    [ 'UserRoom',      'Room',      'room',       1, 0, 'var', '', 0 ],
    [ 'UserStreet',    'Street',    'street',     1, 0, 'var', '', 0 ],
    [ 'UserZip',       'Zip',       'zip',        1, 0, 'var', '', 0 ],
    [ 'UserCity',      'City',      'city',       1, 0, 'var', '', 0 ],
    [ 'UserCountry',   'Country',   'country',    1, 0, 'var', '', 0 ],
    [ 'UserComment',   'Comment',   'comments',   1, 0, 'var', '', 0 ],
    [ 'ValidID',       'Valid',     'valid_id',   0, 1, 'int', '', 0 ],
],
# default selections
Selections => {
  UserTitle => {
    'Mr.' => 'Mr.',
    'Mrs.' => 'Mrs.',
  },
},
};
```

Hati: Kubadilisha miunganiko ya mkusanyiko.

5.4.3. Kugeuza kukufaa jedwali la mteja_mtumiaji kati-ka hifadhidata ya OTRS

Hatua ya mwisho ni kuongeza nambari mpya ya safuwima ya chumba katika jedwali la mteja_mtumiaji kwenye hifadhidata ya OTRS (ona Kielelezo chini). Katika safuwima hii, maingizo ya nambari ya chumba yatahifadhiwa.

```
linux:~# mysql -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 6 to server version: 5.0.18-Debian_7-log

Type 'help;' or '\h' for help. Type '\c' to clear the buffer.

mysql> use otrs;
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
mysql> ALTER TABLE customer_user ADD room VARCHAR (200);
Query OK, 3 rows affected (0.01 sec)
Records: 3 Duplicates: 0 Warnings: 0

mysql> quit
Bye
linux:~#
```

Hati: Kuongeza safuwima mpya kwenye jedwali la mteja_mtumiaji.

Sasa sehemu mpya ya chumba lazima ionyeshwe katika paneli ya taarifa za Mteja kama imejazwa, na kwenye skrini za usimamizi wa Mteja Mtumiaji. Pia, wateja wapya wanatakiwa kuingiza namba zao za chumba kama wakisajili akaunti mpya. Kama ukitumia OTRS

katika Microsoft IIS, unatakiwa kuanzisha upya seva ya tovuti kuamilisha mabadiliko yaliyofanywa katika Config.pm.

6. Mpangilio wa tiketi

6.1. Hali za Tiketi

6.1.1. Hali zilizofasiliwa kabla

OTRS inakuruhusu kubadilisha hali ya tiketi iliyofafanuliwa tayari na aina zake, au hata kuongeza mpya. Sifa mbili ni muhimu kwa ajili ya hali: jina la hali na aina ya hali.

Hali chaguo-msingi ya OTRS ni: 'imefungwa kwa mafanikio', 'imefungwa pasipo mafanikio', 'unganishwa', 'mpya', 'wazi', 'inasubiri kufunga otomatiki+', 'inasubiri kufunga otomatiki-', 'inasumbiri kikumbusho' na 'ondolewa'.

6.1.1.1. Mpya

Tiketi huwa katika hali hii kama zimetengenezwa kutoka kwenye barua pepe zinazolingia.

6.1.1.2. Wazi

Hii ndio chaguo-msingi la hali ya tiketi zilizo chini ya foleni na wakala.

6.1.1.3. Kikumbusho kinachosubiri

Baada ya muda wa kusubiri kuisha, mmiliki wa tiketi atapokea kikumbusho cha barua pepe kuhusu tiketi. Kama tiketi haijafungwa, kikumbusho kitatumwa kwa mawakala wote kwenye foleni. Tiketi za ukumbusho zitatumwa tu katika masaa ya biashara, na kurudia kutumwa kila masaa 24 mpaka hali ya tiketi itakapobadilishwa na wakala. Muda uliotumika na tiketi katika hali hii utajumlishwa kwenye mahesabu ya muda wa kupanda.

6.1.1.4. Funga otomatiki inasubiri-

Tiketi katika hali hii zitasetiwa kuwa "Hazijafungwa Kikamilifu" kama muda wa kusubiri umeisha. Muda uliotumiwa na tiketi katika hali hii utaongezwa kwenye mahesabu ya muda wa kupanda.

6.1.1.5. Funga otomatiki inasubiri+

Tiketi katika hali hii zitasetiwa kuwa "Zimefungwa Kikamilifu" kama muda wa kusubiri umeisha. Muda uliotumiwa na tiketi katika hali hii utaongezwa kwenye mahesabu ya muda wa kupanda.

6.1.1.6. Unganishwa

Hii ni hali ya tiketi zilizounganishwa na tiketi nyingine.

6.1.1.7. Imafungwa kwa Mafanikio

Hii ni hali ya mwisho kwa tiketi ambazo zimesuluhishwa kwa mafanikio. Kutegemeana na usanidi wako, unaweza au usiweze kufungua upya tiketi zilizofungwa.

6.1.1.8. Imefungwa Pasipo Mafanikio

Hii ni hali ya mwisho kwa tiketi ambazo HAZIJASULUHISHWA kwa mafanikio. Kutegemeana na usanidi wako, unaweza au usiweze kufungua upya tiketi zilizofungwa.

6.1.2. Kugeuza hali kukufaa

Kila hali ina jina (jina-la-hali) na aina (aina-ya-hali). Bofya kwenye kiungo Hali katika kurasa ya Msimamizi na kubonyeza kitufe "Ongeza hali" kutengeneza hali mpya. Unaweza kuchagua kwa uhuru jina la hali mpya. Aina ya hali haiwezi kubadilishwa kupitia kiolesura cha wavuti. Hifadhidata inabidi ibadilishwe moja kwa moja kama utataka kuongeza aina mpya au kubadilisha majina yaliyopo. Aina chaguo-msingi la hali halitakiwi kubadilishwa kwa kuwa inaweza kutoa majibu yasiyotabirika. Kwa mfano, mahesabu ya upandaji na kipengele cha kufungua kwa kutegemea aina maalumu ya hali.

Jina la hali iliyopo tayari linaweza kubadilishwa, au hali mpya zilizoongezwa kupitia hii skrini. Kama hali "mpya" imebadilishwa kupitia hiki kiolesura cha tovuti, haya mabadiliko pia lazima yafanyiwe usanidi kupitia faili la usanidi Kernel/Config.pm au kupitia kiolesura cha SysConfig. Mipangilio iliyowekwa bayana katika hati chini lazima ibadilishwe kuhakikisha OTRS inafanya kazi na hali iliyobadilishwa kwa ajili ya "mpya".

```
[...]
# PostmasterDefaultState
# (The default state of new tickets.) [default: new]
$self->{PostmasterDefaultState} = 'new';

# CustomerDefaultState
# (default state of new customer tickets)
$self->{CustomerDefaultState} = 'new';
[...]
```

Hati: Kubadilisha mipangilio ya Kernel/Config.pm.

Kama aina mpya ya hali inatakiwa kuongezwa, Jedwali la tiketi_hali_aina katika hifadhidata ya OTRS inahitaji kubadilishwa na programu ya hifadhidata ya mteja, kama ilivyoonyeshwa kwenye hati chini.

```
linux:~# mysql -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 23 to server version: 5.0.16-Debian_1-log

Type 'help;' or '\h' for help. Type '\c' to clear the buffer.

mysql> use otrs;
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
mysql> insert into ticket_state_type (name,comments) values ('own','Own
state type');
Query OK, 1 row affected (0.00 sec)

mysql> quit
Bye
linux:~#
```

Hati: Kurekebisha hifadhidata ya OTRS .

Sasa inawezekana kutumia aina mpya za hali ulizotengeneza. Baada ya hali kuunganishwa na hii aina mpya ya hali, usanidi wa OTRS pia unatakiwa kunadilishwa kuhakikisha hali mpya inatumika. Badilisha machaguo yafuatayo tu kupitia SysConfig:

Tiketi-> Mazingira ya mbele::Wakala::Tiketi::OnaSimuMpya >
 WakalaTiketiSimu###HaliChaguo-msingi - kufafanua chaguo-msingi la hali inayofuata ya tiketi mpya za simu.

Tiketi -> Mazingira ya mbele::Wakala::Tiketi::OnaSimuMpya >
 WakalaTiketiSimu###AinaHali - kufafanua hali zitakazopatikana kwa tiketi mpya za simu.

Tiketi -> Mazingira ya mbele::Wakala::Tiketi::OnaBaruapepeMpya > TiketiBaruapepe###HaliChaguo-msingi - kufafanua chaguo-msingi la hali inayofuata ya tiketi mpya za barua pepe.

Tiketi -> Mazingira ya mbele::Wakala::Tiketi::OnaBaruapepeMpya > WakalaTiketiBaruapepe###AinaHali - kufafanua hali zinazofuata zitakazopatikana kwa tiketi mpya za barua pepe.

Tiketi -> Mazingira ya mbele::Wakala::Tiketi::OnaSimuZinazotoka > WakalaTiketiSimuZinazotoka###Hali - kufafanua chaguo-msingi la hali inayofuata kwa makala mpya za simu.

Tiketi -> Mazingira ya mbele::Wakala::Tiketi::OnaSimuZinazotoka > WakalaTiketiSimuZinazotoka###HaliAina - kufafanua hali zinazofuata zitakazopatikana kwa makala mpya za simu.

Tiketi -> Mazingira ya mbele::Wakala::Tiketi::OnaHamisha > WakalaTiketiHamisha###Hali - kufafanua chaguo-msingi la hali inayofuata ya kuhamisha tiketi.

Tiketi -> Mazingira ya mbele::Wakala::Tiketi::OnaHamisha > WakalaTiketiHamisha###HaliAina - kufafanua hali zinazofuata zinazopatikana za kuhamisha tiketi.

Tiketi -> Mazingira ya mbele::Wakala::Tiketi::OnaDunda> HaliChaguo-msingi - kufafanua chaguo-msingi la hali inayofuata baada ya tiketi kudunda.

Tiketi -> Mandhari ya mbele::Wakala::Tiketi::OnaDunda > HaliAina - kufafanua inayopatikana itakayofuata katika skrini ya kudunda.

Tiketi -> Mazingira ya mbele::Wakala::Tiketi::OnaNyingi > HaliChaguo-msingi - kufafanua chaguo-msingi la hali inayofuata katika kitendocha mkupuo.

Tiketi -> Mazingira ya mbele::Wakala::Tiketi::OnaNyingi > HaliAina - kufafanua hali zinazofuata zitakazopatikana katika skrini ya vitendo vya mkupuo.

Tiketi -> Mazingira ya mbele::Wakala::Tiketi::OnaFunga > HaliChaguo-msingi - kufafanua chaguo-msingi la hali inayofuata baada ya kufunga tiketi.

Tiketi -> Mazingira ya mbele::Wakala::Tiketi::OnaFunga > HaliAina - kufafanua hali zinazofuata zitakazopatikana katika skrini ya kufunga.

Tiketi -> Mazingira ya mbele::Wakala::Tiketi::OnaTunga > HaliChaguo-msingi - kufafanua chaguo-msingi la hali inayofuata kwenye skrini ya Kutunga (jibu).

Tiketi -> Mazingira ya mbele::Wakala::Tiketi::OnaTunga > HaliAina - kufafanua hali zifuatazo zitakazopatikana kwenye skrini ya Kutunga (jibu).

Tiketi -> Mandhari ya mbele::Wakala::Tiketi::OnaMbele > HaliChaguo-msingi - kufafanua chaguo-msingi la hali inayofuata baada ya kupeleka mbele tiketi.

Tiketi -> Mazingira ya mbele::Wakala::Tiketi::OnaMbele > HaliAina - kufafanua hali zinazofuata zitakazopatikana kwenye skrini ya Kupeleka mbele..

Tiketi -> Mazingira ya mbele::Wakala::Tiketi::OnaMbele > HaliChaguo-msingi - kufafanua chaguo-msingi la hali inayofuata ya tiketi katika skrini ya nakala huru.

Tiketi -> Mazingira ya mbele::Wakala::Tiketi::OnaMbele > HaliAina - kufafanua kali zinazofuata zitakazopatikana katika skrini ya nakala huru.

Tiketi-> Kiini::MkuuWaPosta> MkuuwapostaHaliChaguo-msingi - kufafanua hali ya tiketi zilizotengenezwa kutoka kwenye barua pepe.

Tiketi-> Kiini::MkuuWaPosta> MkuuwapostaUfuatiliajiHali - kufafanua hali ya tiketi baada ya ufuatiliaji kupokelewa.

Tiketi-> Kiini::MkuuWaPosta> MkuuwapostaUfuatiliajiHaliUmefungwa - kufafanua hali ya tiketi baada ya ufuatiliaji wa tiketi iliyofungwa kupokelewa.

Tiketi -> Kiini::Tiketi > AinaHalilnayoonekana - kufafanua aina za hali ambazo zinayonyeshwa katika maeneo tofauti ya mfumo, kwa mfano katika Muonekanofoleni.

Tiketi-> Kiini::Tiketi > FunguaHaliAina - kufafanua aina za hali kwa ajili ya tiketi zilizo-funguliwa.

Tiketi-> Kiini::Tiketi> KikumbushoKinachosubiriHaliAina - kufafanua aina ya hali kwa ajili ya tiketi za kumbukumbu.

Tiketi -> Kiini::Tiketi > KusubiriHaliOtomatikiAina - kufafanua aina ya hali kwa ajili ya tiketi Otomatiki Zinazosubiri.

Tiketi -> Kiini::Tiketi> HaliBaadaKusubiri - kufafanua hali tiketi imesetiwa baada ya muda Otomatiki wa Kusubiri wa hali iliyosanidiwa kuisha.

6.2. Vipaumbele vya tiketi

OTRS inakuja na ngazi tano za chaguo-msingi la vipaumbele ambavyo vinaweza kubadilishwa kupitia kiubgo "Vipaumbele" katika ukurasa wa Msimamizi. Wakati wa kutengeneza orodha iliyogeuzwa kukufaa ya vipaumbele, tafadhali weka akilini kwamba zimepangwa kwa alfabeti katika kisanduku cha kuchagua kipaumbele katika kiolesura cha mtumiaji. Pia, OTRS ina agiza tiketi kwa Vitambulisho vya ndani vya hifadhidata katika MuonekanoWaFoleni.

Note

Kama ilivyo kwa vyombo vingine vya OTRS, vipaumbele haviwezi kufutwa, vinalemazwa tu kwa kuseti chaguo Halali kuwa *batili* au *batili-kwa muda*.

Important

Kama kipaumbele kipya kimeongezwa au kama kilichopo kimebadilishwa, unaweza kutaka kubadilisha baadhi ya thamani katika SysConfig:

- Tiketi:Kiini::Mkuu wa posta::MkuuwapostaKipaumbeleChaguo-msingi - inafafanua kipaumbele chaguo-msingi kwa barua pepe zote zinazolingia.
- Tiketi:Mazingira ya mbele::Wakala:Tiketi::OnaSimuMpya:Kipaumbele - inafafanua chaguo-msingi la kipaumbele kwenye skrini ya Tiketi Mpya Simu ya mawakala.
- Tiketi:Mazingira ya mbele::Wakala:Tiketi::OnaBaruapepeMpya:Kipaumbele - inafafanua chaguo-msingi la kipaumbele katika skrini ya Tiketi Mpya Baruapepe ya mawakala.
- Tiketi:Mandhari ya mbele::Mteja:Tiketi::OnaMpya:KipaumbeleChaguo-msingi - inafafanua chaguo-msingi la kipaumbele katika skrini Mpya ya Tiketi katika mazingira yambele ya Mteja.

6.3. Jukumu la Tiketi & Kuangalia Tiketi

Kutoka OTRS 2.1 na kuendelea, inawezekana kumuweka mtu kama mhusika wa tiketi, zaidi ya mmiliki wake. Zaidi, shughuli zote zilizounganishwa na tiketi zinaweza kuangaliwa


na mtu zaidi ya mmiliki wa tiketi. Hizi kazi mbili zinatakelezwa na sifa TiketiMhusika na TiketiMuangalizi, na kuwezesha ugawaji wa kazi na kufanya kazi ndani ya miundo msonge ya makundi.

6.3.1. Jukumu la Tiketi

Kipengele cha jukumu la tiketi kinawezesha uchakatishaji kamili wa tiketi na wakala mwingine tofauti na mmiliki wa tiketi. Hivyo wakala ambaye amefunga tiketi anaweza kuiruhusu kutumika na wakala mwingine ambaye siyo mmiliki wa tiketi, ili wapili ajibu maombi ya mteja. Baada ya maombi kushughulikiwa, wakala wa kwanza anaweza kutoa jukumu la tiketi kutoka kwa wakala wa pili.


Kwa parameta ya usanidi Tiketi::Jukumu, kipengele cha jukumu la tiketi kinaweza kuamilishwa. Hii itasababisha viungo vipya 3 kutokea katika menyu ya shughuli za tiketi kwa tiketi iliyokuzwa katika kiolesura cha wakala.

Majukumu ya tiketi yanaweza kugawiwa kwa kuita maudhui ya tiketi na kubofya kwenye kiungo "Jukumu" katika menyu ya shughuli za tiketi kwenye tiketi iliyokuzwa katika kiolesura cha wakala (ona kielelezo chini).

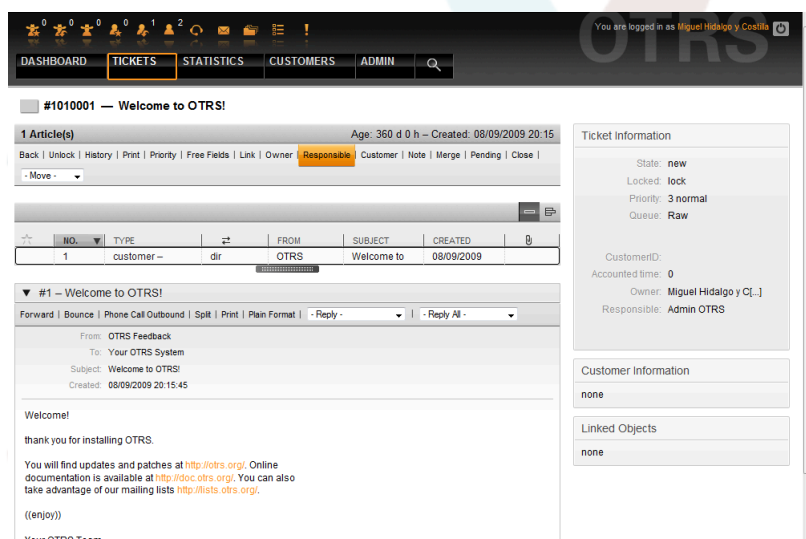

Kielelezo: Kubadilisha Jukumu la tiketi katika muonekano wake uliokuzwa.

Baada ya kubofya "Jukumu", kibanduku ibukizi cha kubadilisha jukumu la tiketi kitafunguka (ona Kielelezo chini). Haya maongezi yanaweza pia kutumika kutuma ujumbe kwa wakala mpya husika.

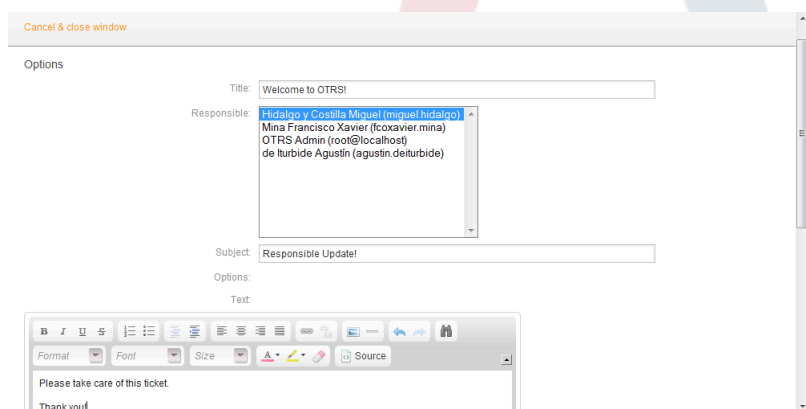

Kielelezo: Maongezi ibukizi ya kubadilisha jukumu la tiketi.


Orodha ya tiketi zote ambazo wakala anawajibika, zinaweza kufikiwa kupitia muonekaano wa Majukumu wa kiolesura cha wakala wa OTRS, baada tu ya kipengele cha jukumu la tiketi kuamilishwa.

6.3.2. Uangalizi wa tiketi

Kutoka OTRS 2.1 na kuendelea, chagua mawakala kama wasimamizi wanaweza kuangalia baadhi ya tiketi ndani ya mfumo bila kuzichakatisha, kwa kutumia kipengele TiketiMwanguzalizi.

Kipengele cha MuangaliziTiketi kinaweza kuamilishwa na parameta ya usanidi Tiketi::Muangalizi ambayo inaongeza viungo vipya kwenye mwambaa zana wako wa vitendo. Kwa kutumia Tiketi::MuangaliziKundi, kundi moja au zaidi lenye ruhusa ya kuangalia tiketi linaweza kufafanuliwa.


Ili kuangalia tiketi, nenda kwenye muonekano wake uliokuzwa na bofya kwenye kiungo "Jiunge" katika menu ya shughuli za tiketi (ona Kielelezo chini).

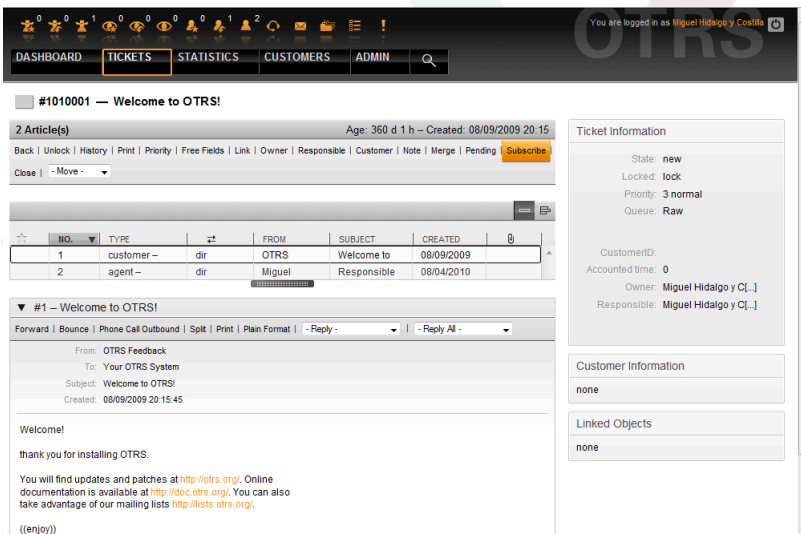

The screenshot shows the OTRS interface for ticket #1010001. The main content area displays the ticket details, including the subject 'Welcome to OTRS!', the sender 'OTRS Feedback', and the recipient 'Your OTRS System'. The ticket was created on 08/09/2009 at 20:15:45. The interface also shows a list of articles and various information panels on the right side, such as Ticket Information, Customer Information, and Linked Objects.

Kielelezo: Kujunga kuona tiketi katika muonekano uliokuzwa.


Kama hutaki tena kuangalia tiketi fulani, nenda kwenye muonekano wake uliokuzwa na bofya kwenye kiungo "Jiondoe" katika menu ya shughuli za tiketi (ona Kielelezo chini).

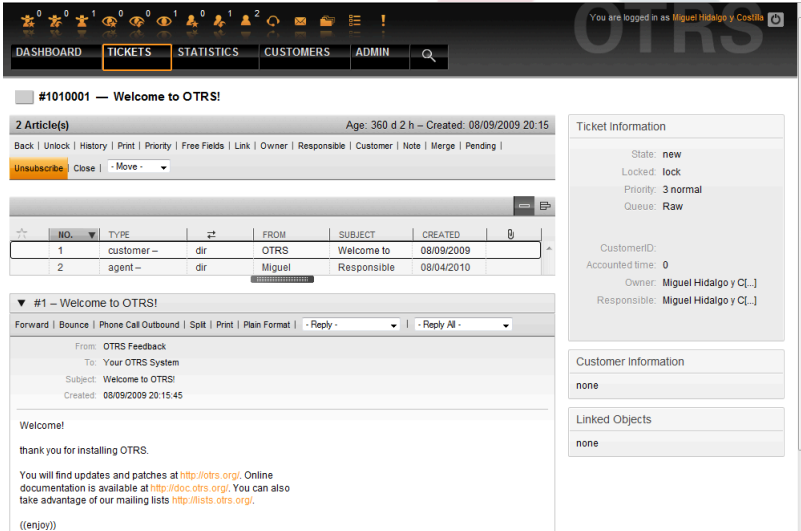

This screenshot is identical to the previous one, showing the OTRS interface for ticket #1010001. The main content area displays the ticket details, including the subject 'Welcome to OTRS!', the sender 'OTRS Feedback', and the recipient 'Your OTRS System'. The ticket was created on 08/09/2009 at 20:15:45. The interface also shows a list of articles and various information panels on the right side, such as Ticket Information, Customer Information, and Linked Objects.

Kielelezo: Kujiondoa kwenye uangalizi wa tiketi katika muonekano wake uliokuzwa.

Orodha ya tiketi zote zinazoangaliwa inaweza kupatikana kupitia muonekano wa Zilizoangaliwa wa wakala wa OTRS (ona Kielelezo chini), baada tu ya mwangalizi wa tiketi kuamilishwa.

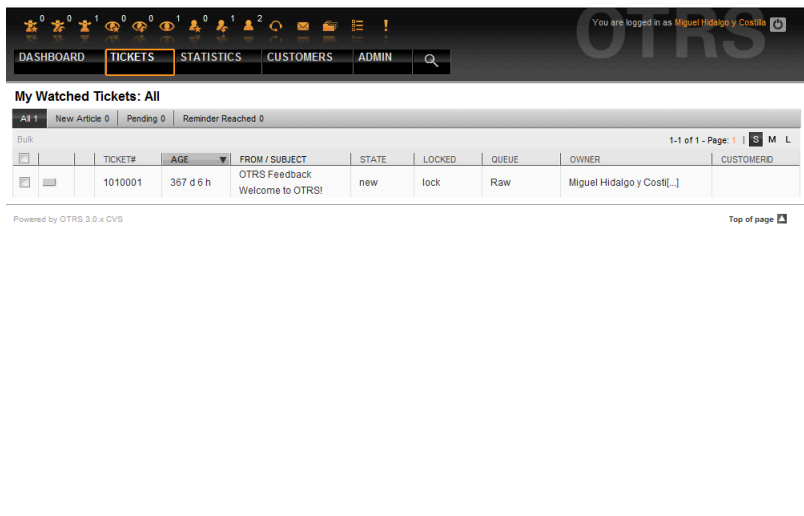

The screenshot shows the OTRS web interface. At the top, there is a navigation bar with 'DASHBOARD', 'TICKETS', 'STATISTICS', 'CUSTOMERS', and 'ADMIN'. Below this, the user is logged in as 'Miguel Hidalgo y Costilla'. The main section is titled 'My Watched Tickets: All' and shows a table of tickets. The table has columns for 'TICKET#', 'AGE', 'FROM / SUBJECT', 'STATE', 'LOCKED', 'QUEUE', 'OWNER', and 'CUSTOMERID'. There is one ticket listed with 'TICKET# 1010001', 'AGE 367 d 6 h', 'FROM / SUBJECT OTRS Feedback Welcome to OTRS!', 'STATE new', 'LOCKED lock', 'QUEUE Raw', and 'OWNER Miguel Hidalgo y Costilla'. The interface also shows 'New Article 0', 'Pending 0', and 'Reminder Reached 0'.

Kielelezo: Muonekano wa tiketi zilizoangaliwa.

7. Shughuli zinazoendana na muda

7.1. Kuseti masaa, sikuku na majira ya biashara

Baadhi ya kazi katika OTRS, kama upandishaji na kufungua kiotomatiki tiketi, inategemea kwenye usanidi sahihi wa masaa ya biashara, majira ya saa na sikukuu. Unaweza kufafanua hii kupitia Kiolesura cha SysConfig, katika Kiunzi > Kiini::Muda. Unaweza kuweka bayana seti tofauti za masaa ya kazi, sikukuu na majira ya saa kama 'Kalenda' tofauti katika Kiunzi > Kiini::Muda::Kalenda1 kupitia Kiunzi > Kiini::Muda::Kalenda9. Kalenda zinaweza kufafanuliwa na mipangilio ya foleni, au ngazi za SLA. Hii ina maanisha, kwa mfano, unaweza kuweka bayana kalenda yenye masaa ya biashara 5 x 8 kwa SLA yako ya 'Kawaida', lakini ukatengeneza kalenda tofauti ya msaada wa 7 x 24 kwa SLA zako za 'dhahabu'; na pia kuseti kalenda kwa ajili ya foleni yako ya 'Msaada-USA' yenye dirisha tofauti la muda tofauti na lile la foleni yako ya 'Msaada-Japan'. OTRS inaweza kushughulikia mpaka kalenda tofauti 99.

7.1.1. Masaa ya Biashara

Seti masaa ya kazi kwa ajili ya mfumo wako katika SysConfig kiunzi> Kiini::Muda::MudaMasaaYaKazi, au kwa kalenda zako maalumu katika usanidi wa kalenda. OTRS inaweza kushughulikia muda wa saa moja. Kuweka alama katika visanduku 8, 9, 10 ... 17 inaendana na masaa ya kazi ya 8 asubuhi - 6 alasiri.

Katika masaa ya biashara tu ndio tiketi zinaweza kupanda, taarifa za tiketi zilizopandishwa na tiketi zinazosubiri zinatumwa, na tiketi zinafunguliwa.

7.1.2. Sikukuu zenye tarehe za kudumu

Sikukuu ambazo ziko kwenye tarehe funge kila mwaka, kama Mwaka mpya au tarehe nne ya Julai, zinaweza kubainishwa katika MudaSikukuuSiku, au katika sehemu husika kwa ajili ya kalenda 1-9

Tiketi hazitapandishwa wala kufunguliwa katika siku zilizofafanuliwa kama MudaSikuZaSikukuu.

Note

Kwa chaguo-msingi OTRS inasafirishwa na sikukuu za *German* zimesakinishwa.

7.1.3. MudaSikuZaSikukuuMaraMoja

Sikuku kama Pasaka ambazo hazima tarehe maalumu ya mwaka lakini badala yake zinabadilika kila mwaka, zinaweza kubainishwa kwenye MudaSikuZaSikukuuMaraMoja.

Tiketi hazitapandishwa na hazitafunguliwa katika tarehe zilizofafanuliwa katika MudaSikuZaSikukuuMaraMoja

Note

OTRS haisafirishwi na sikukuu yoyote ya Wakati-Mmoja ikiwa imesakinishwa. Hii ina maanisha unatakiwa kuongeza sikukuu, kama Pasaka au Sikuku ya Shukrani, kwenye mfumo wakati wa kusanidi OTRS.

7.2. Ufunguaji Otomatiki

Tiketi zilizofungwa zinaweza kufunguliwa kiotomatiki na mfumo. Hiki kipengele kinaweza kuwa cha muhimu, kwa mfano, wakala amefunga tiketi ambazo zinatakiwa kuchakatishwa, lakini hawezi kuzifanyia kazi kwa sababu fulani, tuseme yuko nje ya ofisi kwa dharura. Kipengele otomatiki cha kufungua kinafungua tiketi baada ya muda fulani kuhakikisha hakuna tiketi zilizofungwa zitakazosahaulika, hivyo kuruhusu mawakala wengine kuzichakatisha.

Idadi ya muda kabla tiketi haijafunguliwa inaweza kuwekwa bayana katika mipangilio ya foleni kwa kila foleni. Moduli bin/otrs.UnlockTickets.pl, ambayo inatekelezwa kwa kipindi fulani kama kazi ya mfumo iliyopangwa, inafanya ufunguaji otomatiki wa tiketi.

Taarifa kuhusu tiketi zilizofunguliwa zinatamwa nje kwa wale mawakala wenye foleni zilizosetiwa tiketi zilizofunguliwa kwenye 'Foleni zangu', na wame amilisha taarifa kwenye tiketi zilizofunguliwa katika mapendeleo yao binafsi.

Tiketi zitafunguliwa kama masharti yote yafuatayo yamefikiwa:

- Kuna *muda wa mwisho wa kufungua* umefafanuliwa kwenye foleni ambayo tiketi imo.
- Tiketi imesetiwa kuwa *imefungwa*.
- Hali ya tiketi ni *wazi*.

Muda wa kufungua utasetiwa upya kama wakala akiongeza makala mpya ya nje kwenye tiketi. Inaweza kuwa ya aina yoyote kati ya zifuatazo: *barua pepe-nje, simu, faksi, sms, au notisi-nje*.

Pia, kama makala ya mwisho katika tiketi imetengenezwa na wakala, na mteja akaongeza nyingine, aidha kwa kupitia majibu ya tovuti au barua pepe, muda wa kufungua utasetiwa upya.

Tukio la mwisho ambalo lita seti upya muda wa kufungua ni pale tiketi imegawiwa kwa wakala mwingine.

8. Kugeuza kukufaa matokeo ya PDF

Hiki kifungu kinashughulikia machaguo yanayoweza kusanidiwa kwa ajili ya matokeo ya PDF kwenye OTRS.

Kama ukitumia kitendo cha Kuchapisha kutoka kokote ndani ya kiolesura cha OTRS, itazalisha faili lililoumbuzwa la PDF. Unaweza kulemaza hii kwa kubadilisha usanidi wa parameta PDF kutengeneza HTML badala yake.

Unaweza kurekebisha muonekano wa mafaili yanayozalishwa na OTRS kwa kutengeneza nembo yako na kuiongeza kwenye PDF::FailiLaNembo. Unaweza kutumia PDF::UkubwaWaKurasa kufafanua ukubwa wa kawaida wa faili la pdf linalozalishwa (DIN-A4 au barua), na pia PDF::KikomoKurasa kuweka bayana idadi ya kikomo cha juu cha kurasa kwa faili la pdf, ambayo ni muhimu kama mtumiaji akizalisha faili kubwa kwa makosa.

Moduli za Perl CPAN za PDF::API2 na Compress::Zlib lazima zisakinishwe kwa ajili ya uzalishaji wa mafaili ya pdf. Katika usambazaji mwingi zinapatikana kama vifurushi na vinaweza kusakinishwa kirahisi, kwa kutumia meneja kifurushi husika. Ikiwa hii haiwezekani, inabidi zisakinishwe na CPAN. Kwa taarifa zaidi kuhusu kusakinisha moduli za Perl, tafadhali pitia kifungu cha "Usakinishaji wa moduli za Perl".

9. Moduli ya takwimu


Moduli ya takwimu ya OTRS inashikilia sifa za kufuatilia takwimu za operesheni na inazalisha ripoti zake yenyewe zinazohusiana na matumizi ya OTRS. Mfumo wa OTRS unatumia msembo "stat" kwa ujumla kumaanisha ripoti inayowakilisha viashiria mbali mbali.

Usanidi sahihi wa moduli ya takwimu ya OTRS unahusika na wingi wa mahitaji na mapendeleo. Hii inajumuisha moduli mbali mbali za kutathminiwa, mipangilio ya ruhusa za mtumiaji, viashirio kupigiwa hesabu na ngazi za ugumu, urahisi wa usanidi wa moduli za takwimu, kasi na ufanisi wa mahesabu, na msaada kwa seti tajiri za lahaja zinazotoka.

Elementi za takwimu, mafaili yanayoongeza kazi za moduli ya takwimu kwa mahitaji fulani, yanaweza kuunganishwa kutafuta thamani ya takwimu changamano.

9.1. Kushughulikia moduli kwa kutumia wakala

Ukiingia kama wakala, mwambaa wa uabiri otaonyesha kiungo "Takwimu", na machaguo ya menu ndogo tofauti tofauti, kama ilivyoonyeshwa kwenye Kielelezo.

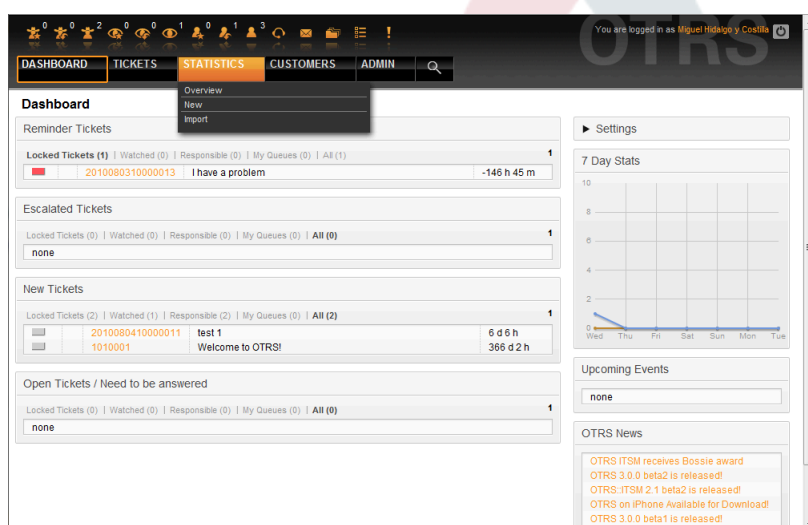


Kielelezo: Machaguo ya menu ya takwimu.

Machaguo tofauti yanayotolewa katika menu ya takwimu ni:

- *Mapitio*. Inawasilisha orodha ya ripoti tofauti zilizosanidiwa kabla.
- *Mpya*. Inahitaji haki za kusoma na kuandika.
- *Agiza*. Inahitaji haki za kusoma na kuandika.

9.1.1. Mapitio

Kwa kuchagua kiungo cha "Takwimu" kwenye mwambaa wa uabiri, na kisha kiungo cha menyu ndogo "Mapitio", inaita skrini ya Mapitio. Skrini ya mapitio inaonyesha orodha ya ripoti zote ambazo zimesanidiwa kabla na wakala anaweza kutumia (ona Kielelezo chini).

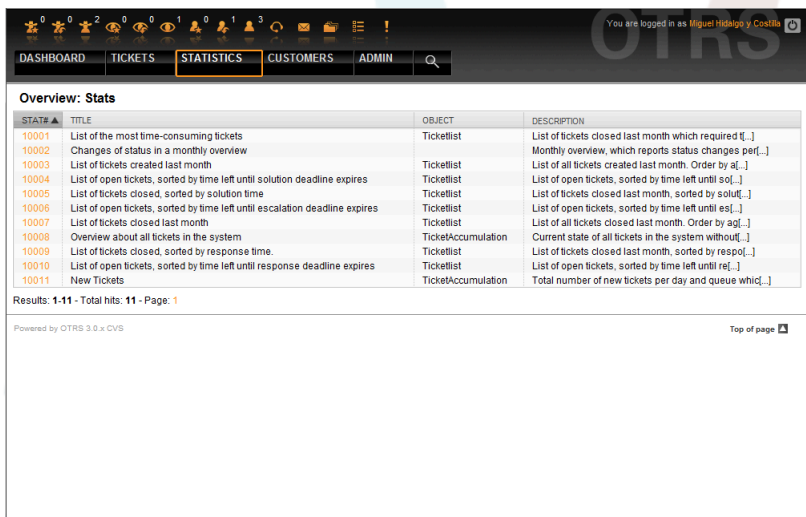

The screenshot shows the OTRS Statistics dashboard. At the top, there are navigation tabs: DASHBOARD, TICKETS, STATISTICS (selected), CUSTOMERS, and ADMIN. Below the tabs is a search bar. The main content area is titled "Overview: Stats" and contains a table with the following columns: STAT#, TITLE, OBJECT, and DESCRIPTION. The table lists 11 reports, including "List of the most time-consuming tickets", "Changes of status in a monthly overview", "List of tickets created last month", "List of open tickets, sorted by time left until solution deadline expires", "List of tickets closed, sorted by solution time", "List of open tickets, sorted by time left until escalation deadline expires", "List of tickets closed last month", "Overview about all tickets in the system", "List of tickets closed, sorted by response time", "List of open tickets, sorted by time left until response deadline expires", and "New Tickets". At the bottom of the table, it says "Results: 1-11 - Total hits: 11 - Page: 1".

STAT#	TITLE	OBJECT	DESCRIPTION
10001	List of the most time-consuming tickets	Ticketlist	List of tickets closed last month which required ti...
10002	Changes of status in a monthly overview		Monthly overview, which reports status changes per...
10003	List of tickets created last month	Ticketlist	List of all tickets created last month. Order by al...
10004	List of open tickets, sorted by time left until solution deadline expires	Ticketlist	List of open tickets, sorted by time left until so[...]
10005	List of tickets closed, sorted by solution time	Ticketlist	List of tickets closed last month, sorted by solu...
10006	List of open tickets, sorted by time left until escalation deadline expires	Ticketlist	List of open tickets, sorted by time left until es[...]
10007	List of tickets closed last month	Ticketlist	List of all tickets closed last month. Order by ag[...]
10008	Overview about all tickets in the system	TicketAccumulation	Current state of all tickets in the system without...
10009	List of tickets closed, sorted by response time	Ticketlist	List of tickets closed last month, sorted by respo[...]
10010	List of open tickets, sorted by time left until response deadline expires	Ticketlist	List of open tickets, sorted by time left until res[...]
10011	New Tickets	TicketAccumulation	Total number of new tickets per day and queue whic[...]

Kielelezo: Mapitio ya ripoti za kawaida.


Taarifa ifuatayo inatolewa kwa kila ripoti ya kawaida iliyoorodheshwa kwenye Mapitio:

- *Takwimu#*. Namba ya ripoti ya kipekee.
- *Kichwa*. Kichwa cha ripoti.
- *Kitu*. Kitu kinachotumika kuzalisha takwimu. Katika kesi ya takwimu tuli, hakuna kitu kinachoonyeshwa kwa kuwa hakuna kitu kinachobadilika kinachotumika kwa uzalishaji wake.
- *Maelezo*. Maelezo mafupi ya ripoti.

Wakati moduli ya takwimu imesakinishwa, inakuja na ripoti chache za mfano zilizoagizwa kwenye mfumo. Hizi zinaonyeshwa kama orodha kwenye kurasa ya Mapitio. Kama kurasa ya mapitio ikipanuliwa kuwa zaidi ya kurasa moja, wakala anaweza kuvinjari kwenye kurasa tofauti. Orodha ya ripoti inaweza kupangwa unavyotaka, kwa kubofya kichwa cha safuwima unavyotaka katika orodha. Kuzalisha ripoti maalumu, bofya kwenye nambari ya takwimu inayohusika na ripoti katika orodha ya Mapitio. Hii inaleta kiolesura "Muonekano" cha ripoti.

9.1.2. Tengeneza na ona ripoti

Kiolesura cha muonekano wa mtumiaji inatoa mipangilio ya usanidi wa takwimu. (ona Kielelezo chini).

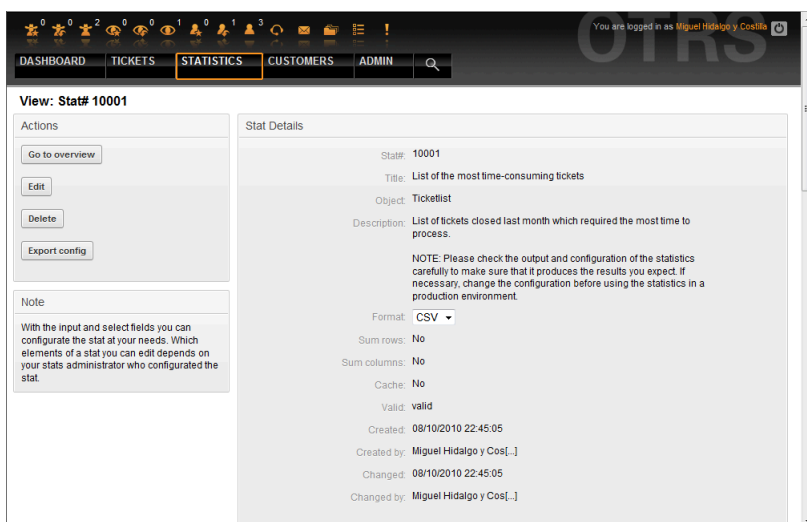

Kielelezo: Kuona ripoti maalumu.

Mipangilio ya usanidi wa ripoti fulani inaweza kusetiwa ndani ya machaguo mbali mbali kwenye skrini ya kuona. Aidha mtengenezaji wa ripoti au mtu mwingine yoyote mwenye ruhusa zinazotakiwa anaweza kuweka mipangilio.


Kurasa inaonyesha vifuatavyo:

- Vitendo viwezekanavyo:
 - *Nenda kwenye mapitio.* Kiungo kinakurudisha kwenye orodha ya mapitio ya ripoti.
 - *Hariri.* Hariri muundo wa ripoti ya sasa (haki za kusoma na kuandika zinahitajika).
 - *Futa.* Futa ripoti ya sasa (haki za kusoma na kuandika zinahitajika).
 - *Hamisha usanidi.* Hamisha ripoti ya usanidi, kupitia upakuaji wa faili (haki za kusoma na kuandika zinahitajika)

Matumizi: Fomula saidizi za Agiza na Hamisha zinaruhusu kwa urahisi wa kutengeneza na kujaribu ripoti katika mifumo ya majaribio na urahisi wa kuingiza kwenye mfumo wa uzalishaji.

- Undani wa ripoti:
 - *Takwimu#.* Nambari ya ripoti.
 - *Kichwa.* Kichwa cha ripoti.
 - *Kitu.* Kitu kinachotumika kutengeneza ripoti.
 - *Maelezo.* Maelezo ya dhumuni la ripoti.
 - *Umbizo.* Umbizo la ripoti itakayotoka, inategemea na usanidi, inaweza kuwa mojawapo ya maumbizo yafuatayo:
 - CSV.
 - Chapisha
 - Grafu-mistari
 - Grafu-miambaa.

- Grafu-miambaa h.
- Grafu-pointi.
- Grafu-mistari-pointi.
- Grafu-eneo.
- Grafu-duara.
- *Ukubwawagrafu*. Ukubwa katika pikseli kwa ajili ya mchoro / chati. Hili chaguo lina-
tolewa pale tu usanidi wa ripoti unaruhusu chati. Ukubwa wowowte unaoweza kutu-
mika kwa ujumla unasaniwa na msimamizi wa OTRS kwenye SysConfig. Wakala kisha
anaweza kuchagua kabla umbizo husika, wakati anasaniwa ripoti.
- *Jumla safumlalo*. Inaonyesha kama ripoti imerekebishwa kwa safuwima, ambamo seli
zake zinatoa jumla ya safumlalo husika.
- *Jumla safuwima*. Inaonyesha kama ripoti imerekebishwa kwa safumlalo, ambamo seli
zake zinatoa jumla ya safuwima husika.
- *Hifadhi muda*. Inaonyesha kama ripoti iliyozalishwa inawekwa kwenye hifadhi muda
ya mfumo.
- *Halali*. Hii inaweza kusetiwa kuwa "batili" kama ripoti itatakiwa kuanzishwa kwa muda
kwa sababu yoyote. Kitufe "Anza" upande wa chini wa paneli ya kulia haionyeshwi
tena. Ripoti haiwezi kuzalishwa tena.
- *Tengenezwa*. Muda wa utengenezaji wa ripoti.
- *Imetengenezwa na*. Jina la wakala aliyetengeneza ripoti.
- *Badilishwa*. Muda ripoti ilibadilishwa kwa mara ya mwisho.
- *Imabadilishwa na*. Jina la wakala aliyebadilisha ripoti mara ya mwisho.
- *jira-X*. Kutumia programu-tumizi hii, wakala anaweza kubadilisha majira x na y (ikiwa
tu imeamilishwa na msimamizi wa OTRS).
- Taarifa ya ujumla inafwatiwa na taarifa kuhusu ripoti yenyewe. Kuna muonekano wa
ripoti (au takwimu) wa aina mbili :
 - *Muonekano tuli wa takwimu*. Vizalishaji vya ripoti tuli vinaweza kuunganishwa katika
moduli ya takwimu (ona Kielelezo chini).

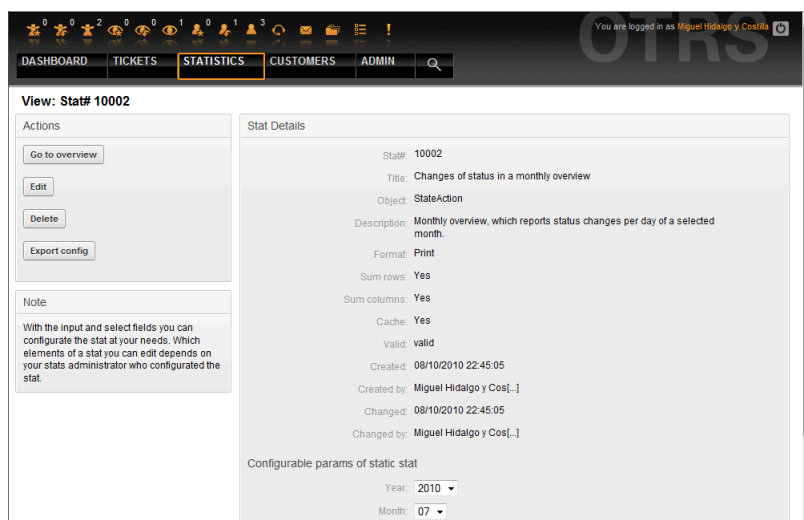

Kielelezo: Kuona ripoti tuli.

- *Muonekano wa takwimu unaobadilika* (ona Kielelezo juu). Zinaweza kuonyeshwa katika njia mbili:
- *Mipangilio isiyobadilika*. Chanzo cha ripoti hakina ruhusa ya kubadilisha hizi sehemu.
- *Mipangilio inayobadilika*. Mipangilio ya usanidi wa ripoti kama hizi inaweza kubadilishwa na wakala.

Kubonyeza kitufe "Anza" (upande wa chini wa skrini) ni hatua ya mwisho ya kuzalisha ripoti. Kuna njia mbili ziwezekanazo kwa hiki kitufe kuto kuonyeshwa:

1. Ripoti imesetiwa kuwa batili na hivyo imelemazwa.
2. Ripoti haikufanyiwa usanidi vizuri, hivyo haiwezi kutekelezeka. Kwa kesi hii taarifa zinazotakiwa zinapatikana katika sehemu ya taarifa za OTRS (chini kuna mwambaa wa uabiri).

Kama mpangilio kwenye Ona kurasa hauko sawa, hii kurasa itaonyeshwa tena baada ya kubonyeza kitufe "Anza", na taarifa kuhusu ingizo lipi limekosewa zitatolewa kwenye sehemu ya taarifa.

9.1.3. Hariri / Mpya

Mawakala wenye haki za kuandika wanaweza kuhariri usanidi wa ripoti kwa kuita kiolesura cha hariri mtumiaji cha moduli ya takwimu. Au, wanaweza kutengeneza ripoti mpya. Skrini zinazohusika zinaweza kufikiwa kwa njia zifuatazo:

1. Hariri: Kupitia kitufe cha "Hariri" kwenye muonekano wa takwimu.
2. Mpya: Kupitia kiungo "Mpya" kwenye menyu sa takwimu kutoka kwenye mwambaa wa uabiri, au kitufe cha "Ongeza" kutoka kwenye kurasa ya Mapitio.

Takwimu zina haririwa na sogora katika hatua nne:


1. Ubainishaji wa jumla.
2. Fasili ya elementi kwa ajili ya jira-X.
3. Ubainishaji wa thamani za mfuatano.
4. Kuchagua vizuizi kuweka kikomo kwenye ripoti.

Hatua 2 kupitia 4 zinahitajika tu kwa uzalishaji wa ripoti zenye takwimu zinazobadilika. Kwa takwimu tuli, taarifa za ujumla tu (pointi 1) ndio zinahitajika.

Taarifa kuhusu jinsi ya kushughulikia ukurasa inatolewa katika kila skrini, chini ya paneli ya Vitendo katika paneli ya madokezo.

Kama maingizo yasiyo sahihi yameingizwa, kiolesura kilichopita kilichochakatishwa ki-taonyeshwa tena na kitakuwa na taarifa kuhusu maingizo yasiyosahihi. Hii taarifa inaweza kupatikana katika kifungu cha taarifa cha OTRS. Kiolesura cha maingizo cha mtumiaji kinachofwata kinaonyeshwa tu baada ya fomu ya sasa kujazwa kwa usahihi.

1. *Ubainishaji wa jumla.* Ni kurasa ya kwanza ya Hariri sogora (ona Kielelezo chini).

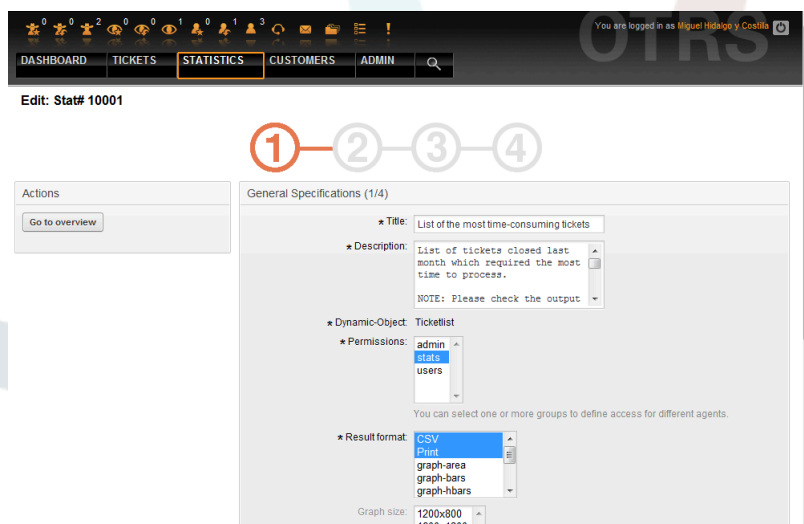

Kielelezo: Kuhariri ubainishaji wa jumla wa ripoti.

Kwenye skrini iliyoonyeshwa kwenye Kielelezo, kuna idadi kubwa ya vipimo na mipangilio ambayo inaweza kuhaririwa:

- *Mada.* Inatakiwa iakisi lengo la takwimu kwa ufupi..
- *Maelezo.* Maelezo zaidi ya taarifa kuhusu ufafanuzi wa ripoti, aina ya parameta za usanidi, na kadhalika.
- *Kltu kinachobadilika.* Kama usanikishaji wa OTRS utatoa vitu vinavyobadilika vingi, mojawapo inaweza kuchaguliwa. Hivi vitu vinafikia mahitaji ya moduli fulani.
- *Faili tuli.* Kwa kawaida chaguo hili halionyeshwi, kwakuwa mafaili tuli ambayo bado hayaja gawiwa kwa ripoti yoyote ndiyo yanayoonyeshwa tu. Hata hivyo kama "Faili tuli" limeonyeshwa, ni muhimu kuweka alama ya pata kwenye sehemu ya chaguo na kuchagua njia ya uzalishaji (inayobadilika na kitu kinachobadilika au tuli na faili). Kama faili tuli limechaguliwa, violesura vya maingizo 2 mpaka 4 havionyeshwi kwa kuwa faili tuli lina mipangilio yote inayotakiwa.
- *Mipangilio ya ruhusa.* Kuwezesha vizuizi vya makundi (na hivyo mawakala) ambao baadaye wanaweza kuona na kuzalisha ripoti zilizosanidiwa. Hivyo ripoti mbali mbali zinaweza kutengewa idara tofauti na makundi ya kazi yanazozihitaji. Inawezekana kutengea ripoti moja kwa makundi tofauti.

Mfano 1: Kundi la "takwimu" lilichaguliwa. Ripoti inaonekana kwa watumiaji wote wenye japo haki za kusoma tu kwenye kundi la "takwimu". Huu ufikivu upo kwa chaguo-msingi.

Mfano 2: Kundi liitwalo "mauzo" lilichaguliwa. Watumiaji wenye haki ya kusoma tu ya kundi "mauzo" wanaweza kuona takwimu katika hali-tumizi ya muonekano na kuizalisha. Hata hivyo, ripoti haitakuwepo kwa ajili ya kuangaliwa na watumiaji wengine.

- *Umbizo*. Umbizo la matokeo ya takwimu: Kutegemeana na usanidi, kati ya maumbizo yafuatayo yanaweza kuchaguliwa:

- CSV.
- Chapisha
- grafu-mistari.
- grafu-miambaa.
- grafu-miambaa h
- grafu-pointi.
- grafu-mistari-pointi.
- grafu-eneo.
- grafu-duara.

- *Ukubwawagrafu*. Chagua ukubwa wa chati katika pikseli. Huu uchaguzi ni muhimu kama umbizo la matokeo ya mchoro limechaguliwa chini ya "Umbizo". Ukubwa wa aina zote wa grafu ambao unaweza kutumiwa kwa ujumla unafafanuliwa na msimamizi wa OTRS katika SysConfig. Wakati wa kusanidi ripoti, wakala anaweza kuchagua kabla ma umbizo yote yanayo husika.

- *Jumla safumlalo*. Inaonyesha kama ripoti imerekebishwa kwa safuwima, ambamo seli zake zinatoa jumla ya safumlalo husika.

- *Jumla safuwima*. Inaonyesha kama ripoti imerekebishwa kwa safumlalo, ambamo seli zake zinatoa jumla ya safuwima husika.


- *Hifadhi muda*. Inabainisha kama ripoti iliyozalishwa inatakiwa kuwekwa kwenye hifadhi muda ndani ya mfumo wa mafaili. Hii inaokoa nguvu na muda wa michakato ya kompyuta kama ripoti ikiitwa tena, lakini inatakiwa itumike tu kama maudhui ya ripoti hayabadiliki tena.

Kuweka kwenye hifadhi muda kunazuiwa kama ripoti haina thamani zinazowajibika za muda, au thamani zinazowajibika za muda zinaashiria mbeleni.

Kama ripoti iliyo kwenye hifadhi muda imehaririwa, data zote za kwenye hifadhimuda zinafutwa.

- *Halali*. Hii inaweza kusetiwa kuwa "batili" kama ripoti iliyosanidiwa kabla haitakiwi kuanzishwa kwa muda kwa sababu yoyote. Kitufe cha "Anza" upande wa chini wa paneli y akulia haionyeshwi tena. Ripoti haiwezi kuzalishwa tena.

2. *Fasili ya elementi kwa ajili ya jira-X*. Ni usanidi wa elementi unaotumika kwa ajili ya uwakilishaji wa jira-X au, kama majedwali yametumika, ya jina la safuwima linalotumika kwenye jira-X (ona Kielelezo) .

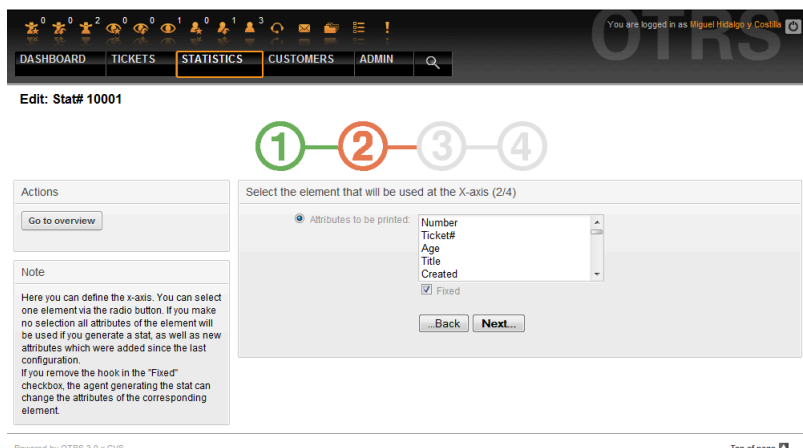

Edit: Stat# 10001

1 — 2 — 3 — 4

Actions

Go to overview

Note

Here you can define the x-axis. You can select one element via the radio button. If you make no selection all attributes of the element will be used if you generate a stat, as well as new attributes which were added since the last configuration. If you remove the hook in the "Fixed" checkbox, the agent generating the stat can change the attributes of the corresponding element.

Select the element that will be used at the X-axis (2/4)

Attributes to be printed:

- Number
- Ticket#
- Age
- Title
- Created
- Fixed

Back Next...

Powered by OTRS 3.0.x CVS Top of page

Kielelezo: Fasili ya elemnti kwa ajili ya jira-X.

Kwanza kabisa, elementi inachaguliwa kwa kutumia sehemu ya chaguo. Kisha sifa mbili au zaidi za elementi lazima zichaguliwe. Kama hakuna sifa zilizo chaguliwa, sida zote zinatumiwa kujumuisha zile zilizoongezwa baada ya usanidi wa ripoti.


Kama mipangilio "Funge" imelemazwa, wakala anayezalisha ripoti anaweza kubadilisha sifa za elementi husika katika kiolesura cha "Muonekano".

Elementi za muda ni tofauti kwa kuwa kipindi cha muda na skeli lazima vijaribiwe. Aina na idadi ya matokeo ya elementi kutoka kwenye kitu kinachobadilika kilichotumiwa na kubadilika kwa kukitegemea.

Kama ingizo si sahihi, kitufe "Inayofwata" kinaelekeza kwenye mfumo wa "Thamani za mfuatano". Pia inawezekana kurudi nyuma kuhariri vifungu vya mwanzoni.

3. Ubainishaji wa mfuatano wa thamani.

Katika hatua ya tatu ya usanidi wa ripoti, thamani za mfuatano zinafanuliwa (ona Kielelezo chini). Baadaye zitategeneza grafu binafsi au misururu mbali mbali ndani ya muonekano wa jedwali

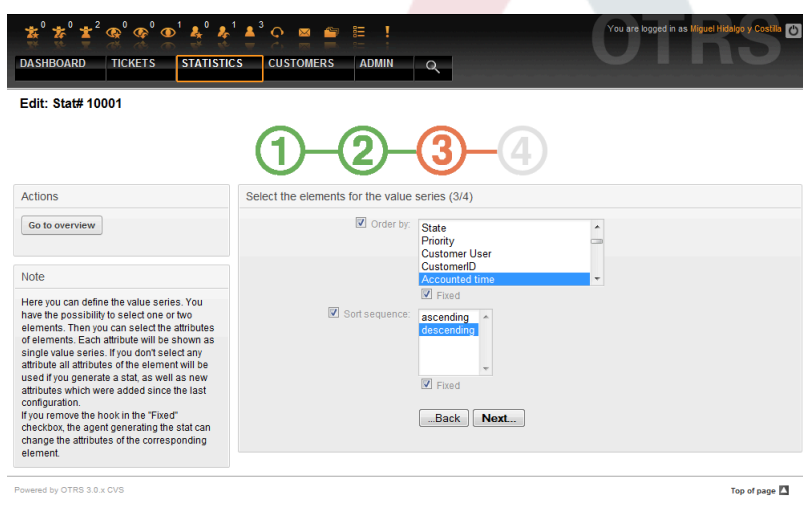

Edit: Stat# 10001

1 — 2 — 3 — 4

Actions

Go to overview

Note

Here you can define the value series. You have the possibility to select one or two elements. Then you can select the attributes of elements. Each attribute will be shown as single value series. If you don't select any attribute all attributes of the element will be used if you generate a stat, as well as new attributes which were added since the last configuration. If you remove the hook in the "Fixed" checkbox, the agent generating the stat can change the attributes of the corresponding element.

Select the elements for the value series (3/4)

Order by:

- State
- Priority
- Customer User
- CustomerID
- Accounted time
- Fixed

Sort sequence:

- ascending
- descending
- Fixed

Back Next...

Powered by OTRS 3.0.x CVS Top of page

Kielelezo: Ufafanuzi wa thamani za mfuatano.

Kama elementi imechaguliwa, kila sifa itakayochaguliwa itahusiana na thamani ya mfuatano (ona Mfano 19-1 chini).

Example 4.19. Ufafanuzi wa thamani ya mfuatano - elementi moja

Elementi Foleni:

- Thamani za mfuatano 1 = Mbichi
- Thamani za mfuatano 2 = Taka
-

Kama elementi mbili zimechaguliwa, kila sifa iliyochaguliwa ya elementi ya kwanza in-aunganishwa na sifa ya elementi ya pili kutengeneza thamani za mfuatano (ona Mfano 19-2 chini).

Example 4.20. Ufafanuzi wa thamani za mfuatano - elementi mbili

Elementi 1 foleni, Elementi 2 hali:


- Thamani za mnyororo 1 = Mbichi - wazi
- Thamani za mfuatano 2 = Mbichi - imefungwa kwa mafanikio
- Thamani za mfuatano 3 = Taka - wazi
- Thamani za mfuatano 4 = Taka - imefungwa kwa mafanikio

Uchaguzi wa elementi tatu au zaidi hauruhusiwi.

Kwa nyongeza masharti hayo hayo yanafanya kazi kwa uchaguzi wa sifa na kisanduku tiki "Funge" na pia kwenye uchaguzi wa "jira-X":

- Kama hakuna sifa za elementi zilizochaguliwa, sifa zote zitatumika, ikijumuisha zile zilizo ongezwa baada ya ripoti ya usanidi.
- Kama mpangilio "Funge" umelemazwa, wakala anaezalisha ripoti anaweza kubadilisha sifa za elementi husika.

4. *Kuweka vizuizi kwenye ripoti.* Hii ni hatua ya nne na ya mwisho ya usanidi (ona Kielelezo chini). Vizuizi vinasaidia kuweka kikomo cha matokeo kwa vigezo vilivyochaguliwa. Katika kesi nyingi, hakuna vizuizi vya kuwekwa kabisa.

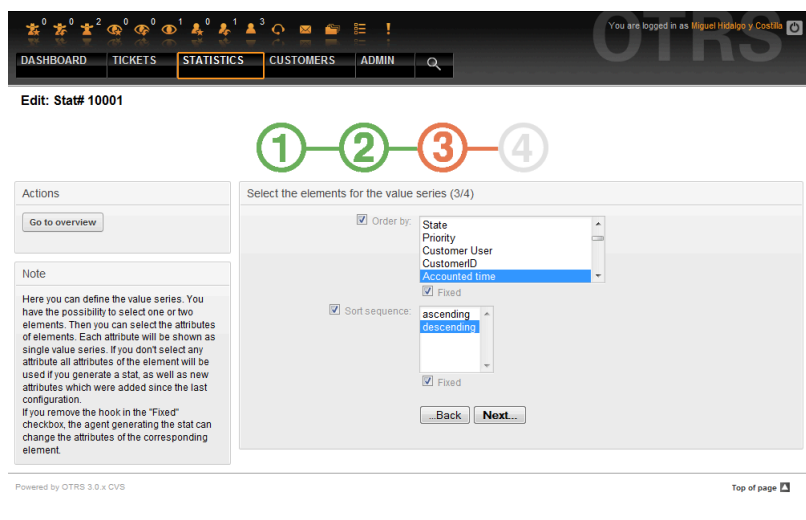


Kielelezo: Fasili ya vizuizi.

Baada ya vizuizi vyote kusetiwa, usanidi wa ripoti unamalizika kwa kubonyeza kitufe "Maliza".

9.1.4. Agiza

Kiolesura cha Agiza mtumiaji (ona Kielelezo chini) kinaweza kufikiwa kwa kuchagua kuto-ka kwenye mwambaa wa uabiri, kiungo "Takwimu", kisha "Agiza". Pia, kubonyeza kitufe cha Agiza katika skrini ya Mapitio inaleta matokeo sawa. Haki za "kusoma na kuandika" kwenye ripoti zinatakiwa.

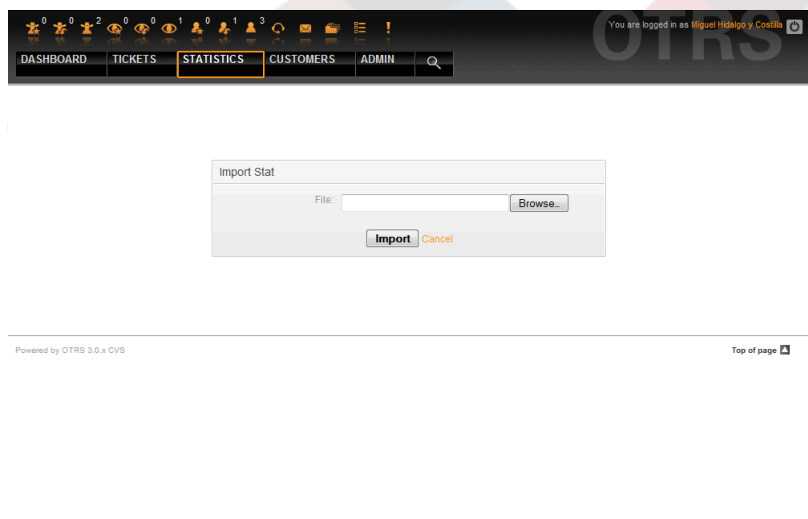

Kielelezo: Kiolesura cha Kuagiza mtumiaji.

Inarahisisha uagizaji wa ripoti na ni, pale inapounganishwa na fomula saidizi hamisha ya moduli, fomula saidizi muhimu sana. Takwimu zinaweza kutengenezwa na kujaribiwa kirahisi kwenye mifumo ya majaribio, kisha kuagizwa nakuingia kwenye mfumo wa uza-lishaji.

Uagizaji unaathiriwa na kupakia faili. Kiolesura cha "Ona" cha ripoti iliyoagizwa kinafun- guliwa kiotomatiki baada ya hapo.

9.2. Usimamizi wa moduli ya takwimu na msimamizi wa OTRS

Hii sehemu inatoa maelezo kuhusu kazi na majukumu ya Msimamizi wa OTRS anayehusika na moduli ya takwimu.

9.2.1. Mipangilio ya ruhusa, Makundi na Foleni

Hakuna foleni mpya na/au makundi yatakayotengenezwa baada ya usanikishaji wa moduli ya takwimu.

Usanidi chaguo-msingi wa moduli ya usajili inawapa mawakala wote wenye ruhusa za kundi "takwimu" ufikivu kwenye moduli ya takwimu.

Ufikivu kuendana na mipangilio ya ruhusa:

- *soma andika*. Inaruhusu kusanidi takwimu na ripoti.
- *soma tu*. Inaruhusu kuzalisha ripoti na takwimu zilizosanidiwa tayari.

Msimamizi wa OTRS anaamua kama mawakala wenye haki za kuzalisha ripoti zilizosanidiwa kabla wanapewa haki za kusoma tu kwenye kundi la "takwimu", au kama makundi yao husika yanaongezwa katika moduli ya usajili kwenye SysConfig.

9.2.2. SysConfig

Makundi ya SysConfigKiunzi:Kiini::Takwimu, Kiunzi:Kiini::Takwimu::Grafu na Kiunzi:Mazingirayambe::Wakala::Takwimu ina usanidi wote wa parameta kwa ajili ya mpangilio wa msingi wa moduli ya takwimu. Zaidi, parameta ya usanidi `$Self->{'Frontend::Module'}->{'AgentStats'}` inadhibiti mpangilio na usajili wa moduli na ikoni ndani ya moduli ya takwimu.

9.3. Usimamizi wa moduli ya takwimu na msimamizi wa mfumo

Kwa ujumla, hakuna msimamizi wa mfumo anayehitajika kwa operesheni, usanidi na matengenezo ya moduli ya takwimu. Hata hivyo, taarifa kidogo za msimamizi wa mfumo zinatolewa katika pointi hii.

Note

Njia za mafaili zinarejea kwenye mipangilio orodha midogo ya mpangilio orodha wa nyumbani wa OTRS (kwa kesi nyingi/opt/otrs).

9.3.1. Jedwali msingi la data

Usanidi wote wa ripoti unafanyika na kusimamiwa katika XML, na hivyo kuhifadhiwa katika jedwali la hifadhidata "xml_storage". Moduli nyingine ambazo maudhui yake yanawasilishwa katika muundo huu wa xml zinatamia hili jedwali pia.

9.3.2. Orodha ya mafaili yote

Mafaili yafuatayo ni muhimu kwa moduli ya takwimu kufanya kazi vizuri:

- `Kernel/System/Stats.pm`

- Kernel/Modules/AgentStats.pm
- Kernel/System/CSV.pm
- Kernel/Output/HTML/Standard/AgentStatsOverview.dtl
- Kernel/Output/HTML/Standard/AgentStatsDelete.dtl
- Kernel/Output/HTML/Standard/AgentStatsEditSpecification.dtl
- Kernel/Output/HTML/Standard/AgentStatsEditRestrictions.dtl
- Kernel/Output/HTML/Standard/AgentStatsEditXaxis.dtl
- Kernel/Output/HTML/Standard/AgentStatsEditValueSeries.dtl
- Kernel/Output/HTML/Standard/AgentStatsImport.dtl
- Kernel/Output/HTML/Standard/AgentStatsPrint.dtl
- Kernel/Output/HTML/Standard/AgentStatsView.dtl
- Kernel/System/Stats/Dynamic/Ticket.pm
- bin/otrs.GenerateStats.pl

9.3.3. Kuhifadhi muda

Kama matokeo ya takwimu yatawekwa kwenye hifadhi muda au la inaweza kusetiwa kwenye usanidi. Matokeo ya ripoti ya kwenye hifadhi muda yanahifadhiwa kama mfaili kwenye mpangilio orodha var/tmp wa usakinishaji wa OTRS (kwa mara nyingi /opt/otrs/var/tmp).

Takwimu za hifadhi muda zinaweza kujulikana kwa kiambishi awali "Takwimu".

Kama data zimepotea, hakuna madhara makubwa yaliyosababishwa. Mara nyingine ripoti itakapoitwa, moduli ya hali haitatafuta faili hilo tena na kwa hiyo itazalisha ripoti mpya. Bila shaka hii itachukua muda zaidi kidogo kufanyika.

9.3.4. otrs.GenerateStats.pl

Hili faili linahifadhiwa kwenye mpangilio orodha bin. Inawezesha uzalishaji wa ripoti katika tungo amri.

Kama mfano, ona ita ya tungo amri katika hati ifuatayo.

```
bin> perl otrs.GenerateStats.pl -n 10004 -o /output/dir
```

Hati: Kuzalisha ripoti kutoka kwenye tungo amri.

Ripoti kutoka kwenye usanidi wa takwimu "Stat#10004" unazalishwa na kuhifadhiwa kama csv katika mpangilio orodha /output/dir.

Ripoti iliyotengenezwa pia inaweza kutumwa kama barua pepe. Taarifa zaidi zinaweza patikana kwa agizo katika hati chini.

```
bin> perl otrs.GenerateStats.pl --help
```

Hati: Kupata taarifa kuhusu faili la `otrs.GenerateStats.pl`.

9.3.5. Utengenezaji takwimu otomatiki - Kazi za mfumo zilizopangwa

Kwa kawaida haina maana kutengeneza ripoti kwa mikono kupitia tungo amri, kwani moduli ya takwimu ina kiolesura michoro rahisi. Lakini, kutengeneza ripoti kwa mikono inaleta maana ikiunganishwa na kazi za mfumo zilizopangwa.

Fikiria mazingira yafuatayo: Kila siku ya kwanza ya mwezi, wakuu wa idara wanataka kupokea ripoti ya mwezi uliopita. Kwa kujumuisha kazi za mfumo zilizopangwa na maito wa tungo amri ripoti zinaweza kutumwa kwa kiotomatiki kwa barua pepe.

9.3.6. Takwimu tuli

Moduli ya takwimu inawezesha uzalishaji wa takwimu tuli. Kwa kila takwimu tuli faili linakuwepo ambalo maudhui yake yamefafanuliwa kwa ufasaha.

Njia hii, takwimu changamano zinaweza kuzalishwa. Kasoro yake ni hazibadiliki kirahisi.

Mafili yanahifadhiwa kwenye mpangilio orodha `Kernel/System/Stats/Static/`.

9.3.7. Kutumia takwimu tuli za zamani

Kabla ya OTRS 1.3 na 2.0 uzalishaji wa ripoti / takwimu ulishawezeshwa. Ripoti tofauti za matoleo ya OTRS 1.3 na 2.0 ambazo ziliundwa kufikia mahitaji ya wateja zinaweza kutumika katika matoleo ya OTRS ya sasa pia.

Mafaili lazima yahamishwe kutoka njia `Kernel/System/Stats/` kwenda `Kernel/System/Stats/Static/`. Pia jina la kifurushi cha hati hiyo lazima kirekebishwe na `::Tuli`

Mfano ufwatao unaonyesha jinsi njia ya kwanza inavyofanyiwa marekebisho.

```
package Kernel::System::Stats::AccountedTime;
```

```
package Kernel::System::Stats::Static::AccountedTime;
```

9.3.8. Takwimu zilizopo

"Sio muhimu wakati wote kuunda vitu ambavyo vipo tayari..... "

Moduli ya takwimu inatoa ripoti chaguo-msingi mbali mbali. Ripoti ambazo ni za muhimu kwa watumiaji wote wa OTRS baadaye zitaongezwa kwenye seti ya ripoti chaguo-msingi za kifurushi cha moduli za takwimu. Ripoti chaguo-msingi zinahifadhiwa katika muundo wa xml wa moduli za takwimu kwenye mpangilio orodha `scripts/test/sample/`.

10. Sehemu zinazobadilika

10.1. Utangulizi

Sehemu inayobadilika ni sehemu ya aina maalumu katika OTRS, iliyotengenezwa kupanua taarifa iliyohifadhiwa katika makala au tiketi. Hizi makala si funge kwenye mfumo na

zinaweza kutokea kwenye skrini maalumu tu, zinaweza kuwa za lazima au si za lazima, na uwasilishwaji wake kwenye skrini unategemeana na aina ya sehemu iliyofafanuliwa wakati wa utengenezaji wake kulingana na data inayoshikiliwa na sehemu. Kwa mfano, kuna sehemu za kushikilia nakala, tarehe, chaguo la vitu, na kadh.

Sehemu zinazobadilika ni mageuko ya spishi ya sehemu TiketiHuruNakala TiketiHuruFunguo TiketiHuruMuda, MakalaHuruNakala na MakalaHuruFunguo ambazo zilkuwa zikitumiwa sana katika OTRS 3.0 na kabla. Kikomo cha hizi "Sehemu Huru" ilikuwa ni zinaweza kufafanuliwa mpaka sehemu 16 (nakala au kunjuzi) na sehemu 6 za muda kwa ajili ya tiketi na sehemu 3 (nakala au kunjuzi) kwa kila nakala tu, sio zaidi.

Sasa kwa kutumia sehemu zinazobadilika kikomo katika nambari ya sehemu kwa tiketi au makala kimeondolewa, unaweza kutengeneza sehemu nyingi zinazobadilika unazotaka aidha kwa tiketi au makala. Na zaidi ya hapo, kiunzi nyuma ya sehemu zinazobadilika kinaandaliwa kushughulikia sehemu zilizogeuzwa kukufaa kwa ajili ya vitu vingine kuachana na tiketi na makala tu.

Kiunzi hiki ambacho kinashughulikia sehemu zinazobadilika kimetengenezwa kwa kutumia mbinu ya moduli, ambapo kila aina ya sehemu inayobadilika inaweza kuonekana kama moduli ya programu-jalizi kwa ajili ya kiunzi. Hii inamaanisha aina mbali mbali ya sehemu zinazobadilika zinaweza kupanuliwa kirahisi kwa kutumia moduli za umma za OTRS, vifaa vya nyongeza vya vipengele vya OTRS, maendeleo yaliyogeuzwa kukufaa ya OTRS, na maendeleo mengine yaliyogeuzwa kukufaa.

Aina zifuatazo za sehemu zinazobadilika zimejumuishwa kwenye toleo hili:

- Nakala (nakala ya mstari mmoja)
- Eneo la nakala (nakala za mistari mingi)
- Kisanduku tiki
- Kunjuzi (chaguo moja, thamani nyingi)
- Uchaguzi anuwai (uchaguzi nyingi, thamani nyingi)
- Tarehe
- Tarehe / Muda

10.2. Usanidi

Kwa kawaida, upakuaji mpya wa OTRS haujumuishi sehemu zozote zinazobadilika. Ukita-ka kutumia sehemu hizo katika tiketi au makala inakubidi uzitengeneze.

Usanidi wa sehemu zinazobadilika umegawanyika katika nyanja mbili, kuongeza sehemu mpya inayobadilika au kusimamia iliyopo unahitaji kwenda paneli ya "Msimamizi" kwenye kiungo "Sehemu Zinazobadilika". Kuonyesha, kuonyesha kwa ulazima au kuficha sehemu inayobadilika katika skrini moja unahitaji kubadilisha mipangilio ya OTRS katika skrini ya "SysConfig".

10.2.1. Kuongeza Sehemu Inayobadilika

Bofya kwenye kitufe cha "Msimamizi" kilicho kwenye mwambaa wa uabiri, kisha bofya kwenye kiungo "Sehemu Inayobadilika" ndani ya boksi la "Mipangilio ya Tiketi" lililo ndani kushoto mwa skrini. Mapitio ya sehemu zinazobadilika itaonekana kama ifuatavyo:

DASHBOARD
TICKETS
STATISTICS
CUSTOMERS
ADMIN
You are logged in as...

Dynamic Fields Management - Overview

Actions

Article

Add new field for object: Article

Ticket

Add new field for object: Ticket

Dynamic Fields List

NAME	LABEL	ORDER	TYPE	OBJECT	VALIDITY
No data found.					

Hint

To add a new field, select the field type form one of the object's list, the object defines the boundary of the field and it can't be changed after the field creation.

Powered by OTRS 3.1.x CVS

Kielelezo: Skrini ya mapitio ya sehemu zinazobadilika, wazi.

Tambua kwamba hii skrini itabadilika kadri uongezavyo sehemu zinazobadilika kuorodhesha sehemu zote zinazobadilika. Hii skrini inaweza tayari kuwa na baadhi ya sehemu kama usanikishaji ulirekebisha kutoka toleo la zamani la OTRS.

Vitendo kwenye ufito wa pembeni kushoto kwa skrini vinaelezea uwezekano wa aina mbili: Makala na Tiketi, kila moja ina uchaguzi kunjuzi wa sehemu zinazobadilika.

Note

Usanikishaji wa kifurushi cha OTRS unaweza kuongeza vitu katika ufito wa pembeni.

Utaratibu wa kawaida wa kutengza sehemu zinazobadilika ni:

- Bofya kwenye kitu cha sehemu inayobadilika unachotaka kwenye mwambaa upande wa Kitendo.
- Bofya kwenye aina ya sehemu inayobadilika unayotaka kuongeza kutoka kwenye orodha.
- Jaza usanidi
- Hifadhi

Maongezi ya usanidi wa sehemu zinazobadilika yamegawanywa katika sehemu mbili, upande wa juu ni wa kawaida baina ya sehemu zote na upande wa chini unaweza kuwa tofauti kwa aina moja ya sehemu inayobadilika kwenda nyingine.

Mipangilio ya ujumla ya sehemu zinazobadilika:

- Jina: Lazima, kipekee, herufi na nambari tu zinaruhusiwa,

Hili ni jina la ndani la sehemu, linatumika kwa mfano kuonyesha au kuficha sehemu katika skrini. Mabadiliko yoyote ya jina la sehemu (haishauriwi) inahitaji usasishaji kwa mikono wa mipangilio ya "SysConfig" ambapo sehemu ina rejea.

- Lebo: Lazima

Hili ndio jina la sehemu litakaloonyeshwa kwenye skrini, ina msaada kwa tafsiri.

Note

Tafsiri za lebo inabidi ziongezwe kwa mikono kwenye mafaili ya utafsiri wa lugha.

- Oda ya sehemu: Lazima.

Inafafanua oda tegemezi ambayo sehemu itaonyeshwa kwenye skrini, kwa chaguo-msingi kila sehemu mpya ina sehemu ya mwisho, mabadiliko katika huu mpangilio utaathiri oda ya sehemu nyingine zinazobadilika zilizotengenezwa.

- Uhalali: Lazima.

Sehemu inayobadilika batili haitaonyeshwa katika skrini yoyote, hata kama imesanidiwa kuonyeshwa.

- Aina ya sehemu: Lazima, Soma tu.

Inaonyesha aina ya sehemu iliyochaguliwa.

- Aina ya kitu: Lazima, Soma tu.

Inaonyesha upeo wa sehemu.

Note

Kuonyesha mipangilio ya kila aina maalumu ya sehemu sehemu chache zitaongezwa kwenye mfano wetu. Hizi sehemu mpya zitafanyiwa marejeo kwenye vifungu vya mbele.

Kwa mfano ufwatao sehemu zote zinazobadilika zitatengenezwa kwa ajili ya kitu cha Tiketi kama unahitaji kutengeneza sehemu inayobadilika kwa kitu cha Makala, chagua tu sehemu kutoka kwenye orodha kunjuzi ya Makala.

Table 4.6. Sehemu zifuatazo zitaongezwa kwenye mfumo:

Jina	Lebo	Aina
Sehemu1	Sehemu yangu 1	Nakala
Sehemu2	Sehemu yangu 2	Eneo la nakala
Sehemu3	Sehemu yangu 3	Kisanduku tiki
Sehemu4	Sehemu yangu 4	Kunjuzi
Sehemu5	Sehemu yangu 5	Chaguanyingi
Sehemu6	Sehemu yangu 5	Tarehe
Sehemu7	Sehemu yangu 6	Tarehe / Muda

10.2.2. Nakala ya Usanidi wa Sehemu Inayobadilika

Sehemu inayobadilika ya Nakala inatumika kuhifadhi tungo ya mstari mmoja.

Nakala ya mpangilio wa sehemu inayobadilika:

- Thamani ya chaguo-msingi: Hiari.

Hii ni thamani ya kuonyeshwa kwa kawaida kwenye shrini za kuhariri (kama Simu Npya ya Tiketi au Tunga Tiketi)


- Onyesha kiungo: Hiari.

Kama imesetiwa, thamani ya sehemu itabadilishwa kuwa kiungo kinachobonyezeka kwa ajili ya skrini za kuonyesha (kama kuza tiketi au mapitio).

Kwa mfano, kama "Onyesha kiungo" imesetiwa kuwa "http://www.otrs.com", kubofya kwenye thamani ya sehemu kitafanya kivinjari chako kufungua ukurasa wa tovuti wa OTRS.

Note

Matumizi ya `$LQData{"JinaX"}` katika thamani ya Seti kiungo, ambapo JinaX ni jina la sehemu litaongeza sehemu hiyo kama sehemu ya marejeo ya kiungo.

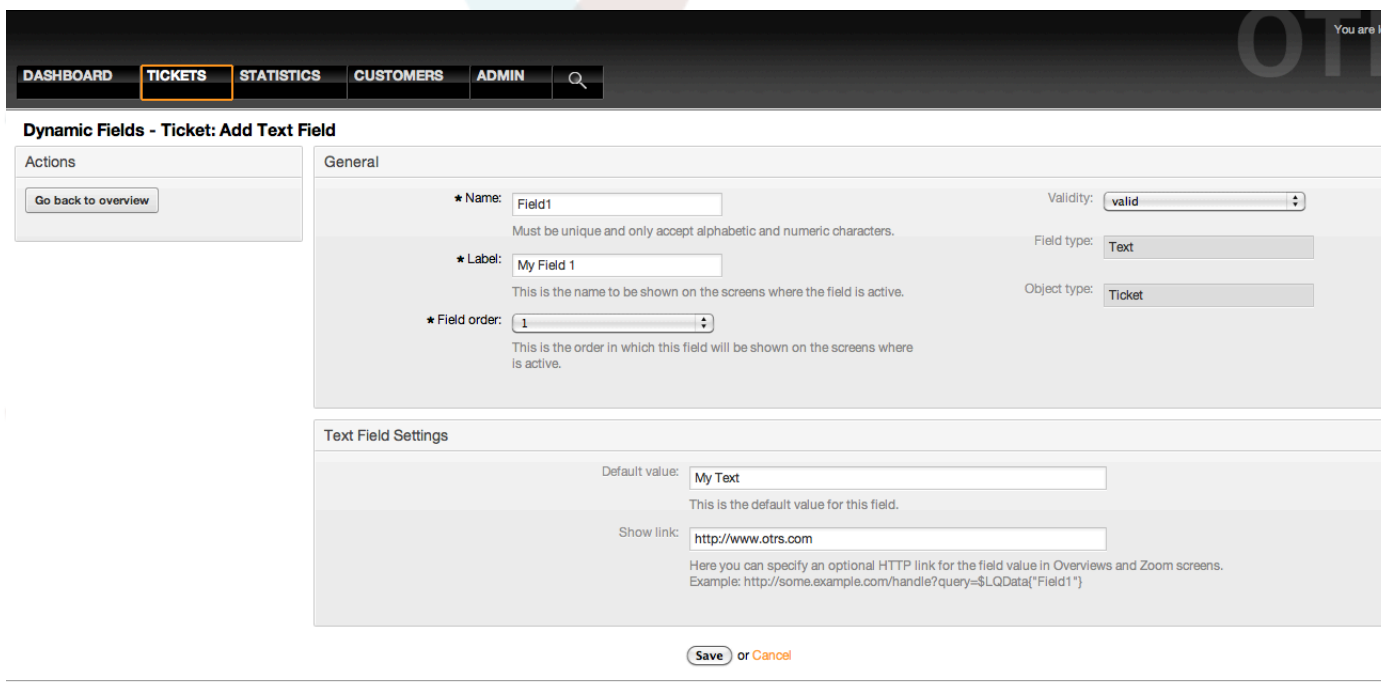

The screenshot shows the OTRS administration interface for configuring a dynamic field. The navigation menu includes DASHBOARD, TICKETS (selected), STATISTICS, CUSTOMERS, and ADMIN. The page title is "Dynamic Fields - Ticket: Add Text Field".

Actions: A button labeled "Go back to overview".

General:

- * Name:** Field1 (Must be unique and only accept alphabetic and numeric characters.)
- * Label:** My Field 1 (This is the name to be shown on the screens where the field is active.)
- * Field order:** 1 (This is the order in which this field will be shown on the screens where is active.)
- Validity:** valid
- Field type:** Text
- Object type:** Ticket

Text Field Settings:

- Default value:** My Text (This is the default value for this field.)
- Show link:** http://www.otrs.com (Here you can specify an optional HTTP link for the field value in Overviews and Zoom screens. Example: http://some.example.com/handle?query=\$LQData{"Field1"})

Buttons: Save or Cancel

Powered by OTRS 3.1.x CVS

Kielelezo: Maongezi ya usanidi wa Nakala ya Sehemu inayobadilika..

10.2.3. Usanidi wa Eneo la nakala ya Sehemu Zina-zobadilika

Eneo la nakala ya sehemu zinazobadilika hutumika kuhifadhi tungo za mstari zaidi ya mmoja

Mpangiio wa sehemu zinazobadilika za eneo la nakala

- Idadi ya safu: Hiari, namba kamili.


Inatumika kufafanua urefu wa sehemu kwenye skrini za kuhariri (kama Simu Mpya ya Tiketi au Tunga Tiketi).

- Idadi ya safu: Hiari, namba kamili.

Hii thamani inatumika kufafanua upana wa sehemu kwenye skrini za kuhariri.

- Thamani ya chaguo-msingi: Hiari.

Hii ni thamani itakayo onyeshwa kwa kawaida kwenye skrini za kuhariri (inaweza kuwa nakala ya zaidi ya mstari mmoja).

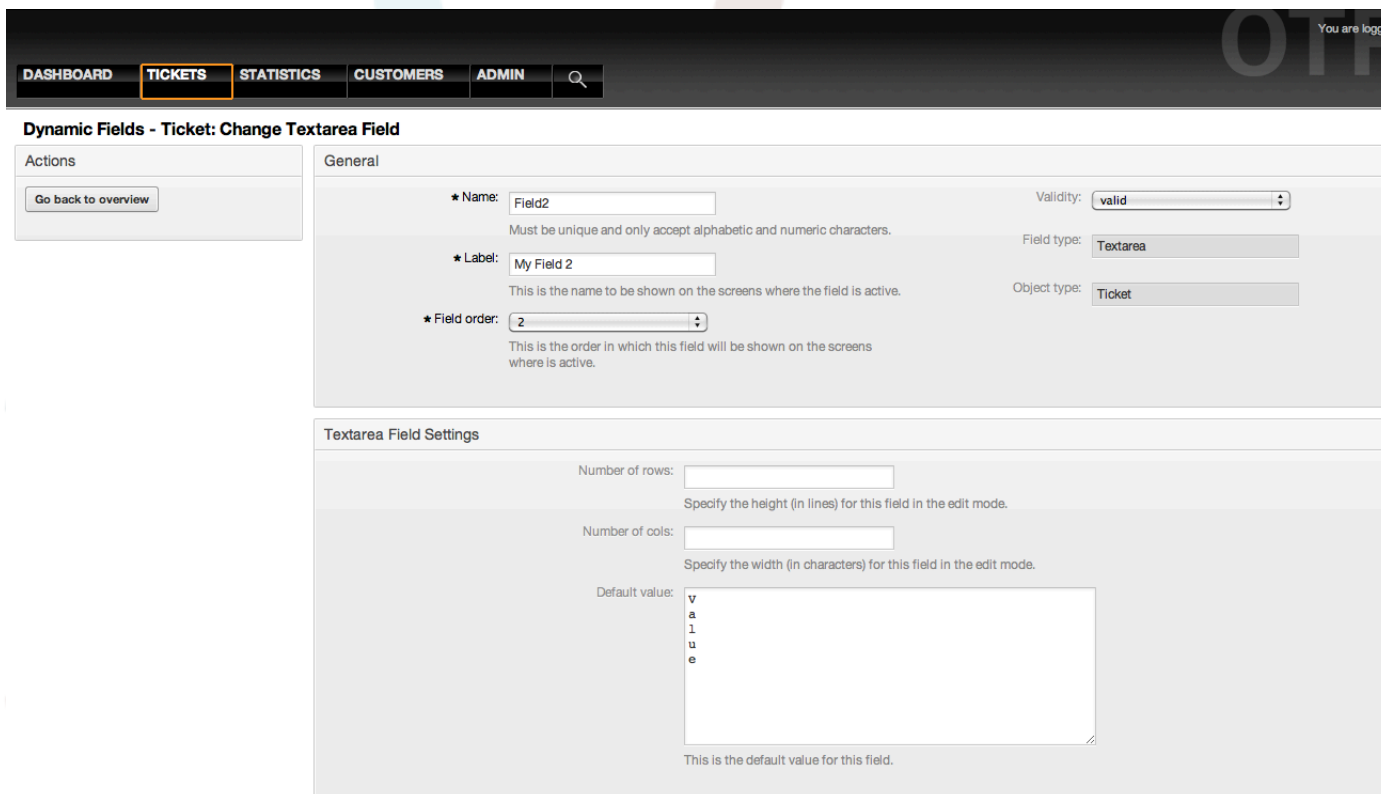

The screenshot shows the 'Dynamic Fields - Ticket: Change Textarea Field' configuration page. It includes a navigation menu with 'DASHBOARD', 'TICKETS', 'STATISTICS', 'CUSTOMERS', and 'ADMIN'. The main content is divided into 'General' and 'Textarea Field Settings' sections.

General Section:

- Name:** Field2 (Validity: valid)
- Label:** My Field 2 (This is the name to be shown on the screens where the field is active.)
- Field order:** 2 (This is the order in which this field will be shown on the screens where is active.)
- Field type:** Textarea
- Object type:** Ticket

Textarea Field Settings Section:

- Number of rows:** (Specify the height (in lines) for this field in the edit mode.)
- Number of cols:** (Specify the width (in characters) for this field in the edit mode.)
- Default value:** v
a
l
u
e (This is the default value for this field.)

Kielelezo: Maongezi ya usanidi wa Nakalaeneo ya Sehemu inayobadilika..

10.2.4. Usanidi wa Sehemu Inayobadilika ya Kisanduku tiki

Sehemu inayobadilika ya kisanduku tiki inatumika kuhifadhi thamani ya kweli au uongo, inayowakilishwa na boksi lenye tiki au lisilo na tiki.

Mipangilio ya sehemu inayobadilika ya kisanduku tiki:

- Thama ya Kawaida: Lazima.

Hii ndiyo thamani ya kuonyeshwa kwa chaguo-msingi katika skrini za kuhariri (kama Tiketi Mpya ya Simu au Unda Tiketi), thamani chaguo-msingi la hii sehemu ni uchaguzi uliofungwa ambao unaweza kutikiwa au kutotikiwa.

DASHBOARD
TICKETS
STATISTICS
CUSTOMERS
ADMIN
🔍

Dynamic Fields - Ticket: Add Checkbox Field

Actions

Go back to overview

General

* Name: Validity:

Must be unique and only accept alphabetic and numeric characters.

* Label: Field type:

This is the name to be shown on the screens where the field is active.

* Field order: Object type:

This is the order in which this field will be shown on the screens where is active.

Checkbox Field Settings

Default value:

This is the default value for this field.

or

Powered by OTRS 3.1.x CVS

Kielelezo: Usanidi wa maongezi wa sehemu inayobadilika ya kisanduku tiki.

10.2.5. Usanidi wa Kikunjuzi cha Sehemu Inayobadilika

Kikunjuzi cha sehemu inayobadilika kinatumika kuhifadhi thamani moja, kutoka kwenye orodha iliyofungwa.

Mipangilio ya sehemu kunjuzi inayobadilika:

- Thamani zinazowezezana: Lazima.

Orodha ya thamani za kuchagua. Kama ikitumika, thamani mpya ni muhimu kubainisha Ufunguo (thamani ya ndani) na Thamani (thamani ya kuonyeshwa).

- Thamani ya chaguo-msingi: Hiari.

Hii ndiyo thamani ya kuonyeshwa kwa chaguo-msingi katika skrini za kuhariri (kama Tiketi Mpya ya Simu au Unda Tiketi), thamani chaguo-msingi la hii sehemu ni uchaguzi uliofungwa unaofafanuliwa na thamani Ziwezekanazo.

- Ongeza sehemu tupu: Lazima, (Ndio/Hapana).

Kama hili chaguo limeamilishwa thamani ya ziada inafafanuliwa kuonyesha "-" kwenye orodha ya thmani ziwezekanazo, hii thamani maalumu ni wazi ndani.

- Tafsiri thamani: Lazima, (Ndio/Hapana).

Huu mpangilio unatumika kuweka alama thamani zinazoweza kutafsiriwa za hii sehemu. Thamani zinazoonyeshwa tu ndio zita tafsiriwa, thamani za ndani hazita athiriwa, utafsiri wa thamani inabidi uongezwe kwa mikono kwenye mafaili ya lugha.


- Onyesha kiungo: Hiari.

Kama imesetiwa, thamani ya sehemu itabadilishwa kuwa kiungo cha HTP kina-chobonyezeka kwa ajili ya skrini za kuonyesha (kama Kuza au mapitio).

Kwa mfano, kama Onyesha kiungo imesetiwa kuwa "http://www.otrs.com", kubofya kwenye thamani hii ya sehemu kutafanya kivinjari chako kufungua ukurasa wa tovuti wa OTRS.

Note

Matumizi ya `$LQData{"JinaX"}` katika thamani ya Seti kiungo, ambapo JinaX ni jina la sehemu, itaongeza sehemu hiyo kama sehemu ya marejeo ya kiungo.

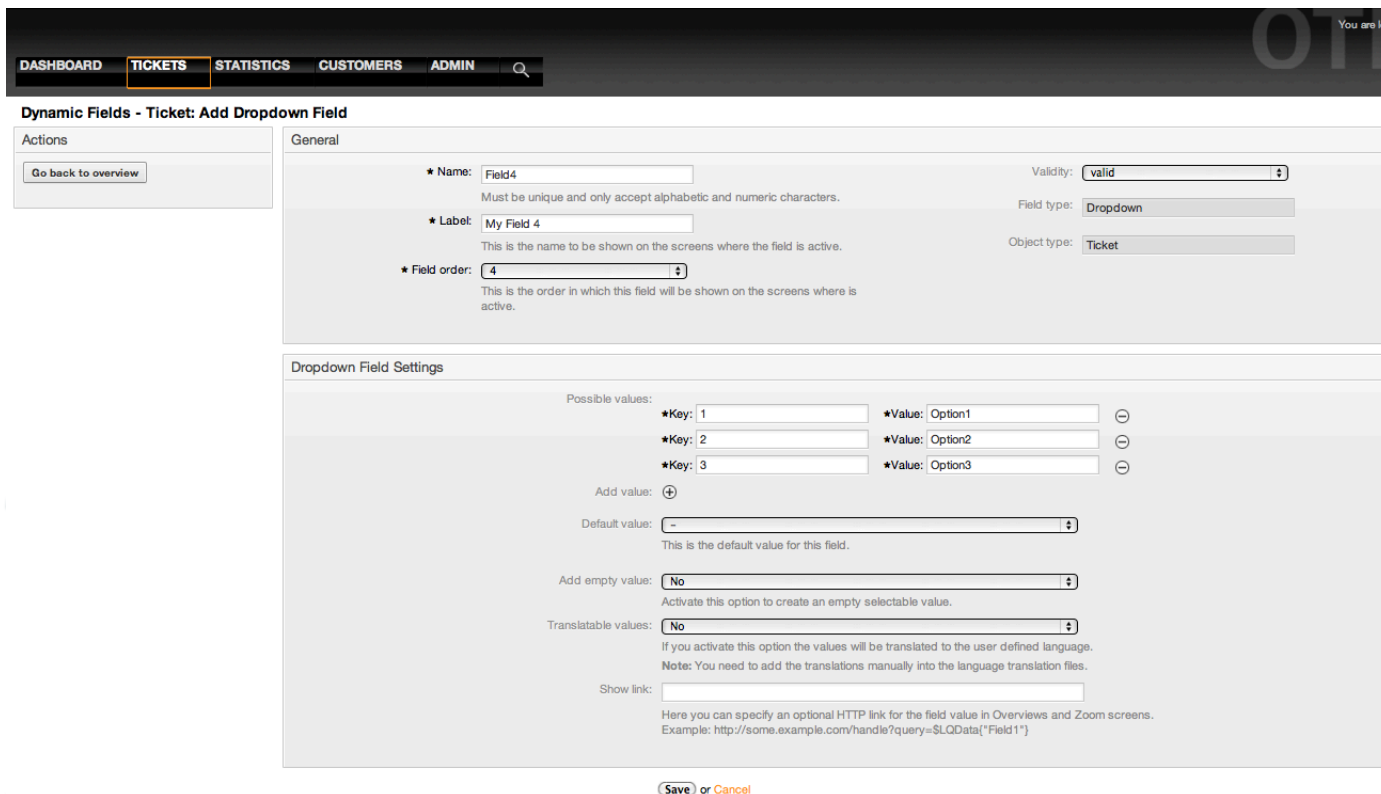

The screenshot shows the 'Dynamic Fields - Ticket: Add Dropdown Field' configuration page. It includes a navigation bar with 'DASHBOARD', 'TICKETS', 'STATISTICS', 'CUSTOMERS', and 'ADMIN'. The page is divided into 'General' and 'Dropdown Field Settings' sections.

General Section:

- Name:** Field4 (Validity: valid)
- Label:** My Field 4 (Field type: Dropdown)
- Field order:** 4 (Object type: Ticket)

Dropdown Field Settings Section:

- Possible values:** Three entries with keys 1, 2, and 3, and values Option1, Option2, and Option3.
- Add value:** + button
- Default value:** - (This is the default value for this field.)
- Add empty value:** No (Activate this option to create an empty selectable value.)
- Translatable values:** No (If you activate this option the values will be translated to the user defined language. Note: You need to add the translations manually into the language translation files.)
- Show link:** (Here you can specify an optional HTTP link for the field value in Overviews and Zoom screens. Example: http://some.example.com/handle?query=\$LQData{"Field1"})

Buttons for 'Save' and 'Cancel' are visible at the bottom.

Kielelezo: Maongezi ya usanidi wa Kikunjuzi cha Sehemu inayobadilika.

10.2.6. Uteuzi Anuwai wa Usanidi wa Sehemu Inayobadilika

Uteuzi Anuwai wa sehemu inayobadilika unatumika kuhifadhi thamani anuai, kutoka kwenye orodha iliyofungwa.

Mipangilio ya sehemu inayobadilika ya uteuzi anuwai:

- Thamani zinazoweza: Lazima.

Orodha ya thamani za kuchagua. Wakati wa kuongeza vifaa vya nyongeza kwenye orodha, ni muhimu kubainisha Ufunguo (thamani ya ndani) na Thamani (thamani ya kuonyesha).

- Thamani ya chaguo-msingi: Hiari.


Hii ndiyo thamani ya kuonyesha kwa chaguo-msingi katika skrini za kuhariri (kama Tiketi Mpya ya Simu au Unda Tiketi), thamani chaguo-msingi la hii sehemu ni uchaguzi uliofungwa kama ulivyofafanuliwa na thamani Ziwezekanazo.

- Ongeza sehemu tupu: Lazima, (Ndio/Hapana).

Kama hili chaguo limeamilishwa thamani ya ziada inafanuliwa kuonyesha "-" katika orodha ya thamani ziwazekanazo. Hii thamani maalumu ni tupu ndani

- Tafsiri thamani: Lazima, (Ndio/Hapana).

Huu mpangilio unatumika kuweka alama thamani zinazoweza kutafsiriwa za hii sehemu. Thamani zinazoonyeshwa tu ndio zita tafsiriwa, thamani za ndani hazita athiriwa, utafsiri wa thamani inabidi uongezwe kwa mikono kwenye mafaili ya lugha.

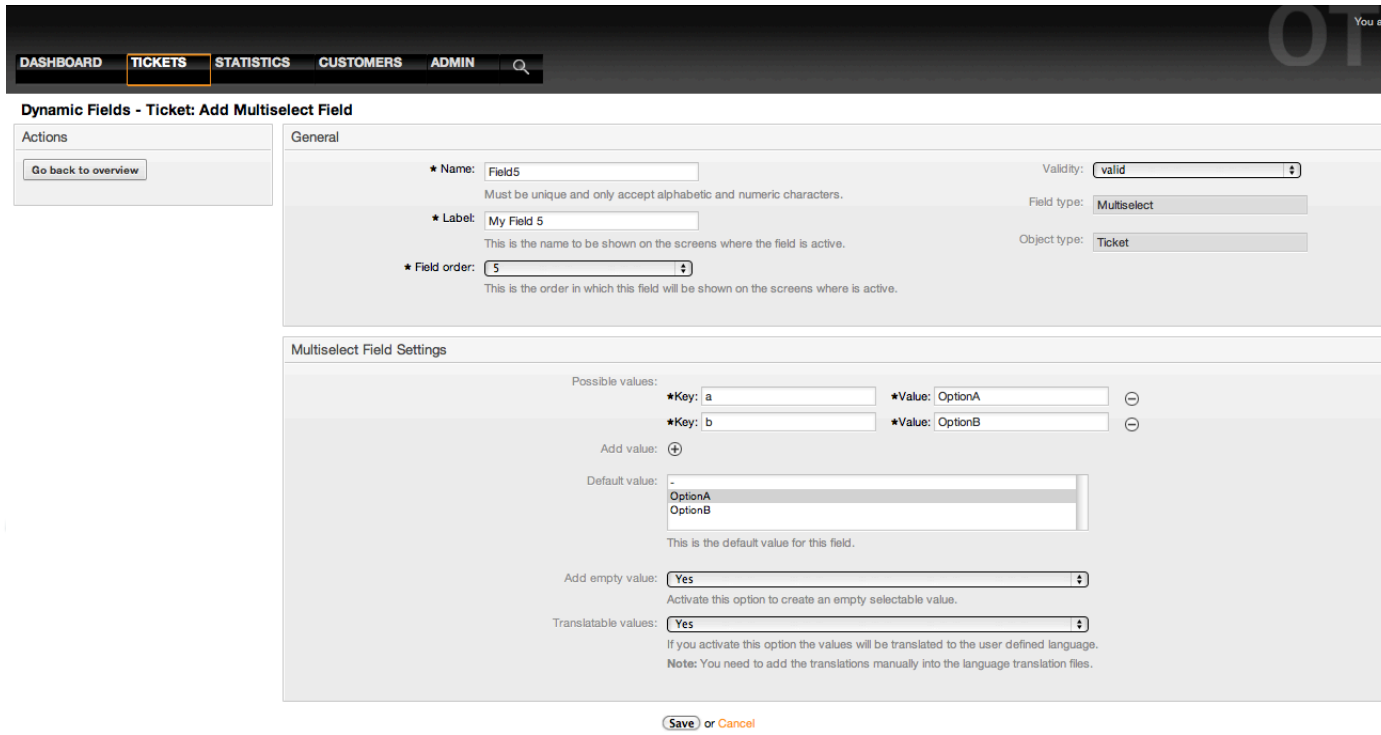

The screenshot shows the 'Dynamic Fields - Ticket: Add Multiselect Field' configuration page. It is divided into several sections:

- Actions:** A button labeled 'Go back to overview'.
- General:**
 - * Name: Field5 (with a note: 'Must be unique and only accept alphabetic and numeric characters.')
 - * Label: My Field 5 (with a note: 'This is the name to be shown on the screens where the field is active.')
 - * Field order: 5 (with a note: 'This is the order in which this field will be shown on the screens where is active.')
 - Validity: valid
 - Field type: Multiselect
 - Object type: Ticket
- Multiselect Field Settings:**
 - Possible values:
 - *Key: a, *Value: OptionA
 - *Key: b, *Value: OptionB
 - Add value: +
 - Default value: OptionA, OptionB (with a note: 'This is the default value for this field.')
 - Activate empty value: Yes (with a note: 'Activate this option to create an empty selectable value.')
 - Translatable values: Yes (with a note: 'If you activate this option the values will be translated to the user defined language. Note: You need to add the translations manually into the language translation files.')

At the bottom, there are 'Save' and 'Cancel' buttons.

Powered by OTRS 3.1.x OVS

Kielelezo: Maongezi ya usanidi wa Uteuzi Anuwai wa Sehemu inayobadilika.

10.2.7. Usanidi wa Sehemu Inayobadilika ya Tarehe

Sehemu inayobadilika ya Tarehe inatumika kuhifadhi thamani ya tarehe (Siku, Mwezi na Mwaka).

Mipangilio ya sehemu inayobadilika ya tarehe:

- Chaguo-msingi la utofauti wa tarehe: Hiari, Namba kamili.

Idadi ya sekunde (hasi au chanya) kati ya tarehe ya sasa na tarehe iliyochaguliwa kuonyeshwa kwa chaguo-msingi katika skrini za kuhariri (kama Tiketi Mpya Simu au Unda Tiketi).

- Fananua kipindi cha miaka: Lazima (Ndio / Hapana).

Inatumika kufafanua idadi maalumu ya miaka ya nyuma na baadaye kwa kutegemeana na tarehe ya sasa ya mwaka uliochaguliwa kwa hii sehemu, kama imesetiwa kuwa Ndiyo machaguo yafwatayo yanapatikana:

- Miaka ya nyuma: Hiari, Namba kamili chanya.

Fafanua idadi ya miaka ya nyuma kutoka siku ya sasa kuonyesha chaguo la mwaka kwa hii sehemu inayobadilika katika skrini za kuhariri.

- Miaka ya mbeleni: Hiari, Namba kamili chanya.

Fafanua idadi ya miaka ya mbeleni kutoka siku ya sasa kuonyesha katika chaguo la mwaka kwa hii sehemu inayobadilika katika skrini za kuhariri.


- Onyesha kiungo: Hiari.

Kama imesetiwa, thamani ya sehemu itabadilishwa kuwa kiungo cha HTTP kina-chobonyezeka kwa ajili ya skrini za kuonyesha (kama Kuza au mapitio).

Kwa mfano, kama Onyesha kiungo imesetiwa kuwa "http://www.otrs.com", kubofya kwenye thamani hii ya sehemu kutafanya kivinjari chako kufungua ukurasa wa tovuti wa OTRS.

Note

Matumizi ya `$LQData{"JinaX"}` katika thamani ya Seti kiungo, ambapo JinaX ni jina la sehemu litaongeza sehemu hiyo kama sehemu ya marejeo ya kiungo.

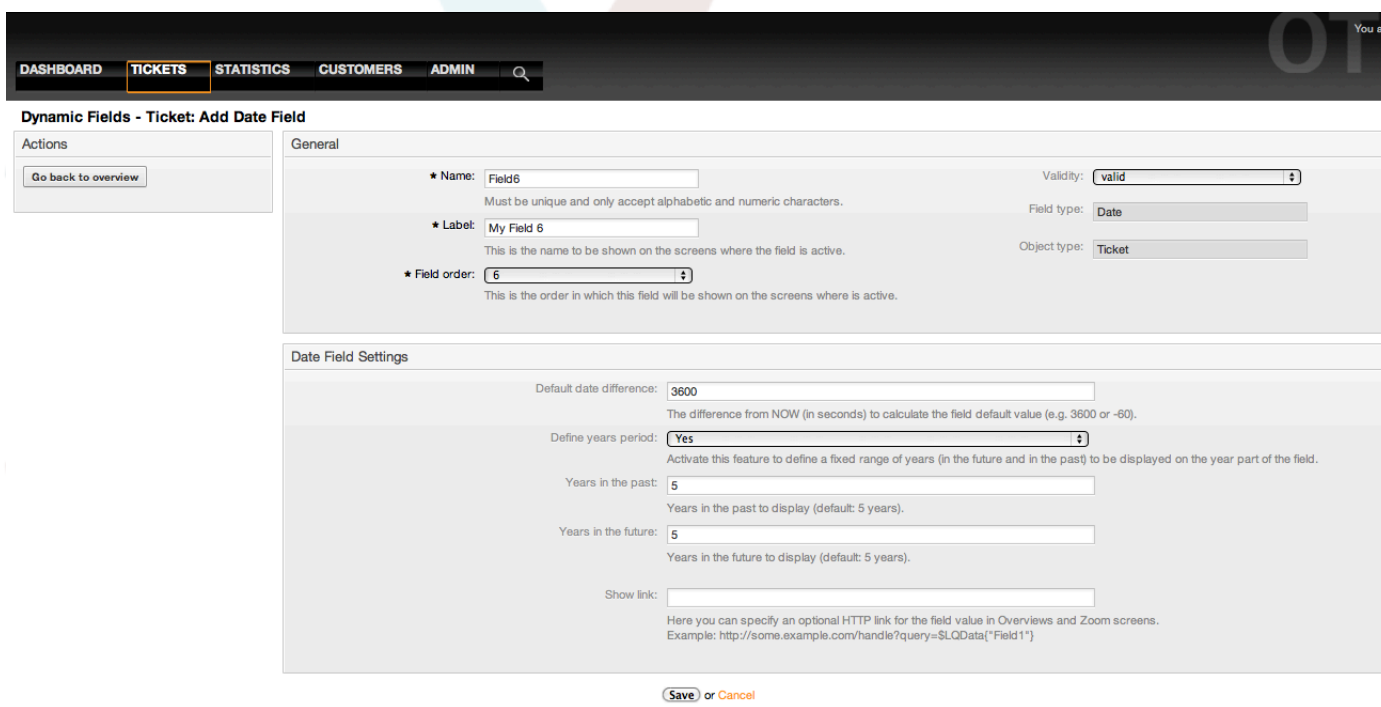

The screenshot shows the OTRS administration interface for configuring a dynamic field. The navigation bar includes Dashboard, Tickets, Statistics, Customers, and Admin. The page title is 'Dynamic Fields - Ticket: Add Date Field'. There are two main sections: 'General' and 'Date Field Settings'.

General Section:

- Name:** Field6 (Note: Must be unique and only accept alphabetic and numeric characters.)
- Label:** My Field 6 (Note: This is the name to be shown on the screens where the field is active.)
- Field order:** 6 (Note: This is the order in which this field will be shown on the screens where is active.)
- Validity:** valid
- Field type:** Date
- Object type:** Ticket

Date Field Settings Section:

- Default date difference:** 3600 (Note: The difference from NOW (in seconds) to calculate the field default value (e.g. 3600 or -60).)
- Define years period:** Yes (Note: Activate this feature to define a fixed range of years (in the future and in the past) to be displayed on the year part of the field.)
- Years in the past:** 5 (Note: Years in the past to display (default: 5 years).)
- Years in the future:** 5 (Note: Years in the future to display (default: 5 years).)
- Show link:** (Note: Here you can specify an optional HTTP link for the field value in Overviews and Zoom screens. Example: http://some.example.com/handle?query=\$LQData{"Field1"})

Buttons: (Save) or Cancel

Powered by OTRS 3.1.x CVS

Kielelezo: Maongezi ya usanidi wa Tarehe ya Sehemu inayobadilika.

10.2.8. Usanidi wa Tarehe / Muda wa Sehemu Inayobadilika

Sehemu inayobadilika ya Tarehe / Muda inatumika kuhifadhi thamani ya tarehe muda (Dakika, Masaa, Siku, Mwezi na Mwaka).

Mipangilio ya sehemu inayobadilika ya tarehe / muda:

- Chaguo-msingi la utofauti wa tarehe: Hiari, Namba kamili.

Idadi ya sekunde (hasi au chanya) kati ya tarehe ya sasa na tarehe iliyochaguliwa kuonyeshwa kwa chaguo-msingi katika skrini za kuhariri (kama Tiketi Mpya Simu au Unda Tiketi).

- Fananua kipindi cha miaka: Lazima (Ndio / Hapana).

Inatumika kuseti nambari ya miaka iliyofafanuliwa huko nyuma na mbeleni kutoka kwenye tarehe ya sasa katika chaguo la mwaka la sehemu hii, kama imesetiwa kuwa Ndiyo machaguo yafwatayo yanapatikana:

- Miaka ya nyuma: Hiari, Namba kamili chanya.

Fafanua idadi ya miaka ya nyuma kutoka siku ya sasa kuonyesha chaguo la mwaka kwa hii sehemu inayobadilika katika skrini za kuhariri.

- Miaka ya mbeleni: Hiari, Namba kamili chanya.

Fafanua idadi ya miaka ya mbeleni kutoka siku ya sasa kuonyesha katika chaguo la mwaka kwa hii sehemu inayobadilika katika skrini za kuhariri.


- Onyesha kiungo: Hiari.

Kama imesetiwa, thamani ya sehemu itabadilishwa kuwa kiungo cha HTTP kina-chobonyezeka kwa ajili ya skrini za kuonyesha (kama Kuza au mapitio).

Kwa mfano, kama Onyesha kiungo imesetiwa kuwa "http://www.otrs.com", kubofya kwenye thamani hii ya sehemu kutafanya kivinjari chako kufungua ukurasa wa tovuti wa OTRS.

Note

Matumizi ya `$LQData{"JinaX"}` katika thamani ya Seti kiungo, ambapo JinaX ni jina la sehemu litaongeza sehemu hiyo kama sehemu ya marejeo ya kiungo.

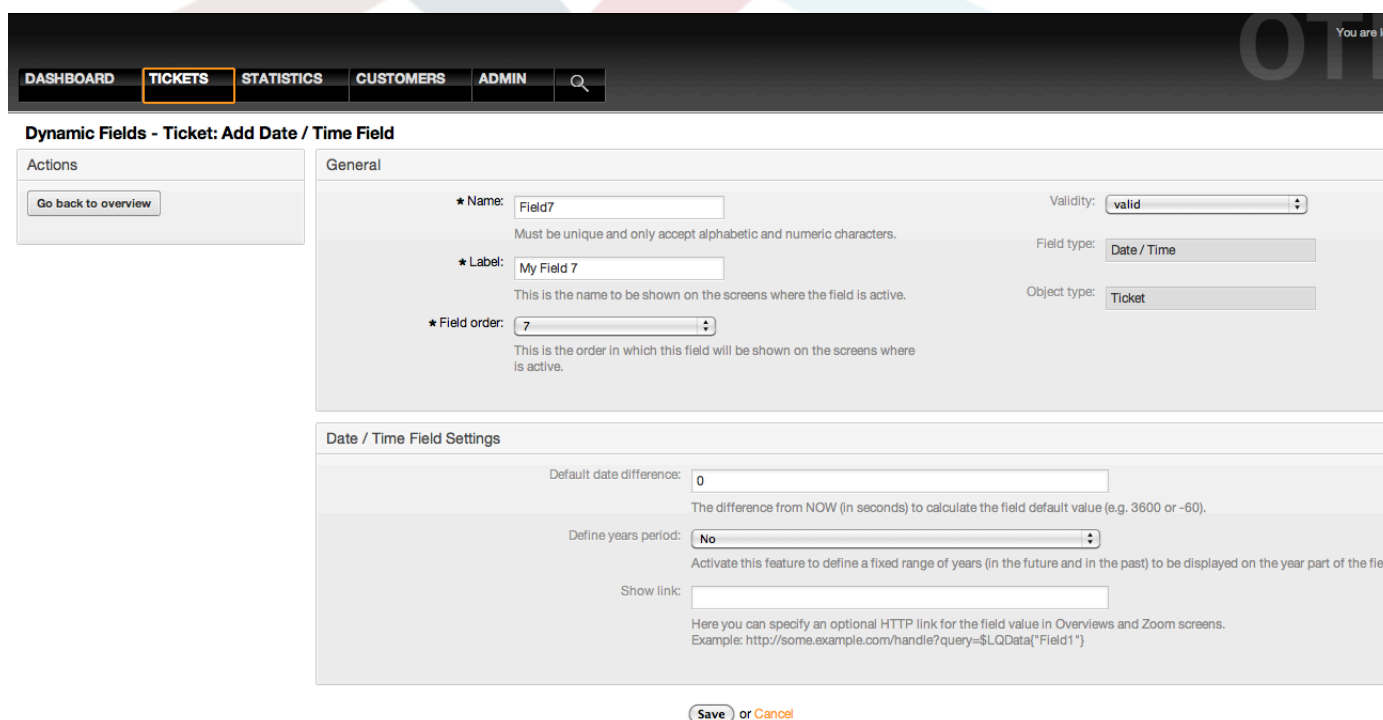

The screenshot shows the OTRS administration interface for configuring a dynamic field. The navigation menu includes DASHBOARD, TICKETS (selected), STATISTICS, CUSTOMERS, and ADMIN. The page title is "Dynamic Fields - Ticket: Add Date / Time Field".

Actions: A button labeled "Go back to overview".

General:

- Name:** Field7 (Validity: valid)
- Label:** My Field 7 (Field type: Date / Time)
- Field order:** 7 (Object type: Ticket)

Date / Time Field Settings:


- Default date difference:** 0 (The difference from NOW (in seconds) to calculate the field default value (e.g. 3600 or -60).)
- Define years period:** No (Activate this feature to define a fixed range of years (in the future and in the past) to be displayed on the year part of the field value.)
- Show link:** (Here you can specify an optional HTTP link for the field value in Overviews and Zoom screens. Example: http://some.example.com/handle?query=\$LQData{"Field1"})

Buttons: Save or Cancel

Kielelezo: Maongezi ya usanidi wa Tarehe / Muda wa Sehemu inayobadilika.

10.2.9. Kuhariri sehemu inayobadilika

Skrini ya mapitio ya sehemu inayobadilika iliyojazwa (na mifano iliyopita) inatakiwa ionekane kama:

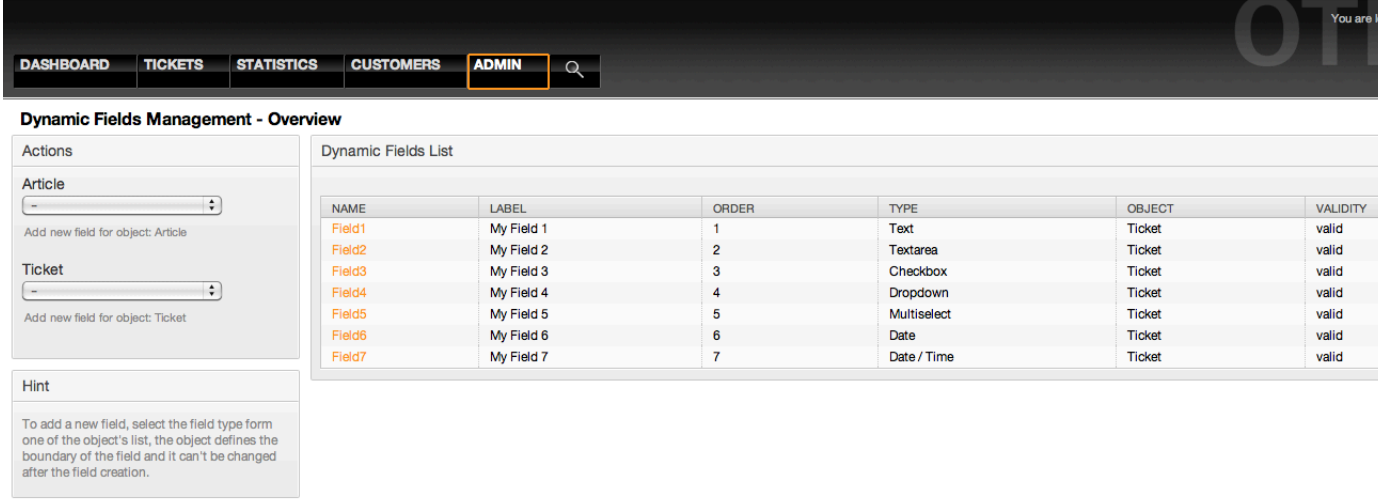

NAME	LABEL	ORDER	TYPE	OBJECT	VALIDITY
Field1	My Field 1	1	Text	Ticket	valid
Field2	My Field 2	2	Textarea	Ticket	valid
Field3	My Field 3	3	Checkbox	Ticket	valid
Field4	My Field 4	4	Dropdown	Ticket	valid
Field5	My Field 5	5	Multiselect	Ticket	valid
Field6	My Field 6	6	Date	Ticket	valid
Field7	My Field 7	7	Date / Time	Ticket	valid

Powered by OTRS 3.1.x CVS

Kielelezo: Skrini ya mapitio ya sehemu zinazobadilika iliyojazwa na data za sampuli.

Kubadilisha au kuhariri sehemu inayobadilika lazima uwe na sehemu moja iliyofafanuliwa, chagua sehemu ambayo tayari imejazwa kutoka kwenye skrini ya mapitio ya sehemu zinazobadilika na sahihisha mipangilio.

Note

Sio sehemu zote zinazobadilika zinaweza kubadilishwa, aina ya Sehemu na aina ya Kitu zimefungwa kutoka kwenye machaguo ya sehemu na haziwezi kubadilishwa.

Haishauriwi kubadilisha jina la ndani la sehemu, lakini lebo inaweza kubadilishwa mda wowote. Kama jina la ndani limebadilishwa mipangilio yote ya "SysConfig" ambayo ina marejeo kwenye sehemu hiyo yanahitaji kusasishwa na pia mapendeleo ya mtumiaji (kama imefafanuliwa).

10.2.10. Kuonyesha Sehemu Inayobadilika kwenye Skrini

Kuonyesha sehemu inayobadilika kwenye skrini fulani kuna masharti mawili ya lazima:

1. Sehemu inayobadilika lazima iwe halali.
2. Sehemu inayobadilika lazima isetiwe kuwa 1 au 2 kwenye skrini ya usanidi.

Fuata hatua hizi kuonyesha sehemu inayobadilika katika skrini

- Kuwa na uhakika kwamba sehemu inayobadilika imesetiwa kuwa halali, unaweza kuona uhalali wa sehemu kutoka kwenye skrini ya mapitio ya sehemu inayobadilika. Seti kuwa halali kwa kuhariri sehemu kama ikihitajika.
- Fungua "sysconfig" na chagua "Tiketi" kutoka kwenye orodha kunjuzi katika mwambaa upande wa Vitendo ulio katika upande wa kushoto wa skrini.

Note

Pia unaweza kutafuta "Sehemulnayobadilika" katika kisanduku cha kutafuta juu au ufunguo wa "sysconfig" moja kwa moja kama unaujua.

- Tambua mpangilio kundi dogo kwa skrini unayoitafuta na kibonyeze. Kwa mfano "Mazingira ya mbele::Wakala::Tiketi::OnaSimuMpya".
- Tafuta mpangilio uanoishia na "###Sehemulnayobadilika". Kwa mfano "Tiketi::Mazingira ya mbele::WakalaTiketiSimu###Sehemulnayobadilika".
- Kama mpangilio uko tupu au hauna jina linalotakiwa la sehemu inayobadilika, bofya kwenye kitufe "+" kuongeza ingizo jipya. Kwa mfano Ufunguo: Sehemu1, Maudhui: 1.

Kama mpangilio tayari una orodha ya jina la sehemu inayobadilika kuwa na uhakika kwamba imesetiwa kuwa "1" ili kuonyesha hiyo sehemu au kuwa "2" kuonyesha kwa ulazima.

- Hifadhi usanidi kwa kubofya katika kitufe cha "Sasisha" na chini ya skrini na abiri kwenda kwenye skrini ambayo unataka sehemu ionyeshwe.

10.2.10.1. Onyesha Mifano

Ifuatayo ni mifano ya usanidi wa "sysconfig" kuonyesha au kuficha sehemu zinazobadilika katika skrini tofauti.

Example 4.21. Amilisha Sehemu1 katika Simu Mpya Tiketi Skrini.


- *Umbo:* Kundi. Tiketi
- *Kundi-dogo:* Mazingira ya mbele::Wakala::Tiketi::OnaSimuMpya
- *Mpangilio:* Tiketi::Mazingira ya mbele::WakalaTiketiSimu###Sehemulnayobadilika
- *Thamani:*

Ufunguo	Maudhui
Sehemu1	1

★ Subject:

Options: [Customer]

★ Text:

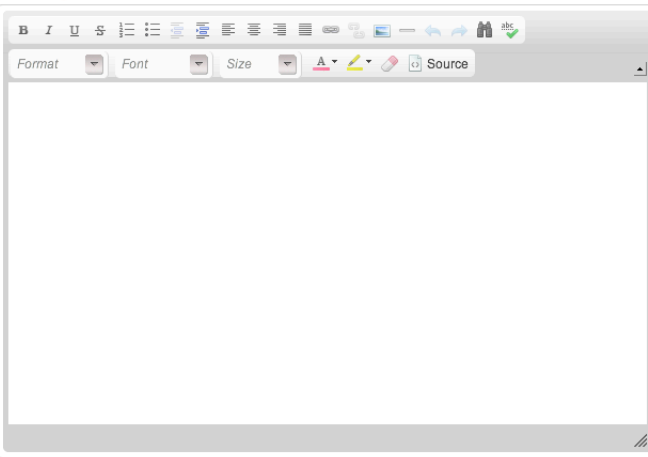

Attachment: No file chosen

CustomerID:

Next ticket state:

Pending Date (for pending* states): / / :

Priority:

My Field 1:

Powered by OTRS 3.1.x CVS

Kielelezo: Sehemu1 katika Simu Mpya Tiketi Skrini.

Example 4.22. Amilisha Sehemu1 katika Simu Mpya Tiketi Skrini kwa ulazima.


- *Umbo:* Kundi. Tiketi
- *Kundi-dogo:* Mazingira ya mbele::Wakala::Tiketi::OnaSimuMpya
- *Mpangilio:* Tiketi::Mazingira ya mbele::WakalaTiketiSimu###SehemuNayobadilika
- *Thamani:*

Ufunguo Sehemu1	Maudhui 2
---------------------------	---------------------

★ Subject:

Options: [Customer]

★ Text:

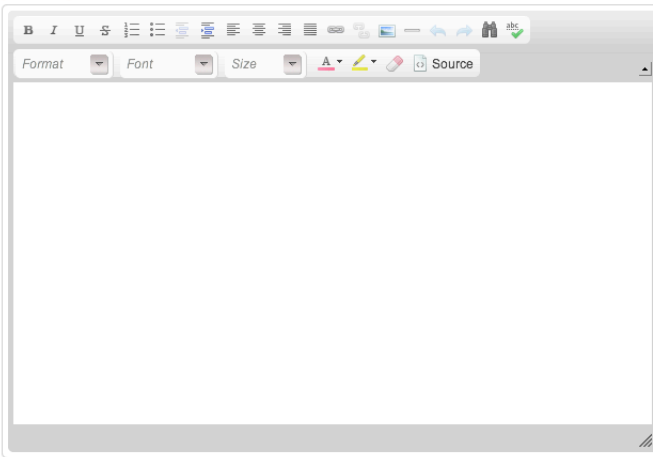

Attachment: No file chosen

CustomerID:

Next ticket state:

Pending Date (for pending* states): / / :

Priority:

★ My Field 1:

Powered by OTRS 3.1.x CVS

Kielelezo: Sehemu1 katika Simu Mpya Tiketi Skrini kwa ulazima.

Example 4.23. Amilisha sehemu mbali mbali katika Simu Mpya Tiketi Skrini.

- *Umbo:* Kundi. Tiketi
- *Kundi-dogo:* Mazingira ya mbele::Wakala::Tiketi::OnaSimuMpya
- *Mpangilio:* Tiketi::Mazingira ya mbele::WakalaTiketiSimu###SehemuNayobadilika
- *Thamani:*

Ufunguo	Maudhui
Sehemu1	1
Sehemu2	1
Sehemu3	1
Sehemu4	1
Sehemu5	1
Sehemu6	1
Sehemu7	1

Attachment: No file chosen

CustomerID:

Next ticket state:

Pending Date (for pending* states): / / - :

Priority:

My Field 1:

My Field 2:

My Field 3:

My Field 4:

My Field 5:

My Field 6: / /

My Field 7: / / - :

Powered by OTRS 3.1.x CVS

Kielelezo: Sehemu mbali mbali katika Simu Mpya Tiketi Skrini kwa ulazima.

Example 4.24. Lemaza baadhi ya sehemu katika Simu Mpya Tiketi Skrini.

- *Umbo:* Kundi. Tiketi
- *Kundi-dogo:* Mazingira ya mbele::Wakala::Tiketi::OnaSimuMpya
- *Mpangilio:* Tiketi::Mazingira ya mbele::WakalaTiketiSimu###SehemuNayobadilika
- *Thamani:*

Ufunguo	Maudhui
Sehemu1	1
Sehemu2	0
Sehemu3	1
Sehemu4	0
Sehemu5	1
Sehemu6	0
Sehemu7	1

Attachment: No file chosen

CustomerID:

Next ticket state:

Pending Date (for pending* states): / / - :

Priority:

My Field 1:

My Field 3:

My Field 5:

My Field 7: / / - :

Powered by OTRS 3.1.x CVS

Kielelezo: Baadhi ya sehemu zilizolemazwa katika Simu Mpya Tiketi Skrini kwa ulazima.

Example 4.25. Amilisha Sehemu1 katika Skrini Kuza Tiketi.

- *Umbo:* Kundi. Tiketi
- *Kundi-dogo:* Mazingira ya mbele::Wakala::Tiketi::OnaKuza
- *Mpangilio:* Tiketi::Mazingira ya mbele::WakalaTiketiKuza###SehemuInayobadilika
- *Thamani:*

Ufunguo	Maudhui
Sehemu1	1

1

DASHBOARD **TICKETS** STATISTICS CUSTOMERS ADMIN

Ticket#2012021510000016 – Testing Ticket

1 Article(s) Age: 4 m – Created: 02/15/2012 22:30 by My User

Back | Lock | History | Print | Priority | Free Fields | Link | Owner | Responsible | Customer | Note | Merge | Pending | Watch | Close | Change Queue

NO.	TYPE	FROM	SUBJECT	CREATED
1	customer – phone	test@test.com	Testing Ticket	02/15/2012 22:30

▼ #1 – Testing Ticket Created: 02/15/2012 22:30 by My User

Forward | Phone Call Outbound | Phone Call Inbound | Split | Print | Reply

From: test@test.com
 To: Junk
 Subject: Testing Ticket

This is a test

Ticket Information
 State: open
 Locked: unlocked
 Priority: 3 normal
 Queue: Junk
 CustomerID:
 Owner: My User
 Responsible: My User
 My Field 1: My User

Customer Information
 none

Linked Objects
 none

Powered by OTRS 3.1.x CVS

Kielelezo: Sehemu1 katika Skrini Kuza Tiketi.

Example 4.26. Amilisha Sehemu1 katika Mapitio ya Skrini Ndogo za Tiketi.

- *Umbo:* Kundi. Tiketi
- *Kudni-dogo:* Mazingira ya mbele::Wakala::TiketiMapitio
- *Mpangilio:* Tiketi::Mazingira ya mbele::MapitioMadogo###Sehemu1nayobadilika
- *Thamani:*

Ufunguo Sehemu1	Maudhui 1
---------------------------	---------------------

You are logged in as **OTRS**
1

DASHBOARD
TICKETS
STATISTICS
CUSTOMERS
ADMIN
🔍

QueueView: Junk

My Queues (0) Junk (1) Raw (1)

All tickets 1
Available tickets 1

Bulk

	TICKET#	AGE	FROM / SUBJECT	STATE	LOCKED	QUEUE	OWNER	CUSTOMERID
<input type="checkbox"/>	2012021510000016	10 m	test@test.com Testing Ticket	open	unlock	Junk	My User	

Powered by OTRS 3.1.x CVS

Kielelezo: Sehemu1 katika Mapitio ya Skrini Ndogo za Tiketi.

Huu mpangilio unaathiri: Muonekano wa Upandaji, Muonekano Uliofungwa, Muonekano wa Foleni, Muonekano wa Mhusika, Muonekano wa Hali na skrini za Muonekano wa Uan-galizi.

10.2.11. Kuweka Thamani Chaguo-msingi kwa kutumia Moduli ya Tukio la Tiketi

Tukio la tiketi (mf. TengenezaTiketi) linaweza kuchochea thamani kusetiwa kwa sehemu fulani, kama sehemu bado haina thamani.

Note

Kwa kutumia njia hii thamani chaguo-msingi, haionekani katika skrini za kuhariri (mf. Simu Mpya Tiketi) kwa kuwa thamani imesetiwa baada ya utengenezaji wa tiketi.

Kuamilisha hiki kipengele ni muhimu kuwezesha mpangilio ufwatao: "Tiketi::TukioModuli-Tuma###TiketiSehemulnayobadilikaChaguo-msingi".

Example 4.27. Amilisha Sehemu1 katika kitendo cha TengenezaTiketi.

- *Umbo:* Kundi. Tiketi
- *Kundi-dogo:* Kiini::TiketiSehemulnayobadilikaChaguo-msingi
- *Mpangilio:* Tiketi::TiketiSehemulnayobadilikaChaguo-msingi###Elementi1

Note

Huu usanidi unaweza kusetiwa katika moja ya tiketi 16::TiketiSehemuInayobadilikaChaguo-msingi###Mipangilio ya elementi.

Kama zaidi ya sehemu 16 zinahitajika kuaanzishwa faili la XML kililogeuzwa kukufaa lazima liwekwe kwenye mpangilio orodha \$OTRS_HOME/Kernel/Config/files kuendeleza kipengele hiki.

- *Thamani:*

Ufunguo	Maudhui
Kitendo	TengenezaTiketi
Jina	Sehemu1
Thamani	thamani mpya

10.2.12. Seti thamani ya chaguo-msingi kwa Upendeleo wa mtumiaji

Chaguo-msingi la sehemu inayobadilika inaweza kubadilishwa na thamani ziliyofafanuliwa na mtumiaji zilizohifadhiwa kwenye mapendeleo ya mtumiaji.

Kutumia njia hii, thamani ya chaguo-msingi la hiyo sehemu litaonyeshwa kwenye skrini yoyote ambapo sehemu hiyo imeamilishwa (kama sehemu tayari haina thamani nyingine).

Mipangilio ya "sysconfig" ya "MapendeleoMakundi###SehemuInayobadilika" inayopatikana katika Kundi dogo la "Mazingira ya mbele::Wakala::Mapendeleo". Huu mpangilio ni mfano wa jinsi ya kutengeneza ingizo katika skrini ya Mapendeleo ya Mtumiaji kuseti thamani ya chaguo-msingi la sehemu inayobadilika pweke kwa ajili ya mtumiaji aliyechaguliwa. Kiwango cha juu cha huu mpangilio ni inaruhusu matumizi ya sehemu moja tu inayobadilika. Kama sehemu mbili au zaidi zitatumia hiki kipengele, ni muhimu kutengeneza usanidi wa faili la XML uliogeuzwa kukufaa kuongeza mipangilio zaidi inayofanana na huu.

Note


Kumbuka, kama mipangilio zaidi imeongezwa katika XML mpya kila jina la mpangilio linahitaji kuwa la kipekee kwenye mfumo na tofauti na "MapendeleoMakundi###SehemuInayobadilika". kwa mfano: MapendeleoMakundi###101-SehemuInayobadilika-Sehemu1, MapendeleoMakundi###102-SehemuInayobadilika-Sehemu2, MapendeleoMakundi###Sehemu-yangu1, MapendeleoMakundi###Sehemu-yangu2, na kadh.

Example 4.28. Amilisha Sehemu1 katika mapendeleo ya Mtumiaji.

- *Umbo:* Kundi. Tiketi
- *Kundi-dogo:* Mazingira ya mbele::Wakala::Mapendeleo
- *Mpangilio:* MakundiMapendeleo###101-SehemuInayobadilika-Sehemu1
- *Thamani:*

Ufunguo	Maudhui
Kitendo	TengenezaTiketi
Amilifu	1

Ufunguo	Maudhui
fungu	Ingizo
Safuwima	Mipangilio mingine
Data:	<code>\$Env{"MtumiajiSehemuInayobadilika_Sehemu1"}</code>
Ufunguo:	Sehemu yangu 1
Lebo:	Chaguo-msingi kwa: Sehemu yangu 1
Moduli:	Kiini::Matokeo::HTML::MapendeleoUjumla
MapendeleoUfunguo:	MtumiajiSehemuInayobadilika_Sehemu1
Kipaumbele:	7000

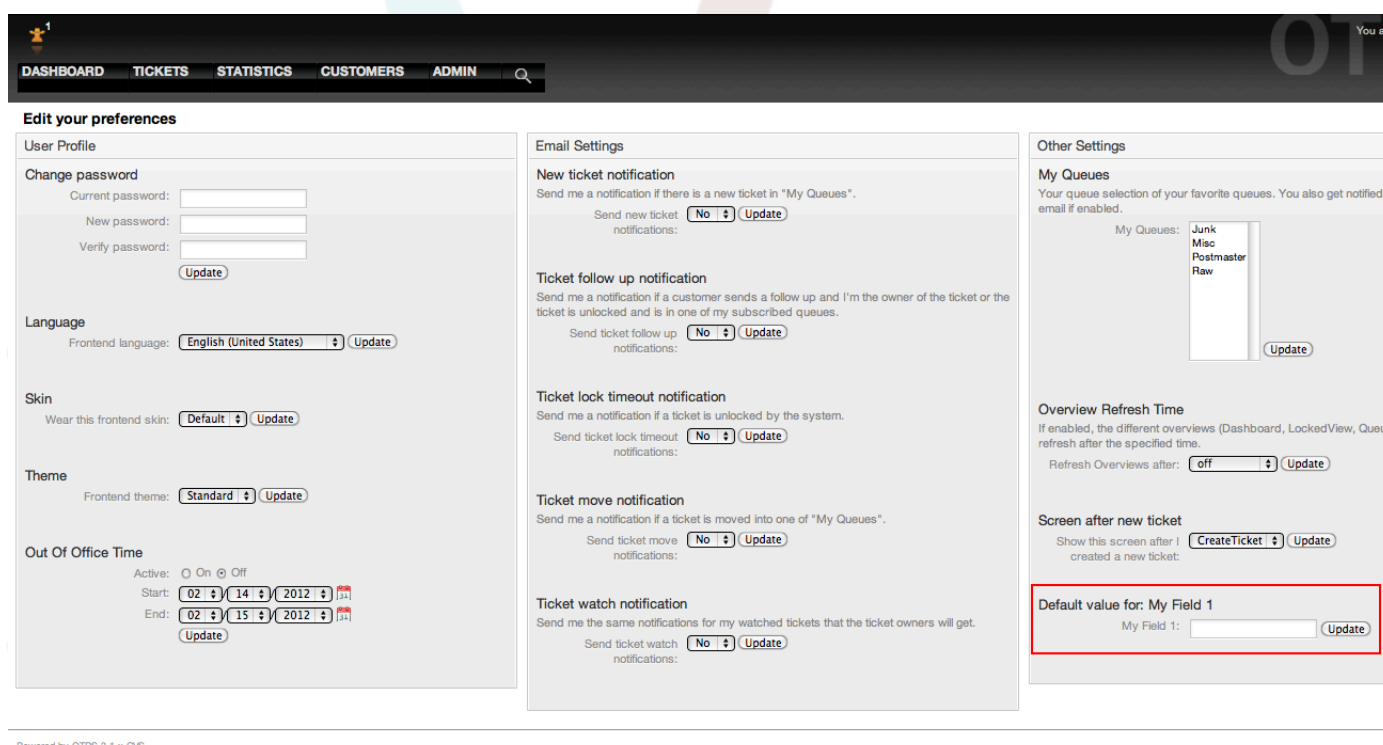

The screenshot shows the 'Edit your preferences' page in OTRS. It is divided into several sections:

- User Profile:** Includes 'Change password' (with fields for current, new, and verify passwords), 'Language' (set to English (United States)), 'Skin' (set to Default), and 'Theme' (set to Standard).
- Out Of Office Time:** Includes 'Active' status (On/Off), 'Start' time (02:14, 2012), and 'End' time (02:15, 2012).
- Email Settings:** Includes 'New ticket notification', 'Ticket follow up notification', 'Ticket lock timeout notification', 'Ticket move notification', and 'Ticket watch notification', each with a 'No' dropdown and an 'Update' button.
- Other Settings:** Includes 'My Queues' (with a list: Junk, Masc, Postmaster, Raw), 'Overview Refresh Time' (set to off), 'Screen after new ticket' (set to CreateTicket), and 'Default value for: My Field 1' (with a text input field and an 'Update' button).

Powered by OTRS 3.1.x OVS

Kielelezo: Sehemu1 katika Skrini ya mapendeleo ya mtumiaji.

11. Kiolesura cha Ujumla

Kiolesura cha Ujumla cha OTRS kina matabaka mengi ya viunzi ambavyo vinaruhusu OTRS kuwasiliana na mifumo mingine kupitia huduma ya tovuti. Haya mawasiliano yanweza kuwa ya pande mbili.

- *OTRS kama Mtoaji:* OTRS inakuwa kama seva inasikiliza maombi kutoka kwenye Mfumo wa Nje, inachakatisha taarifa, kufanya vitendo vilivyoombwa, na kujibu maombi.
- *OTRS kama Muombaji:* OTRS inakuwa kama mteja inakusanya taarifa, kutuma maombi kwa Mifumo ya Nje, na kusubiri majibu.

11.1. Matabaka ya Kiolesura cha Ujumla


Kiolesura cha Ujumla kimetengenezwa katika moduli ya tabaka, kuwa rahisi kubadilika na kugeuza kukufaa.

Tabaka ni seti ya mafaali, ambayo inadhhibiti jinsi Kiolesura cha Ujumla kinavyotekeleza sehemu tofauti za huduma ya tovuti. Kwa kutumia usanidi sahihi, mtu anaweza kujenga huduma tofauti za tovuti kwa Mifumo tofauti ya Nje bila kutengeneza moduli mpya.

Note

Kama Mfumo wa Nje hauna usaidizi kwa furushi la moduli za sasa za Kiolesura cha Ujumla, moduli maalumu zinahitaji kutengenezwa kwa ajili ya hiyo huduma maalumu ya tovuti.

Orodha ya moduli zilizotolewa za Kiolesura cha Ujumla zilizosafirishwa na OTRS zita sasishwa na kuongezwa.

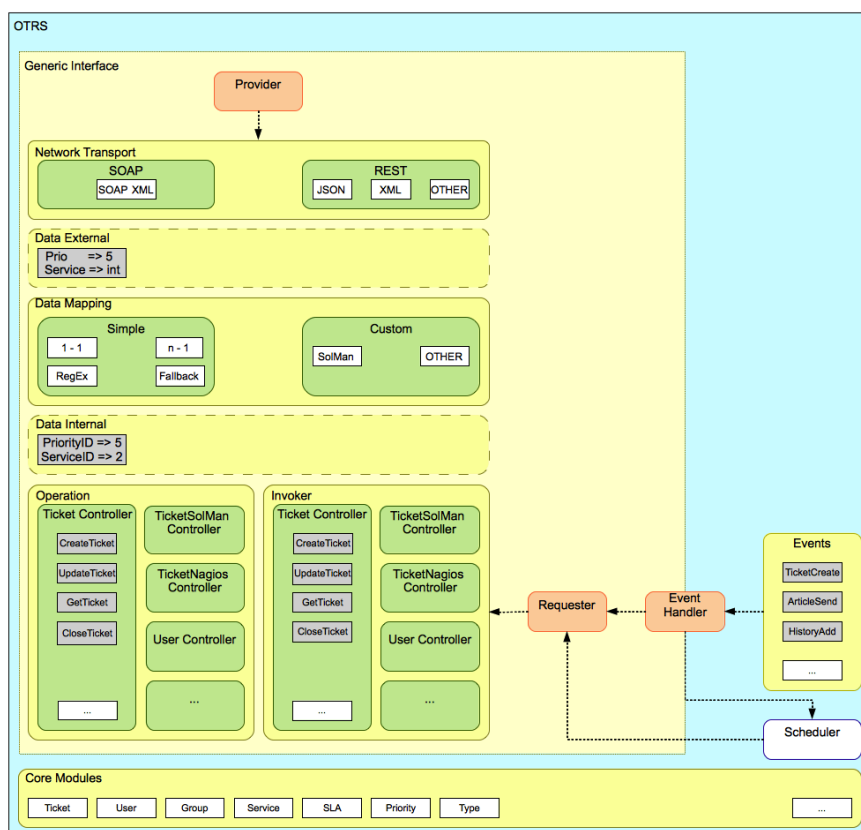

Kielelezo: Matabaka ya kiolesura michoro.

11.1.1. Usafirishaji wa Mtandao

Hili tabaka lina jukumu la mawasiliano sahihi na Mfumo wa Mbali. Inapokea maombi na kutengeneza majibu ikiwa kama mtoaji, na kutengeneza maombi na kupokea majibu ikiwa kama muombaji.

Mawasiliano ya mtoaji yanashughulikiwa na kishiko kipya cha seva ya wavuti kiitwacho "nph-genericinterface.pl".

Mawasiliano ya muombaji yanaweza kuanzishwa wakati wa tukio linalosababishwa na moduli ya Kiolesura cha Ujumla au moduli nyingine ya OTRS. Hili tukio linahifadhiwa kwenye hifadhi muda na kishughulika matukio na kutegemeana na usanidi tukio litachakatishwa moja kwa moja na muombaji au kuachwa kwa Mratibu (daemon tofauti iliyoundwa kuchakatisha kazi kisolandanifu).

11.1.2. Kuunganisha data

Tabaka hili lina jukumu la kutafsiri muundo wa data kati ya OTRS na Mfumo wa Mbali (tabaka la data za ndani na data za nje). Kwa kawaida Mifumo ya Mbali ina muundo tofauti wa data kufananisha na OTRS (ikijumuisha thamani tofauti na majina tofauti ya hizo thamani), na hapa umuhimu wa hili tabaka unaonekana kubadilisha taarifa inayopokelewa kuwa kitu ambacho OTRS inaweza kuelewa na kwa upande mwingine kutuma taarifa kwa kila Mfumo wa Mbali kwa kutumia kamusi zao za data.

Example: "Kipaumbele" (OTRS) kinaweza kuitwa "Prio" katika mfumo wa mbali na inaweza kuwa thamani "1 Chini" (OTRS) inatakiwa kuunganishwa na "Taarifa" kwenye mfumo wa mbali.

11.1.3. Mdhibiti

Wadhibiti ni mkusanyiko wa Operesheni zinazofanana au Wachochezi. Kwa mfano, mdhibiti wa Tiketi anaweza kuwa na operesheni za kawaida za tiketi. Wadhibiti wa kawaida wanaweza kutekelezeka, kwa mfano mdhibiti "TiketiNjeKampuni" ambayo inaweza kuwa na kazi sawa na mdhibiti wa kawaida wa Tiketi, lakini ana kiolesura tofauti cha data, au majina ya kazi (ili kukabiliana na majina ya Mfumo wa Mbali) au kanuni tofauti kabisa.

Kazi moja ya Kiolesura cha Ujumla inaweza kuwa kulandanisha taarifa za Mfumo mmoja wa Mbali unaoweza kuongea na Mfumo mwingine wa Mbali unaofanana tu. Katika kesi hii wadhibiti wapya inabidi watengenezwe na Operesheni na Wachochezi inabidi waige tabia za Mfumo wa Mbali ili kiolesura ambacho OTRS itaonyesha kifanane na kiolesura cha Mfumo wa Mbali.

11.1.4. Operesheni (OTRS kama mtoaji)

Operesheni ni kitendo kimoja kinachoweza kufanywa ndani ya OTRS. Operesheni zote zina kiolesura cha kuundia programu za ngamizi kinachofanana, zinapokea data katika parameta moja maalumu, na kurudisha muundo wa data wenye hali ya mafanikio, ujumbe wa kasoro zilizotokea na kurudisha data.

Kwa kawaida operesheni zinatumia data (za ndani) ambazo tayari zimeunganika kuita moduli viini na kufanya vitendo kama: Tengeneza Tiketi, Sasisha Mtumiaji, Batilisha Foleni, Tuma Taarifa, na kadh. Operesheni ina ufikivu kamili kwenye API ya OTRS kufanya kitendo hicho.

11.1.5. Mchochezi (OTRS kama muombaji)

Mchochezi ni kitendo ambacho OTRS inafanya dhidi ya Mfumo wa Mbali. Wachochezi wanatumia moduli za kiini cha OTRS kuchakatisha na kukusanya taarifa zote zinazotakiwa kutengeneza maombi. Taarifa zikiwa tayari inabidi ziunganishwe na umbizo la Mfumo wa Mbali ili zitumwe kwenda kwenye Mfumo wa Mbali, hiyo itachakatisha taarifa itatekeleza kitendo na kutuma majibu, ili aidha kuchakatisha mafanikio au kushughulikia makosa.

11.2. Mtiririko wa Mawasiliano ya Kiolesura cha Ujumla

Kiolesura cha Ujumla kina mtiririko uliofafanuliwa kutekeleza vitendo kama mtoaji na muombaji.

Mtiririko huu unaelezewa hapa chini:

11.2.1. OTRS kama mtoaji

11.2.1.1. Maombi ya Mbali:

1. Maombi ya HTTP

- OTRS inapokea maombi ya HTTP na kuzipitisha kwenye matabaka.
- Moduli ya mtoaji ndiyo ina mamlaka ya kutekeleza na kusimamia vitendo hivi.

2. Usafirishaji wa Mtandao

- Moduli ya usafirishaji wa mtandao inasimbua fiche mzigo wa data na kutofautisha jina la operesheni kutoka kwenye data nyingine.
- Jina laoperesheni na data za operesheni zinarudishwa kwa mtumaji.

3. Data za Nje

- Data kama zilivyotumwa kutoka kwenye mfumo wa mbali (hili siyo tabaka linalotege-mea moduli).

4. Kuunganisha

- Data inabadilishwa kutoka muundo wa Mfumo wa Nje na kuwa muundo wa mfumo wa ndani wa OTRS kama ilivyobainishwa katika usanidi wa muunganiko wa operesheni hii (Muunganiko wa maombi ya data zinazolingia).
- Data ambazo tayari zimebadilishwa zinarudishwa kwa mtoaji.

5. Data za Ndani

- Data kama zilivyobadilishwa na kuandaliwa kupelekwa kwenye operesheni (Hili siyo tabaka la moduli).

6. Operesheni

- Inapokea na kuthidbitisha data.
- Inafanya udhibiti ufikivu wa mtumiaji.
- Inatekeleza vitendo.

11.2.1.2. Majibu ya OTRS:

1. Operesheni

- Inarudisha matokeo ya data kwa mtoaji.

2. Data za Ndani

- Data kama zilivyorudishwa kutoka kwenye operesheni.

3. Kuunganisha

- Data inabadilishwa kurudi kuwa ya Mfumo wa nje kama ilivyobainishwa katika usanidi wa muunganiko (Muunganiko wa majibu ya data zinazotoka).
- Data ambazo tayari zimebadilishwa zinarudishwa kwa mtoaji.

4. Data za nje

- Data kama ilivyobadilishwa na kuandaliwa kupitishwa kwenye Usafirishaji wa Mtandao kama majibu.

5. Usafirishaji wa Mtandao

- Inapokea data tayari katika umbizo la mfumo wa mbali.
- Inatengeneza majibu halali kwa hii aina ya usafirishaji wa mtandao.

6. Majibu ya HTTP

- Majibu yanatumwa kwa mteja wa huduma ya tovuti.
- Kama kukiwa na kosa, kosa linatumwa kwa mfumo wa mbali (mf. kosa la SOAP, kosa la HTTP, na kadhalika).

11.2.2. OTRS kama Muombaji

11.2.2.1. Maombi ya OTRS:

1. Kishiko Tukio Kichochezi

- Kwa kutegemea usanidi wa huduma za mtandao itaamua kama maombi yatakuwa landanifu au solandanifu.
 - Landanifu
 - Simu ya moja kwa moja inapigwa kwa Muombaji ili kutengeneza ombi jipya na kulipitisha kwenye matabaka.
 - Solandanifu
 - Tengeneza kazi mpya ya Kiolesura cha Ujumla (Muombaji) kwa ajili ya Mratibu wa OTRS (kwa kugawia kazi ya utekelezaji kwa Mratibu, uzoefu wa mtumiaji unaweza kuboreshwa mara dufu, la sivyo muda wote unaohitajika kuandaa maombi na utekelezaji wa mbali utaongezwa kwenye Matukio ya OTRS ambayo yanasababisha maombi hayo).
 - Katika mzunguko unaofuata mchakato wa Mratibu unasoma kazi mpya na kupiga simu kwa Muombaji ambaye atatengeneza ombi jipya na kulipitisha kwenye matabaka.

2. Mchochezi

- Inapokea data kutoka kwenye kitendo.
- Inathibitisha data zilizopokelewa (kama itahitajika).
- Inaita moduli ili kusaidia data (kama itahitajika).
- Rudisha maombi ya muundo wa data au tuma ishara ya kusitisha mawasiliano kwa muombaji, kusitisha mawasiliano kwa nia njema.

3. Data za Ndani

- Data kama ilivyopitishwa kwa mchochezi (Hii siyo tabaka linalotegemea moduli).

4. Kuunganisha

- Data zinabadilishwa kuwa muundo wa Mfumo wa nje kama ilivyobainishwa katika usanidi wa muunganiko. (Muunganiko wa majibu ya data zinazotoka) .

- Data ambayo imekwisha badilishwa inarudishwa kwa muombaji.

5. *Data za Nje*

- Data kama ilivyobadilishwa na kuandaliwa kwa kutuma kwa mfumo wa mbali.

6. Usafirishaji wa Mtandao

- Inapokea jina la operesheni ya mbali na data ambazo tayari zimekwisha badilishwa umbizo kuwa lile la mfumo wa mbali kutoka kwa muombaji.
- Inatengeneneza maombi halali ya usafirishaji wa mtandao.
- Inatuma maombi kwa mfumo wa mbali na kusubiri majibu.

11.2.2.2. Majibu ya Mbali:

1. Usafirishaji wa mtandao

- Inapokea majibu na kusimbua fiche mzigo wa data.
- Inarudisha data kwa muombaji.

2. *Data za Nje*

- Data kama zilivyopokelewa kutoka kwenye Mfumo wa Mbali

3. Kuunganisha

- Data inabadilishwa kutoka kwenye muunda wa Mfumo wa Nje kuwa muundo wa ndani wa OTRS kama ilivyobainishwa kwenye usanidi wa muunganiko wa operesheni hii (Muunganiko wa majibu ya data zinazotoka).
- Data ambayo imekwisha badilishwa inarudishwa kwa muombaji.

4. *Data za Ndani*

- Data kama ilivyobadilishwa na tayari kupitishwa kurudi kwa muombaji.

5. Mchochezi

- Inapokea data zilizorudishwa
- Inashughulikia data inayohitajika na mchochezi maalumu (inajumuisha ushughulikiaji wa makosa kama yapo).
- Rudisha matokeo ya Mchochezi na data kwa Muombaji.

6. Mratibu au Anayeshughulika na Matukio

- Inapokea data kutoka kwa Muombaji, kwa kesi ya Mratibu hii data inaweza kuwa na taarifa za kurekebisha ratiba hapo hapo au baadaye.

11.3. Huduma za Tovuti

Huduma ya Tovuti ni njia ya mawasiliano kati ya mifumo miwili, katika kesi yetu ni OTRS na Mifumo ya Mbali.

Moyo wa Huduma ya Wavuti ni usanidi wake, ambapo imefafanuliwa vitendo ambavyo huduma ya wavuti inaweza kufanya kwa ndani (Operesheni), vitendo gani maombi ya

OTRS inaweza kufanya Mfumo wa Mbali (Wachochezi), jinsi gani data inabadilishwa kutoka mfumo mmoja kwenda mwingine (Kuunganisha), na kupitia itifaki gani mawasiliano yatapita (Usafirishaji)

Kiolesura cha Ujumla ni kiunzi kinachoweza utengenezaji wa Huduma za Tovuti za OTRS katika jinsi ambayo imefafanuliwa tayari, kwa kutumia fungu jenzi zilizotengenezwa tayari ambazo ni huru kwa nyenzake na haziwezi kubadilishana.

11.4. Kiolesura Michoro cha Huduma za Tovuti

Kiolesura michoro cha huduma za tovuti ni kifaa kinachoruhusu kutengeneza usanidi wa huduma za tovuti changamano katika kiolesura ambacho ni rahisi kutumika. Inaruhusu ku:

- Tengeneza na Kufuta huduma za tovuti.
- Kuagiza na Kuhamisha usanidi (katika umbizo la YAML) kwa huduma za tovuti zilizopo.
- Ona, rudisha na Hamisha usanidi wa zamani wa huduma za tovuti zilizopo katika skrini ya Historia ya Huduma za Tovuti.
- Fuatilia batli zote za mawasiliano kwa kila huduma ya tovuti kwenye skrini ya kueua.

11.4.1. Mapitio ya Huduma za Tovuti

Kiungo cha "Huduma za Tovuti" kwenye skrini kuu ya kiolesura cha Msimaizi (kwenye boksi la Usimamizi wa Mfumo) Inatuongoza kwenye skrini ya mapitio ya huduma za tovuti, ambapo unaweza kusimamia usanidi wa huduma zako za tovuti. Unaweza kuongeza huduma mpya au kubadilisha usanidi kwa zilizopo kutoka kwenye skrini hii.

Kila skrini ya usanidi wa huduma za tovuti katika upande wa juu ina staili ya uabiri njia ya "makombo ya mikate". Huu uabiri unasaidia kujua kwa usahihi tupo upande gani wa usanidi wa huduma za tovuti, na pia inasaidia mtumiaji kurukia upande wowote wa mchakato wa usanidi muda wowote (kitendo hiki hakitahifadhi mabadiliko yoyote).

Note

Kutengeneza huduma mpya ya tovuti bofya kitufe "Ongeza huduma ya tovuti", na utoe taarifa zinazotakiwa.

GenericInterface Web Service Management - Overview

» Web Services

Actions		Web Service List				
NAME	DESCRIPTION	REMOTE SYSTEM	PROVIDER TRANSPORT	REQUESTER TRANSPORT	VALIDITY	
No data found.						

Powered by OTRS 3.0.x CVS

Top of page

Kielelezo: Mapitio ya huduma za tovuti.

11.4.2. Ongeza Huduma ya Tovuti

Sehemu inayohitajika katika upande huu ni "Jina" la huduma ya tovuti ambalo linatakiwa kuwa la kipekee kwenye mfumo na halitakiwi kuachwa wazi. Sehemu nyingine ambazo pia ni muhimu kwa usanidi kama "Kizingiti cha kueua" na "uhalali" lakini hizi sehemu tayari zina chaguo-msingi kwa kila orodha.

Thamani chaguo-msingi la "Eua Kizingiti" ni "Eua". Zikiwa zimesanidiwa kwa mpangilio huu batli zote za mawasiliano zinasajiliwa kwenye hifadhidata. Kila Kizingiti cha kueua kinachofwata kina udhibiti zaidi na kinapuuza batli za mawasiliano ya oda ya chini zaidi ya iliyosetiwa kwenye mfumo.

Kizingiti cha viwango vya kueua (kutoka chini kwenda juu)

- Eua
- Maelezo
- Notisi
- Kasoro


Pia inawezekana kufafanua itifaki ya usafirishaji wa mtandao kwa "OTRS kama mtoaji" na "OTRS kama mwombaji".

Bofya kwenye kitufe "Hifadhi" kusajili huduma mpya ya tovuti kwenye hifadhidata au bofya "Katisha" kuchana na operesheni hiyo. Sasa utarudishwa kwenye skrini ya mapitio ya huduma za tovuti.

Kama tayari una faili la usanidi wa huduma za tovuti katika umbizo la YAML unaweza ku bofya kwenye kitufe "Agiza huduma ya tovuti" upande wa kushoto wa skrini. Kwa maelezo zaidi ya uagizaji wa huduma za tovuti tafadhali angalia kifungu kinachofuata "Badiisha Huduma za Tovuti".

Note

Kubadilisha au kuongeza maelezo ya huduma ya tovuti, bofya kwenye jina la huduma ya tovuti kwenye skrini ya mapitio ya huduma za tovuti.

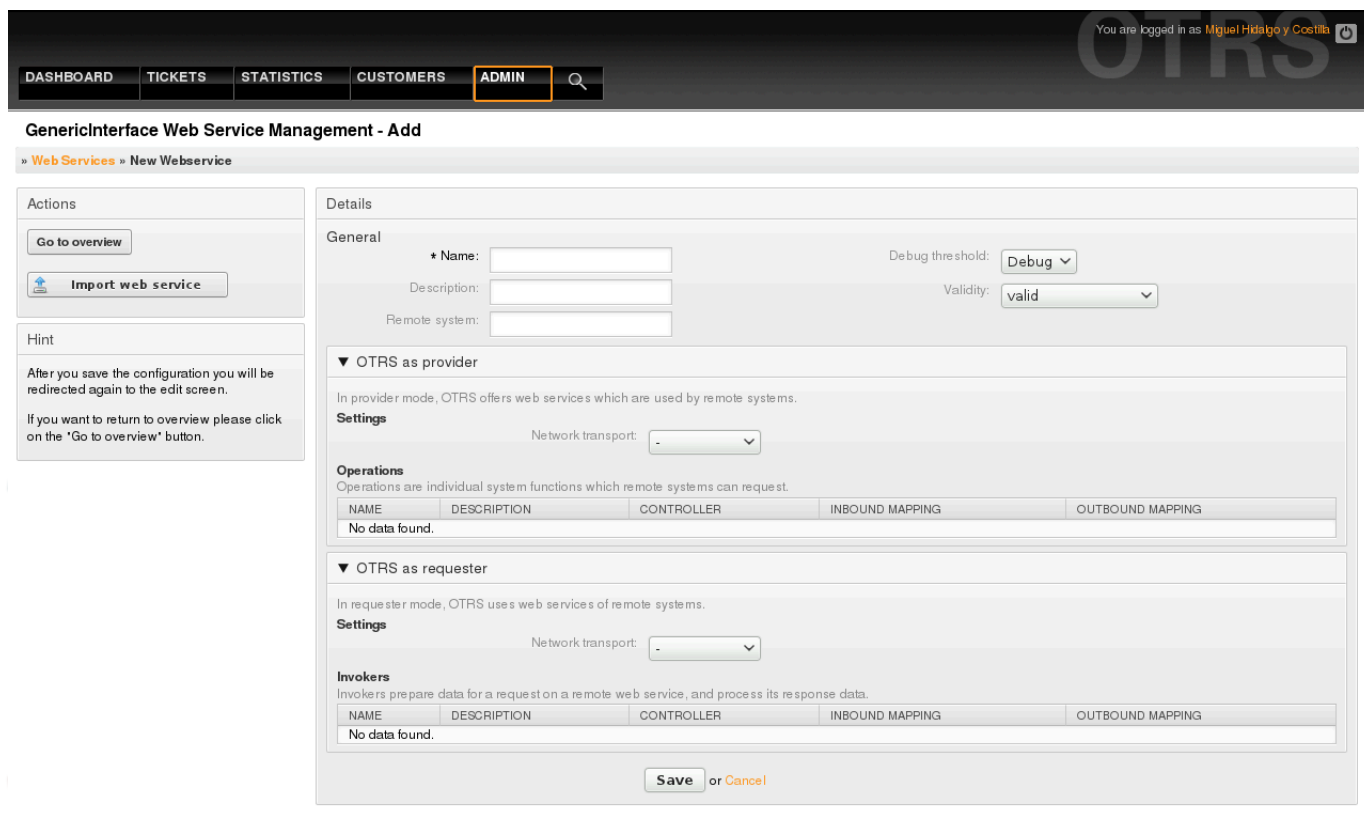

GenericInterface Web Service Management - Add

» Web Services » New Webservice

Actions

Go to overview

Import web service

Hint

After you save the configuration you will be redirected again to the edit screen.

If you want to return to overview please click on the 'Go to overview' button.

Details

General

* Name: Debug threshold: Debug

Description: Validity: valid

Remote system:

OTRS as provider

In provider mode, OTRS offers web services which are used by remote systems.

Settings

Network transport: -

Operations

Operations are individual system functions which remote systems can request.

NAME	DESCRIPTION	CONTROLLER	INBOUND MAPPING	OUTBOUND MAPPING
No data found.				

OTRS as requester

In requester mode, OTRS uses web services of remote systems.

Settings

Network transport: -

Invokers

Invokers prepare data for a request on a remote web service, and process its response data.

NAME	DESCRIPTION	CONTROLLER	INBOUND MAPPING	OUTBOUND MAPPING
No data found.				

Save or Cancel

Powered by OTRS 3.0.x CVS

Top of page

Kielelezo: Ongeza huduma za tovuti.

11.4.3. Badilisha Huduma ya Tovuti

Katika skrini hii una seti kamili ya fomula saidizi kushughulikia kila kipande cha huduma ya wavuti. Upande wa kushoto katika safuwima ya kitendo unaweza kupata vitufe ambavyo vitakuruhusu kufanya vitendo vyote vinavyowezekana kwenye huduma ya wavuti:

- Nakili huduma ya tovuti.
- Hamisha huduma ya tovuti
- Agiza huduma ya tovuti
- Historia ya usanidi
- Futa huduma ya tovuti
- Anaye eua.

Note

"Historia ya usanidi" na "Anaye eua" itapelekea kwenye skrini tofauti.


11.4.3.1. Nakala ya Huduma ya Tovuti

Kutengeneza nakala ya huduma ya tovuti, unahitaji ku bofya kitufe cha "Nakili huduma ya tovuti". Maongezi yatatokea ambapo unaweza kutumia jina la lililopo au kuseti jina jipya kwa (nakala) ya huduma ya tovuti.

Note

Kumbuka kwamba jina la huduma ya mtandao lazima liwe la kipekee kwenye mfumo.

Bofya kitufe cha "Nakili" kutengeneza nakala ya huduma ya tovuti au "Katisha" kufunga maongezi.

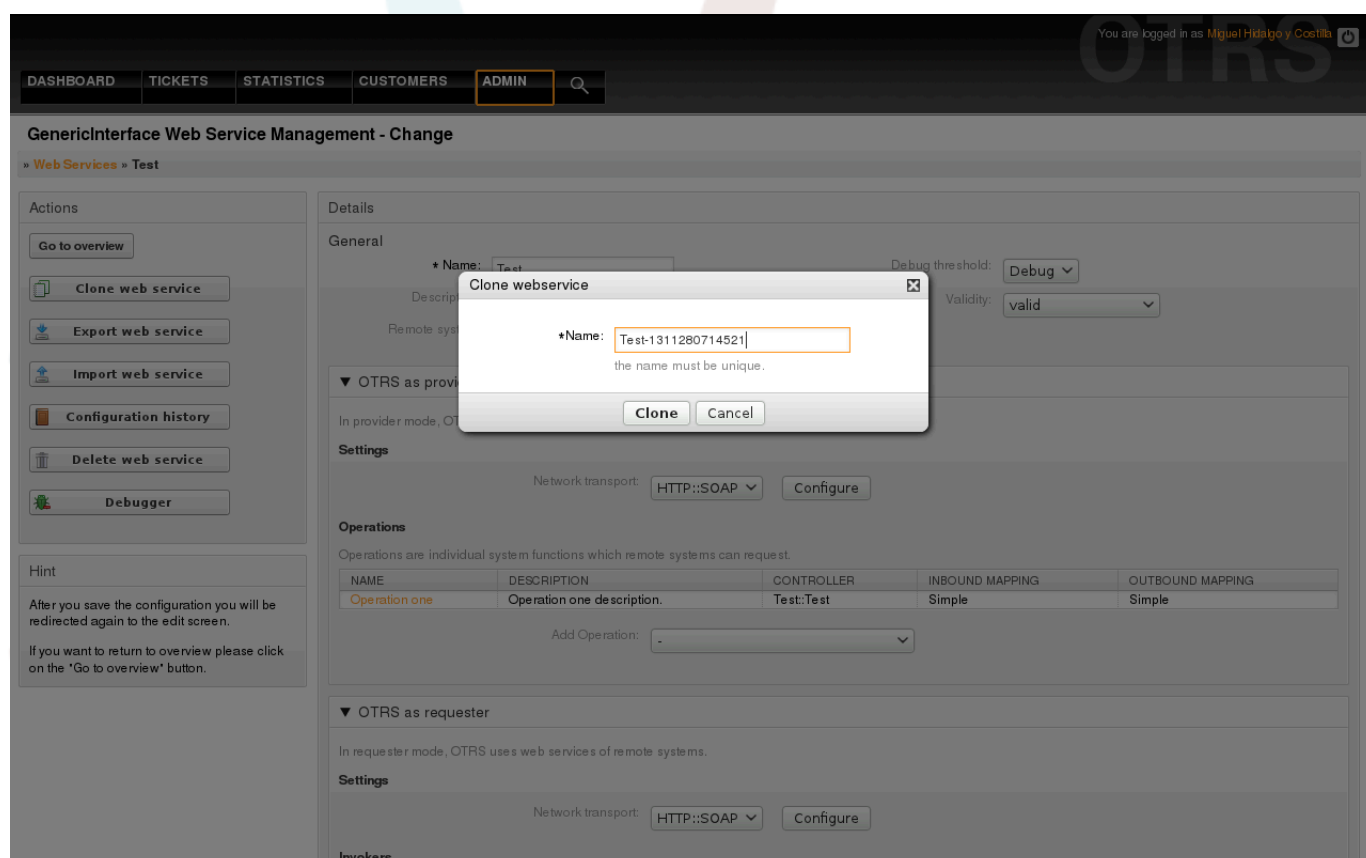

Kielelezo: Nakala ya huduma ya tovuti.

11.4.3.2. Hamisha Huduma ya Tovuti

Kitufe cha "Hamisha huduma za tovuti" kinakupa nafasi ya kuweka usanidi wa huduma ya tovuti ya sasa kwenye faili la YAML, kulipakua na kuhifadhi katika mfumo wako wa mafaili. Hii inakuwa na manufaa pale unapotaka kuhamisha huduma za tovuti kutoka seva moja kwenda nyingine, kwa mfano kutoka kwenye mazingira ya kupima kwenda mazingira ya uzalishaji.


Warning

Nywila zote zilizohifadhiwa katika usanidi wa huduma ya tovuti zitahamishwa kati-ka umbizo la nakala wazi.

Baada tu ya kubofya kitufe cha "Hamisha huduma ya tovuti" maongezi ya kuhifadhi ya kivinjari yatatokea, kama vile ukibofya kiungo cha kupakua kwenye kurasa za tovuti.

Note

Kila kivinjari katika kila mfumo endeshi kina skrini yake ya kuhifadhi maongezi na aina. Kutegemeana na kivinjari na usanidi inawezekana kwamba hakuna maongezi yanayo onyeshwa na faili linahifadhiwa kwenye mpangilio orodha chaguo-msingi katika mfumo wako wa faili. Tafdhali pitia nyaraka ya kivinjari chako kwa maelekezo zaidi kama inahitajika.

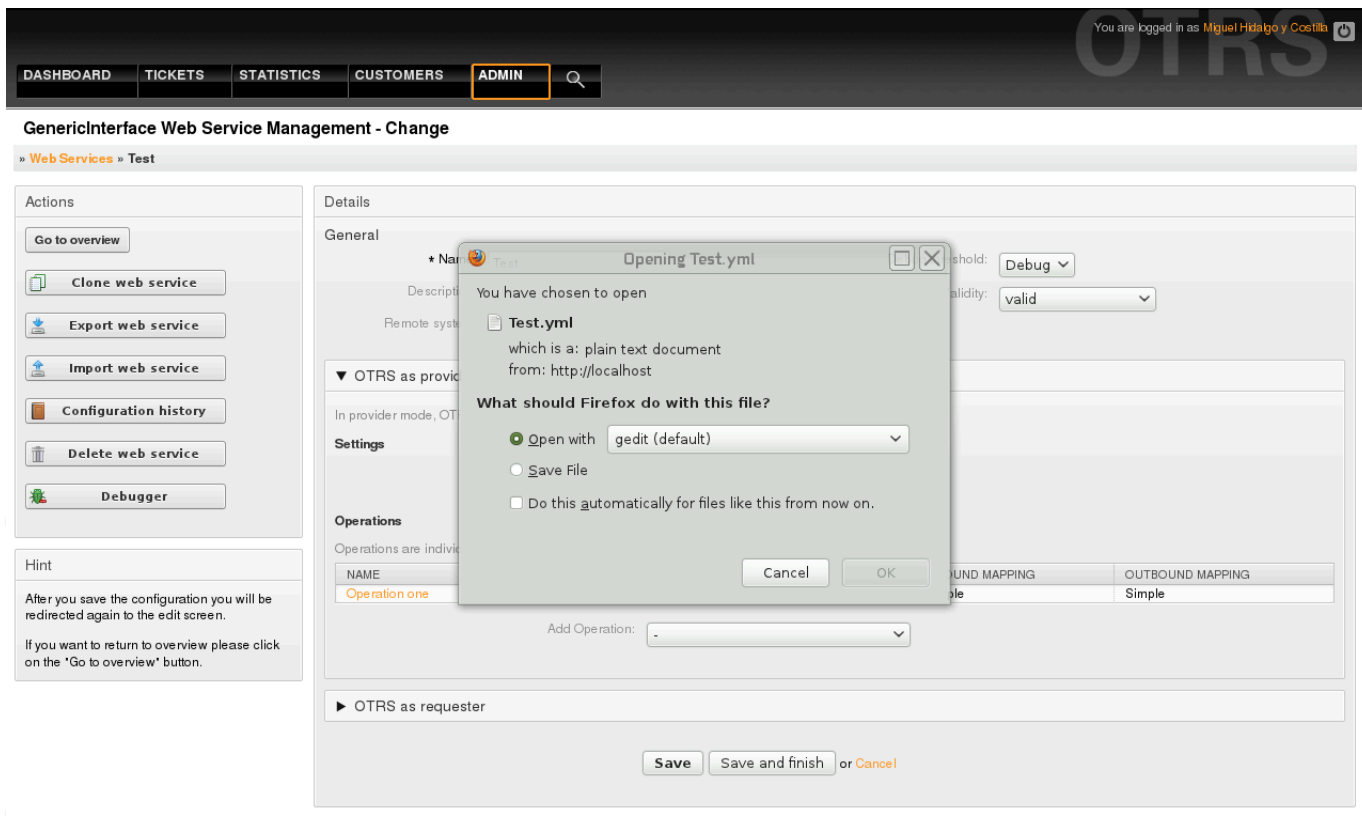

Powered by OTRS 3.0.x CVS

Top of page

Kielelezo: Hamisha huduma ya tovuti.


11.4.3.3. Agiza huduma ya tovuti

Faili halali la YAML la usanidi wa huduma ya tovuti linatakiwa kutumia kipengele cha agiza huduma ya tovuti. Bofya kitufe cha "Agiza huduma ya tovuti", tafuta faili la usanidi au toa njia kamili kwenye boksi la maingizo.

Bofya kitufe "Agiza" kutengeneza huduma mpya ya tovuti kutoka kwenye faili au "Katisha" kufunga maongezi.

Note

Jina la huduma ya tovuti litachukuliwa kutoka kwenye jina la faili la usanidi (mf. kama jina la faili ni HudumaTovutiYangu.yml hivyo basi huduma ya tovuti itaitwa HudumaTovutiYangu). Kama kuna huduma ya tovuti iliyosajiliwa kwenye mfumo kwa jina sawa na unayotaka kuagiza, mfumo utakupeleka kwenye skrini ya kubadilisha huduma ya tovuti ili kukuwezesha kubadilisha jina la huduma ya tovuti uliyoagiza.

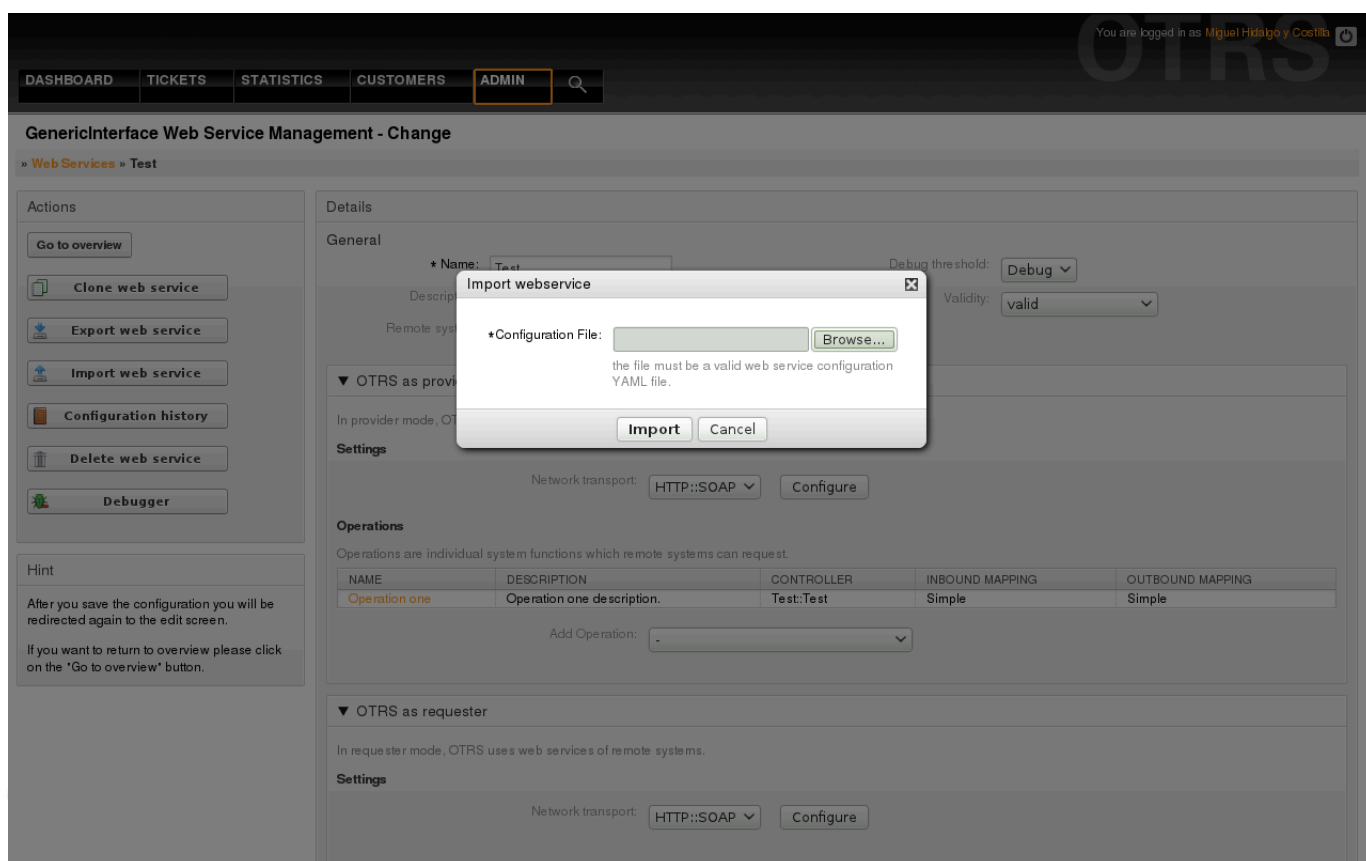

Kelelezo: Agiza huduma za tovuti.

11.4.3.4. Historia ya Huduma ya Tovuti

Kila mabadiliko ya usanidi wa huduma ya tovuti inatengeneza ingizo jipya kwenye historia ya huduma ya tovuti (kama jarida). Skrini ya historia ya huduma ya tovuti inaonyesha orodha ya matoleo yote ya usanidi wa huduma ya tovuti. Kila safu mlalo (toleo) kwenye "Orodha ya Historia ya Usanidi" inawakilisha mojawapo ya marekebisho kwenye historia ya huduma ya tovuti.

Bofya kwenye moja ya safu mlalo kuonyesha usanidi mzima kama ulivyo kwa tarehe / muda huo. Usanidi utaonyeshwa kwenye sehemu "Undani wa Historia" ya skrini. Hapa pia unaweza kuhamisha toleo la usanidi wa huduma ya tovuti au kurejesha hilo toleo kwenye usanidi uliopo wa huduma za tovuti.

Kipengele "Hamisha usanidi wa huduma ya tovuti" kina tabia sawa na "Hamisha huduma ya tovuti" kwenye skrini ya kubadilisha huduma ya tovuti. Kwa maelezo zaidi nenda kwenye hiyo sehemu.

Kama mabadiliko kwenye usanidi wa huduma ya tovuti iliyopo hayafanyi kazi kama ilivyotegemewa na sio rahisi kurudisha hali kabla ya mabadiliko, bofya kitufe "Rudisha usanidi wa huduma ya tovuti". Hii itafungua maongezi yatakayokuuliza kama una uhakika unataka kurudisha usanidi wa huduma ya tovuti. Bofya "Rudisha usanidi wa huduma ya tovuti" kwenye haya maongezi kubadili usanidi uliopo na toleo lililochaguliwa, au bofya "Katisha" kufunga maongezi.

Warning

Kumbuka kwamba nywila zote zilizohofadhiwa katika usanidi wa huduma ya tovuti zita hamishwa katika umbizo la nakala wazi.

Tafadhali kuwa makini wakati unarudisha usanidi kwani huu mchakato haubadiliki.

You are logged in as **Miguel Hidalgo y Costilla**
DASHBOARD **TICKETS** STATISTICS CUSTOMERS ADMIN

GenericInterface Configuration History for Web Service Test

» Web Services » Test » History

Actions

[Go back to Web Service](#)

Hint

Here you can view older versions of the current web service's configuration, export or even restore them.

Configuration History List

VERSION	CREATE TIME
5	2011-07-21 15:23:02
4	2011-07-21 13:57:38
3	2011-07-21 13:48:04
2	2011-07-21 13:36:14
1	2011-07-21 13:33:11

Select a single configuration version to see its details.

History Details: Version 3, 2011-07-21 13:48:04

Export web service configuration | Restore web service configuration

```

---
Debugger:
  DebugThreshold: debug
  TestMode: 0
Description: A test web service config
Provider:
  Operation:
    Operation one:
      Description: Operation one description.
      MappingInbound:
        Type: Simple
      MappingOutbound:
        Type: Simple
      Type: Test::Test
    Transport:
      Config:
        Authentication: {}
      Type: HTTP::SOAP
    RemoteSystem: remote
    Requester:
      Transport:
        Config:
          Authentication: {}
        Type: HTTP::SOAP
          
```

Powered by OTRS 3.0.x CVS
Top of page

Kielelezo: Historia ya huduma ya tovuti.

11.4.3.5. Futa Huduma ya Tovuti

Wakati mwingine ni lazima kufuta huduma ya tovuti kabisa. Kufanya hivi unabonyeza kitufe "Futa huduma ya tovuti" na maongezi mapya yatatokea kukuuliza uthibitisho.

Bofya "Futa" kuthibitisha uondoaji wa huduma ya tovuti au "Katisha" kufunga maongezi.

Warning

Kufuta huduma ya tovuti hakubadiliki, tafadhali kuwa makini wakati wa kufuta huduma ya tovuti.

You are logged in as Miguel Hidalgo y Costilla

DASHBOARD TICKETS STATISTICS CUSTOMERS **ADMIN**

GenericInterface Web Service Management - Change

» Web Services » Test

Actions

Go to overview

Clone web service

Export web service

Import web service

Configuration history

Delete web service

Debugger

Hint

After you save the configuration you will be redirected again to the edit screen.

If you want to return to overview please click on the 'Go to overview' button.

Details

General

* Name: Test Debug threshold: Debug

Validity: valid

OTRS as provider

In provider mode, OTRS offers web services which are used by remote systems.

Settings

Network transport: HTTP::SOAP Configure

Operations

Operations are individual system functions which remote systems can request.

NAME	DESCRIPTION	CONTROLLER	INBOUND MAPPING	OUTBOUND MAPPING
Operation one	Operation one description.	Test:Test	Simple	Simple

Add Operation: -

OTRS as requester

In requester mode, OTRS uses web services of remote systems.

Settings

Network transport: HTTP::SOAP Configure

Delete webservice

Do you really want to delete this web service?

Delete Cancel

Kielelezo: Futa huduma ya tovuti.

11.4.3.6. Kieuaji cha Huduma ya Tovuti

Anaye eua anahifadhi batli ya huduma ya tovuti. Katika skrini ya kueua unaweza kufwatilia mawasiliano yote ya huduma za tovuti kwa aidha aina za mtoaji au muombaji.

Hii skrini ikionyeshwa orodha ya maombi inanza kupakuliwa. Baada ya orodha kujaa unaweza kuchagua moja ya safu mlalo (hii ina maana mlolongo wa mawasiliano) kukagua undani wake. Maelezo haya yatatokea kwenye boksi chini.

Unaweza kupunguza orodha ya mawasiliano kwa kutumia kichujio upande wa kulia wa skrini. Unaweza kuchuja na:

- Aina ya mawasiliano (mtoaji au mpokeaji)
- Tarehe: kabla na / au baada tarehe fulani
- Anuani ya IP ya mbali
- Mjumuisho wa yote.

Baada ya mpangilio wa kichujio kusetiwa, bonyeza kitufe cha "Onyesha Upya" na orodha mpya itaonyeshwa inayofikia vigezo vya utafutaji wako.


Note

Kutegemea na vigezo vya utafutaji kwa vichujio orodha mpya inaweza isitoe matokeo yoyote.

Upande wa kushoto wa skrini chini ya safuwima ya kitendo unaweza kuchagua "Rudi nyuma kwenye huduma ya tovuti" au futa batli ya anaye eua kwa kubonyeza kitufe "Futa".

Hii itafungua maongezi yanayo kuuliza kuthibitisha kufuta batli. Bofya "Futa" katika kitufe cha maongezi kufanya kitendo au bofya "Sitisha" kufunga maongezi.

Kwenye sehemu ya "Undani wa maombi" unaweza kuona maelezo yote ya mawasiliano yaliyochaguliwa. Hapa unaweza kufuatilia mtiririko mzima na kukagua kasoro zozote au kuthibitisha mafanikio ya majibu.

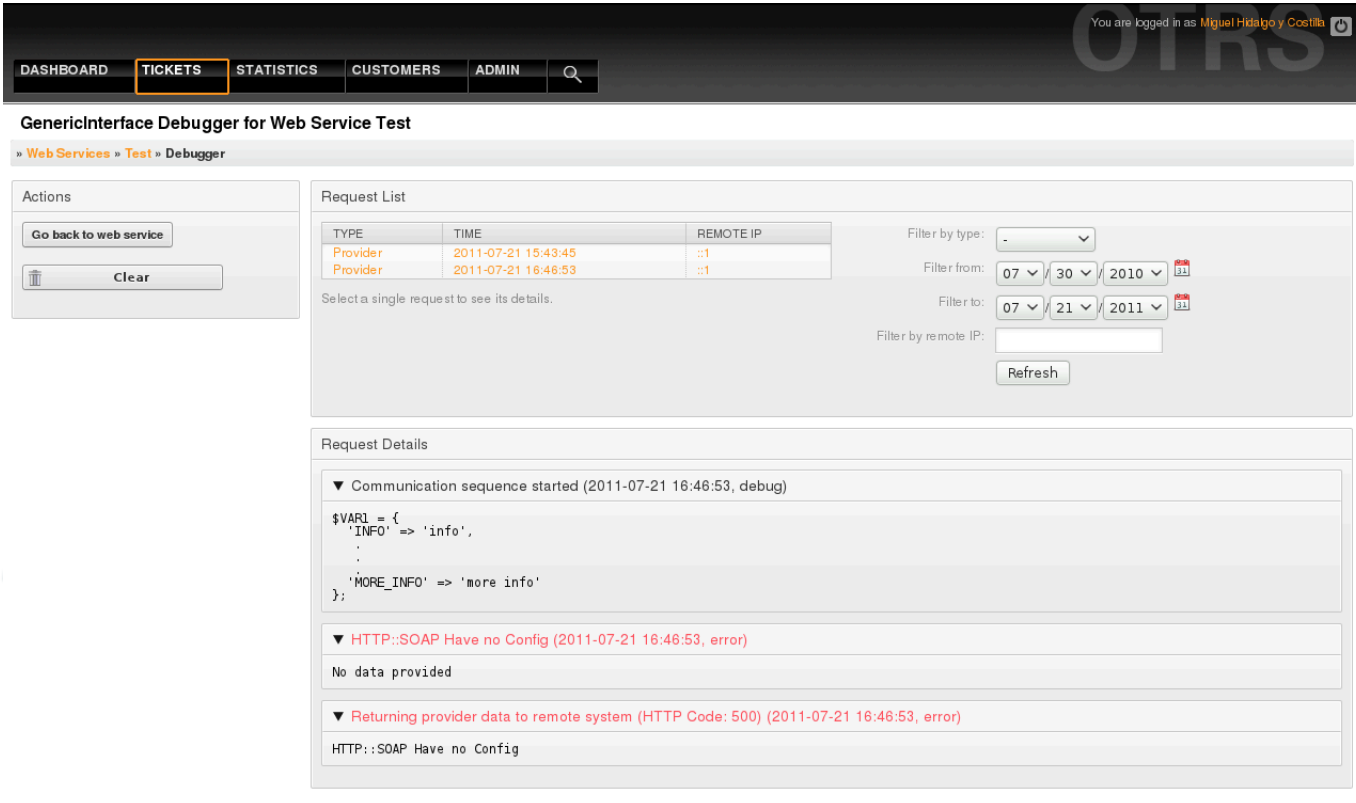

The screenshot shows the OTRS GenericInterface Debugger for Web Service Test. The interface includes a navigation menu with 'TICKETS' selected, and a user login status 'You are logged in as Miguel Hidalgo y Costilla'. The main content area is titled 'GenericInterface Debugger for Web Service Test' and contains a 'Request List' table with columns for TYPE, TIME, and REMOTE IP. Below the table are filter options for type, date, and remote IP, along with a 'Refresh' button. The 'Request Details' section shows a communication sequence starting at 2011-07-21 16:46:53, followed by an error message: 'HTTP::SOAP Have no Config (2011-07-21 16:46:53, error)'. The error details show 'No data provided' and 'Returning provider data to remote system (HTTP Code: 500) (2011-07-21 16:46:53, error)'. The footer indicates 'Powered by OTRS 3.0.x CVS' and 'Top of page'.

Kielelezo: Kieuaji cha huduma ya tovuti.

11.4.3.7. Badili Usanidi wa Huduma ya Tovuti

Tukirudi kwenye skrini ya kubadilisha huduma ya tovuti, sasa tutafanya mapitio ya upande wake wa kulia. Hapa tuna uwezo wa kubadili data zote za ujumla za huduma ya tovuti kama jina, maelezo, kizingiti cha kueua, na kadhalika. Pia kuna sehemu nyingine mbili chini zinazoturuhusu kubadili parameta maalumu za aina za mawasilinao "OTRS kama Mtoaji" na "OTRS kama Muombaji".

Usanidi wa huduma ya tovuti unahitaji kuhifadhiwa katika kila hatua. Hii inamaanisha kama mpangilio umebadilishwa, viungo vya kwenda kwa sehemu nyingine za ndani za usanidi vitalemazwa kukulazimisha wewe kuhifadhi usanidi wa ngazi uliyopo. Baada ya kuhifadhi viungo vilivyo lemazwa vitawezeshwa tena kukuwezesha kuendelea na usanidi.

Katika kifungu "OTRS kama mtoaji" inawezekana kuseti au kusanidi itifaki ya usafirishaji wa mtandao. Mazingira ya nyuma ya usafirishaji mtandao yaliyosajiliwa tu ndiyo yanaonyeshwa kwenye orodha. Kusanidi usafirishaji wa mtandao bofya kwenye kifufe cha "Sanidi". Pia inawezekana kuongeza operesheni mpya katika boksi hili. Kufanya hivi chagua moja ya operesheni zilizopo kutoka kwenye orodha "Ongeza Operesheni". Hii itakupeleka kwenye skrini ya kusanidi operesheni. Baada ya kuhifadhi operesheni mpya itaorodheshwa kwenye jedwali juu.

"OTRS kama muombaji" ni sawa na iliyopita, lakini badala ya "operesheni" unaweza kuongeza wachochezi hapa.

Bofya kitufe "Hifadhi" kuhifadhi na kuendelea na usanidi wa huduma za tovuti, "Hifadhi na maliza" kuhifadhi na kurudi kwenye skrini ya mapitio ya huduma za tovuti, au "Sitisha" kupuuza mabadiliko ya ngazi za usanidi wa sasa na kurudi kwenye skrini ya mapitio ya huduma za tovuti.

DASHBOARD
TICKETS
STATISTICS
CUSTOMERS
ADMIN
Q

You are logged in as Miguel Hidalgo y Costilla

GenericInterface Web Service Management - Change

» Web Services » Test

Actions

Go to overview

Clone web service

Export web service

Import web service

Configuration history

Delete web service

Debugger

Hint

After you save the configuration you will be redirected again to the edit screen.

If you want to return to overview please click on the 'Go to overview' button.

Details

General

* Name: Debug threshold:

Description: Validity:

Remote system:

▼ OTRS as provider

In provider mode, OTRS offers web services which are used by remote systems.

Settings

Network transport:

Operations

Operations are individual system functions which remote systems can request.

NAME	DESCRIPTION	CONTROLLER	INBOUND MAPPING	OUTBOUND MAPPING
Operation one	Operation one description.	Test:Test	Simple	Simple

Add Operation:

▼ OTRS as requester

In requester mode, OTRS uses web services of remote systems.

Settings

Network transport:

Invokers

Invokers prepare data for a request on a remote web service, and process its response data.

NAME	DESCRIPTION	CONTROLLER	INBOUND MAPPING	OUTBOUND MAPPING
Invoker one	Invoker one description	Test:Test	Simple	Simple

Add Invoke:

or

Kielelezo: Badilisha huduma ya tovuti.

Note

Kama skrini nyingine za ujumla za Kiolesura cha usanidi kwa mfano Usafirishaji wa Mtandao, Operesheni, Mchochezi na Muunganiko, skrini ya usanidi (ongeza) wa awali itaonyesha machaguo mawili: "Hifadhi" na "Sitisha". Usanidi ukirudiwa, chaguo jipya "Hifadhi na Maliza" litaonekana. Tabia ya kipengele hiki imafafanuliwa chini.

"Hifadhi" itahifadhi usanidi wa ngazi uliyopo kwa sasa kwenye hifadhidata na itarudi kwenye skrini iliyopita kufanya mapitio ya mabadiliko uliyofanya au kufanya usanidi wa mipangilio ya ndani.


"Hifadhi na Maliza" itahifadhi usanidi wa ngazi uliyopo kwa sasa kwenye hifadhidata na itarudi kwenye skrini iliyopita kwenye mfumo wa viwango wa usanidi (kwa ngazi ya juu inayofuata ya usanidi)

"Katisha" itapuuza mabadiliko yoyote ya usanidi kwa ngazi uliyopo na itarudi kwenye skrini iliyopita kwenye mfumo wa viwango wa usanidi.

11.4.3.7.1. Usafirishaji Mtandao wa Mtoaji wa Huduma ya Tovuti

Mbeleni orodha ya visafirishaji mtandao vinavyopatikana itaongezeka. Kwa sasa usafirishaji wa "HTTP::SOAP" unapatikana. Kila usafirishaji una machaguo tofauti ya usanidi kuanzisha na yanaweza kutumia moduli tofauti za mazingira ya mbele kuisanidi, lakini mara nyingi zinatakiwa kuwa sawa na moduli za usanidi wa usafirishaji wa "HTTP::SOAP".

Ni rahisi kusanidi itifaki "HTTP::SOAP" kama mtoaji. Kuna mipangilio miwili tu: "Nafasiyajina" na "Upeo wajuu wa urefu wa ujumbe". Hizi sehemu zinahitajika. Ya kwanza ni URI kuzipa njia za SOAP maudhui, kupunguza utata, na ya pili ni sehemu ambayo unaweza kuweka bayana ukomo wa juu wa ukubwa (katina baiti) kwa ujumbe wa SOAP ambao OTRS itachakatisha.

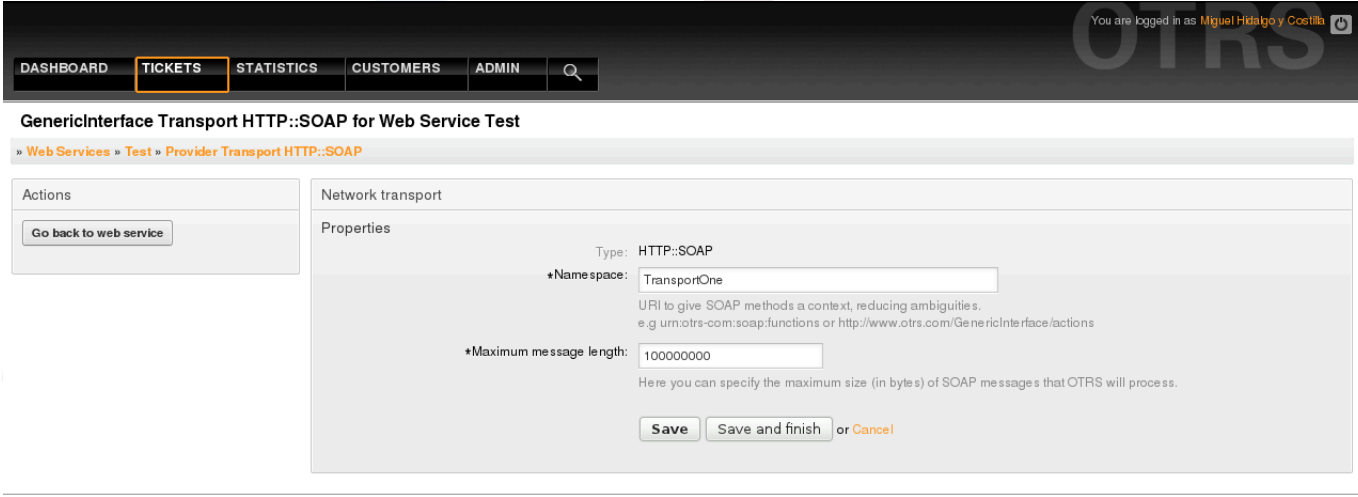

The screenshot shows the OTRS web interface. At the top right, it says "You are logged in as Miguel Hidalgo y Costilla". The navigation menu includes DASHBOARD, TICKETS (highlighted), STATISTICS, CUSTOMERS, and ADMIN. The main content area is titled "GenericInterface Transport HTTP::SOAP for Web Service Test" and shows a breadcrumb trail: » Web Services » Test » Provider Transport HTTP::SOAP. On the left, there is an "Actions" panel with a "Go back to web service" button. The main form is titled "Network transport" and "Properties". It contains the following fields and options:

- Type: HTTP::SOAP
- *Namespace: TransportOne
- *Maximum message length: 100000000

Below the form, there is a note: "Here you can specify the maximum size (in bytes) of SOAP messages that OTRS will process." At the bottom of the form, there are three buttons: "Save", "Save and finish", and "or Cancel".

Kielelezo: Usafirishaji mtandao wa mtoaji wa huduma ya tovuti.

11.4.3.7.2. Operesheni ya Huduma ya Tovuti

Vitendo ambavyo vinaweza kufanyika wakati unatumia OTRS kama mtoaji vinaitwa "Operesheni". Kila operesheni inamilikiwa na mdhibiti. Wadhibiti ni mkusanyiko wa operesheni au wachochezi, kwa kawaida operesheni kutoka kwa mdhibiti mmoja zina mipangilio inayofanana na zinatumia maongezi ya usanidi kwa pamoja. Lakini kila operesheni inaweza kuwa na maongezi ya usanidi yanayojitegemea kama itahitajika..


Jina, Maelezo, Mazingira ya nyuma, na Miunganiko ni sehemu zinazoonekana katika kila operesheni, sehemu nyingine maalumu zinaweza kutokea katika maongezi ya usanidi yasiyo ya kawaida kutimiza mahitaji maalumu ya operesheni.

Kawaida kuna sehemu mbili za usanidi wa miunganiko katika kila operesheni, moja kwa data zinazolingia nyingine kwa data zinazotoka. Unaweza kuchagua aina nyingi za miunganiko (mazingira ya nyuma) kwa kila mwelekeo wa muunganiko, kwa kuwa usanidi wake ni huru kutoka kwa mwingine na pia kutoka kwa mazingira ya nyuma ya operesheni. Zoezi

la kwaida na linalo faamika ni operesheni kutumia aina sawa ya miunganiko katika kesi zote mbili (na usanidi uliogeuzwa). Usanidi kamili wa muunganiko unafanyika katika skrini tofauti ambayo inategemea na aina ya muunganiko.

Mazingira ya nyuma ya operesheni yamejazwa tayari na haiwezekani kuhariri. Utaona parameta hii ukichagua operesheni katika skrini ya kuhariri huduma ya wavuti. Sehemu hiyo inatoa taarifa.

Katika upande wa kushoto wa skrini katika safuwima ya kitendo una machaguo: "Rudi nyuma kwenye huduma ya tovuti" (kupuuza mabadiliko yote tangu uhifadhi wa mwisho) na "Futa". Kama ukibofya kwenye ya mwisho, maongezi yatafunguka na kukuuliza kama unataka kuondoa operesheni. Bofya kwenye kitufe "Futa" kuthibitisha uondoaji wa operesheni na usandi wake au "Sitisha" kufunga futa maongezi.

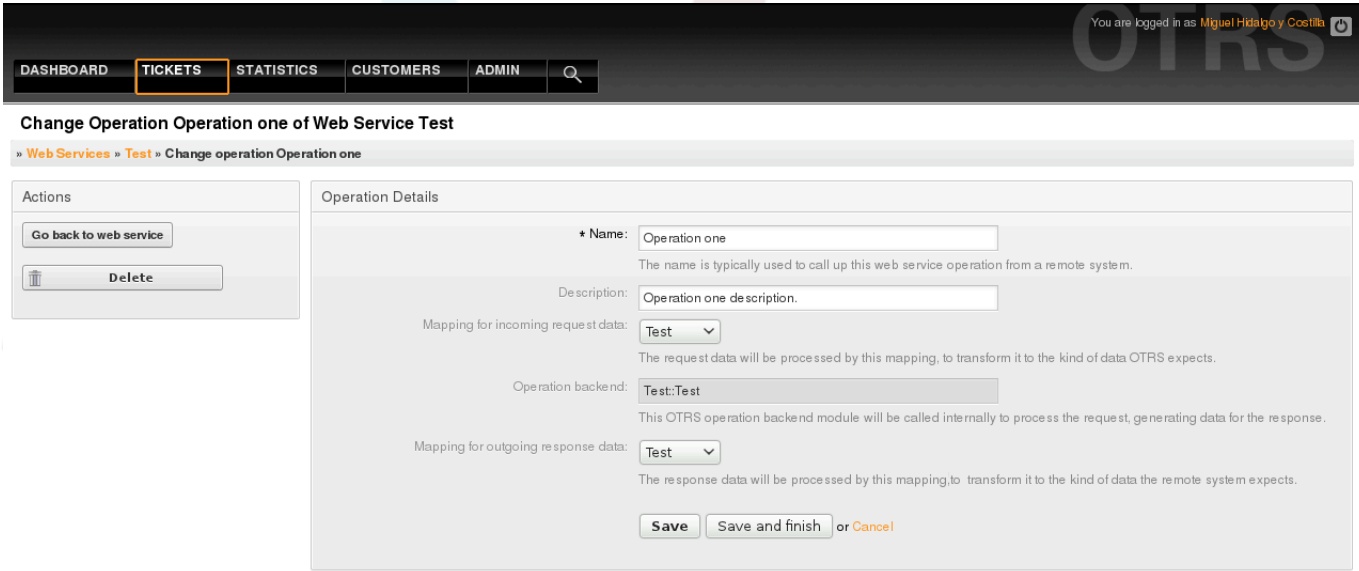

The screenshot shows the OTRS web interface. At the top, there is a navigation menu with 'DASHBOARD', 'TICKETS', 'STATISTICS', 'CUSTOMERS', and 'ADMIN'. The 'TICKETS' menu item is highlighted. Below the navigation, the page title is 'Change Operation Operation one of Web Service Test'. The breadcrumb trail is '» Web Services » Test » Change operation Operation one'. On the left, there is an 'Actions' panel with two buttons: 'Go back to web service' and 'Delete'. The main content area is titled 'Operation Details' and contains the following fields:

- * Name: Operation one (Text input field)
- Description: Operation one description. (Text input field)
- Mapping for incoming request data: Test (Dropdown menu)
- Operation backend: Test:Test (Text input field)
- Mapping for outgoing response data: Test (Dropdown menu)

At the bottom of the form, there are three buttons: 'Save', 'Save and finish', and 'Cancel'. The footer of the page indicates 'Powered by OTRS 3.0.x CVS' and 'Top of page'.

Kielelezo: Operesheni ya huduma ya tovuti.

11.4.3.7.3. Usafirishaji Mtandao wa Muombaji wa Huduma ya Tovuti

Usanidi wa usafirishaji mtandao wa muombaji ni sawa na usanidi wa mtoaji. Kwa Muombaji usafirishaji mtandao wa "HTTP::SOAP" kuna sehemu nyingi zaidi kusetiwa.

Kuachana na "Pointiyamwisho" (URI ya kiolesura cha huduma ya tovuti ya Mfumo wa Mbali kukubali maombi) na "Jinanafasi" ambazo ndiyo sehemu zinazotakiwa, unaweza pia kubainisha:

- Usimbaji (kama utf-8, latin1, iso-8859-1, cp1250, na kdhalika) kwa ajili ya ujumbe wa SOAP.
- Kichwa cha SOAPAction: unaweza kutumia hii kutuma kichwa cha SOAPAction tupu au kilichojazwa. Seti kuwa "Hapana" na kichwa cha SOAPAction katika ujumbe wa SOAPA kitakuwa tungo tupu, ay seti kuwa "Ndiyo" kutuma kitendo cha soap katika umbizo

Jinanafasi#Kitendo na fafanua kigawanyaji (kwa kawaida "/" kwa ajili ya huduma za tovuti za .NET na "#" kwa zilizobaki).


- Uthibitisho: kuseti utaratibu wa uthibitisho, seti kuwa "-" ili kutokutumia uthibitisho wowote au chagua moja kutoka kwenye orodha na sehemu za undani zitatokea.

Note

Kwa sasa utaratibu wa uthibitisho(HTTP) wa "BasicAuth" tu ndio unaotekelezwa. Unaweza kuchagua kuutumia au kutokuutumia kwa kutegemea usanidi wa Mfumo wa Mbali. Kama ikitumika, lazima utoe Jina la Mtumiaji na Nywila kufikia mfumo wa mbali.

Warning

Ukitoa nywila kwa ajili ya uthibitisho na baada ya kutuma huduma ya mtandao kwenda kwenye faili la YAML hii nywila itaonyeshwa na kuandikwa kwenye tungo ya nakala wazi ndani ya faili la YAML. Kuwa makini nayo na chukua tahadhari kama ikihitajika.

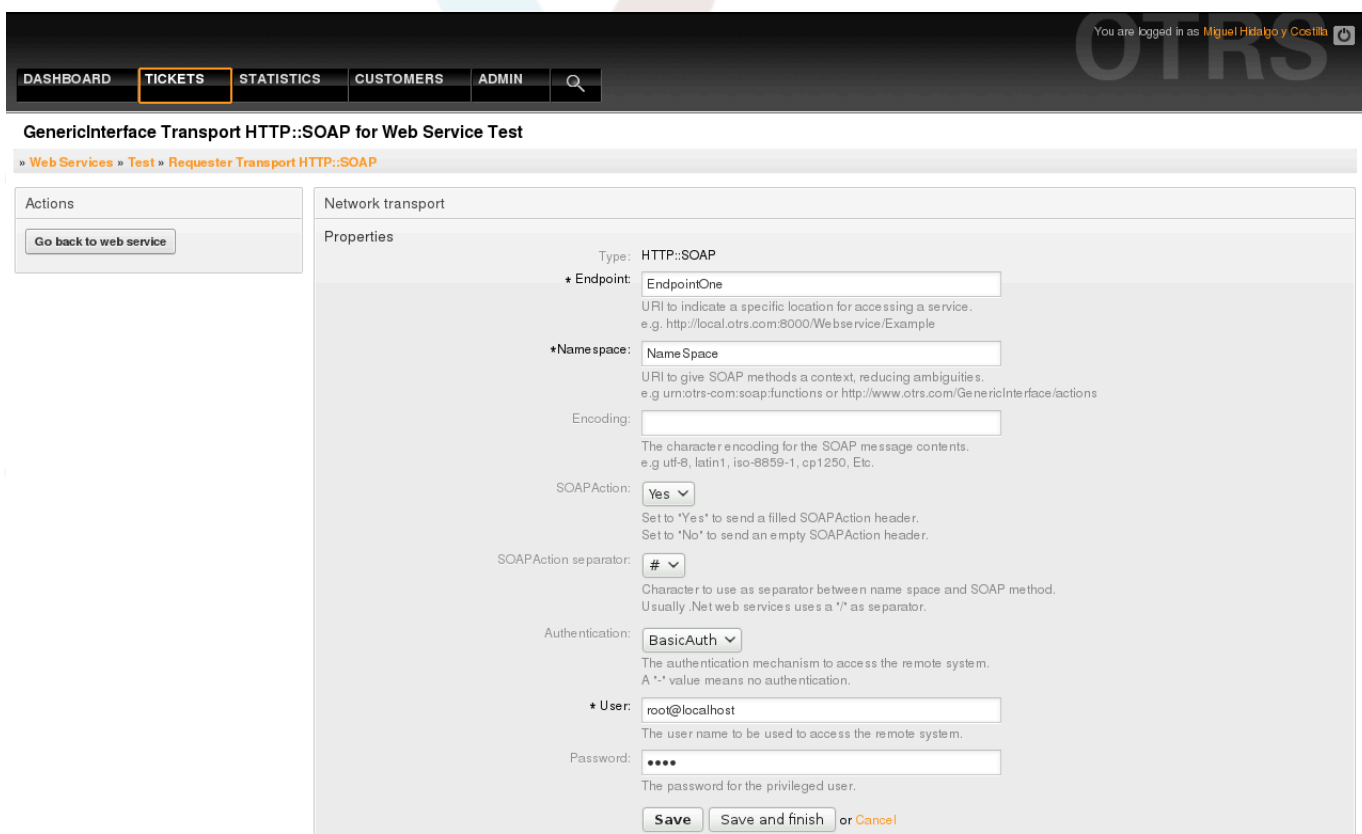

The screenshot shows the OTRS web interface. At the top, there is a navigation menu with 'DASHBOARD', 'TICKETS', 'STATISTICS', 'CUSTOMERS', and 'ADMIN'. The 'TICKETS' tab is selected. Below the menu, the user is logged in as 'Miguel Hidalgo y Costilla'. The main content area displays the configuration for a 'GenericInterface Transport HTTP::SOAP for Web Service Test'. The configuration is organized into sections: 'Actions' (with a 'Go back to web service' button) and 'Network transport' (with a 'Properties' sub-section). The 'Properties' section includes the following fields and options:

- Type: HTTP::SOAP
- * Endpoint: EndpointOne (with a description: URI to indicate a specific location for accessing a service. e.g. http://local.otrs.com:8000/WebService/Example)
- * Namespace: NameSpace (with a description: URI to give SOAP methods a context, reducing ambiguities. e.g. urn:otrs-com:soap:functions or http://www.otrs.com/GenericInterface/actions)
- Encoding: (empty field, with a description: The character encoding for the SOAP message contents. e.g. utf-8, latin1, iso-8859-1, cp1250, Etc.)
- SOAPAction: Yes (dropdown menu, with a description: Set to "Yes" to send a filled SOAPAction header. Set to "No" to send an empty SOAPAction header.)
- SOAPAction separator: # (dropdown menu, with a description: Character to use as separator between name space and SOAP method. Usually .Net web services uses a "." as separator.)
- Authentication: BasicAuth (dropdown menu, with a description: The authentication mechanism to access the remote system. A "-" value means no authentication.)
- * User: root@localhost (with a description: The user name to be used to access the remote system.)
- Password: (masked with dots, with a description: The password for the privileged user.)

At the bottom of the configuration form, there are three buttons: 'Save', 'Save and finish', and 'Cancel'.

Kielelezo: Usafirishaji mtandao wa muombaji wa huduma ya tovuti.

11.4.3.7.4. Mchochezi wa Huduma ya Wavuti

Vitendo unavyoweza kuvifanya wakati unatumia OTRS kama muombaji vinaitwa "Wachochezi". Kila mchochezi anamilikiwa na mdhibiti (wadhhibiti ni mkusanyiko wa operesheni au wachochezi). Kwa kawaida wachochezi kutoka mdhibiti mmoja wanahitaji mipangilio sawa na wanatumia kwa pamoja maongezi ya usanidi. Kila mchochezi anaweza kuwa na maongezi ya peke yake ya usanidi kama ikihitajika.

Jina, Maelezo, Mazingira ya nyuma, na Miunganiko ni sehemu ambazo hutokea kwa kila msababishi. Kwa nyongeza orodha ya vichocheo vya matukio na sehemu nyingine maalumu

mu zinaweza kutokea kwenye maongezi ya usanidi yasiyo ya kawaida kutimiza mahitaji maalumu ya msababishi.

Kwa kawaida kuna sehemu mbili za usanidi wa muunganiko kwa kila mchochezi, moja kwa data zinazolingia na nyingine kwa data zinazotoka. Unaweza kuchagua aina tofauti za miunganiko (mazingira ya nyuma) kwa kila mwelekeo, kwa kuwa usanidi wake ni huru kutoka kwa nyenzake na huru kutoka mazingira ya nyuma ya mchochezi. Zoezi la kawaida na linalofahamika ni mchochezi kutumia aina moja ya muunganiko kwa kesi zote mbili, na usanidi uliogeuzwa. Usanidi kamili wa miunganiko unafanywa kwenye skrini tofauti, ambayo inategemea aina ya muunganiko.

Mazingira ya nyuma ya mchochezi yamejazwa tayari na haiwezekani kuhariri. Utaona parameta hii ukichagua mchochezi katika skrini ya kuhariri huduma ya wavuti. Sehemu hiyo inatoa taarifa.

Visababishi vya tukio ni matukio ndani ya OTRS kama "TiketiTengeneza", "MakalaTuma", na kadh. Hizi zinaweza kuwa kama visababishi kutekeleza kichochezi. Kila kichochezi kinahitaji japo kisababishi kimoja kilichosajiliwa, au kichochezi kitakuwa hakina kazi, kwasababu hakitaitwa. Sifa solandanifu ya vichochezi vya matukio vitafafanua kama mchakato wa OTRS utawajibika kwa vichochezi au itaachwa kwa Mratibu.

Note

Mratibu wa OTRS ni mchakato tofauti ambao una tekeleza kazi katika mandharinyuma. Kwa kutumia hii mchakato wa OTRS hautaathirika kama mchakato wa Mfumo wa Mbali utachukua muda mwingi kutoa majibu, haupatikani au kuna matatizo ya mtandao. Kama usipotumia mratibu kwa kutumia huduma za wavuti unaweza kuifanya OTRS ifanye kazi taratibu au isitoe majibu kabisa. Hivyo basi inashauriwa kutumia kwa mara nyingi visababishi vya matukio solandanifu.

Kuongeza kichochezi cha tukio, kwanza chagua familia ya tukio kutoka kwenye orodha ya kwanza, kisha jina la tukio katika orodha ya pili, kisha seti sifa solandanifu (kama haijatikiwa ina maanisha kichochezi cha tukio kitakuwa sio solandanifu) na mwisho bofya kitufe cha kujumlisha. Kichochezi kipya cha matukio kitakuwa kimetengenezwa na kiawekwa kwenye orodha ya wachochezi "Vichochezi vya Matukio".

Kufuta Kichochezi cha matukio, onyesha kichochezi hicho cha kufutwa katika orodha ya "Vichochezi vya Matukio" na kisha bofya ikoni ya takataka mwisho wa safu mlalo. Hii itafungua maongezi yatakayo kuuliza kama una uhakika unataka kufuta kichochezi cha matukio. Bofya "Futa" kuondoa kichochezi cha matukio kutoka kwenye orodha, au "Sitisha" kufunga maongezi.

Kwenye upande wa kushoto wa skrini katika safuwima ya vitendo una machaguo: "Rudi nyuma kwenye huduma za wavuti" (puuza maadiliko yote kuanzia uhifadhi wa mwisho) na "Futa". Kama ukibofya kitufe cha mwisho maongezi yatatokea na kukuuliza kama ungependa kuondoa mchochezi. Bofya kitufe cha "Futa" kuthibitisha uondoaji wa mchochezi na usanidi wake au "Sitisha" kufunga maongezi.

Change Invoker Invoker one of Web Service Test

» Web Services » Test » Change invoker Invoker one

Actions

[Go back to web service](#)

[Delete](#)

Invoker Details

* Name:

The name is typically used to call up an operation of a remote web service.

Description:

Invoker backend:

This OTRS invoker backend module will be called to prepare the data to be sent to the remote system, and to process its response data.

Mapping for outgoing request data:

The data from the invoker of OTRS will be processed by this mapping, to transform it to the kind of data the remote system expects.

Mapping for incoming response data:

The response data will be processed by this mapping, to transform it to the kind of data the invoker of OTRS expects.

Event Triggers:

EVENT	ASYNCHRONOUS	DELETE
HistoryAdd	Yes	

This invoker will be triggered by the configured events.

Add Event Trigger: Asynchronous

To add a new event select the event object and event name and click on the '+' button.
Asynchronous event triggers are handled by the OTRS Scheduler in background (recommended).
Synchronous event triggers would be processed directly during the web request.

or

Kielelezo: Mchochezi wa huduma ya wavuti.

11.4.3.7.5. Kuunganisha Huduma za Wavuti

Kuna kesi ambapo unahitaji kubadilisha data kutoka umbizo moja kwenda lingine (unganisha au badilisha muundo wa data), kwa sababu kwa kawaida huduma ya wavuti inatumika kuwasiliana na Mfumo wa Mbali, hii ni kwa makisio makubwa si mfumo mwingine wa OTRS na / au hauwezi kuelewa muundo wa data na thamani za OTRS. Kwa kesi hii baadhi au thamani zote inabidi zibadilishwe, na wakati mwingine hata majina ya thamani (funguo) au muundo mzima, ili ifanane na data za upande mwingine. Kufanikisha kazi hii Tabaka la Kiolesura cha Ujumla cha Muunganiko kinakuwepo.

Kila Mfumo wa Mbali una muundo wake wa data na inawezekana kutengeneza moduli mpya za muunganiko kwa kila kesi (mf. kuna moduli ya muunganiko maalumu kwa SAP Meneja Usuluhishi inayosafirishwa na OTRS), lakini sio ya lazima. Muunganiko wa moduli::Rahisi inatakiwa kukidhi mahitaji mengi ya muunganiko.

Note

Wakati Muunganiko::Rahisi haukidhi mahitaji yote ya muunganiko kwa huduma ya wavuti, moduli mpya ya muunganiko inatakiwa itengenezwe. Kujifunza zaidi kuhusu kutengeneza moduli mpya ya muunganiko tafadhali pitia Mwongozo wa Maendeleo wa OTRS.

Hii moduli inakupa nafasi ya kuseti thamani chaguo-msingi za kuunganisha kwa kila ufunguo au thamani kwa mawasiliano yote ya data.

Mwanzo wa skrini utaona kifungu cha kawaida ambapo unaweza kuseti sheria chaguo-msingi ambazo zitafanya kazi kwa funguo na thamani zote ambazo hazijaunganishwa. Kuna machaguo matatu yanayopatikana, haya machaguo yameorodheshwa chini:

- Weka (acha bila kubadilisha): haigusi funguo au thamani kwa njia yoyote.
- Puuza (dondosha jozi ya ufunguo/thamani): hii ikitumika katika ufunguo inafuta ufunguo na thamani, kwa sababu ufunguo ukifutwa pia na thamani yake husika inafutwa pia. Hii ikitumika kwa hii thamani, thamani tu ndiyo inafutwa, kuacha ufunguo, hiyo sasa itahusishwa na ufunguo ulio tupu.
- UnganishaKwenda (tumia ufunguo uliotolewa au thamani kama chaguo-msingi): funguo zote na / au thamani bila sheria ya miunganiko, zitatumia hii kama chaguo-msingi, ukichagua hili chaguo sehemu mpya ya nakala itatokea kuweka hii kama chaguo-msingi.

Kubofya kwenye kitufe "+" kwa ufunguo mpya wa muunganiko, itaonyesha boksi jipya kwa usanidi wa muunganiko mmoja. Unaweza kuongeza funguo nyingi za muunganiko kadri ya mahitaji yako. Bonyeza tena kwenye kitufe "+" na boksi jipya la muunganiko litaonekana chini ya lililokuwepo. Kutoka kwenye haya maboksi ya muunganiko unaweza kufafanua muunganiko wa ufunguo mmoja, na machaguo yanayofwata:

- Thamni halisi(moja au nyingi): tungo ya ufunguo wa zamani itabadilishwa kuwa mpya kama ufunguo wa zamani utafanania kabisa.
- Usemi wa kawaida: Tungo ya ufunguo itawekwa upya baada ya sheria ya usemi wa kawaida.

Kubonyeza kitufe cha thamani mpya ya kuunganisha "+" itaonyesha safu mlalo mpya kwa ajili ya thamani ya kuunganisha. Hapa inawezekana pia kufafanua sheria kwa kila thamani ya kuunganishwa ikiwa na machaguo yale yale kama ya ramani ya ufunguo (Thamani halisi na Usemi wa kawaida). Unaweza kuongeza thamani nyingi kwenye muunganiko kama inavyohitajika, na kama unataka kufuta moja wapo, bonyeza tu kwenye kitufe "-" kwa kila safu mlalo ya muunganiko.

Kufuta kifungu (boksi) muunganiko kamili wa ufunguo inawezekana, bonyeza tu katika kitufe "-" kilicho kwenye upande wa juu kulia wa kila boksi unalotaka kufuta.

Kama unahitaji kufuta kikamilifu usanidi wa muunganiko: rudi nyuma katika operesheni husika au skrini ya mchochezi, angalia mwelekeo wa muunganiko unaouchagua kabla na seti thamani yake kuwa "-", na hifadhi usanidi kufanya mabadiliko.

GenericInterface Mapping Simple for Web Service Test

» Web Services » Test » Operation Operation one » Simple Mapping for Incoming Data

Actions

[Go back to operation](#)

Mapping Simple

Default rule for unmapped keys:

This rule will apply for all keys with no mapping rule.

Default rule for unmapped values:

This rule will apply for all values with no mapping rule.

New key map:

▼ Mapping for Key KeyNew

Key mapping:

*Map key: matching the: *to new key:

Value mapping:

*Map value: matching the: *to new value:

*Map value: matching the: *to new value:

New value map:

or

Kielelezo: Muunganiko wa huduma za wavuti.

11.5. Kiolesura cha Tungo Amri cha Huduma ya Tovuti.

Kiolesura cha Tungo Amri (CLI) ni njia ya haraka ya kufanya kazi na huduma za tovuti. Ina seti ya vifaa ambavyo vinaweza kutumika kufanya kazi za msingi kama:

- Tengeneza, Sasisha, Soma, Orodhesha na Futa huduma za tovuti zenye msingi wa mafaili ya YAML.
- Soma batli ya anaye eua, na machaguo ya kuchuja.

Note

Huitaji kutumia CLI kufanya kazi na huduma za wavuti. Katika kiolesura cha Msimamizi kuna seti za skrini zilizounganishwa kwa ajili ya kuwasiliana na kila upande wa huduma za tovuti. Tafadhali soma GUI ya huduma za tovuti iliyojumuishwa kwenye mwongozo huu.

11.5.1. Usanidi wa Huduma za Tovuti

"WebserviceConfig.pl" ilitengenezwa ili kutengeneza kifaa cha msingi, lakini kirahisi na chenye nguvu cha kufanya kazi na usanidi wa huduma za tovuti. Inakupa uwezo wa kufanya vitendo vifuatavyo:

- Ongeza: kutengeneza huduma za tovuti kwa kutumia faili la YAML kama chanzo cha usanidi.
- Sasisha: kubadilisha huduma ya tovuti iliyopo, usanidi unaweza kubadilishwa kwa kutumia faili la YAML tofauti au lililoboreshwa.

- Soma: kupata usanidi wa huduma ya tovuti iliyopo kuonyeshwa kwenye skrini.
- Orodha: kupata orodha nzima ya huduma za tovuti zilizosajiliwa kwenye mfumo.
- Futa: kufuta huduma ya tovuti kutoka kwenye mfumo. Kuwa makini ukiitumia, kwa sababu kitendo hiki hakiwezi kubadilishwa.

Warning

Operesheni ya huduma ya tovuti ya SOMA itaonyesha usanidi wote kama nakala wazi kwenye skrini, ikijumuisha nywila zilizohifadhiwa. Tafadhali kuwa macho na hili na chukua tahadhari.

Mfano: Kutengeneza usanidi mpya wa huduma ya mtandao:

```
shell> OTRS_HOME/bin/otrs.WebserviceConfig.pl -a write -n <webservice_name>
-f /path/to/yaml/file
```

Pia unaweza kutumia 'otrs.WebserviceConfig.pl' na machaguo yafuatayo:

- **-a read -i <webservice_id>** - Kusoma usanidi uliohifadhiwa.
- **-a write -n <webservice_name> -f /path/to/yaml/file** - Kutengeneza huduma mpya ya tovuti.
- **-a write -i <webservice_id> -f /path/to/yaml/file** - Kusasisha huduma ya tovuti.
- **-a list** - Kuorodhesha huduma za tovuti zinazopatikana.
- **-a delete -i <webservice_id>** - Kufuta huduma ya tovuti.

11.5.2. Kieuaji cha Huduma ya Tovuti

Kifaa kingine kinachopatikana kupitia kiolesura cha tungo amri ni hati ya "otrs.GenericInterfaceDebugRead.pl", ambacho ni kiolesura cha kutafuta mweuaji wa maingizo ya batli ya huduma ya tovuti.

Mfano: Kutafuta maingizo ya batli za anaye eua:

```
shell> bin/otrs.GenericInterfaceDebugRead.pl
```

Parameta za hiari zinaweza kutumika kwa ajili ya hati ya "otrs.GenericInterfaceDebugRead.pl":

- **-c** - kuchuja Mawasiliano kwa Kitambulisho (muundo wa md5sum).
- **-t** - kuchuja kwa MawasilianoAina ('Mtoaji' or 'Muombaji').
- **-a** - kuchuja kwa tarehe (Katika au Baada ya tarehe).
- **-b** - kuchuja kwa tarehe (Katika au Kabla ya tarehe).
- **-i** - kuchuja kwa anwani ya IP (lazima iwe anwani halisi ya IPV4 au IPV6).
- **-w** - kuchuja kwa Kitambulisho cha Huduma ya Tovuti.
- **-d** - kujumuisha data za mawasiliano kwa undani.

Mfano: Kutafuta maingizo ya anaye eua kwa kutumia parameta zote:

```
shell> ./otrs.GenericInterfaceDebugRead.pl -c
a7cc4d9f5c70387a9bfbe1351bc88966 -t Provider -a '2011-07-22 00:00:00' -b '2011-07-26
00:00:00' -i 127.0.0.1 -w 123 -d 1
```

Note

Inashauriwa sana kujumuisha japo moja ya machaguo ya kuchuja yaliyoorodheshwa juu, na zaidi kama chaguo "-d" limechaguliwa, kwa sababu taarifa *nyingi* zinaweza kupatikana kutoka kwenye hifadhidata na kuonyeshwa kwenye skrini, hii inaweza kupelekea muda wa majibu kuongezeka na taarifa zaidi ya zile unazohitaji.

11.6. Usanidi wa Huduma za Tovuti

Kutoka kwenye usanifu wake huduma za tovuti zilionekana kuweza kutumika kutoa mfuomo mmoja wa OTRS kwenda mwingine, mf. kutoka kwenye mazingira ya majaribio au usanifu kwenda kwenye mazingira ya uzalishaji. Kwa hiyo ilihitajika kuwa na njia rahisi ya kupata usanidi wa huduma za tovuti kutoka kwenye hifadhidata, na kuhamishia kwenye nyingine. Kufanikisha kazi hii Kiolesura cha Ujumla kinatumia mafaili ya YAML kama msingi wa usanidi wa huduma za tovuti.

Kwanini YAML? YAML ni lugha ya dhulisho mabadiliko iliyoundwa kuwa rafiki kwa binadamu kuandika na kusoma (ni rahisi kuelewa zaidi ya JSON) , haina baadhi ya vikwazo vya XML kama lebo za tarakimu, ni wazi, ya kawaida, na ni kamili zaidi kuhifadhi usanidi mzima wa huduma ya tovuti.

Note

Kujifunza zaidi kuhusu YAML tafadhali tembelea <http://www.yaml.org/>.

ufuatao ni mfano wa usanidi wa huduma ya tovuti katika muundo wa YAML:

```
---
Debugger:
  DebugThreshold: debug
Description: This an example of a web service configuration
Provider:
  Operation:
    CloseIncident:
      Description: This is a test operation
      MappingInbound: {}
      MappingOutbound: {}
      RemoteSystemGuid: ''
      Type: Test::Test
    Test:
      Description: This is a test operation
      MappingInbound:
        Config:
          KeyMapDefault:
            MapTo: ''
            MapType: Keep
          KeyMapExact:
            Prio: Priority
          ValueMap:
            Priority:
              ValueMapExact:
                Critical: 5 Very High
                Information: 1 Very Low
                Warning: 3 Normal
            ValueMapDefault:
              MapTo: 3 Normal
              MapType: MapTo
          Type: Simple
      MappingOutbound:
```

```

Config:
  KeyMapDefault:
    MapTo: ''
    MapType: Ignore
  KeyMapExact:
    Priority: Prio
  ValueMap:
    Prio:
      ValueMapExact:
        1 Very Low: Information
        3 Normal: Warning
        5 Very High: Critical
    ValueMapDefault:
      MapTo: ''
      MapType: Ignore
      Type: Simple
      Type: Test::Test
Transport:
  Config:
    MaxLength: 10000000
    NameSpace: http://www.example.com/actions
    Type: HTTP::SOAP
RemoteSystem: remote.system.description.example.com
Requester:
  Invoker:
    Test:
      Description: This is a test invoker
      Events:
        - Asynchronous: 1
          Event: TicketCreate
        - Asynchronous: 0
          Event: ArticleUpdate
      MappingInbound:
        Type: Simple
      MappingOutbound:
        Type: Simple
      Type: Test::Test
Transport:
  Config:
    Authentication:
      Password: '*****'
      Type: BasicAuth
      User: otrs
    Encoding: utf-8
    Endpoint: http://www.example.com:8080/endpoint
    NameSpace: http://www.example.com/actions
    SOAPAction: Yes
    SOAPActionSeparator: '#'
    Type: HTTP::SOAP
  
```

11.6.1. Undani wa Usanidi

11.6.1.1. Ujumla

- Maelezo: nakala fupi inayoelezea huduma ya tovuti.
- MfumoMbali: maelezo mafupi ya Mfumo wa Mbali.
- Anaye eua: chombo cha mipangilio ya anaye eua.
- Mtoaji: chombo cha mipangilio ya mtoaji.
- Muombaji: chombo cha mipangilio ya muombaji.

11.6.1.2. Anaye eua

- EuaKizingiti: Ngazi ya anaye eua

Thamani ziwezekanazo

- eua: batli zote zinahifadhiwa kwenye hifadhidata.
- Taarifa: batli za tabaka la taarifa, notisi na kasoro ndio zinahifadhiwa katika hifadhidata.
- notisi: batli za tabaka la notisi na makosa ndio zinahifadhiwa kwenye hifadhidata.
- kosa: batli za tabaka la makosa tu ndio zinahifadhiwa kwenye hifadhidata.

11.6.1.3. Mtoaji

- Operesheni: chombo kwa kila mipangilio ya operesheni.
- Usafirishaji: chombo cha mipangilio ya mtoaji usafiri wa mtandao.

11.6.1.3.1. Operesheni

- <Opereshenijina>: Jina la kipekee kwa operesheni, chombo cha mipangilio yake ya operesheni (nambari ya elementi 0..n, haitakiwi kujirudia).

11.6.1.3.1.1. <JinaOperesheni>

Hiki kifungu kinajikita katika operesheni kutoka aina "Test::Test" operesheni nyingine zinaweza kuwa na zaidi au mipangilio mingine.

- Maelezo: nakala fupi inayoelezea operesheni.
- KuunganishaZinazoingia: chombo cha kuunganisha mipangilio ya data za maombi yanayoingia.
- KuunganishaZinazotoka: chombo cha kuunganisha mipangilio ya data za majibu yanayotoka.
- Aina: mazingira ya nyuma ya operesheni, katika Mdhibili::Umbizo la operesheni.

11.6.1.3.1.1.1. KuunganishaZinazoingia

Kifungu hiki kinajikita katika miunganiko ya aina "Rahisi". Miunganiko mingine inaweza kuwa na mipangilio zaidi au tofauti.

- Usanidi: chombo cha kuunganisha mipangilio hii.
- Aina: kuunganisha mazingira ya nyuma.

11.6.1.3.1.1.1.1. Usanidi

- UfunguoUnganishaChaguo-msingi: chombo cha mipangilio yote ya funguo isiyunganishwa.
- ThamaniUnganishaChaguo-msingi: chombo cha mipangilio ya thamani zote zisizounganishwa.
- FunguoUnganishaHalisi: chombo cha miunganiko yote halisi ya funguo (nambari ya elementi 0 .. 1)
- UfunguoUnganishaRegEx: chombo cha miunganiko yote ya semi za kawaida za ufunguo (nambari ya elementi 0 .. 1).
- ThamaniUnganisha: chombo cha miunganiko yote ya thamani (nambari ya elementi 0 .. 1).

11.6.1.3.1.1.3.1. Usanidi

- KikomoUrefu: kikomo cha urefu wa kusomwa katika baiti kwenye ujumbe wa SOAP kwa OTRS.
- JinaNafasi: URI ambayo inatoa maudhui kwa operesheni zote zilizo kwenye huduma hii ya tovuti.

11.6.1.4. Muombaji

- Mchochezi: chombo cha mipangilio ya kila mchochezi.
- Usafirishaji: chombo cha mipangilio ya muombaji wa usafiri wa mtandao.

11.6.1.4.1. Mchochezi

- <Mchochezijina>: Jina la kipekee la mchochezi, chombo cha mipangilio yake ya mchochezi (nambari ya elementi 0..n, haitakiwi kujirudia).

11.6.1.4.1.1. <Mchochezijina>

Hiki kifungu kinatokana na wachochezi wa aina "Jaribio::Jaribio" wachochezi wengine wanaweza kuwa na mipangilio tofauti.

- Maelezo: nakala fupi inayoelezea mchochezi
- Matukio: chombo cha mipangilio ya vichochezi vya matukio visivyo na majina.
- KuunganishaZinazoingia: chombo cha kuunganisha mipangilio ya majibu ya data zina-zoingia.
- KuunganishaZinazotoka: chombo cha kuunganisha mipangilio ya data za maombi yanayotoka.
- Aina: mazingira ya nyuma ya mchochezi, katika Mdhibili::Umbizo la mchochezi.

11.6.1.4.1.1.1. Matukio

- *Orodhesha Elementi*: (nambari ya elementi 0 .. n)
 - Solandanifu: inaseti kama mchochezi ataachwa kuwa jukumu la Mratibu

Thamani ziwezekanazo

- 0: haijashughulikiwa na Mratibu.
- 1: imeshughulikiwa na Mratibu.
- Tukio: jina la kichochezi cha tukio.

Thamani Ziwezekanazo (kwa matukio ya tiketi)

- TengenezaTiketi
- FutaTiketi
- SasishaKichwaTiketi
- TiketiFunguaMudaWaMwishoSasisha
- SasishaFoleniTiketi
- SasishaAinaTiketi

- SasishaHudumaTiketi
- SasishaSLATiketi
- SasishaMtejaTiketi
- SasishaNakalaHuruTiketi
- SasishaMudaHuruTiketi
- SasishaMudaKusubiriTiketi
- SasishaFungaTiketi
- TiketiNyarakaBenderaSasisha
- SasishaHaliTiketi
- SasishaMmilikiTiketi
- TiketiJukumuSasisha
- TiketiKipaumbeleSasisha
- OngezaHistoria
- FutaHistoria
- TiketiHesabuMuda
- MuunganikoTiketi
- TiketiJiunge
- TiketiJiondoe
- TiketiBenderaSeti
- TiketiBenderaFuta
- TiketiMtumwaKiungoOngeza
- TiketiMtumwaKiungoFuta
- TiketiMkuuKiungoFuta

Thamani Ziwezekanazo (kwa matukio ya makala)

- Matukio ya Makala
- TengenezaMakala
- SasishaNakalaHuruMakala
- SasishaMakala
- TumaMakala
- MakalaDunda

- MakalaMtejaTaarifa
- MakalaOtomatikiMajibu
- MakalaBenderaSeti
- MakalaBenderaFuta
- MakalaWakalaTaarifa
- MakalaMtejaTaarifa

11.6.1.4.1.1.2. KuunganishaZinazoingia

Sawa na Operesheni KuunganishaZinazoingia

11.6.1.4.1.1.3. KuunganishaZinazotoka

Sawa na Operesheni KuunganishaZinazoingia.

11.6.1.4.1.1.4. Safirisha

Hiki kifungu kimejikita kwenye usafirishaji mtandao wa HTTP::SOAP wa muombaji, usafirishaji mwingine unawezakuwa na mipangilio tofauti au zaidi.

- Config: chombo cha mipangilio yote maalumu ya usanidi wa usafirishaji wa mtandao.
- Aina: mazingira ya nyuma ya muombaji wa usafirishaji wa mtandao.

11.6.1.4.1.1.4.1. Usanidi

- Uthibitisho: chombo cha mipangilio ya uthibitisho
- Usimbaji: ujumbe wa SOAP usimbaji maombi
- Pointiyamwisho: URI ya huduma ya tovuti ya Mfumo wa Mbali kukubali maombi ya OTRS
- JinaNafasi: URI inayowapa maudhui wachochezi wote walio katika huduma hii ya wavuti.
- SOAPAction: kutuma kichwa cha SOAPAction kilicho tupu au kilichojazwa katika ujumbe wa SOAP (ndani ya "<JinaNafasi> <Kigawanyo> <Kitendo>" umbizo).

Thamani ziwezekanazo

- NDIYO: kutuma kichwa cha SOAPAction kilichojazwa.
- Hapana: kutuma kichwa cha SOAPAction tupu.
- SOAPActionSeparator: kuseti <Kigawanyo> cha kichwa cha SOAPAction iliyojazwa.

Thamani ziwezekanazo

- '/': inatumika kwa na huduma za tovuti za .net.
- '#': inatumika na huduma zote za tovuti zilizobaki.

11.6.1.4.1.1.4.1.1. Uthibitisho

- Mtumiaji: jina la mtumiaji lenye haki ambalo lina ufikivu kwa huduma ya mbali ya tovuti.
- Nywila: nywila ya mtumiaji mwenye haki katika nakala wazi.
- Aina: aina ya uthibitisho.

11.7. Viunganishi

Kiunganisho ni seti ya vitendo ambavyo aidha vinaitwa Operesheni kama OTRS inasimama kama mtoaji wa huduma ya wavuti au Wachochezi kama OTRS itasimama kama muombaji huduma ya wavuti. Pia inaweza kujumuisha Miunganiko au Usafirishaji.

Kiunganisho kimoja kinaweza kuwa na Operesheni tu, Wachochezi tu au zote. Kiunganisho kinaweza kutumia sehemu za viunganisho vingine kama Miunganiko au Usafirishaji kama siyo maalumu kwa kiunganisho kinachojaribu kuzitekeleza.

Kwa maneno mengine kiunganisho hakijajikita kwa tabaka moja la kidhibiti lakini inaweza kutanuliwa kwenye Muunganiko wa Data au matabaka ya Usafirishaji wa Mtandao kama itahitajika.

Kutokana na usanifu wa moduli wa Kiolesura cha Ujumla Kiunganishi kinaweza kuonekana kama programu-jalizi; hii inamaanisha kwa kuongeza Viunganishi uwezo wa kiolesura cha ujumla kinaweza kupanuliwa kwa kutumia: vifaa vya nyongeza vya OTRS, moduli zilizo-geuzwa kukufaa za OTRS, moduli za mshiriki wa 3, na mengineyo.

11.7.1. Kifungu cha Viunganishi

Iliyojumuishwa na hili toleo la OTRS viunganishi vifuatavyo viko tayari kutumika.

- Kipindi
- Tiketi

11.7.1.1. Kiunganishi cha Kipindi

Kiungo hiki kinaweza kutengeneza Kitambulisho halali cha Kipindi ambacho kinaweza kutumika katika operesheni nyingine yoyote.

Inatoa:

- Operesheni:
 - TengenezaKipindi:

11.7.1.1.1. Operesheni

11.7.1.1.1.1. TengenezaKipindi:

Inatengeneza Kitambulisho kipya halali kitakachotumika katika operesheni nyingine kutoka kwenye viunganishi vingine kama TengenezaTiketi.

Note

Kutumia Kitambulisho cha Kipindi katika operesheni nyingine kutoka kwenye viunganishi vingine ni muhimu kwamba operesheni ifanye uthibitisho kwa kutumia Kitambulisho cha Kipindi. Vifurushi vingine vya operesheni vinaweza kukubali Kitambulisho cha Kipindi halali kama njia ya uthibitisho.

Sifa ziwezekanazo:

```
<SessionCreate>
  <!--You have a MANDATORY CHOICE of the next 2 items at this level-->
  <!--Optional:-->
  <UserLogin?</UserLogin>
  <!--Optional:-->
  <CustomerUserLogin?</CustomerUserLogin>
  <!--Optional:-->
  <Password?</Password>
</SessionCreate>
```

11.7.1.2. Kiunganishi cha Tiketi

Hiki kiunganishi kinatoa programu-tumizi za msingi kuwasiliana na tiketi

Inatoa:

- Operesheni:
 - TengenezaTiketi
 - SasishaTiketi
 - PataTiketi
 - TafutaTiketi

11.7.1.2.1. Operesheni

11.7.1.2.1.1. TengenezaTiketi

Inatoa kiolesura cha kutengeneza tiketi katika OTRS. Tiketi lazima iwe na Makala na inaweza kuwa na viambatanishi mbali mbali, Sehemu Zinazobadilika zote zilizofafanuliwa zinaweza pia kusetiwa katika operesheni ya TiketiTengeneza.

Sifa ziwezekanazo:

```

<TicketCreate>
  <!--You have a MANDATORY CHOICE of the next 3 items at this level-->
  <!--Optional:-->
  <UserLogin?>/UserLogin>
  <!--Optional:-->
  <CustomerUserLogin?>/CustomerUserLogin>
  <!--Optional:-->
  <SessionID?>/SessionID>
  <!--Optional:-->
  <Password?>/Password>
  <Ticket>
    <Title?>/Title>
    <!--You have a MANDATORY CHOICE of the next 2 items at this level-->
    <!--Optional:-->
    <QueueID?>/QueueID>
    <!--Optional:-->
    <Queue?>/Queue>
    <!--You have a CHOICE of the next 2 items at this level-->
    <!--Optional:-->
    <TypeID?>/TypeID>
    <!--Optional:-->
    <Type?>/Type>
    <!--You have a CHOICE of the next 2 items at this level-->
    <!--Optional:-->
    <ServiceID?>/ServiceID>
    <!--Optional:-->
    <Service?>/Service>
    <!--You have a CHOICE of the next 2 items at this level-->
    <!--Optional:-->
    <SLAID?>/SLAID>
    <!--Optional:-->
    <SLA?>/SLA>
    <!--You have a MANDATORY CHOICE of the next 2 items at this level-->
    <!--Optional:-->
    <StateID?>/StateID>
    <!--Optional:-->
    <State?>/State>
    <!--You have a MANDATORY CHOICE of the next 2 items at this level-->
    <!--Optional:-->
  
```

```

<PriorityID?></PriorityID>
<!--Optional:-->
<Priority?></Priority>
<!--You have a CHOICE of the next 2 items at this level-->
<!--Optional:-->
<OwnerID?></OwnerID>
<!--Optional:-->
<Owner?></Owner>
<!--You have a CHOICE of the next 2 items at this level-->
<!--Optional:-->
<ResponsibleID?></ResponsibleID>
<!--Optional:-->
<Responsible?></Responsible>
<CustomerUser?></CustomerUser>
<!--Optional:-->
<CustomerID?></CustomerID>
<!--Optional:-->
<PendingTime>
  <Year?></Year>
  <Month?></Month>
  <Day?></Day>
  <Hour?></Hour>
  <Minute?></Minute>
</PendingTime>
</Ticket>
<Article>
  <!--You have a CHOICE of the next 2 items at this level-->
  <!--Optional:-->
  <ArticleTypeID?></ArticleTypeID>
  <!--Optional:-->
  <ArticleType?></ArticleType>
  <!--You have a CHOICE of the next 2 items at this level-->
  <!--Optional:-->
  <SenderTypeID?></SenderTypeID>
  <!--Optional:-->
  <SenderType?></SenderType>
  <!--Optional:-->
  <From?></From>
  <Subject?></Subject>
  <Body?></Body>
  <!--You have a CHOICE of the next 2 items at this level-->
  <!--Optional:-->
  <ContentType?></ContentType>
  <Charset?></Charset>
  <MimeType?></MimeType>
  <!--Optional:-->
  <HistoryType?></HistoryType>
  <!--Optional:-->
  <HistoryComment?></HistoryComment>
  <!--Optional:-->
  <AutoResponseType?></AutoResponseType>
  <!--Optional:-->
  <TimeUnit?></TimeUnit>
  <!--Optional:-->
  <NoAgentNotify?></NoAgentNotify>
  <!--Zero or more repetitions:-->
  <ForceNotificationToUserID?></ForceNotificationToUserID>
  <!--Zero or more repetitions:-->
  <ExcludeNotificationToUserID?></ExcludeNotificationToUserID>
  <!--Zero or more repetitions:-->
  <ExcludeMuteNotificationToUserID?></ExcludeMuteNotificationToUserID>
</Article>
<!--Zero or more repetitions:-->
<DynamicField>
  <Name?></Name>
  <!--1 or more repetitions:-->
  <Value?></Value>
</DynamicField>
<!--Zero or more repetitions:-->
<Attachment>
  <Content>cid:61886944659</Content>
  <ContentType?></ContentType>

```

```

    <Filename?></Filename>
  </Attachment>
</TicketCreate>

```

11.7.1.2.1.2. SasishaTiketi

Operesheni ya SasishaTiketi inaongeza uwezo wa kubadili sifa kutoka kwenye tiketi iliyopo au kuongeza makala mpya, ikijumuisha na viambatanisho na sehemu zinazobadilika zote zilizofafanuliwa kwa ajili ya tiketi na makala mpya.

Note

Sio lazima kutengeneza makala mpya kubadilisha sifa ya tiketi.

Sifa ziwezekanazo:

```

<TicketUpdate>
  <!--You have a MANDATORY CHOICE of the next 3 items at this level-->
  <!--Optional:-->
  <UserLogin?></UserLogin>
  <!--Optional:-->
  <CustomerUserLogin?></CustomerUserLogin>
  <!--Optional:-->
  <SessionID?></SessionID>
  <!--Optional:-->
  <Password?></Password>
  <!--You have a CHOICE of the next 2 items at this level-->
  <TicketID?></TicketID>
  <TicketNumber?></TicketNumber>
  <!--Optional:-->
  <Ticket>
    <!--Optional:-->
    <Title?></Title>
    <!--You have a CHOICE of the next 2 items at this level-->
    <!--Optional:-->
    <QueueID?></QueueID>
    <!--Optional:-->
    <Queue?></Queue>
    <!--You have a CHOICE of the next 2 items at this level-->
    <!--Optional:-->
    <TypeID?></TypeID>
    <!--Optional:-->
    <Type?></Type>
    <!--You have a CHOICE of the next 2 items at this level-->
    <!--Optional:-->
    <ServiceID?></ServiceID>
    <!--Optional:-->
    <Service?></Service>
    <!--You have a CHOICE of the next 2 items at this level-->
    <!--Optional:-->
    <SLAID?></SLAID>
    <!--Optional:-->
    <SLA?></SLA>
    <!--You have a CHOICE of the next 2 items at this level-->
    <!--Optional:-->
    <StateID?></StateID>
    <!--Optional:-->
    <State?></State>
    <!--You have a CHOICE of the next 2 items at this level-->
    <!--Optional:-->
    <PriorityID?></PriorityID>
    <!--Optional:-->
    <Priority?></Priority>
    <!--You have a CHOICE of the next 2 items at this level-->
    <!--Optional:-->
    <OwnerID?></OwnerID>
    <!--Optional:-->

```

```

    <Owner>?</Owner>
    <!--You have a CHOICE of the next 2 items at this level-->
    <!--Optional:-->
    <ResponsibleID>?</ResponsibleID>
    <!--Optional:-->
    <Responsible>?</Responsible>
    <!--Optional:-->
    <CustomerUser>?</CustomerUser>
    <!--Optional:-->
    <CustomerID>?</CustomerID>
    <!--Optional:-->
    <PendingTime>
      <Year>?</Year>
      <Month>?</Month>
      <Day>?</Day>
      <Hour>?</Hour>
      <Minute>?</Minute>
    </PendingTime>
  </Ticket>
  <!--Optional:-->
  <Article>
    <!--You have a CHOICE of the next 2 items at this level-->
    <!--Optional:-->
    <ArticleTypeID>?</ArticleTypeID>
    <!--Optional:-->
    <ArticleType>?</ArticleType>
    <!--You have a CHOICE of the next 2 items at this level-->
    <!--Optional:-->
    <SenderTypeID>?</SenderTypeID>
    <!--Optional:-->
    <SenderType>?</SenderType>
    <!--Optional:-->
    <From>?</From>
    <Subject>?</Subject>
    <Body>?</Body>
    <!--You have a CHOICE of the next 2 items at this level-->
    <!--Optional:-->
    <ContentType>?</ContentType>
    <Charset>?</Charset>
    <MimeType>?</MimeType>
    <!--Optional:-->
    <HistoryType>?</HistoryType>
    <!--Optional:-->
    <HistoryComment>?</HistoryComment>
    <!--Optional:-->
    <AutoResponseType>?</AutoResponseType>
    <!--Optional:-->
    <TimeUnit>?</TimeUnit>
    <!--Optional:-->
    <NoAgentNotify>?</NoAgentNotify>
    <!--Zero or more repetitions:-->
    <ForceNotificationToUserID>?</ForceNotificationToUserID>
    <!--Zero or more repetitions:-->
    <ExcludeNotificationToUserID>?</ExcludeNotificationToUserID>
    <!--Zero or more repetitions:-->
    <ExcludeMuteNotificationToUserID>?</ExcludeMuteNotificationToUserID>
  </Article>
  <!--Zero or more repetitions:-->
  <DynamicField>
    <Name>?</Name>
    <!--1 or more repetitions:-->
    <Value>?</Value>
  </DynamicField>
  <!--Zero or more repetitions:-->
  <Attachment>
    <Content>cid:166861569966</Content>
    <ContentType>?</ContentType>
    <Filename>?</Filename>
  </Attachment>
</TicketUpdate>

```

11.7.1.2.1.3. PataTiketi

Hii operesheni inatumika kupata sifa zote za tiketi ikijumuisha sehemu zinazobadilika, makala zote na viambatanisho vyote ambavyo ni vya tiketi.

Sifa ziwezekanazo:

```

<TicketGet>
  <!--You have a MANDATORY CHOICE of the next 3 items at this level-->
  <!--Optional:-->
  <UserLogin?></UserLogin>
  <!--Optional:-->
  <CustomerUserLogin?></CustomerUserLogin>
  <!--Optional:-->
  <SessionID?></SessionID>
  <!--Optional:-->
  <Password?></Password>
  <!--1 or more repetitions:-->
  <TicketID?></TicketID>
  <!--Optional:-->
  <DynamicFields?></DynamicFields>
  <!--Optional:-->
  <Extended?></Extended>
  <!--Optional:-->
  <AllArticles?></AllArticles>
  <!--Optional:-->
  <ArticleSenderType?></ArticleSenderType>
  <!--Optional:-->
  <ArticleOrder?></ArticleOrder>
  <!--Optional:-->
  <ArticleLimit?></ArticleLimit>
  <!--Optional:-->
  <Attachments?></Attachments>
</TicketGet>

```

11.7.1.2.1.4. TafutaTiketi

Operesheni TiketiTafuta inarudisha orodha ya Vitambulisho vya Tiketi ambazo zinafanana na kigezo kilichofafanuliwa.

Sifa ziwezekanazo:

```

<TicketSearch>
  <!--You have a MANDATORY CHOICE of the next 3 items at this level-->
  <!--Optional:-->
  <UserLogin?></UserLogin>
  <!--Optional:-->
  <CustomerUserLogin?></CustomerUserLogin>
  <!--Optional:-->
  <SessionID?></SessionID>
  <!--Optional:-->
  <Password?></Password>
  <!--Optional:-->
  <Limit?></Limit>
  <!--Zero or more repetitions:-->
  <TicketNumber?></TicketNumber>
  <!--Zero or more repetitions:-->
  <Title?></Title>
  <!--Zero or more repetitions:-->
  <Queues?></Queues>
  <!--Zero or more repetitions:-->
  <QueueIDs?></QueueIDs>
  <!--Optional:-->
  <UseSubQueues?></UseSubQueues>
  <!--Zero or more repetitions:-->

```

```

<Types>?</Types>
<!--Zero or more repetitions:-->
<TypeIDs>?</TypeIDs>
<!--Zero or more repetitions:-->
<States>?</States>
<!--Zero or more repetitions:-->
<StateIDs>?</StateIDs>
<!--Zero or more repetitions:-->
<StateType>?</StateType>
<!--Zero or more repetitions:-->
<StateTypeIDs>?</StateTypeIDs>
<!--Zero or more repetitions:-->
<Priorities>?</Priorities>
<!--Zero or more repetitions:-->
<PriorityIDs>?</PriorityIDs>
<!--Zero or more repetitions:-->
<Services>?</Services>
<!--Zero or more repetitions:-->
<ServiceIDs>?</ServiceIDs>
<!--Zero or more repetitions:-->
<SLAs>?</SLAs>
<!--Zero or more repetitions:-->
<SLAIDs>?</SLAIDs>
<!--Zero or more repetitions:-->
<Locks>?</Locks>
<!--Zero or more repetitions:-->
<LockIDs>?</LockIDs>
<!--Zero or more repetitions:-->
<OwnerIDs>?</OwnerIDs>
<!--Zero or more repetitions:-->
<ResponsibleIDs>?</ResponsibleIDs>
<!--Zero or more repetitions:-->
<WatchUserIDs>?</WatchUserIDs>
<!--Zero or more repetitions:-->
<CustomerID>?</CustomerID>
<!--Zero or more repetitions:-->
<CustomerUserLogin>?</CustomerUserLogin>
<!--Zero or more repetitions:-->
<CreatedUserIDs>?</CreatedUserIDs>
<!--Zero or more repetitions:-->
<CreatedTypes>?</CreatedTypes>
<!--Zero or more repetitions:-->
<CreatedTypeIDs>?</CreatedTypeIDs>
<!--Zero or more repetitions:-->
<CreatedPriorities>?</CreatedPriorities>
<!--Zero or more repetitions:-->
<CreatedPriorityIDs>?</CreatedPriorityIDs>
<!--Zero or more repetitions:-->
<CreatedStates>?</CreatedStates>
<!--Zero or more repetitions:-->
<CreatedStateIDs>?</CreatedStateIDs>
<!--Zero or more repetitions:-->
<CreatedQueues>?</CreatedQueues>
<!--Zero or more repetitions:-->
<CreatedQueueIDs>?</CreatedQueueIDs>
<!--Zero or more repetitions:-->
<DynamicFields>
  <!--You have a MANDATORY CHOICE of the next 6 items at this level-->
  <!--Optional:-->
  <Equals>?</Equals>
  <!--Optional:-->
  <Like>?</Like>
  <!--Optional:-->
  <GreaterThan>?</GreaterThan>
  <!--Optional:-->
  <GreaterThanEquals>?</GreaterThanEquals>
  <!--Optional:-->
  <SmallerThan>?</SmallerThan>
  <!--Optional:-->
  <SmallerThanEquals>?</SmallerThanEquals>
</DynamicFields>
<!--Optional:-->

```

```

<Ticketflag>
  <!--Optional:-->
  <Seen?</Seen>
</Ticketflag>
<!--Optional:-->
<From?</From>
<!--Optional:-->
<To?</To>
<!--Optional:-->
<Cc?</Cc>
<!--Optional:-->
<Subject?</Subject>
<!--Optional:-->
<Body?</Body>
<!--Optional:-->
<FullTextIndex?</FullTextIndex>
<!--Optional:-->
<ContentSearch?</ContentSearch>
<!--Optional:-->
<ConditionInline?</ConditionInline>
<!--Optional:-->
<ArticleCreateTimeOlderMinutes?</ArticleCreateTimeOlderMinutes>
<!--Optional:-->
<ArticleCreateTimeNewerMinutes?</ArticleCreateTimeNewerMinutes>
<!--Optional:-->
<ArticleCreateTimeNewerDate?</ArticleCreateTimeNewerDate>
<!--Optional:-->
<ArticleCreateTimeOlderDate?</ArticleCreateTimeOlderDate>
<!--Optional:-->
<TicketCreateTimeOlderMinutes?</TicketCreateTimeOlderMinutes>
<!--Optional:-->
<ATicketCreateTimeNewerMinutes?</ATicketCreateTimeNewerMinutes>
<!--Optional:-->
<TicketCreateTimeNewerDate?</TicketCreateTimeNewerDate>
<!--Optional:-->
<TicketCreateTimeOlderDate?</TicketCreateTimeOlderDate>
<!--Optional:-->
<TicketChangeTimeOlderMinutes?</TicketChangeTimeOlderMinutes>
<!--Optional:-->
<TicketChangeTimeNewerMinutes?</TicketChangeTimeNewerMinutes>
<!--Optional:-->
<TicketChangeTimeNewerDate?</TicketChangeTimeNewerDate>
<!--Optional:-->
<TicketChangeTimeOlderDate?</TicketChangeTimeOlderDate>
<!--Optional:-->
<TicketCloseTimeOlderMinutes?</TicketCloseTimeOlderMinutes>
<!--Optional:-->
<TicketCloseTimeNewerMinutes?</TicketCloseTimeNewerMinutes>
<!--Optional:-->
<TicketCloseTimeNewerDate?</TicketCloseTimeNewerDate>
<!--Optional:-->
<TicketCloseTimeOlderDate?</TicketCloseTimeOlderDate>
<!--Optional:-->
<TicketPendingTimeOlderMinutes?</TicketPendingTimeOlderMinutes>
<!--Optional:-->
<TicketPendingTimeNewerMinutes?</TicketPendingTimeNewerMinutes>
<!--Optional:-->
<TicketPendingTimeNewerDate?</TicketPendingTimeNewerDate>
<!--Optional:-->
<TicketPendingTimeOlderDate?</TicketPendingTimeOlderDate>
<!--Optional:-->
<TicketEscalationTimeOlderMinutes?</TicketEscalationTimeOlderMinutes>
<!--Optional:-->
<TTicketEscalationTimeNewerMinutes?</TTicketEscalationTimeNewerMinutes>
<!--Optional:-->
<TicketEscalationTimeNewerDate?</TicketEscalationTimeNewerDate>
<!--Optional:-->
<TicketEscalationTimeOlderDate?</TicketEscalationTimeOlderDate>
<!--Optional:-->
<ArchiveFlags?</ArchiveFlags>
<!--Zero or more repetitions:-->
<OrderBy?</OrderBy>

```



```
<!--Zero or more repetitions:-->
<SortBy?></SortBy>
<!--Zero or more repetitions:-->
<CustomerUserID?></CustomerUserID>
</TicketSearch>
```

11.7.2. Mifano:

11.7.2.1. Usanidi wa Huduma za Tovuti

Ufwatao ni usanidi wa msingi lakini uliokamilika wa huduma ya tovuti katika muundo wa YAML kutumia operesheni zote za Viunganishi vya Tiketi. Ili kuweza kuitumia katika OTRS unahitaji kunakili yaliyomo, hifadhi katika faili litwalo GenericTicketConnector.yml, na kuliagiza kwenye OTRS katika skrini ya Huduma za Tovuti katika paneli ya Msimamizi kwa kubofya katika kitendo "Ongeza huduma ya tovuti" kutoka kwenye skrini ya mapitio na kisha kubofya katika kitendo "Agiza huduma ya tovuti" kwenye skrini ya kuongeza.

```
---
Debugger:
  DebugThreshold: debug
  TestMode: 0
Description: Ticket Connector Sample
FrameworkVersion: 3.2.x CVS
Provider:
  Operation:
    SessionCreate:
      Description: Creates a Session
      MappingInbound: {}
      MappingOutbound: {}
      Type: Session::SessionCreate
    TicketCreate:
      Description: Creates a Ticket
      MappingInbound: {}
      MappingOutbound: {}
      Type: Ticket::TicketCreate
    TicketUpdate:
      Description: Updates a Ticket
      MappingInbound: {}
      MappingOutbound: {}
      Type: Ticket::TicketUpdate
    TicketGet:
      Description: Retrieve Ticket data
      MappingInbound: {}
      MappingOutbound: {}
      Type: Ticket::TicketGet
    TicketSearch:
      Description: Search for Tickets
      MappingInbound: {}
      MappingOutbound: {}
      Type: Ticket::TicketSearch
  Transport:
    Config:
      MaxLength: 100000000
      NameSpace: http://www.otrs.org/TicketConnector/
      Type: HTTP::SOAP
RemoteSystem: ''
Requester:
  Transport:
  Type: ''
```

11.7.2.2. Muombaji wa Perl SOAP

Kanuni ifuatayo ni hati ya Perl ambayo inaweza kujiunganisha kwenye OTRS kupitia kiolesura cha ujumla. Ili kutekeleza operesheni zilizotolewa na Kiunganishi cha Tiketi, inatumia moduli mbili za Perl CPAN SOAP::Lite na Data::Dumper. Tafadhali hakikisha mazingira yako yanaweza kutumia moduli hizi kabla ya kujaribu kuanzisha hati hiyo.

```
#!/usr/bin/perl -w
# --
# otrs.SOAPRequest.pl - sample to send a SOAP request to OTRS Generic Interface Ticket
Connector
# Copyright (C) 2001-2015 OTRS AG, http://otrs.com/
# --
# This program is free software; you can redistribute it and/or modify
# it under the terms of the GNU AFFERO General Public License as published by
# the Free Software Foundation; either version 3 of the License, or
# any later version.
#
# This program is distributed in the hope that it will be useful,
# but WITHOUT ANY WARRANTY; without even the implied warranty of
# MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
# GNU General Public License for more details.
#
# You should have received a copy of the GNU Affero General Public License
# along with this program; if not, write to the Free Software
# Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA
# or see http://www.gnu.org/licenses/agpl.txt.
# --

use strict;
use warnings;

# use ../ as lib location
use File::Basename;
use FindBin qw($RealBin);
use lib dirname($RealBin);

use SOAP::Lite;
use Data::Dumper;

# ---
# Variables to be defined.

# this is the URL for the web service
# the format is
# <HTTP_TYPE>:://<OTRS_FQDN>/nph-genericinterface.pl/Webservice/<WEB_SERVICE_NAME>
# or
# <HTTP_TYPE>:://<OTRS_FQDN>/nph-genericinterface.pl/WebserviceID/<WEB_SERVICE_ID>
my $URL = 'http://localhost/otrs/nph-genericinterface.pl/Webservice/GenericTicketConnector';

# this name space should match the specified name space in the SOAP transport for the web
service.
my $NameSpace = 'http://www.otrs.org/TicketConnector/';

# this is operation to execute, it could be TicketCreate, TicketUpdate, TicketGet,
TicketSearch
# or SessionCreate. and they must to be defined in the web service.
my $Operation = 'TicketCreate';

# this variable is used to store all the parameters to be included on a request in XML
format. Each
# operation has a determined set of mandatory and non mandatory parameters to work
correctly. Please
# check the OTRS Admin Manual in order to get a complete list of parameters.
my $XMLData = '
<UserLogin>some user login</UserLogin>
<Password>some password</Password>
<Ticket>
  <Title>some title</Title>
```

```

    <CustomerUser>some customer user login</CustomerUser>
    <Queue>some queue</Queue>
    <State>some state</State>
    <Priority>some priority</Priority>
</Ticket>
<Article>
  <Subject>some subject</Subject>
  <Body>some body</Body>
  <ContentType>text/plain; charset=utf8</ContentType>
</Article>
';

# ---

# create a SOAP::Lite data structure from the provided XML data structure.
my $SOAPData = SOAP::Data
  ->type( 'xml' => $XMLData );

my $SOAPObject = SOAP::Lite
  ->uri($NameSpace)
  ->proxy($URL)
  ->$Operation($SOAPData);

# check for a fault in the soap code.
if ( $SOAPObject->fault ) {
  print $SOAPObject->faultcode, " ", $SOAPObject->faultstring, "\n";
}

# otherwise print the results.
else {

  # get the XML response part from the SOAP message.
  my $XMLResponse = $SOAPObject->context()->transport()->proxy()->http_response()-
>content();

  # deserialize response (convert it into a perl structure).
  my $Deserialized = eval {
    SOAP::Deserializer->deserialize($XMLResponse);
  };

  # remove all the headers and other not needed parts of the SOAP message.
  my $Body = $Deserialized->body();

  # just output relevant data and no the operation name key (like TicketCreateResponse).
  for my $ResponseKey ( keys %{$Body} ) {
    print Dumper( $Body->{$ResponseKey} );
  }
}

```

12. Mratibu wa OTRS

Mratibu wa OTRS ni mchakato huru wa mfumo ambao unachakatisha kazi katika mandharinyuma. Hizi aina za mchakato zinajulikana kama *daemons* katika mfumo ya Unix / Linux au kama *huduma* kwenye mazingiro ya Window. Ni huru lakini hii haimaanishi kwamba Mratibu anafanya kila kitu mwenyewe, imeunganishwa kikamilifu na OTRS na inaweza kutumia moduli yoyote ya OTRS kama inavyohitajika kukamilisha kila kazi.

Kwa sababu za akili ya kawaida mchakato wa Mratibu unahitaji kuanzishwa muda hadi muda. Hii inafanyika kiotomatiki na mchakato wa mratibu mwenyewe mara moja kwa siku, lakini inaweza kurekebisha kama ikihitajika kwa kutumia SysConfig kwa kuhariri mpangilio "Mratibu::AnzishaupyaBaadaYaSekunde".

Mratibu wa OTRS ni mchakato otomatiki, binadamu anaingilia mchakato huu ili kuona hali yake mara kwa mara na kuanzisha au kusitisha mchakato.

Note

Kama Mratibu akisitishwa kwa sababu yoyote, kazi zote zinazosubiri na mpya zilizosajiliwa wakati mratibu amesitishwa zitatekelezwa mara tu mratibu atakapoanzishwa tena (isipokuwa kama kazi zimesetiwa kutekelezwa hapo baadaye)

12.1. Kiolesura Michoro cha Mratibu

Mratibu haonekani katika Kiolesura cha Michoro cha Mtumiaji hadi kisishe kufanya kazi.

12.1.1. Mratibu hatoi Taarfa

Kuna taarifa za aina ambili tofauti kama mfumo ukitambua mratibu hafanyi kazi. Huu utambuzi unategemea ni mara ngapi usasishaji wa mchakato wa mratibu unafanyika. Kama tofauti kati ya muda wa sasa na muda wa mwisho wa usasishaji wa mchakato wa mwisho ni zaidi ya mara 2 ya usasishaji wa mchakato ujumbe wa onyo utaonyeshwa kwenye eneo la taarifa la OTRS . Kama ni zaidi ya mara 4 ya mchakato tahadhari itatolewa badala yake.

Muda wa kusasisha Mratibu wa mchakato unaweza kusanidiwa kupitia SysConfig kwenye mpangilio wa "Mratibu::PIDSasishaMuda".

Ukiona ujumbe wa onyo si lazima kuchukua hatua, lakini inashauriwa sana kukagua kama mratibu anafanya kazi. Kama ukiona tahadhari, basi kuna asilimia kubwa mratibu hafanyi kazi na inatakiwa kuanzishwa kwake.

Kwa kawaida taarifa ya Mratibu hafanyi kazi imewezeshwa, kama kuna huduma ya tovuti halali iliyosajiliwa katika hifadhidata, na inaonyeshwa kwa watumiaji wa kundi la "msimamizi" tu.

Kulemeza taarifa (haishauriwi) au kubadilisha au kuongeza makundi ya taarifa, tafadhali hariri mpangilio wa "Mazingira ya mbele::ModuliTaarifa###800-Mratibu-Kagua" kati ka SysConfig.



Kielelezo: Taarifa za mratibu.


12.1.2. Mratibu Kuanza

Kwa ku bofya kiungo cha Mratibu hafanyi kazi (aidha onyo au tahadhari) kisanduku kidadisi kitafunguka kukuwezesha kuanza mchakato wa Mratibu tena. Mratibu anaweza kuanzishwa kwa kawaida au kwa lazima, kwa kubofya kwenye kisanduku tiki kinachohusika.

Note

Kuanzisha Mratibu kwa lazima inahitajika endapo mchakato uliopita wa Mratibu ulisitishwa kwa hali isiyokuwa ya kawaida na Kitambulisho cha Mchakato bado kimesajiliwa kwenye hifadhidata.

Ili kuwa na udhibiti kamili wa Mratibu wa mchakato na kukagua hali yake halisi tafadhali tumia vifaa katika tungo amri kama ilivyoielezwa chini.

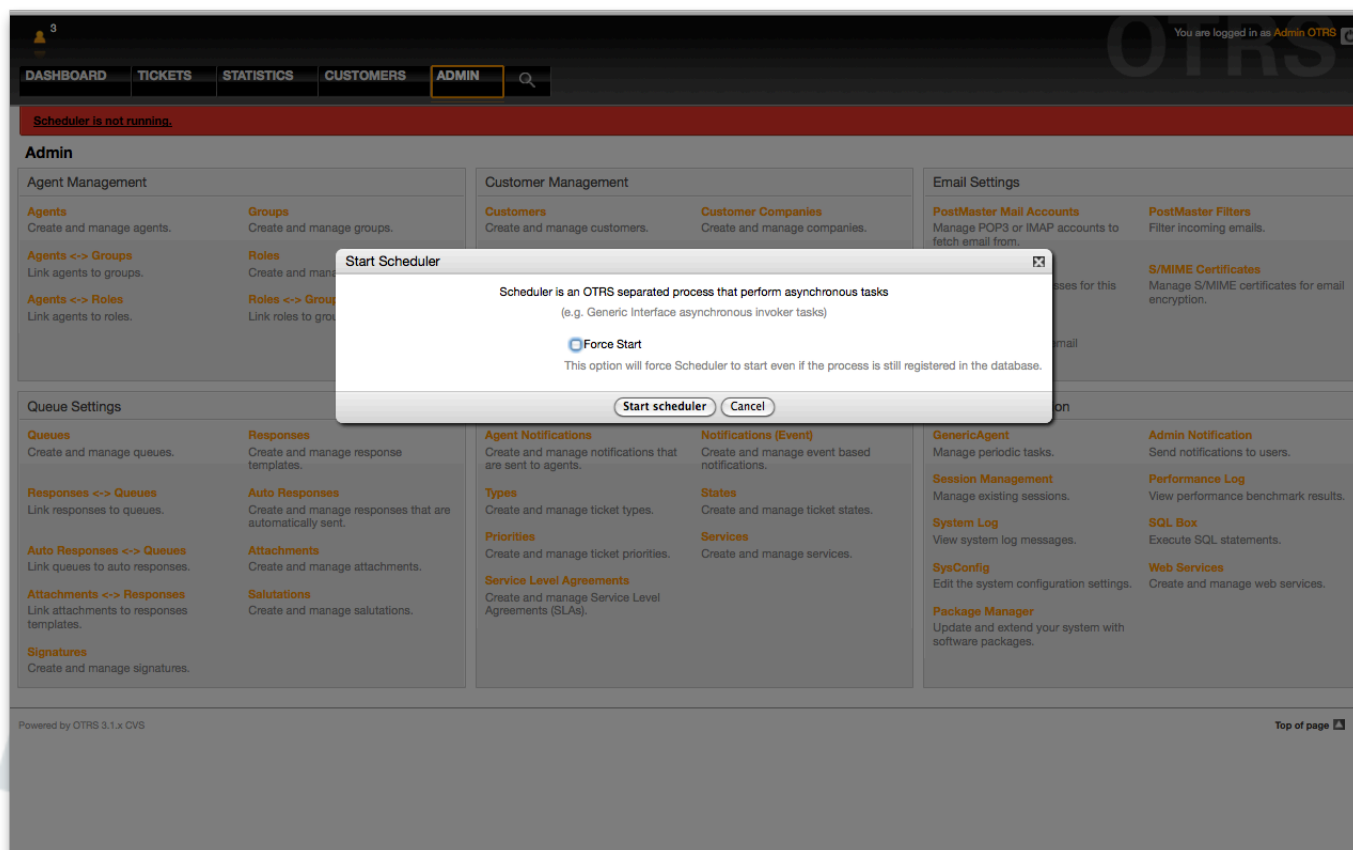

Kielelezo: Anzisha Mratibu.

12.2. Kiolesura cha Tungo Amri ya Mratibu

Vifaa vya tungo amri ya Mratibu vinakuruhusu kudhibiti mchakato wa Mratibu (Kuanza / Kusitisha) au kuuliza hali yake. Pia kuna vifaa vya kusajili mchakato ili udhibitiwe na mfumo wa uendeshaji.

OTRS imejumuishwa na seti mbili za vifaa vya CLI, moja ya Unix / Linux na nyingine ya Microsoft Windows.

12.2.1. Unix / Linux

12.2.1.1. Mafaili ya init.d ya mratibu

Mafaili ya init.d ni hati za kipekee ambazo huitwa na mfumo endeshi wakati wa kuanzisha na kuzima

OTRS inatoa hati za init.d kuanza / kusitisha mchakato wa Mratibu wa OTRS kiotomatiki kwa kutumia mfumo wa uendeshaji. Hati hizo zinapatikana chini ya OTRS_NYUMBANI/hati.

Hati za init.d zinahitaji kunakiliwa kwenda kwenye mahali sahihi kwa ajili ya mfumo endeshi wako. Zinahitaji kuwa na ruhusa sahihi na baadhi ya vishika nafasi vya ndani vinahitaji kusetiwa kufanya kazi vizuri. Kama ulitumia RPM za OTRS kuseti mfumo, hii inafanyika kiotomatiki.

Init.d Vishika nafasi vya Ndani vya Hati

- **OTRS_NYUMBANI** - njia kwenda kwenye usanidi wa OTRS yako.
- **Mtumiaji** - jina la mtumiaji wa mchakato wa apache.

- **Kundi** - jina la kudni la mtumiaji wa apache.

Note

Kwa sasa OTRS inatoa hati za init.d tu kwa majukwaa ya Linux.

Table 4.7. Orodha ya hati za init.d na mifumo endeshi inayotumikana nayo

Hati ya Init	Mfumo endeshi unaokubalika
otrs-mratibu-linux	Red Hat, Fedora, CentOS, SUSE, openSUSE, Debian, Ubuntu
otrs-scheduler-gentoo-init.d, otrs-scheduler-gentoo-conf.d	Gentoo

Example 4.29. Mfano kuanzisha Mratibu wa OTRS kwenye linux

```
shell> /etc/init.d/otrs-scheduler-linux start
```

Vitendo vilivyopo.

- **anza** Kuanza mchakato wa Mratibu wa OTRS.
- **sitisha** kusitisha mchakato wa Mratibu wa OTRS.
- **anza upya** kuanza upya mchakato wa Mratibu wa OTRS.
- **hali** kuuliza hali ya mchakato wa Mratibu wa OTRS.

Mratibu anahitaji hifadhidata ipatikane kusajili kitambulisho chake cha Mchakato, kwasababu hii ni muhimu ku:

- Tekeleza hati ya init.d ya Mratibu ili *kuanza* mchakato wa Mratibu baada ya mchakato wa hifadhidata kuamka na kuanza kazi.
- Tekeleza hati ya init.d ya Mratibu ili *kusitisha* mchakato wa Mratibu baada ya mchakato wa hifadhidata kuzimwa.

Note

Ukitaka Mratibu afanye kazi wakati wa uwashaji wa Mfumo, tafadhali soma waraka wa mfumo endeshi kujua sehemu sahihi ya kuweka hati za init.d, jinsi ya kufanya usanidi ziweze kuanza kiotomatiki na kuseti oda yao ya kazi.

12.2.1.2. Faili la Daemon la Mratibu

Hii ni sehemu ya Mratibu inayobakia ikifanya kazi katika mazingira ya nyuma kukagua kazi za kutekeleza. Pia inatoa kazi za muhimu kudhibiti mchakato.

Unix / Linux zote zinatumia faili **OTRS_HOME/bin/otrs.Scheduler.pl**.

Example 4.30. Mfano Kuanza Mratibu wa OTRS

```
shell> OTRS_HOME/bin/otrs.Scheduler.pl -a start
```

Machaguo Yaliyopo

- **-a** kitendo.

Thamani ziwezekanazo

- **anza**-kuanza mchakato wa Mratibu.
- **sitisha**- kusitisha mchakato wa Mratibu.
- **hali**- kuuliza hali ya mchakato wa Mratibu.
- **-f** kulazimisha kuanza au kusitisha mchakato wa Mratibu.

Example 4.31. Mfano kulazimisha kusitisha Mratibu wa OTRS

```
shell> OTRS_HOME/bin/otrs.Scheduler.pl -a stop -f 1
```

Note

Kusitisha Mratibu kwa lazima inatumika kuondoa kitambulisho cha mchakato kuto-ka kwenye hifadhidata wakati mratibu hafanyi kazi na mchakato bado umesajiliwa.

Kuanzisha Mratibu kwa lazima inatumika kuanza mchakato wa Mratibu kama mratibu hafanyi kazi na mchakato bado umesajiliwa.

Kuanzisha au kusitisha kwa lazima ni muhimu kama kuanza kwa mchakato kunahitajika kufanyika kabla ya muda wa kusasisha mchakato haujaisha. La sivyo ingizo lilokwisha muda wake kwenye hifadhidata linapuuzwa na uanzaji wa kawaida.

12.2.2. Windows

12.2.2.1. Kisanikishi cha Huduma za Mratibu

Katika Windows, Mratibu wa OTRS amesajiliwa kama mchakato kupitia Meneja Udhubiti wa Huduma wa Windows (SCM). Ili kuufanya mchakato wa Mratibu wa OTRS kudhibitiwa na SCM ni muhimu kuanzisha huduma hii. Kama ulitumia kisanikishi cha Windows hii itashughulikiwa na kisanikishi, na hakuna vitendo vinavyohitajika visivyokuwa vya otomatiki.

OTRS inatoa hati **OTRS_HOME/bin/otrs.Scheduler4WinInstaller.pl** kusajili au kutosajili Mratibu wa OTRS kwenye SCM.

Note

Kujisajili na kujiondoa vinaweza kufanywa na wanachama wa kundi la msimamizi katika Windows. Unaweza kuhitaji kubofya kulia katika cmd.exe na kuchagua 'Anzisha kama Msimamizi' kabla ya kusajili huduma kwa usahihi.

Example 4.32. Mfano kusajili Mratibu wa OTRS kama Huduma ya Windows

```
shell> perl OTRS_HOME/bin/otrs.Scheduler4WinInstaller.pl -a install
```

Machaguo Yaliyopo

- **-a** kitendo.

Thamani ziwezekanazo

- **sakinisha**- kusakinisha mchakato wa Mratibu kweye Windows.
- **ondoa**- kuondoa mchakato wa Mratibu kutoka kwenye Windows.

Baada ya usakinishaji kwenye Windows SCM mchakato wa Mratibu wa OTRS unaweza kutumika kama mchakato mwingine wowote katika Windows. Unaweza kuanzishwa, kusitishwa na kuanzishwa upya na inaweza kusanidiwa kuanzishwa kiotomatiki au kwa mikono.

Note

Kujifunza zaidi kuhusu Huduma za Windows na Windows SCM tafadhali soma nyaraka ya Windows, na usaidizi wa kwenye mtandao wa Microsoft.

12.2.2.2. Faili la Huduma la Mratibu

Hii ni sehemu ya Mratibu inayobakia ikifanya kazi katika mazingira ya nyuma kukagua kazi za kutekeleza. Pia inatoa kazi za muhimu kudhibiti mchakato.

Microsoft Windows inatumia faili **OTRS_HOME/bin/otrs.Scheduler4Win.pl**.

Example 4.33. Mafano kuanza Mratibu wa OTRS kwenye Windows

```
shell> OTRS_HOME/bin/otrs.Scheduler4Win.pl -a start
```

Machaguo Yaliyopo

- **-a** kitendo.

Thamani ziwezekanazo

- **anza**-kuanza mchakato wa Mratibu.
- **sitisha**- kusitisha mchakato wa Mratibu.
- **hali**- kuuliza hali ya mchakato wa Mratibu.
- **-f** kulazimisha kuanza au kusitisha mchakato wa Mratibu.

Example 4.34. Mfano kulazimisha kusitisha Mratibu wa OTRS kwenye Windows

```
shell> OTRS_HOME/bin/otrs.Scheduler4Win.pl -a stop -f 1
```

Note

Kusitisha Mratibu kwa lazima inatumika kuondoa kitambulisho cha mchakato kutoka kwenye hifadhidata wakati mratibu hafanyi kazi na mchakato bado umesajiliwa.

Kuanzisha Mratibu kwa lazima inatumika kuanza mchakato wa Mratibu kama mratibu hafanyi kazi na mchakato bado umesajiliwa.

Kuanzisha au kusitisha kwa lazima ni muhimu kama kuanza kwa mchakato kunahitajika kufanyika kabla ya muda wa kusasisha mchakato haujaisha. La sivyo ingizo lilokwisha muda wake kwenye hifadhidata linapuuzwa na uanzaji wa kawaida.



Chapter 5. Kugeuza kukufaa

1. Orodha Dhibiti Sikivu

1.1. Utangulizi

Kutoka OTRS 2.0 na kuendelea, Orodha Dhibiti Ufikivu (ACL) inaweza kutumika kudhibiti tiketi za ufikivu, moduli, foleni, na kadh., au kushawishi vitendo kwenye tiketi (kufunga, kuhamisha, na kadh.) katika hali fulani. ACLs zinaweza kutumika kwa nyongeza kwenye mfumo uliopo wa ruhusa wa majukumu na makundi. Kwa kutumia ACLs, misingi ya mtiririko wa kazi ndani ya mfumo inaweza kuunganishwa, kwa kutegemea sifa za tiketi.

Kwa sasa, ACL haziwezi kutengenezwa kwa kutumia Kiolesura cha SysConfig. Lazima izingizwe moja kwa moja kwenye faili la Kernel/Config.pm. Hii sura ina baadhi ya mifano ya ACL ambayo itakuelekeza mchakato wa kufafanua maana za ACL, na itakuwa kama rejea ya mipangilio yoyote muhimu ya ACL.

1.2. Mifano

Example 5.1. ACL inayoruhusu uingizwaji kwenye foleni wa tiketi zenye kipaumbele cha tiketi 5.

Huu mfano unakuonyesha mundo wa kwaida wa ACL. Kwanza, inahitaji kuwa na jina. Katika kesi hii ni "ACL-Jina-2". Tambua kwamba ACL zitapangwa kwa nambari kabla ya kutekelezwa, kwa hiyo unatakiwa kutumia majina kwa uangalifu.

Pili, una kifungu cha "Sifa" ambacho ni kichujio cha tiketi zako. Vigezo vyote vilivyofafanuliwa hapa vitatumika kwenye tiketi kujua kama ACL lazima itumike au isitumike. Katika mfano wetu, tiketi itafanania kama iko kwenye foleni "Mbichi" na ina kipaumbele "5 cha juu sana". Hii pia inaathiriwa na mabadiliko katika mfumo (mf. kama tiketi ni foleni "mbichi" na ina kipaumbele "3 kawaida", lakini kikunjuzi cha kipaumbele kimechaguliwa na kipaumbele kimebadilishwa kuwa "5 cha juu sana" pia kitafanania).

Mwisho, kifungu "Inawezekana" inafafanua mabadiliko ya skrini. Katika kesi hii, kutoka kwenye foleni zinazopatikana, foleni "Tahadhari" tu inaweza kuchaguliwa katika skrini ya tiketi.

```
# ticket acl
$self->{TicketAcl}->{'100-Example-ACL'} = {
  # match properties
  Properties => {
    # current ticket match properties
    Ticket => {
      Queue => ['Raw'],
      Priority => ['5 very high'],
    }
  },
  # return possible options (white list)
  Possible => {
    # possible ticket options (white list)
    Ticket => {
      Queue => ['Alert'],
    },
  },
};
```

Example 5.2. ACL inaruhusu uingiaji kwenye foleni kwa zile tiketi zenye kipaumbele cha tiketi 5 na zimehifadhiwa kwenye hifadhidata.

Huu mfano ni sawa na uliopita, lakini katika kesi hii tiketi za kwenye foleni "Mbichi" na zenye kipaumbele "5 cha juu sana", zote zikiwa kwenye hifadhidata zitafanana. Hii aina ya ACL haiweki maanani mabadiliko katika muundo kabla tiketi haijasasishwa kwenye hifadhidata.

```
# ticket acl
$self->{TicketAcl}->{'100-Example-ACL'} = {
  # match properties
  PropertiesDatabase => {
    # current ticket match properties
    Ticket => {
      Queue => ['Raw'],
      Priority => ['5 very high'],
    }
  },
  # return possible options (white list)
  Possible => {
    # possible ticket options (white list)
    Ticket => {
      Queue => ['Alert'],
    },
  },
};
```

Example 5.3. ACL ikilemaza ufungaji wa tiketi katika foleni mbichi, na kuficha kitufe cha kufunga.

Hapa unaweza kuona jinsi sehemu ya tiketi (hali) inavyoweza kuchujwa na zaidi ya thamani moja ya kuchagua. Pia inawezekana kuweka kikomo cha vitendo vinavyoweza kutekelezeka kutoka kwenye tiketi. Katika kesi hii tiketi haiwezi kufungwa.

```
$self->{TicketAcl}->{'101-Second-Example-ACL'} = {
  # match properties
  Properties => {
    # current ticket match properties
    Ticket => {
      Queue => ['Raw'],
    }
  },
  # return possible options (white list)
  Possible => {
    # possible ticket options (white list)
    Ticket => {
      State => ['new', 'open', 'pending reminder'],
    },
    # possible action options
    Action => {
      AgentTicketBounce => 1,
      AgentTicketClose => 0,
      AgentTicketCompose => 1,
      AgentTicketCustomer => 1,
      AgentTicketForward => 1,
      AgentTicketFreeText => 1,
      AgentTicketHistory => 1,
      AgentTicketLink => 1,
      AgentTicketLock => 1,
      AgentTicketMerge => 1,
      AgentTicketMove => 1,
      AgentTicketNote => 1,
      AgentTicketOwner => 1,
      AgentTicketPending => 1,
      AgentTicketPhone => 1, # only used to hide the Split action
    }
  }
};
```

```

    AgentTicketPhoneInbound => 1,
    AgentTicketPhoneOutbound => 1,
    AgentTicketPrint => 1,
    AgentTicketPriority => 1,
    AgentTicketResponsible => 1,
    AgentTicketWatcher => 1,
    AgentTicketZoom => 1,
    AgentLinkObject => 1, # only used to hide the Link action
  },
},
};

```

Example 5.4. Uondoaji wa ACL una hali imefungwa kikamilifu mara zote.

Huu mfano unaonyesha jinsi inavyowezekana kufafanua vichujio hasi (hali "imefungwa kwa mafanikio" itaondolewa). Pia unaweza kuona kutofafanua sifa za kufanana za tiketi itafananisha tiketi yoyote, ikimaanisha ACL itatumika mara zote. Hii itakuwa na manufaa kama utataka kuficha baadhi ya thamani kwa chaguo-msingi, na kuziwezesha katika hali maalumu (mf. kama wakala yupo kwenye kundi maalumu).

```

$self->{TicketAcl}->{'102-Third-ACL-Example'} = {
  # match properties
  Properties => {
    # current ticket match properties (match always)
  },
  # return possible options
  PossibleNot => {
    # possible ticket options
    Ticket => {
      State => ['closed successful'],
    },
  },
};

```

Example 5.5. ACL inaonyesha huduma za Vifaa kwa ajili ya tiketi ambazo zinatengenezwa kwenye foleni zinazoanza na "HW"

Huu mfano unaonyesha jinsi unavyoweza kutumia semi za kawaida kufananisha tiketi na kuchuja machaguo yaliyopo.

```

$self->{TicketAcl}->{'Only-Hardware-Services-for-HW-Queues'} = {
  # match properties
  # note we don't have "Ticket => {" because there's no ticket yet
  Properties => {
    Queue => {
      Name => ['[RegExp]HW'],
    }
  },
  # return possible options
  Possible => {
    # possible ticket options
    Ticket => {
      Service => ['[RegExp]^(Hardware)'],
    },
  },
};

```

1.3. Marejeo

Kwenye mfano chini kuna orodha ya parameta zote ambazo zinaweza kutumika na ACLs.

Tafadhali ona kifungu katika ACL katika nyaraka za UsimamiziWaMchakato kwa maelezo ya ndani ya jinsi ACL inavyochakatisha tiketi.

Example 5.6. Rejea inayoonyesha mipangilio yote muhimu ya ACLs.

```
# ticket acl
$self->{TicketAcl}->{'200-ACL-Reference'} = {
  # match properties (current values from the form)
  Properties => {

    # the used frontend module
    Frontend => {
      Action => ['AgentTicketPhone', 'AgentTicketEmail'],
    },

    # the logged in agent
    User => {
      UserLogin => ['some login'],
      Group_rw => [
        'hotline',
      ],
      Role => [
        'admin',
      ],
      # ...
    },

    # the logged in customer
    CustomerUser => {
      UserLogin => ['some login'],
      Group_rw => [
        'hotline',
      ],
      Role => [
        'admin',
      ],
      # ...
    },

    # process properties
    Process => {
      ProcessEntityID => ['P1'], # the Process that the current ticket is
part of
      ActivityEntityID => ['A1'], # the current Activity of the ticket
      ActivityDialogEntityID => ['AD1'], # the current ActivityDialog that the Agent/
Customer is using
    },

    # ticket properties
    Queue => {
      Name => ['Raw'],
      QueueID => ['some id'],
      GroupID => ['some id'],
      Email => ['some email'],
      RealName => ['OTRS System'],
      # ...
    },
    Service => {
      ServiceID => ['some id'],
      Name => ['some name'],
      ParentID => ['some id'],
      # ...
    },
    Type => {
      ID => ['some id'],
      Name => ['some name'],
      # ...
    },
    Priority => {
      ID => ['some id'],
      Name => ['some name'],
      # ...
    }
  }
}
```

```

},
SLA = {
  SLAID    => ['some id'],
  Name     => ['some name'],
  Calendar => ['some calendar'],
  # ...
},
State = {
  ID       => ['some id'],
  Name     => ['some name'],
  TypeName => ['some state type name'],,
  TypeID   => ['some state type id'],
  # ...
},
Owner => {
  UserLogin => ['some login'],
  Group_rw => [
    'some group',
  ],
  Role => [
    'admin',
  ],
  # ...
},
Responsible => {
  UserLogin => ['some login'],
  Group_rw => [
    'some group',
  ],
  Role => [
    'admin',
  ],
  # ...
},
DynamicField => {
  # Names must be in DynamicField_<field_name> format.
  # Values in [ ... ] must always be the untranslated internal data keys
  #   specified in the dynamic field definition and
  #   not the data values shown to the user.
  DynamicField_Field1    => ['some value'],
  DynamicField_OtherField => ['some value'],
  DynamicField_TicketFreeText2 => ['some value'],
  # ...
},
# alternatively, ticket properties can be specified in the ticket hash
Ticket => {
  Queue          => ['Raw'],
  State          => ['new', 'open'],
  Priority        => ['some priority'],
  Lock           => ['lock'],
  CustomerID     => ['some id'],
  CustomerUserID => ['some id'],
  Owner          => ['some owner'],
  DynamicField_Field1 => ['some value'],
  DynamicField_MyField => ['some value'],
  # ...
},
},

# match properties (existing values from the database)
PropertiesDatabase => {
  # See section "Properties", the same config can be used here.
  # ...
}

# return possible options (white list)
Possible => {
  # possible ticket options (white list)
  Ticket => {
    Queue => ['Hotline', 'Coordination'],
    State => ['some state'],
    Priority => ['5 very high'],

```

```

    DynamicField_Field1 => ['some value'],
    DynamicField_MyField => ['some value'],
    # ...
    NewOwner => ['some owner'],
    OldOwner => ['some owner'],
    # ...
  },

  # Limit the number of possible ActivityDialogs the Agent/Customer
  # can use in a process ticket.
  ActivityDialog => ['AD1', 'AD3'],

  # Limit the number of possible Processes that can be started
  Process => ['P1', 'P2'],

  # possible action options (white list)
  Action => {
    AgentTicketBounce      => 1,
    AgentTicketClose       => 1,
    AgentTicketCompose     => 0,
    AgentTicketCustomer    => 0,
    AgentTicketForward     => 0,
    AgentTicketFreeText    => 1,
    AgentTicketHistory     => 1,
    AgentTicketLink        => 0,
    AgentTicketLock        => 1,
    AgentTicketMerge       => 0,
    AgentTicketMove        => 1,
    AgentTicketNote        => 1,
    AgentTicketOwner       => 1,
    AgentTicketPending     => 1,
    AgentTicketPhone       => 1, # only used to hide the Split action
    AgentTicketPhoneInbound => 0,
    AgentTicketPhoneOutbound => 1,
    AgentTicketPrint       => 1,
    AgentTicketPriority    => 0,
    AgentTicketResponsible => 1,
    AgentTicketWatcher     => 1,
    AgentTicketZoom        => 1,
    AgentLinkObject        => 1, # only used to hide the Link action
  },
},
# remove options (black list)
PossibleNot => {
  # See section "Possible"
  # ...
},
};

```

Note

Wakati wa kufananisha ACL ikiwa parameta ya KitambulishoChaMtejaMtumiaji imetumwa, utaratibu wa ACL utafanananisha ACL zilizofafanuliwa kwa kutumia KitambulishoChaMtejaMtumiajiMteja kukusanya undani wa MtejaMtumiaji ili kujaza hash ya MtejaMtumiaji na pia inabadilisha taarifa za Mteja katika hash ya Tiketi kwa ajili ya sifa kufanana. Kwa upande mwingine haya mahesabu pia yanafanywa kwa ajili ya upande wa SifaZaHifadhidata, lakini kwa kutumia Mteja wa Tiketi kama msingi wa kukusanya data.

Tambua kwamba katika Kiolesura cha Mteja, Kitambulisho cha MtejaMtumiaji kinatumwa mara zote na Mtumiaji Mteja aliye kwenye mfumo.

Tambua kwamba katika skrini za kutafuta tiketi (WakalaTiketiTafuta na MtejaTiketiTafuta) sifa ambazo zinaathirika na ACL ni Sehemu Zinazobadilika tu. Hii inamaanisha kwamba hizi skrini huwezi kuzuia sifa nyingine zozote kama aina ya tiketi, hali, foleni, na kadh.

2. Usimamizi wa mchakato

2.1. Utangulizi

Hiki kipengele cha OTRS kinakuruhusu kutengeneza michakato (mitiririko ya kazi) katika mfumo wa tiketi. Wazo la msingi ni kufafanua michakato inayojirudia, na kugawa kazi kwa watu tofauti, na pia kuongoza maendeleo ya mchakato katika njia tofauti kutegemeana na vigezo fulani.

2.2. Mchakato wa mfano

Tuone mfano ili kuona zaidi inavyofanyika. Tutafafanua mchakato wa kuoda kitabu:

2.2.1. Ku rekodi mahitaji

Kabla oda haijawekwa, maombi ya fasihi ya mwajiriwa yatarekodiwa. Kitabu kifuatacho kitahitajika katika mfano wetu:

Title: Prozessmanagement für Dummies
Autor: Thilo Knuppertz
ISBN: 3527703713

2.2.2. Imehakikiwa na meneja

Kiongozi wa idara ya wafanya kazi inabidi aamue kwenye oda. Kama imekataliwa, sababu lazima irekodiwe na meneja. Kama imekubaliwa, oda inapitishwa kwenda kwa idara ya manunuzi.

2.2.3. Idara chakatishi ya manunuzi

Manunuzi sasa yana kazi ya kujua wapi oda ya kitabu itafanywa penye masharti mazuri. Kama vimeisha, inaweza kurekodiwa kwenye oda. Kama oda imefanikiwa manunuzi atarekodi msambazaji, bei na tarehe ya kuwasilisha.

2.2.4. Chumba chakatishi cha barua pepe

Vilivyosafirishwa vitawasili kwenye kampuni. Idara ya mali zinazolingia itakagua vilivyosafirishwa na kurekodi siku ya kupokea. Sasa wafanyakazi watapewa taarifa kwamba oda yao imewasili na iko tayari kuchukuiwa.

2.3. Kutekeleza mfano

Kama tukiamini kwamba tiketi inatenda kama waraka unao andamana nao katika huu mtiririko wa kazi ambao unaweza kupokea notisi za mabadiliko, sasa tuna picha kamili ya tiketi za mchakati.

Kutoka kwenye uchambuzi wa mchakato wa mfano tunaweza kubainisha vifaa muhimu vifuatavyo:

- Uwezekano wa kurekodi data, tuziite *Maongezi ya Shughuli*,
- Inaangalia ipi itabadilika kiotomatiki na data zilizobadilishwa, tuziite *Mapito*,
- mabadiliko yanayoweza kufanyika kwenye tiketi ya mchakato baada ya kufanikiwa kwa mapito ya tiketi ya mchakato, tuyaite *Vitendo vya Mpito*.

Pia tunahitaji vifaa vya ziada ambavyo si dhahiri:

- Uwezekano wa upatikanaji wa Maongezi ya Shughuli zaidi ya aina moja. Katika mfano wetu hii inahitajika pale msimamizi inabidi apate machaguo kati ya "Kubali" na "Kataa". Hii tuiite *Shughuli*.

Sasa, tukiwa na Shughuli, Maongezi ya Shughuli, Mapito na Vitendo vya Mpito tuna vifaa vinavyohitajika ili kutengeneza moduli ya hatua binafsi za mfano wetu. Kinachobakia ni eneo ambalo kila mtiririko wa kazi mpangilio wa ngazi unaweza kuwekwa bayana. Hii tuiite *Mchakato*. Ili tuweze kurejea kwenye hivi vyombo baadae, tutazipa vifupisho katika mabano. Huu ufupisho unategemeana na utaratibu wa ndani wa utambulisho uitwao Kitambulisho cha Chombo.

Vitambulisho vya Chombo vinafanana na vina herufi moja au mbili (kutegemeana na mchakato au chombo) na baada ya hapo mfululizo wa namba, mifano:

- Mchakato: 'P1', 'P2' ... 'Pn'.
- Shughuli: 'A1', 'A2' ... 'An'.
- Maongezi ya Shughuli: 'AD1', 'AD2' ... 'ADn'.
- Mpito: 'T1', 'T2' ... 'Tn'.
- Vitendo vya Mpito: 'TA1', 'TA2' ... 'TAn'.

Kabla ya utengenezaji wa mchakato na viji sehemu vyake ni muhimu kuuandaa mfumo, tutahitaji kufafanua baadhi ya Foleni, Watumiaji na Sehemu Zinazobadilika na pia kuseti baadhi ya machaguo ya SysConfig.

Tengeneza foleni zifuatazo:

- Usimamizi
- Wafanyakazi
- Ununuzi
- Ofisi ya posta

Tengeneza watumiaji wafwatao:

- Meneja
- Mfanyakazi

Tengeneza Sehemu Zinazobadilika zifuatazo:

- Mada

Lebo	Mada
Aina	Nakala
Kitu	Tiketi

- Mwandishi

Lebo	Mwandishi
Aina	Nakala
Kitu	Tiketi

- ISBN

Lebo	ISBN
Aina	Nakala
Kitu	Tiketi

- Hali

Lebo	Hali
Aina	Kunjuzi
Kitu	Tiketi
Thamani ziwezekanazo	<ul style="list-style-type: none"> • Kibali • Kibali kimekataliwa • Kubaliwa • Oda imekataliwa • Oda imewekwa • Vilivyosafirishwa vimepokelewa

Kumbuka: Tafadhali tumia thamani hizi ziwezekanazo kwa "Ufunguo" na "Thamani" kwenye usanidi wa Sehemu Zinazobadilika.

- Msambazaji

Lebo	Msambazaji
Aina	Nakala
Kitu	Tiketi

- Bei

Lebo	Bei
Aina	Nakala
Kitu	Tiketi

- TareheUwasilishaji

Lebo	Tarehe ya uwasilishaji
Aina	Tarehe
Kitu	Tiketi

- TareheYaKupokea

Lebo	Tarehe Ya Kupokea
Aina	Tarehe
Kitu	Tiketi

Seti mipangilio ifuatayo ya SysConfig:

- 'Tiketi::Kuwajibika':Ndio
- 'Ticket::Frontend::AgentTicketZoom###ProcessWidgetDynamicFieldGroups':

Ufunguo:	Maudhui:
Kitabu	Mada, Mwandishi, ISBN
Ujumla	Hali
Oda	Bei, Msambazaji, TareheUwasilishaji
Usafirishaji	TareheYaKupokea

- 'Ticket::Frontend::AgentTicketZoom###ProcessWidgetDynamicField':

Ufunguo:	Maudhui:
Mwandishi	1
TareheYaKupokea	1
TareheUwasilishaji	1
ISBN	1
Bei	1
Hali	1
Msambazaji	1
Mada	1

Sasa tuanze na mambo ya kweli ya Usimamizi wa Mchakato. Katika hatua inayofwata, tutafafanua vyombo vyenyewe tunavyohitaji.

2.3.1. Mchakato (kama chombo)

Kutengeneza mchakato mpya ni muhimu kubofya kwenye kiungo cha "Usimamizi wa Mchakato" katika boksi la Usimamizi wa Mfumo katika paneli ya Msimamizi, hii itakupeleka kwenye skrini ya Mapitio ya Usimamizi wa Mchakato. Baada ya utengenezaji wa mchakato tunaweza kutengeneza vyombo vingine vyote (au sehemu za mchakato).



Note

Shughuli, Maongezi ya Shughuli, Mapito na Vitendo vya Mpito vilivyofafanuliwa kwenye mchakato mmoja vitapatikana kwa kila michakato ya mfumo.

System Administration	
GenericAgent Manage periodic tasks.	Admin Notification Send notifications to users.
Session Management Manage existing sessions.	Performance Log View performance benchmark results.
System Log View system log messages.	SQL Box Execute SQL statements.
Process Management Configure Processes.	SysConfig Edit the system configuration settings.
Web Services Create and manage web services.	Package Manager Update and extend your system with software packages.

Kielelezo: Skrini ya Msimamizi wa OTRS - Usimamizi wa Mfumo .

Bonyeza kitendo cha "Tengeneza mchakato mpya" kutoka kwenye boksi la vitendo.

Actions	
	Create New Process
	Synchronize All Processes

Kielelezo: Tengeneza Kitufe Kipya cha Mchakato.

Jaza taarifa za mchakato, seti jina la Mchakato na Undani wake, tutaacha Hali ya mchakato kuwa iliyo "Lemazwa", mpaka tumalize kazi zote. Hifadhi mchakato.

Create New Process

Actions

◀ Go to overview

Description

In this screen, you can create a new process. In order to make the new process available to users, please make sure to set its state to 'Active' and synchronize after completing your work.

Create New Process

* Process Name:

* Description:

State:

or

Kielelezo: Ongeza mchakato mpya.

2.3.2. Maongezi ya Shughuli

Bofya katika jina jipya la mchakato kwenye Skrini ya Mapitio ya Usimamizi wa Mchakato, kisha katika "Elemnti za Mchakato Zinzapatikana" bofya katika "Maongezi ya Shughuli" (hiki kitendo kitapanua machaguo ya maongezi ya shughuli na kukunja nyingine zote na athari za kodian), kisha bofya "Tengeneza Maongezi Mapya ya Shughuli".

Available Process Elements

Activities

Activity Dialogs

Filter Activity Dialogs...

No data found.

Transitions

Transition Actions

Kielelezo: Tengeneza Kitufe cha Maongezi ya Shughuli kipya.

Katika skrini ibukizi iliyofunguliwa jaza "Jina la maongezi ya Shughuli" na pia "sehemu za Maelezo (mafupi)", kwa huu mfano tutaacha sehemu nyingine zote kama zilivyo kawaida, ili kugawia sehemu kwa Maongezi ya Shughuli kokota sehemu inayotakiwa kutoka kwenye bwawa la "Sehemu Zilizopo" na dondoshwa katika bwawa la "Sehemu Zilizogawiwa". Oda katika bwawa la "Sehemu Zilizogawiwa" ndiyo oda sehemu zitakuwa nazo katika skrini, kubadilisha oda kokota na kudondoshwa hiyo sehemu kwenye bwawa kupanga katika sehemu sawia.

▼ Activity Dialog

★ Activity dialog Name:

Available in:

★ Description (short):

Description (long):

Permission:

Required Lock:

Submit Advice Text:

Submit Button Text:

▼ Fields

You can assign Fields to this Activity Dialog by dragging the elements with the mouse from the left list to the right list. Ordering the elements within the list is also possible by drag 'n' drop.

Filter available fields...

AVAILABLE FIELDS	ASSIGNED FIELDS
Article	DynamicField_Author Edit
CustomerID	DynamicField_ISBN Edit
DynamicField_AText	DynamicField_Status Edit
	DynamicField_Title Edit

Kielelezo: Ongeza Maongezi ya Shughuli mapya.

Baada tu ya sehemu kudondoshwa katika bwawa la "Sehemu Zilizogawiwa" skrini ibukizi nyingine inaonyeshwa yenye undani kuhusu sehemu hiyo, tutaacha machaguo ya kawaida na kwa sehemu za Makala tu ndiyo tuhakikishe kwamba sehemu ya Aina ya Makala imesetiwa kuwa "notisi-ndani".

Edit Field Details

Edit Details for Field "Article"

Description (short):

Description (long):

Default value:

ArticleType:

Display:

Kielelezo: Hariri undani wa uga (Makala).

Baada ya sehemu zote kupewa thamani bofya kitufe cha kuwasilisha katika skrini kuu ibukizi kuhifadhi mabadiliko.

Katika mfano huu tutatumia sehemu ya Makala kwa ajili ya maoni, lakini chaguo Ingene linaweza kuwa kutengeneza EneoLaNakala la aina Sehemu Inayobadilika, sehemu zilizobaki ambazo zimetajwa katika mistari chini ni Sehemu Zinazobadilika ambazo tumefafanua kabla.

Tafadhali tambua kwamba katika skrini hii Sehemu Zinazobadilika zote zina kiambishi awali "SehemuInayobadilika_" kama kwenye "SehemuInayobadilika_Kichwa", Usichanganye na sehemu "Kichwa" ambacho ni Kichwa cha Tiketi.

Tengeneza Maongezi ya Shughuli yafwatayo:

- "Kurekodi mahitaji" (AD1)

Maongezi ya Shughuli yenye sehemu zote zinazoitajika ili data ikusanywe kwa oda (Kichwa cha habari, Mwandishi na ISBN), na sehemu ya Haliyenye uwezekano wa kuchagua "Kibali".

- "Kibali kimekataliwa" (AD2)

Maongezi ya Shughuli yenye sehemu ya kuweka maoni (Makala) na sehemu ya Hali yenye chaguo "Kibali kimekataliwa".

- "Kubaliwa" (AD3)

Hapa tunahitaji hali ya uga wenye chaguo "Kubaliwa"

- "Oda imekataliwa" (AD4)

Maongezi ya shughuli yanayoweza kununua ili kukataa oda isiyowezekana (kulipia mzigo kabla ikiwa hisa zimeisha). Hapa pia tunahitaji sehemu ya maoni na sehemu ya Hali yenye chaguo "Oda imekataliwa"

- "Oda imewekwa" (AD5)

Maongezi ya Shughuli yenye sehemu Msambazaji, Bei na tarehe ya Uwasilishaji kwa manunuzi na sehemu ya Hali yenye chaguo "Oda imewekwa".

- "Vilivyosafirishwa vimepokelewa" (AD6)

Shughuli ya kwenye chumba cha barua yenye sehemu ya Tarehe ya upokeaji na sehemu ya Hali yenye chaguo "Vilivyosafirishwa vimepokelewa".

Kuzuia sehemu ya hali ya kila maongezi ya shughuli tunahitaji kuongeza baadhi ya ACL katika Kernel/Config.pm au kwenye faili jipya la perl lililo kwenye Kernel/Config/Files.

```

$self->{TicketAcl}->{'P1-AD1-1'} = {
  Properties => {
    Process => {
      ActivityDialogEntityID => ['AD1'],
    },
  },
  Possible => {
    Ticket => {
      DynamicField_Status => ['Approval'],
    },
  },
};

$self->{TicketAcl}->{'P1-AD2-1'} = {
  Properties => {
    Process => {
      ActivityDialogEntityID => ['AD2'],
    },
  },
  Possible => {
    Ticket => {
      DynamicField_Status => ['Approval denied'],
    },
  },
};

$self->{TicketAcl}->{'P1-AD3-1'} = {
  Properties => {
    Process => {
      ActivityDialogEntityID => ['AD3'],
    },
  },
};

```

```

Possible => {
  Ticket => {
    DynamicField_Status => ['Approved'],
  },
},
};

$Self->{TicketAcl}->{'P1-AD4-1'} = {
  Properties => {
    Process => {
      ActivityDialogEntityID => ['AD4'],
    },
  },
  Possible => {
    Ticket => {
      DynamicField_Status => ['Order denied'],
    },
  },
},
};


$Self->{TicketAcl}->{'P1-AD5-1'} = {
  Properties => {
    Process => {
      ActivityDialogEntityID => ['AD5'],
    },
  },
  Possible => {
    Ticket => {
      DynamicField_Status => ['Order placed'],
    },
  },
},
};

$Self->{TicketAcl}->{'P1-AD6-1'} = {
  Properties => {
    Process => {
      ActivityDialogEntityID => ['AD6'],
    },
  },
  Possible => {
    Ticket => {
      DynamicField_Status => ['Shipment received'],
    },
  },
},
};

```

2.3.3. Mapito

Kwenye "Elementi Zinazopakikana za Mchakato" bofya kwenye "Mapito", kisha bofya "Tengeneza Mpito Mpya"

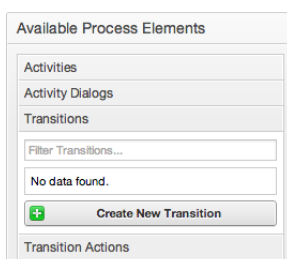

Kielelezo: Tengeneza kitufe kipya cha mpito.

Katika skrini ibukizi iliyofunguliwa jaza "Jina la Mpito", kisha kwenye masharti, kwa mfano huu tumia sharti moja tu na sehemu moja, kwa zote tunaweza kuacha Aina ya muunganiko kama "na" na tutatumia thamani ya aina ya kufanana kama "Tungo".

▼ Transition

* Transition Name:

▼ Conditions

Type of Linking between Conditions:

Condition 1: ⊖

Type of Linking:

Fields:

Name: Type: Value: ⊖

⊕

Kielelezo: Ongeza mpito mpya.

Baada ya masharti yote kusetiwa bofya kwenye kitufe cha kuhifadhi kuhifadhi mabadiliko.

Tengeneza Mpito yafuatayo:

- "Kibali" (T1)
Mpito unaokagua kama Sehemu ya Hali imesetiwa kuwa "Kibali".
- "Kibali kimekataliwa" (T2)
Mpito unaokagua kama Sehemu ya Hali imesetiwa kuwa "Kibali kimekataliwa".
- "Kubaliwa" (T3)
Mpito unaokagua kama Sehemu ya Hali imesetiwa kuwa "Kubaliwa".
- "Oda imekataliwa" (T4)
Mpito unaokagua kama sehemu ya Hali imesetiwa kuwa "Oda imekataliwa".
- "Oda imewekwa" (T5)
Mpito unaokagua kama sehemu ya Hali imesetiwa kuwa "Oda imewekwa".
- "Vilivyosafirishwa vimepokelewa" (T6)
Mpito unaokagua kama sehemu ya Hali imesetiwa kuwa "Vilivyosafirishwa vimepokelewa".

2.3.4. Vitendo vya mpito

Bofya kwenye "Vitendo vya Mpito" katika "Elementi za Michakato Zilizopo", kisha bofya "Tengeneza Kitendo Kipya cha Mpito".

Available Process Elements

- Activities
- Activity Dialogs
- Transitions
- Transition Actions

Filter Transition Actions...

No data found.


Kielelezo: Tengeneza kitufe kipya cha vitendo vya mpito.

Katika skrini ibukizi iliyofunguliwa jaza "Jina la Mpito", na "Moduli ya Vitendo vya Mpito" kisha ongeza majina na thamani za parameta za hiari na zinazohitajika

Moduli zote za mpito zinapatikana kwenye Kiini/Mfumo/UsimamiziwaMchakato/Vitendo vya Mpito na ifuatayo ni orodha ya kifungu cha Vitendo vya Mpito vilivyojumuishwa kwenye hili toleo

- SetiSehemulnayobadilika
- TengenezaTiketiMakala
- SetiTiketiMteja
- SetiKitasaTiketi
- SetiMwenyeTiketi
- SetiFoleniTiketi
- SetKuwajibikaTiketi
- SetiHudumaTiketi
- SetiSLATiketi
- SetiHaliTiketi
- SetiMadaTiketi
- SetiAinaTiketi

Kila moduli ina parameta zake tofauti. Tafadhali pitia nyaraka za moduli ili kujifunza parameta zote zinazohitajika na za hiari.

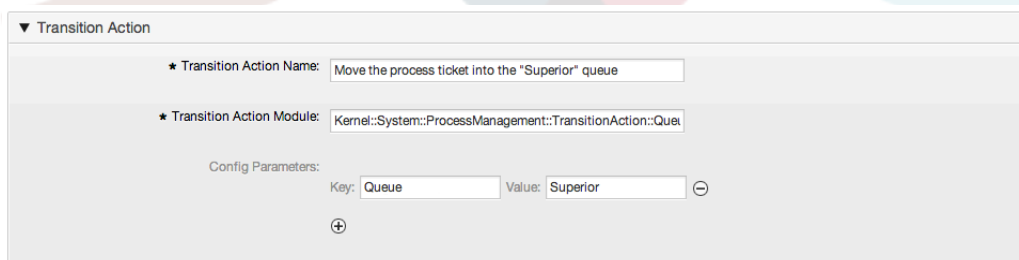

Kielelezo: Ongeza vitendo vya mpito mpya.

Baada ya parameta na thamani zote kusetiwa bofya kitufe kuwasilisha ili kuhifadhi mabadiliko.

Tengeneza vitendo vya mpito vifwatavyo:

- "Peleka tiketi ya mchakato kwa Foleni ya 'Usimamizi' (TA1)

Hiki kitendo kinatakiwa kutekelezwa wakati Mpito "Kibali" (T1) umetumika.

- "Badilisha tiketi inayowajibika kwa 'manager'" (TA2)

Itatekelezwa pale mpito "Kibali" (T1) umetumika.

- "Peleka tiketi ya mchakato kwenye Foleni ya 'Wateja'" (TA3)

Itatekelezwa wakati:

- Mpito "Kibali kimekataliwa" (T2) umetumika
- Mpito "Oda imekataliwa" (T4) umetumika
- Mpito "Vilivyosafirishwa vimepokelewa" (T6) umetumika
- "Badilisha tiketi inayowajibika kwa 'Mwajiriwa'" (TA4)

Itatekelezwa wakati:

- Mpito "Kibali kimekataliwa" (T2) umetumika
- Mpito "Oda imekataliwa" (T4) umetumika
- Mpito "Vilivyosafirishwa vimepokelewa" (T6) umetumika
- "Peleka tiketi ya mchakato kwa Foleni ya 'Manunuzi'" (TA5)

Itatekelezwa pale mpito "Imekubaliwa" (T3) umetumika.

- "Peleka tiketi za mchakato kwenye Foleni ya 'Ofisi ya posta'" (TA6)

Itatekelezwa pale mpito "Oda imewekwa" (T5) umetumika.

- "Kufunga tiketi kumefanikiwa" (TA7)

Itatekelezwa wakati:

- Mpito "Vilivyosafirishwa vimepokelewa" (T6) umetumika
- "Kufunga tiketi hakujaifanikiwa" (TA8)

Itatekelezwa wakati:


- Mpito "Kibali kimekataliwa" (T2) umetumika
- Mpito "Oda imekataliwa" (T4) umetumika

Kama unavyo ona, kuna sehemu ambazo vitendo vya mpito vile vile vitatekelezwa. Hivyo ni busara kuwezesha muunganiko wa Vitendo vya Mpito na Mapito kirahisi ili kuweza kurudia kuvitumia.

2.3.5. Shughuli

Tumechagua mbinu ya kuona shughuli kama kikapu ambacho kina Maongezi ya Shughuli.

Bofya "Shughuli" katika "Elementi za Michakato Zilizopo", kisha bofya "Tengeneza Shughuli Mpya".



Kielelezo: Tengeneza Kitufe kipywa cha Shughuli .

Katika skrini ibukizi iliyofunguliwa jaza "Jina la Shughuli", kisha kokota Maongezi ya Shughuli yanayotakiwa kutoka "Maongezi ya Shughuli Yanayopatikana" na ziweke kwenye "Maongezi ya Shughuli Yaliyogawiwa". Haya maongezi yataonyeshwa (katika skrini iliyokutwa ya tiketi) katika oda ile ile kama ilivyofafanuliwa kwenye skrini hii ikitafsiri kutoka juu kwenda chini, kwenda kushoto kwenda kulia.

Hii oda ni muhimu hasa kwa Shughuli ya kwanza, kwa kuwa Maongezi ya kwanza ya Shughuli kwa shughuli hii ndio ya pekee yanawasilishwa mchakato ukianza.

Tengeneza Shughuli zifuatazo

- "Kurekodi mahitaji" (A1)

Ina Maongezi ya Shughuli "Kurekodi mahitaji" (AD1)

- "Kibali" (A2)

Ina Maongezi ya Shughuli "Kibali kimekataliwa" (AD2) na pia "Imekubaliwa" (AD3)

- "Oda" (A3)

Ina Maongezi ya Shughuli "Oda imekataliwa" (AD4) na pia "Oda imewekwa" (AD5)

- "Zinazoingia" (A4)

Ina Maongezi ya Shughuli "Vilivyosafirishwa vimepokelewa" (AD6)

- "Mchakato umekamilika" (A5): Hii ni shughuli bila maongezi ya shughuli yawezekanayo. Ita setiwa baada ya "Kibali kimekataliwa", "Oda imekataliwa" au "Vilivyosafirishwa vimepokelewa" na inaashiria mwisho wa mchakato.

Sasa tunaweza kuona shughuli zimefafanuliwa kuwa hali za michakato ya tiketi. Baada ya kufanikiwa kwa mpito tiketi inapelekwa kutoka shughuli moja kwenda nyingine.

2.3.6. Njia ya mchakato wa kuoda kitabu

Tuhitimishe mfano wetu na kipande cha mwisho kisichokwepo cha fumbo, mchakato kama mfafanuzi wa mtiririko. Katika kesi yetu huu ni upangaji mzima wa mtiririko wa kazi. Michakato mingine inaweza kuwa kuweka oda za vifaa vya ofisi na michakato mingine tofauti kabisa.

Mchakato una pointi ya kuanza ambayo ina Shughuli ya kuanza na Maongezi ya Shughuli ya kuanza. Kwa oda yeyote mpya ya kitabu, skrini ya kwanza kuonyeshwa ni ya Maongezi ya Shughuli (Maongezi ya kwanza ya Shughuli kwa Shughuli ya kwanza). Kama hii imemalizika na kuhifadhiwa, tiketi ya mchakato itatengenezwa na kufwata sanidi ya mtiririko wa kazi.

Mchakato pia una mwelekeo ambao tiketi ya mchakato itapitishwa ndani ya mchakato. Tuiite hii "Njia". Ina Shughuli ya kuanza, Mpito mmoja au zaidi (pengine na Vitendo vya Mpito), na Shughuli nyingine.

Tukiamini kwamba Shughuli tayari zimegawia Maongezi Ya Shughuli kuokota Shughuli kutoka kwenye kodiani (katika upande wa kushoto wa skrini) na kuzidondosha kwenye eneo la turubai (chini ya taarifa za mchakato). Tambua mshale kutoka mwanzo wa mchakato (duara la kijani) kwenda kwenye Shughuli imewekwa kiotomatiki. (Hii ni Shughuli ya kwanza na Maongezi yake ya kwanza ya Shughuli ni skrini ya kwanza ambayo itaonyeshwa wakati mchakato unaanza).

Available Process Elements

Activities

Filter Activities...

- Recording the demand ✎ 🗑
- Approval ✎ 🗑
- Order ✎ 🗑
- Incoming ✎ 🗑
- Process complete ✎ 🗑

+ Create New Activity

Activity Dialogs

Transitions

Transition Actions

Description

The Elements listed above in this sidebar can be moved to the canvas area on the right by using drag'n'drop.

Activities: You can place Activities on the canvas area to assign this Activity to the Process.


Activity Dialogs: To assign an Activity Dialog to an Activity drop the Activity Dialog element from this sidebar over the Activity placed in the canvas area.

Transitions: You can start a connection between to Activities by dropping the Transition element over the Start Activity of the connection. After that you can move the loose end of the arrow to the End Activity.

Transition Actions: Actions can be assigned to a Transition by dropping the Action Element onto the label of a Transition.

State: Inactive

▼ Add and Edit Activities, Activity Dialogs and Transitions

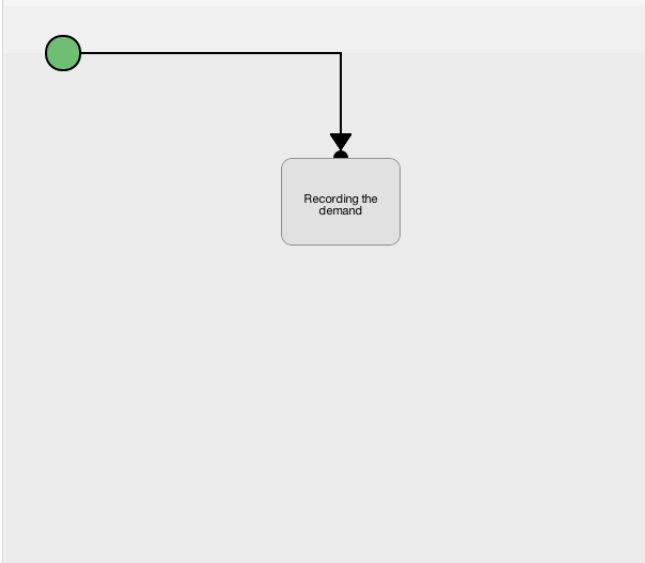

Save or Save and finish or Cancel

Kielelezo: Kokota shughuli ya kwanza kwenye turubai.

Kokota shughuli nyingine kwenye turubai. sasa tuna shughuli mbili kwenye turubai ya kwanza imeunganishwa na pointi ya kuanza na ya pili haina muunganiko, unaweza kupitisha kipanya juu ya kila shughuli ku dhihirisha Maongezi Shughuli yao.

Available Process Elements

Activities

Filter Activities...

- Recording the demand ✎ 🗑
- Approval ✎ 🗑
- Order ✎ 🗑
- Incoming ✎ 🗑
- Process complete ✎ 🗑

+ Create New Activity

Activity Dialogs

Transitions

Transition Actions

Description

The Elements listed above in this sidebar can be moved to the canvas area on the right by using drag'n'drop.

Activities: You can place Activities on the canvas area to assign this Activity to the Process.


Activity Dialogs: To assign an Activity Dialog to an Activity drop the Activity Dialog element from this sidebar over the Activity placed in the canvas area.

Transitions: You can start a connection between to Activities by dropping the Transition element over the Start Activity of the connection. After that you can move the loose end of the arrow to the End Activity.

Transition Actions: Actions can be assigned to a Transition by dropping the Action Element onto the label of a Transition.

State: Inactive


▼ Add and Edit Activities, Activity Dialogs and Transitions

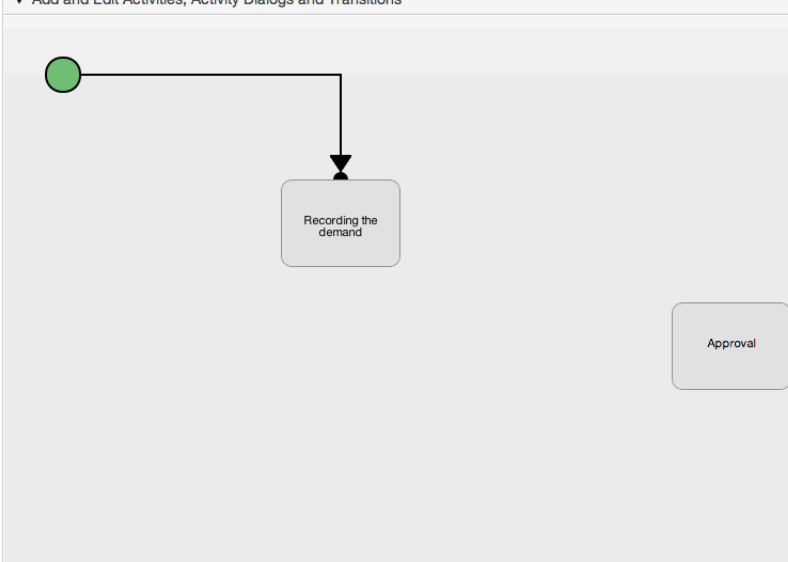

Save or Save and finish or Cancel

Kielelezo: Kokota shughuli ya pilikwenye turubai.

Kisha tutengeneze "Njia" (uhusiano) kati ya shughuli hizi mbili, kwa hili tutatumia Mapito, Bofya kwenye Mapito kwenye kodiani kokota Mpito na udondoshe ndani ya Shughuli ya kwanza, tambua kwamba Shughuli inabadilisha rangi kuonyesha Mpito umeambatanishwa, baada tu ya mpito kudondosha mwisho wa mshale wa Mpito utawekwa karibu na pointi ya kuanza mchakato. Kokota mwisho wa mshale wa Mpito na udondoshe ndani ya shughuli nyingine kutengeneza uhusiano kati ya Shughuli hizo.

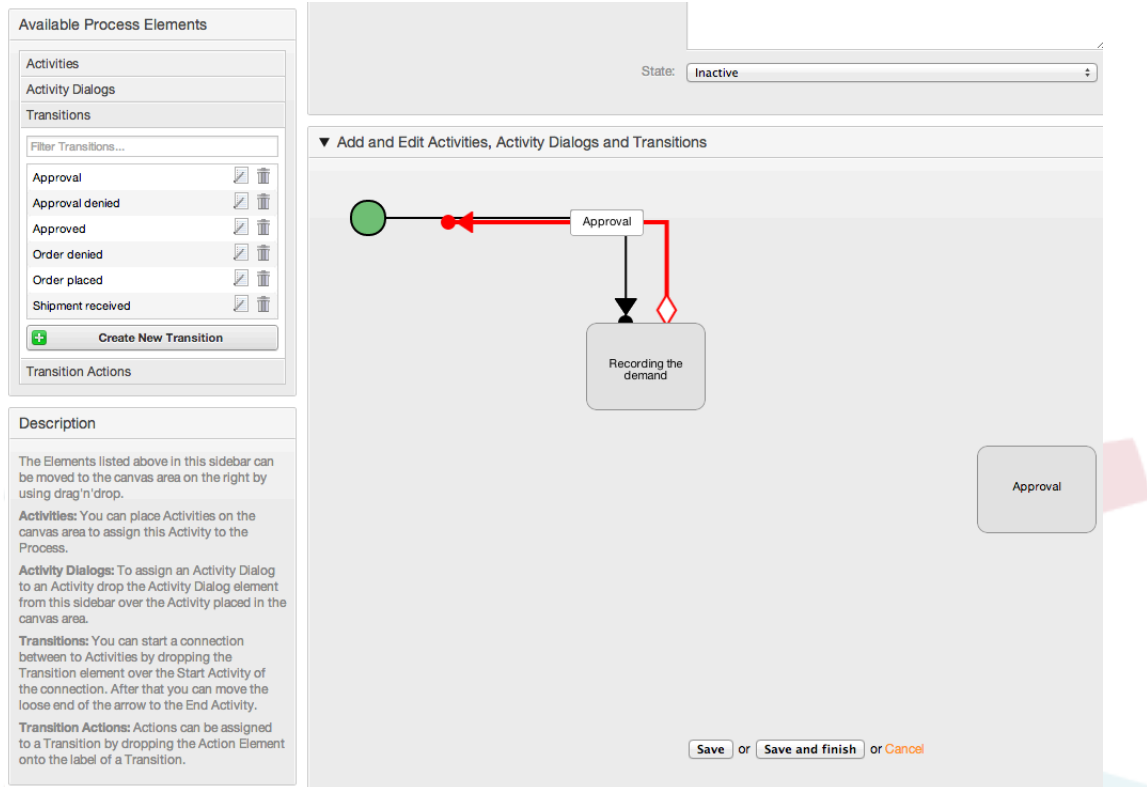

The screenshot shows the OTRS process editor interface. On the left, there is a sidebar titled "Available Process Elements" containing a list of activities and transitions. The "Approval" activity is highlighted with a red box. Below the sidebar is a "Description" section with instructions on how to use the elements. The main canvas area shows a workflow diagram with a green start circle, a red arrow pointing to an "Approval" activity, and a red arrow pointing to a "Recording the demand" activity. The "Approval" activity is highlighted with a red box. At the bottom right of the canvas, there are buttons for "Save", "Save and finish", and "Cancel".

Kielelezo: Kokota Mapito kwenda kwenye turubai.

Sasa "Njia" kati ya vitendo imefafanuliwa, kisha tunahitaji kuweka Vitendo vya Mpito chini ya Mpito, bofya marambili lebo ya mpito (ndani ya turubai), hii itafungua dirisha ibukizi jipya.

Available Process Elements

Activities

Filter Activities...

- Recording the demand ✎ ✕
- Approval ✎ ✕
- Order ✎ ✕
- Incoming ✎ ✕
- Process complete ✎ ✕

+ Create New Activity

Activity Dialogs

Transitions

Transition Actions

Description

The Elements listed above in this sidebar can be moved to the canvas area on the right by using drag 'n' drop.

Activities: You can place Activities on the canvas area to assign this Activity to the Process.


Activity Dialogs: To assign an Activity Dialog to an Activity drop the Activity Dialog element from this sidebar over the Activity placed in the canvas area.

Transitions: You can start a connection between to Activities by dropping the Transition element over the Start Activity of the connection. After that you can move the loose end of the arrow to the End Activity.

Transition Actions: Actions can be assigned to a Transition by dropping the Action Element onto the label of a Transition.

State: Inactive

▼ Add and Edit Activities, Activity Dialogs and Transitions

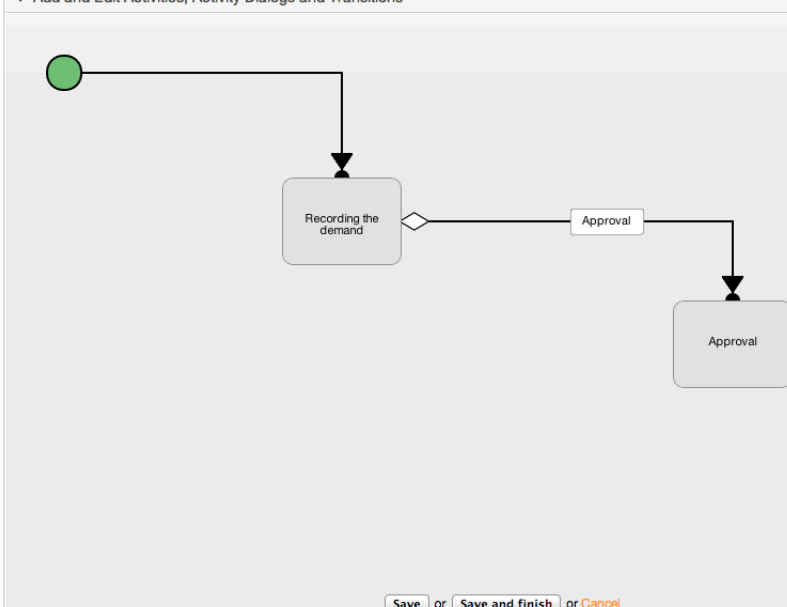


Save or Save and finish or Cancel

Kielelezo: Uganisha shughuli kwa kutumia Mapito.

Kokota Vitendo vya Mpito vinavyotakiwa kutoka bwawa la Vitendo vya Mpito Vinavyopatikana na dondoshwa katika bwawa la Vitendo vya Mpito Vilivyogawiwa kisha bofya kitufe cha kuwasilisha.

▼ Path



▼ Transition Actions

You can assign Transition Actions to this Transition by dragging the elements with the mouse from the left list to the right list. Ordering the elements within the list is also possible by drag 'n' drop.

Filter available Transition Actions...

AVAILABLE TRANSITION ACTIONS

- Move the process ticket into the "Employee" queue Edit
- Change ticket responsible to "Employee" Edit
- Move process ticket into the "Purchasing" queue Edit
- Move process ticket into the "Post office" queue Edit
- Close ticket successfully Edit
- Close ticket unsuccessfully Edit

Create New Transition Action

ASSIGNED TRANSITION ACTIONS

- Change ticket responsible to "Superior" Edit
- Move the process ticket into the "Superior" queue Edit

kielelezo: Vitendo vya mpito vilivyogawiwa.

Kisha tukirudi kwenye skrini ya kuhariri mchakato wa msingi bofya kwenye kitufe cha kuhifadhi chini ya turubai kuhifadhi mabadiliko mengine yote.

Kamilisha "Njia" kwa kuongeza Shughuli zifuatazo, Mapito na Vitendo vya Mpito:

Mahitaji yanarekodiwa mpaka "Kibali"

- Pointi ya kuanza: Shughuli: Mahitaji yanarekodiwa (A1)

- Mpito uwezekanao: Kibali (T1)
 - Kama masharti ya hii shughuli yamekamilishwa, tiketi itapelekwa kwa Shughuli: Kibali (A2)
 - Kwa nyongeza, VitendoVyaMpito vifwatavyo vina tekelezeka
 - "Kuhamisha tiketi kwenda kwenye foleni ya 'Usimamizi'" (TA1)
 - "Seti tiketi iwe jukumu la 'Meneja'" (TA2)

Shughuli: "Kurekodi mahitaji" (A1) ni hatua iliyofafanuliwa ya mchakato wa tiketi, ambapo kuna uwezekano wa mpito: "Kibali" (T1). Kama hii itakubali tiketi itapelekwa kwenye shughuli inayofuata: "Kibali" (A2), na Vitendo vya Mpito: "Kupeleka tiketi kwenye foleni ya 'Usimamizi'" (TA1) na "Seti tiketi iwe jukumu la 'Meneja'" (TA2) zinatekelezeka. Kwenye Shughuli: "Approval" (A2), Maongezi ya Shughuli: "Kibali kimekataliwa" (AD2) na "Kubaliwa" (AD3) zinapatikana.

Kibali

- Pointi ya Kuanza: Shughuli "Kibali" (A2)
- Mapito yawezekanayo:
 - "Kibali kimekataliwa" (T2)
 - Kama hii inalingana, tiketi ya mchakato itapelekwa kwa Shughuli: "Mchakato umekamilika" (A5).
 - Kwa nyongeza, Vitendo Vya Mpito vifwatavyo vina tekelezeka:
 - "Peleka tiketi ya mchakato kwenye Foleni ya 'Wateja'" (TA3)
 - "Seti tiketi yenye jukumu kwa 'Mteja'" (TA4)
 - "Kufunga tiketi hakujaifanikiwa" (TA8)
 - "Kubaliwa" (T3)
 - Kama hii inalingana, tiketi ya mchakato itapelekwa kwa Shughuli: "Oda" (A3).
 - Kwa nyongeza, Kitendo cha Mpito kifwatacho kitatekelezwa.
 - "Peleka tiketi ya mchakato kwa Foleni ya 'Manunuzi'" (TA5)

Tunaweza kuona kutoka kwenye shughuli za sasa, ambayo inafafanua hatua katika mchakato wa tiketi, kuna uwezekano mmoja au zaidi wa mpito ambao una lengo moja la shughuli (na ikiwezekana Kitendo kimoja au zaidi cha mpito)

Oda


- Pointi ya kuanza: Shughuli "Oda" (A3)
- Mapito yawezekanayo:
 - "Oda imekataliwa" (T4)
 - Kama hii inalingana, tiketi ya mchakato itapelekwa kwa Shughuli: "Mchakato umekamilika" (A5).
 - Kwa nyongeza, Vitendo Vya Mpito vifwatavyo vina tekelezeka:
 - "Peleka tiketi ya mchakato kwenye Foleni ya 'Wateja'" (TA3)

- "Seti tiketi yenye jukumu kwa 'Mteja'" (TA4)
- "Kufunga tiketi hakujaifanikiwa" (TA8)
- "Oda imewekwa" (T5)
 - Kama hii inalingana, tiketi ya mchakato itapelekwa kwa Shughuli: "zinazoin-gia" (A5).
 - Kwa nyongeza, Kitendo cha Mpito kifwatacho kitatekelezwa.
 - "Peleka tiketi za mchakato kwa Foleni ya 'Ofisi ya posta'" (TA6)

"Zinazoin-gia"

- Pointi ya Kuanza: Shughuli "Zinazoin-gia" (A4)
- Mapito yawezekanayo:
 - "Vilivyosafirishwa vimepokelewa" (T6)
 - Kama hii inalingana, tiketi ya mchakato itapelekwa kwa Shughuli: "Mchakato umekamilika" (A5).
 - Kwa nyongeza, Vitendo Vya Mpito vifwatavyo vina tekelezeka:
 - "Peleka tiketi ya mchakato kwenye Foleni ya 'Wateja'" (TA3)
 - "Seti tiketi yenye jukumu kwa 'Mteja'" (TA4)
 - "Kufunga tiketi kumefanikiwa" (TA7)

Njia kamili ya mchakato wa kuoda vitabu itaonekana kama hivi:

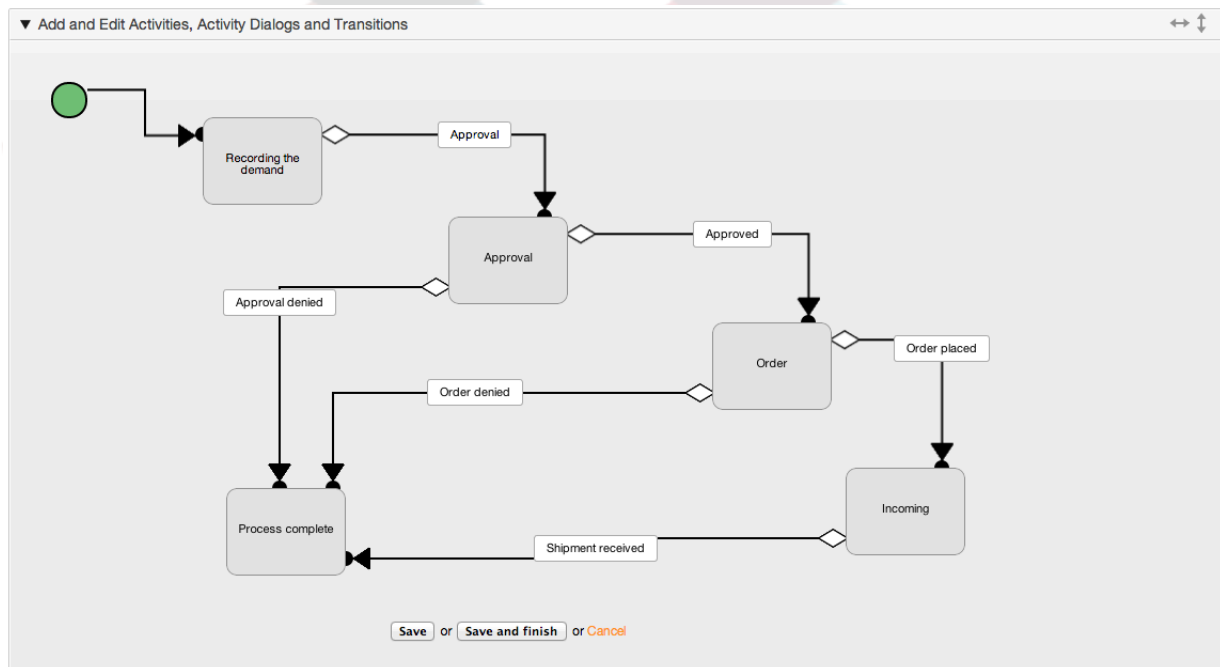

Kielelezo: Njia kamili ya mchakato wa kuoda vitabu.

Baada ya kumaliza njia ya mchakato tafadhali bonyeza kitufe cha "hifadhi" upande wa chini wa turubai kisha bonyeza kitufe "Landanisha Michakato yote". Hii itakusanya taarifa zote za michakato kutoka kwenye hifadhidata na kutengeneza faili la hifadhi muda (kwa

lugha ya Perl). Hii hifadhi muda ni sanidi za michakato ambazo mfumo utatumia kutingeneza au kutumia tiketi za michakato.

Mabadiliko yeyote yaliyofanyika kwenye michakato (katika kiolesura michoro cha mtumiaji) yatahitaji kurudia kulanandisha faili la hifadhi muda ili mabadiliko yawepo kwenye mfumo.

Pia inawezekana kuagiza mchakato mzima kutoka faili la YAML, lakini ni muhimu kutingeneza Sehemu zote Zinazobadilika, Watumiaji, Foleni, na kadh. ambazo zinahitajika na kila mchakato kabla ya kuagiza.

Tambua kwamba kama mchakato unahitaji utumiaji wa ACL hizo zinahitaji pia kusetiwa kwa mikono.

Lifwatalo ni faili kamili la YAML kwa ajili ya mfano wa mchakato wa kuoda kitabu:

```
---
Activities:
  A1:
    ActivityDialogs:
      - AD1
    ChangeTime: 2012-11-23 14:49:22
    Config:
      ActivityDialog:
        1: AD1
    CreateTime: 2012-11-23 11:49:38
    EntityID: A1
    ID: 151
    Name: Recording the demand
  A2:
    ActivityDialogs:
      - AD2
      - AD3
    ChangeTime: 2012-12-13 00:55:12
    Config:
      ActivityDialog:
        1: AD2
        2: AD3
    CreateTime: 2012-11-23 11:50:11
    EntityID: A2
    ID: 152
    Name: Approval
  A3:
    ActivityDialogs:
      - AD4
      - AD5
    ChangeTime: 2012-11-23 18:12:14
    Config:
      ActivityDialog:
        1: AD4
        2: AD5
    CreateTime: 2012-11-23 11:50:35
    EntityID: A3
    ID: 153
    Name: Order
  A4:
    ActivityDialogs:
      - AD6
    ChangeTime: 2012-11-23 18:12:35
    Config:
      ActivityDialog:
        1: AD6
    CreateTime: 2012-11-23 11:51:00
    EntityID: A4
    ID: 154
    Name: Incoming
  A5:
    ActivityDialogs: []
    ChangeTime: 2012-11-23 11:51:33
```

```
Config: {}
CreateTime: 2012-11-23 11:51:33
EntityID: A5
ID: 155
Name: Process complete
ActivityDialogs:
AD1:
ChangeTime: 2012-12-06 02:16:21
Config:
DescriptionLong: ''
DescriptionShort: Recoding the demand
FieldOrder:
- DynamicField_Author
- DynamicField_ISBN
- DynamicField_Title
- DynamicField_Status
Fields:
DynamicField_Author:
DefaultValue: ''
DescriptionLong: ''
DescriptionShort: ''
Display: 1
DynamicField_ISBN:
DefaultValue: ''
DescriptionLong: ''
DescriptionShort: ''
Display: 1
DynamicField_Status:
DefaultValue: ''
DescriptionLong: ''
DescriptionShort: ''
Display: 1
DynamicField_Title:
DefaultValue: ''
DescriptionLong: ''
DescriptionShort: ''
Display: 1
Interface:
- AgentInterface
Permission: ''
RequiredLock: 0
SubmitAdviceText: ''
SubmitButtonText: ''
CreateTime: 2012-11-23 14:34:43
EntityID: AD1
ID: 154
Name: Recording the demand
AD2:
ChangeTime: 2012-11-23 14:57:41
Config:
DescriptionLong: ''
DescriptionShort: Approval denied
FieldOrder:
- Article
- DynamicField_Status
Fields:
Article:
Config:
ArticleType: note-internal
DefaultValue: ''
DescriptionLong: ''
DescriptionShort: ''
Display: 1
DynamicField_Status:
DefaultValue: ''
DescriptionLong: ''
DescriptionShort: ''
Display: 1
Interface:
- AgentInterface
Permission: ''
RequiredLock: 0
```

```
SubmitAdviceText: ''
SubmitButtonText: Deny Request
CreateTime: 2012-11-23 14:36:39
EntityID: AD2
ID: 155
Name: Approval denied
AD3:
ChangeTime: 2012-12-14 03:14:23
Config:
  DescriptionLong: ''
  DescriptionShort: Approved
  FieldOrder:
    - DynamicField_Status
  Fields:
    DynamicField_Status:
      DefaultValue: ''
      DescriptionLong: ''
      DescriptionShort: ''
      Display: 1
  Interface:
    - AgentInterface
  Permission: ''
  RequiredLock: 0
  SubmitAdviceText: ''
  SubmitButtonText: Approve Request
CreateTime: 2012-11-23 14:37:35
EntityID: AD3
ID: 156
Name: Approved
AD4:
ChangeTime: 2012-11-23 14:58:52
Config:
  DescriptionLong: ''
  DescriptionShort: Order rejected
  FieldOrder:
    - Article
    - DynamicField_Status
  Fields:
    Article:
      Config:
        ArticleType: note-internal
        DefaultValue: ''
        DescriptionLong: ''
        DescriptionShort: ''
        Display: 1
      DynamicField_Status:
        DefaultValue: ''
        DescriptionLong: ''
        DescriptionShort: ''
        Display: 1
    Interface:
      - AgentInterface
  Permission: ''
  RequiredLock: 0
  SubmitAdviceText: ''
  SubmitButtonText: Reject Order
CreateTime: 2012-11-23 14:38:48
EntityID: AD4
ID: 157
Name: Order rejected
AD5:
ChangeTime: 2012-12-06 02:20:12
Config:
  DescriptionLong: ''
  DescriptionShort: Order placed
  FieldOrder:
    - DynamicField_DeliveryDate
    - DynamicField_Price
    - DynamicField_Supplier
    - DynamicField_Status
  Fields:
    DynamicField_DeliveryDate:
```

```

    DefaultValue: ''
    DescriptionLong: ''
    DescriptionShort: ''
    Display: 1
  DynamicField_Price:
    DefaultValue: ''
    DescriptionLong: ''
    DescriptionShort: ''
    Display: 1
  DynamicField_Status:
    DefaultValue: ''
    DescriptionLong: ''
    DescriptionShort: ''
    Display: 1
  DynamicField_Supplier:
    DefaultValue: ''
    DescriptionLong: ''
    DescriptionShort: ''
    Display: 1
  Interface:
    - AgentInterface
  Permission: ''
  RequiredLock: 0
  SubmitAdviceText: ''
  SubmitButtonText: Place Order
  CreateTime: 2012-11-23 14:41:28
  EntityID: AD5
  ID: 158
  Name: Order placed
AD6:
  ChangeTime: 2012-11-23 14:42:43
  Config:
    DescriptionLong: ''
    DescriptionShort: Shipment received
  FieldOrder:
    - DynamicField_DateOfReceipt
    - DynamicField_Status
  Fields:
    DynamicField_DateOfReceipt:
      DefaultValue: ''
      DescriptionLong: ''
      DescriptionShort: ''
      Display: 1
    DynamicField_Status:
      DefaultValue: ''
      DescriptionLong: ''
      DescriptionShort: ''
      Display: 1
  Interface:
    - AgentInterface
  Permission: ''
  RequiredLock: 0
  SubmitAdviceText: ''
  SubmitButtonText: ''
  CreateTime: 2012-11-23 14:42:43
  EntityID: AD6
  ID: 159
  Name: Shipment received
Process:
  Activities:
    - A1
    - A2
    - A3
    - A4
    - A5
  ChangeTime: 2012-12-06 02:31:59
  Config:
    Description: The process to order a book
  Path:
    A1:
      T1:
        ActivityEntityID: A2

```

```

    TransitionAction:
      - TA2
      - TA1
  A2:
    T2:
      ActivityEntityID: A5
      TransitionAction:
        - TA3
        - TA4
        - TA8
    T3:
      ActivityEntityID: A3
      TransitionAction:
        - TA5
  A3:
    T4:
      ActivityEntityID: A5
      TransitionAction:
        - TA3
        - TA4
        - TA8
    T5:
      ActivityEntityID: A4
      TransitionAction:
        - TA6
  A4:
    T6:
      ActivityEntityID: A5
      TransitionAction:
        - TA3
        - TA4
        - TA7
  A5: {}
  StartActivity: A1
  StartActivityDialog: AD1
  CreateTime: 2012-11-23 11:45:12
  EntityID: P1
  ID: 94
  Layout:
    A1:
      left: 172
      top: 63
    A2:
      left: 402
      top: 156
    A3:
      left: 649
      top: 255
    A4:
      left: 774
      top: 391
    A5:
      left: 194
      top: 410
  Name: Book ordering
  State: Active
  StateEntityID: S1
  TransitionActions:
    - TA1
    - TA2
    - TA3
    - TA4
    - TA8
    - TA5
    - TA3
    - TA4
    - TA8
    - TA6
    - TA3
    - TA4
    - TA7
  Transitions:

```

- T1
- T2
- T3
- T4
- T5
- T6

TransitionActions:**TA1:**

ChangeTime: 2012-11-23 16:01:37
Config:
 Config:
 Queue: Management
 Module: Kernel::System::ProcessManagement::TransitionAction::TicketQueueSet
CreateTime: 2012-11-23 15:50:59
EntityID: TA1
ID: 61
Name: Move the process ticket into the "Management" queue

TA2:

ChangeTime: 2012-11-23 16:02:12
Config:
 Config:
 Responsible: manager
 Module: Kernel::System::ProcessManagement::TransitionAction::TicketResponsibleSet
CreateTime: 2012-11-23 15:58:22
EntityID: TA2
ID: 62
Name: Change ticket responsible to "manager"

TA3:

ChangeTime: 2012-11-24 14:27:02
Config:
 Config:
 Queue: Employees
 Module: Kernel::System::ProcessManagement::TransitionAction::TicketQueueSet
CreateTime: 2012-11-23 16:02:54
EntityID: TA3
ID: 63
Name: Move the process ticket into the "Employees" queue

TA4:

ChangeTime: 2012-11-23 16:04:06
Config:
 Config:
 Responsible: Employee
 Module: Kernel::System::ProcessManagement::TransitionAction::TicketResponsibleSet
CreateTime: 2012-11-23 16:04:06
EntityID: TA4
ID: 64
Name: Change ticket responsible to "Employee"

TA5:

ChangeTime: 2012-12-06 02:18:34
Config:
 Config:
 Queue: Purchasing
 Module: Kernel::System::ProcessManagement::TransitionAction::TicketQueueSet
CreateTime: 2012-11-23 16:04:54
EntityID: TA5
ID: 65
Name: Move process ticket into the "Purchasing" queue

TA6:

ChangeTime: 2012-12-06 02:18:48
Config:
 Config:
 Queue: Post office
 Module: Kernel::System::ProcessManagement::TransitionAction::TicketQueueSet
CreateTime: 2012-11-23 16:06:20
EntityID: TA6
ID: 66
Name: Move process ticket into the "Post office" queue

TA7:

ChangeTime: 2012-12-06 02:29:55
Config:
 Config:
 State: closed successful

```
Module: Kernel::System::ProcessManagement::TransitionAction::TicketStateSet
CreateTime: 2012-12-06 02:29:27
EntityID: TA7
ID: 67
Name: Close ticket successfully
TA8:
  ChangeTime: 2012-12-06 02:31:12
  Config:
    Config:
      State: closed unsuccessful
    Module: Kernel::System::ProcessManagement::TransitionAction::TicketStateSet
    CreateTime: 2012-12-06 02:31:12
    EntityID: TA8
    ID: 68
    Name: Close ticket unsuccessfully
Transitions:
T1:
  ChangeTime: 2012-11-23 15:12:20
  Config:
    Condition:
      1:
        Fields:
          DynamicField_Status:
            Match: Approval
            Type: String
          Type: and
        ConditionLinking: and
    CreateTime: 2012-11-23 11:53:52
    EntityID: T1
    ID: 94
    Name: Approval
T2:
  ChangeTime: 2012-11-23 15:12:50
  Config:
    Condition:
      1:
        Fields:
          DynamicField_Status:
            Match: Approval denied
            Type: String
          Type: and
        ConditionLinking: and
    CreateTime: 2012-11-23 11:54:26
    EntityID: T2
    ID: 95
    Name: Approval denied
T3:
  ChangeTime: 2012-11-23 15:13:29
  Config:
    Condition:
      1:
        Fields:
          DynamicField_Status:
            Match: Approved
            Type: String
          Type: and
        ConditionLinking: and
    CreateTime: 2012-11-23 11:54:54
    EntityID: T3
    ID: 96
    Name: Approved
T4:
  ChangeTime: 2012-11-23 15:14:08
  Config:
    Condition:
      1:
        Fields:
          DynamicField_Status:
            Match: Order denied
            Type: String
          Type: and
        ConditionLinking: and
```

```

CreateTime: 2012-11-23 11:55:25
EntityID: T4
ID: 97
Name: Order denied
T5:
  ChangeTime: 2012-11-23 18:30:33
  Config:
    Condition:
      1:
        Fields:
          DynamicField_Status:
            Match: Order placed
            Type: String
          Type: and
        ConditionLinking: and
  CreateTime: 2012-11-23 11:56:15
  EntityID: T5
  ID: 98
  Name: Order placed
T6:
  ChangeTime: 2012-11-23 15:15:30
  Config:
    Condition:
      1:
        Fields:
          DynamicField_Status:
            Match: Shipment received
            Type: String
          Type: and
        ConditionLinking: and
  CreateTime: 2012-11-23 11:56:48
  EntityID: T6
  ID: 99
  Name: Shipment received

```

2.4. Rejea ya sanidi ya mchakato

2.4.1. Mchakato

Mchakato unatengeneza njia ya mtiririko wa kazi/mchakato. Pointi za njia katika mwelekeo huu zinaweza kuwa Shughuli au Mapito, tutaongelea haya baadaye.

2.4.1.1. Sanidi ya mchakato

Usanidi wa mchakato unaweza kufanyika kwenye faili Kernel/Config.pm lakini inashauriwa kutengeneza mafaili mapya kama Kernel/Config/Files/MyProcess.pm. Ona kwamba GUI inatengeneza faili Kernel/Config/File/ZZZProcessManagement tafadhali usitumie jina hilo la faili, la sivyo litaandikwa juu yake ukifanya ulandanishi wa mchakato. Tuone mfano wa mchakato wa usanidi (kutoka kwenye faili la hifadhi muda ya mchakato):

```

$self->{'Process'} = {
  'P1' => {
    Name           => 'Book order',
    CreateTime     => '16-02-2012 13:37:00',
    CreateBy       => '1',
    ChangeTime     => '17-02-2012 13:37:00',
    ChangeBy       => '1',
    State          => 'Active',
    StartActivity  => 'A1',
    StartActivityDialog => 'AD1',
    Path => {
      'A1' => {
        'T1' => {
          ActivityEntityID => 'A2',
        },
      },
    },
  },
}

```



```

    },
    'A2' => {
      'T2' => {
        ActivityEntityID => 'A3',
      },
    },
  },
},
'P2' => {
  Name           => 'IT order',
  CreateTime     => '26-02-2012 13:37:00',
  CreateBy      => '1',
  ChangeTime    => '27-02-2012 13:37:00',
  ChangeBy      => '1',
  State         => 'Active',
  StartActivity => 'A2',
  StartActivityDialog => 'AD2',
  Path => {
    'A2' => {
      'T3' => {
        ActivityEntityID => 'A4',
      },
    },
  },
},
}
};

```

2.4.1.2. Jina

Jina la mchakato, hii inaweza kuchaguliwa na wakala wakati wa kutengeneza tiketi ya mchakato mpya.

2.4.1.3. Tengeneza muda

Muda ambao mchakato ulitengenezwa.

2.4.1.4. Imetengenezwa na

UID ya mtumiaji anayetengeneza mchakato.

2.4.1.5. Badilisha muda

Muda ambao mchakato ulibadilishwa.

2.4.1.6. Ilibadilishwa na

UID ya mtumiaji aliyeweka mabadiliko ya mwisho.

2.4.1.7. Hali

Inafafanua hali ya mchakato. Thamani ziwezekanazo:

- 'Amilifu' ni michakato yote ambayo inaweza kutumika katika tiketi mpya za mchakato.
- 'KwanjukaMwali' ni michakato ambayo haiwezi kuchaguliwa tena kwa tiketi mpya, lakini tiketi zilizopo zinaweza kutumia huo mchakato.
- 'Isiyo Amilifu' michakato inalemazwa na haiwezi kutumika kwa tiketi mpya au zilizopo.

2.4.1.8. AnzaShughuli

Wakati wa kutengeneza mchakato mpya wa tiketi, lazima ufafanue ki AnzaShughuli. Mara tu tiketi itakapotengenezwa, hiishughuli ita setiwa na kutumika kama msingi wa kaguzi za kwanza za mpito.

2.4.1.9. AnzaShughuliMaongezi

Kwa tiketi mpya, ki AnzaShughuliMaongezi lazima kifafanuliwe. Hii itaonyeshwa wakati wa kutengeneza mchakato mpya wa tiketi (baada ya mchakato kuchaguliwa). Hapa tiketi bado haipo, itatengenezwa baada ya kuwasilisha ki AnzaShughuliMaongezi.

2.4.1.10. Njia

Njia ina muundo wa Shughuli, na Mapito yanayowezekana kati yao, kwa ajili ya mchakato wa sasa. Na pia Vitendo vya Mpito ambavyo vinatokea wakati wa Mpito. Hii inadhibiti mwelekeo ambao tiketi ya mchakato itachukua. Mfano:

```
'A1' => {
  'T1' => {
    ActivityEntityID => 'A2',
  },
  'T2' => {
    ActivityEntityID => 'A3',
  },
  'T3' => {
    ActivityEntityID => 'A4',
    TransitionAction => ['TA1', 'TA2'],
  },
},
```

Kama tiketi ya mchakato iko kwenye shughuli 'A1', ina njia tatu zinazowezekana kwenda kwenye Shughuli nyingine. Kwenye Mapito 'T1' kwenda 'T3', masharti yamefafanuliwa, ambayo tiketi ya mchakato inabidi iyatimize ili ihamie kwenye Shughuli nyingine.

Kama katika kesi hii thamani zote za tiketi ya mchakato na sehemu zake zinazobadilika ambazo zinahitajika kwa Mpito 'T2' ziko sawa, tiketi itahamishwa kutoka Shughuli 'A1' kwenda 'A3'. Baada ya MaongeziYaShughuli kuwasilishwa, au mabadiliko yoyote mengine yamefanywa kwenye tiketi, itakaguliwa kwa Mapito yawezekanayo kutoka kwenye Shughuli ya sasa. Kama Mapito zaidi ya moja yanawezekana, ya kwanza yatatumika (kutegemea na upangaji wa nambari za Vitambulisho vya Mpito).

Kwa nyongeza, inawezekana kugawia Vitendo vya Mpito kwa Mapito katika usanidi wa Njia. Hizi moduli ambazo zinatekelezwa baada ya mpito uliofanikiwa. Inabidi zibainishwe katika fomu ya mkusanyiko kama kwenye mfano, tutaongelea kwa undani baadaye.

2.4.2. Shughuli

Shughuli ina Maongezi ya Shughuli ya aina moja au zaidi na inatengeneza 'hatua' katika mchakato. Maongezi ya Shughuli yote ya Shughuli ya sasa yanaonyeshwa katika kuza tiketi na inaweza kutumika mpaka masharti ya Mpito yatimizwe.

2.4.2.1. Sanidi ya shughuli

Tuone mfano wa sanidi ya shughuli:

```
$Self->{'Process::Activity'} =
{
  'A1' => {
    Name      => 'Activity 1 optional',
    CreateTime => '16-02-2012 13:37:00',
    CreateBy  => '1',
    ChangeTime => '17-02-2012 13:37:00',
    ChangeBy  => '1',
    ActivityDialog => {
      1 => 'AD1',
    },
  },
  'A2' => {
```

```

Name      => 'Activity 2 optional',
CreateTime => '16-02-2012 13:37:00',
CreateBy  => '1',
ChangeTime => '17-02-2012 13:37:00',
ChangeBy  => '1',
ActivityDialog => {
  1 => 'AD5',
  2 => 'AD6',
  3 => 'AD1',
},
},
};

```

2.4.2.2. Jina

Jina la shughuli.

2.4.2.3. Tengeneza muda

Muda ambao ilitengenezwa.

2.4.2.4. Imetengenezwa na

UID ya mtumiaji aliyetengeneza shughuli.

2.4.2.5. Badilisha muda

Muda wa mwisho ilipo badilishwa

2.4.2.6. Ilibadilishwa na

UID ya mtumiaji wa mwisho aliyebadilisha shughuli.

2.4.2.7. MaongeziShughuli

Maongezi ya Shughuli yana orodha ya maongezi ya shughuli ambayo yanapatikana katika hii shughuli. Maongezi yote ya Shughuli ya sasa yanaonekana katika Kuza tiketi. Oda yao inasetiwa na oda ya kwenye sanidi, hapa 'AD5' inaonyeshwa kabla ya 'AD6' na 'AD1'.

2.4.3. MaongeziShughuli

Maongezi ya Shughuli ni skrini maalumu na inaweza kutumika katika shughuli mbali mbali.

2.4.3.1. Sanidi ya MaongeziShughuli

Tuone mfano wa usanidi

```

$self->{'Process::ActivityDialog'} = {
  'AD1' => {
    Name      => 'ActivityDialog 1 optional',
    DescriptionShort => 'Basic info',
    DescriptionLong  => 'Please insert the necesesary basic information for IT orders',
    CreateTime      => '28-02-2012 13:37:00',
    CreateBy       => '1',
    ChangeTime     => '29-02-2012 13:37:00',
    ChangeBy      => '1',
    Fields => {
      PriorityID => {
        DescriptionShort => 'Priority ID',
        DescriptionLong  => 'Enter the priority here',
        Display          => 2,
      },
    },
    FieldOrder      => [ 'PriorityID' ],
    SubmitAdviceText => 'Note: If you submit the form...',
    SubmitButtonText => 'Send request',
  },
};

```

```

    },
    'AD2' => {
      Name => 'ActivityDialog 2 optional',
      DescriptionShort => 'Basic info',
      DescriptionLong => 'Please insert the necessary basic information for Book
orders',
      CreateTime => '28-02-2012 13:37:00',
      CreateBy => '1',
      ChangeTime => '29-02-2012 13:37:00',
      ChangeBy => '1',
      Fields => {
        StateID => {
          DescriptionShort => 'State ID',
          DescriptionLong => 'Enter the state here',
          Display => 2,
          DefaultValue => '2',
        },
        Queue => {
          DescriptionShort => 'Queue ID',
          DescriptionLong => 'Enter the queue here',
          Display => 2,
          DefaultValue => 'Raw',
        },
        Title => {
          DescriptionShort => 'Title',
          DescriptionLong => 'Enter the title here',
          Display => 1,
          DefaultValue => 'Default Title',
        },
        DynamicField_Anzahl => {
          DescriptionShort => 'Amount',
          DescriptionLong => 'Enter the amount here',
          Display => 2,
          DefaultValue => '4',
        },
      },
      FieldOrder => [ 'DynamicField_Anzahl', 'StateID', 'Queue', 'Title' ],
      SubmitAdviceText => 'Note: If you submit the form...',
      SubmitButtonText => 'Send request',
    },
  },
};

```

2.4.3.2. Jina

Jina la Maongezi Shughuli.

2.4.3.3. Tengeneza muda

Muda iliyotengenezwa.

2.4.3.4. Imetengenezwa na

UID ya mtumiaji aliyetengeneza haya Maongezi Shughuli.

2.4.3.5. Badilisha muda

Muda wa mwisho ilipobadilishwa

2.4.3.6. Ilibadilishwa na

UID ya mtumiaji wa mwisho aliyebadilisha haya Maongezi Shughuli.

2.4.3.7. Sehemu

Ina sehemu zote ambazo zinaweza kuonyeshwa katika Maongezi ya Shughuli haya. Sehemu zifuatazo zinaweza kutumika sasa:

```

Title
State
StateID
Priority
PriorityID
Lock
LockID
Queue
QueueID
Customer
CustomerID
CustomerNo
CustomerUserID
Owner
OwnerID
Type
TypeID
SLA
SLAID
Service
ServiceID
Responsible
ResponsibleID
PendingTime
DynamicField_FieldName # for all dynamic fields

```

Mfano wa sanidi yen

```

StateID => {
  DescriptionShort => 'State ID',
  DescriptionLong => 'Enter the state here',
  Display          => 2,
  DefaultValue     => '2',
},

```

Sehemu "Makala" ni kesi maalumu. Kama ipo kwenye usanidi wa "Sehemu", Maongezi ya Shughuli yatakuwa na kihariri kamili cha Nakalatajiri chenye sehemu ya somo na ushughulikiaji viambatamishi. Nakala iliyoingizwa kisha itaongezwa kwenye tiketi kama nakala na kutumwa kwa barua pepe. Tuone mfano wa usanidi wa sehemu ya Makala:

```

Article => {
  DescriptionShort => 'Please insert your comment here.',
  DescriptionLong => '',
  Display          => 1,
  Config           => {
    ArticleType => 'note-internal',
    LabelSubject => '',
    LabelBody   => '',
  },
},

```

Tuangualie chaguo za usanidi wa sehemu:

2.4.3.7.1. MaelezoMafupi

Maelezo mafupi ya hiari yanayo onyeshwa na mada ya sehemu.

2.4.3.7.2. MaelezoMarefu

Maelezo marefu ya sehemu ya hiari yanayo onyeshwa pale kipanya kinapokuwa juu ya eneo, kwa mfano ushauri wa jinsi ya kujaza eneo.

2.4.3.7.3. Onyesha

Inadhibiti kama sehemu inaonekana au ni ya lazima. Thamani zinazowezekana:

- '0': sehemu haionekani. Hii inakuwa na manufaa kama thamani za sehemu zinatakiwa kusetiwa kiotomatiki. ThamaniChaguo-msingi iliyosanidiwa itahifadhiwa katika kesi hii.
- '1': sehemu inaonekana, lakini ni ya hiari.
- '2': sehemu inaonekana na ni ya lazima. Sehemu zifuatazo zinaweza kuwa hazionekani na za lazima tu:

```

QueueID
Queue
State
StateID
Lock
LockID
Priority
PriorityID
Type
TypeID

```

Kama sehemu zimesanidiwa kama za hiari, na hakuna thamani iliyowasilishwa na mtumiaji, Thamani Chaguo-msingi itahifadhiwa wakati Maongezi ya Shughuli yanawasilishwa na mtumiaji.

2.4.3.7.4. ThamaniChaguo-msingi

Kwa sehemu zenye 'Kitambulisho' (kama KitambulishoChaFoleni, KitambulishoChaMmiliki), hii inamaanisha Kitambulisho cha hifadhidata ya thamani. Kwa sehemu nyingine zisizo na 'Kitambulisho' (kama Foleni, Mmiliki), ThamaniChaguo-msingi lazima iwe na thamani yenyewe. Mfano:

```

Queue => {
  DescriptionShort => 'Queue',
  DescriptionLong => 'Enter the queue here',
  Display          => 2,
  DefaultValue    => 'Raw',
},

```

2.4.3.8. OdaSehemu

Hapa mpangilio wa muonekano wa sehemu unasanidiwa. MUHIMU: Sehemu zizoonekana lazima zisanidiwe hapa, kwa sababu sehemu zilizosanidiwa tu zitahusishwa wakati wa kuhifadhi. Sehemu ambazo hazijasanidiwa hazita hifadhiwa.

2.4.3.9. WasilishaNakalaUshauri

Nakala ya hiari kuonyeshwa juu ya kitufe cha kuwasilisha kwa msaada zaidi au nakala ya ushauri.

2.4.3.10. KitufeWasilishaNakala

Nakala ya kawaida ya hiari kwa ajili ya kitufe cha kuwasilisha.

2.4.4. Mpito

Mpito unachagua - kutegemeana na masharti yanayoweza kusanidiwa - njia gani katika Mchakato inachukuliwa, yaani Shughuli gani tiketi ya Mchakato inaweza kupelekwa.

2.4.4.1. Usanidi wa mpito

Tuone mfano:

```

$self->{'Process::Transition'} = {
  'T1' => {
    Name => 'Transition 1',
    CreateTime => '14-03-2012 13:37:00', # optional
    CreateBy => '1', # optional
    ChangeTime => '15-03-2012 13:37:00', # optional
    ChangeBy => '15-03-2012 13:37:00', # optional
    Condition => {
      Cond1 => {
        Fields => {
          StateID => {
            Type => 'String',
            Match => '1',
          },
        },
      },
    },
  },
  'T2' => {
    Name => 'Transition 2 optional',
    CreateTime => 'DATE', # optional
    CreateBy => 'USERID', # optional
    ChangeTime => 'DATE', # optional
    ChangeBy => 'USERID', # optional
    Condition => {
      Cond1 => {
        Queue => 'Raw',
        DynamicField_Farbe => '2',
        DynamicField_Anzahl => '1',
      },
    },
  },
};

```

2.4.4.2. Jina

Jina la mpito

2.4.4.3. Tengeneza muda

Muda iliyotengenezwa.

2.4.4.4. Imetengenezwa na

UID ya mtumiaji aliyetengeneza huu Mpito.

2.4.4.5. Badilisha muda

Muda wa mwisho ilipobadilishwa

2.4.4.6. Ilibadilishwa na

UID ya mtumiaji wa mwisho aliyebadilisha huu Mpito.

2.4.4.7. Sharti

Ina masharti ya muhimu kwa huu mpita kufanya kazi. Mfano:

```

Condition => {
  Type => 'and',
  Cond1 => {
    Type => 'and',
    Fields => {
      StateID => {
        Type => 'String',

```

```

        Match => '1',
      },
      DynamicField_Marke => {
        Type => 'String',
        Match => 'VW',
      },
    },
    Cond2 => {
      Type => 'and',
      Fields => {
        Queue => {
          Type => 'String',
          Match => 'Raw',
        },
      },
    },
  },
},

```

Tuangalie sharti la usanidi kwa undani.

2.4.4.7.1. Aina (Sharti)

Inaweka bayana uhusiano wa elementi za masharti kwa nyenzake. Thamani ziwezekana-zo:

- 'na': Hili ni chaguo-msingi. Masharti yote lazima yafikiwe ili mpito ufanyike.
- 'au': Angalau sharti moja lilingane.
- 'xor': Lazima sharti moja tu lifanane, siyo zaidi.

2.4.4.7.2. Sharti1

Hili ni jina la mfano wa sharti. Inaweza kuchaguliwa kwa uhuru. Masharti yana tathminiwa katika oda iliyo pangwa.

2.4.4.7.3. Aina (Sharti)

Inaweka bayana uhusiano baina ya vipimo vya maeneo binafsi ya hili sharti. Thamani ziwezekana-zo:

- 'na': Hili ni chaguo-msingi. Vipimo vya maeneo yote lazima vifanane ili sharti lilingane.
- 'or' Angalau kipimo kimoja cha sehemu kifanane
- 'xor': Lazima jatribio moja la eneo lifanane sio zaidi.

2.4.4.7.4. Sehemu

Inabainisha sehemu maalumu ambazo thamani zake zinatakiwa kujaribiwa. Kutoka kwenye mfano wetu:

```

Fields => {
  StateID => {
    Type => 'String',
    Match => '1',
  },

```

2.4.4.7.5. IDyaHali

Mfina wa jina la sehemu. Sehemu zifwatazo za tiketi zinaweza kutumika:

```

Title
State

```



```

StateID
Priority
PriorityID
Lock
LockID
Queue
QueueID
Customer
CustomerID
CustomerNo
CustomerUserID
Owner
OwnerID
Type
TypeID
SLA
SLAID
Service
ServiceID
Responsible
ResponsibleID
DynamicField_FieldName # for all DynamicFields

```

Wakati wa kujaribisha sehemu kwa 'Kitambulisho' (kama Kitambulisho cha SLA), Kitambulisho cha hifadhidata ya sehemu kitatumika kwa ajili ya majaribio, kwa sehemu nyingine (kama SLA) thamani halisi inatumika kwa ajili ya majaribio.

2.4.4.7.6. Aina

Inaamua aina ya kipimo cha eneo. Thamani ziwezekanazo:

- 'Tungo': Inalinganisha thamani ya sehemu na tungo iliyobainishwa katika 'Lingana'. Zinalingana kama ziko sawa kabisa.
- 'Hash': Inafananisha thamani ya sehemu (hash) na hash iliyobainishwa kwenye 'Fanana'. Thamani zote za hash lazima ziwe sawa.
- 'Mkusanyiko': Inalinganisha thamani ya sehemu (mkusanyiko) na mkusanyiko uliobainishwa kwenye 'Lingana'. Orodha zote mbili lazima ziwe sawa.
- 'Regex': Thamani ya sehemu inaweza kujaribiwa na usemi wa kawaida. Nimuhimu kwamba 'Fanana' ina *qr{xms}* kama sharti la msingi. Katikati ya mabano semi ya kawaida halisi inaweza kuandikwa.
- 'Moduli': Inakuruhusu kutumia moduli ya Perl kwa ajili ya kukagua masharti. Kama ikirudisha 1, ukaguzi ulikua chanya. Unaweza kupata moduli ya mfano kwenye `Kernel/System/ProcessManagement/TransitionValidation/ValidateDemo.pm`.

2.4.5. Vitendo vya mpito

Vitendo vya Mpito ni vitendo ambavyo vinaweza kuchochewa baada ya mapito yaliyofanyika kikamilifu (pale tiketi ya mchakato inapohama kutoka shughuli moja hadi nyingine). Vitendo hivi vya Mpito vinaweza kutumika kufanya mabadiliko mengi kwenye tiketi, mf. badilisha Foleni au Mmiliki wa tiketi, na pia unaweza kutengeneza Vitendo vyako vya Mpito kufanya mabadiliko mengine magumu.

2.4.5.1. Usanidi wa Vitendo vya Mpito

Tuone mfano:

```

$self->{'Process::TransitionAction'} = {
  'TA1' => {
    Name => 'Queue Move',

```

```

Module => 'Kernel::System::ProcessManagement::TransitionAction::TicketQueueSet',
Config => {
    Queue => 'Junk',
    UserID => 123,
},
},
};

```

2.4.5.2. Jina

Jina la Kitendo cha Mpito.

2.4.5.3. Moduli

Inaweka bayana moduli ya Perl itakayotumika.

2.4.5.4. Usanidi

Parameta hii ina mipangilio yote inayohitajika na moduli. Maudhui yake yanategemea moduli maalumu ya Kitendo cha Mpito inayotumika. Tafadhali pitia nyaraka za moduli moja moja kwa undani zaidi. Katika mfano wetu, Foleni tu lazima iwekwe bayana, Hata hivyo tunatuma pia parameta ya Kitambulisho cha mtumiaji, kwa kutumia parameta ya kitambulisho cha mtumiaji, kitendo cha mpito kitatekelezwa na kumfanya mtumiaji kuwa mwenye kitambulisho cha mtumiaji hicho.

Matumizi ya Kitambulisho cha Mtumiaji ndani ya parameta "Config" ya Kitendo cha Mpito inakubalika na Vitendo vyote vya Mpito (tangu OTRS 3.2.4), katika huu mfano inaweza kuwa muhimu zaidi kama mtumiaji anayesababisha Mpito hana ruhusa za kuhamisha tiketi kwenda kwenye foleni 'Taka', wakati mtumiaji mwenye Kitambulisho cha mtumiaji 123 anaweza kuwa nayo.

2.4.5.5. Kutumia Moduli za Vitendo vya Mpito kwa kurudia

Ili kutumia moduli za Kitendo cha Mpito zaidi ya mara moja, weka bayana VitendoVyaMpito mbali mbali kwenye usanidi wako. Mfano:

```

$self->{'Process::TransitionAction'} = {
    'TA1' => {
        Name => 'Queue Move Junk',
        Module => 'Kernel::System::ProcessManagement::TransitionAction::TicketQueueSet',
        Config => {
            Queue => 'Junk',
        },
    },
    'TA2' => {
        Name => 'Queue Move Raw',
        Module => 'Kernel::System::ProcessManagement::TransitionAction::TicketQueueSet',
        Config => {
            Queue => 'Raw',
        },
    },
},
};

```

Hapa moduli ile ile inatumika kuhamisha tiketi ya mchakato kwenda kwenye foleni 'Mbichi', na wakati mwingine kuhamisha kwenda kwenye foleni taka. Kitendo cha Mpito ambacho lazima kitumike kwa Mpito fulani kinajulikana kutoka kwenye mpangilio wa 'Njia' ya usanidi wa Mchakato.

2.4.5.6. Vitendo vya Mpito vilivyopo.

OTRS inakuja na Vitendo vya Mpito vingi unavyoweza kutumia katika michakato yako. Hapa utapata nyaraka zake na jinsi zilivyo sanidiwa.

2.4.5.6.1. SetiSehemuInayobadilika

Ina seti sehemu zinazobadilika moja au zaidi katika mchakato wa tiketi. mfano:

```
$Self->{'Process::TransitionAction'} = {
  'TA1' => {
    Name => 'Set DynamicField Master to Master and Approved to 1',
    Module => 'Kernel::System::ProcessManagement::TransitionAction::DynamicFieldSet',
    Config => {
      MasterSlave => 'Master',
      Approved => '1',
    },
  },
};
```

'Jina' inaweka bayana jina la KitendoChampito kilicho sanidiwa.

'MkuuMtumwa' na 'Kubaliwa' inatolewa kama mifano ya majina ya SehemuZinazobadilika. Thamani za sehemu ('Mkuu' na '1') itasetiwa na KitendoChampito hiki.

2.4.5.6.2. TengenezaTiketiMakala

Inatengeneza Makala na inaweza kutumika kutengeneza dokezo au majibu ya barua pepe. Mfano:

```
$Self->{'Process::TransitionAction'} = {
  'TA1' => {
    Name => 'Article Create Note Internal',
    Module =>
'Kernel::System::ProcessManagement::TransitionAction::TicketArticleCreate',
    Config => {
      ArticleType => 'note-internal', #
note-external|phone|fax|sms|... #
excluding any email type #
  SenderType => 'agent', #
agent|system|customer #
  ContentType => 'text/plain; charset=ISO-8859-15', # or
optional Charset & MimeType #
  Subject => 'some short description', #
required #
  Body => 'the message text', #
required #
  HistoryType => 'OwnerUpdate', #
EmailCustomer|Move|AddNote|PriorityUpdate|WebRequestCustomer|... #
  HistoryComment => 'Some free text!', #
  From => 'Some Agent <email@example.com>', #
not required but useful #
  To => 'Some Customer A <customer-a@example.com>', #
not required but useful #
  Cc => 'Some Customer B <customer-b@example.com>', #
not required but useful #
  ReplyTo => 'Some Customer B <customer-b@example.com>', #
not required #
  InReplyTo => '<asdasdasd.12@example.com>', #
not required but useful #
  References => '<asdasdasd.1@example.com> <asdasdasd.12@example.com>', #
not required but useful #
  NoAgentNotify => 0, # if
you don't want to send agent notifications #
  AutoResponseType => 'auto reply', #
auto reject|auto follow up|auto reply/new ticket|auto remove #
  ForceNotificationToUserID => [ 1, 43, 56 ], # if
you want to force somebody #
  ExcludeNotificationToUserID => [ 43, 56 ], #
};
```

```

    # if you want full exclude somebody from notifications,
    # will also be removed in To: line of article,
    # higher prio as ForceNotificationToUserID
    ExcludeMuteNotificationToUserID => [ 43, 56 ],
    # the same as ExcludeNotificationToUserID but only the
    # sending gets muted, agent will still shown in To:
    # line of article
  },
},
};

```

'Jina' inaweka bayana jina la KitendoChampito kilicho sanidiwa. Inachaguliwa kwa uhuru, lakini inatakiwa kuakisi maana ya kitendo kilicho sanidiwa.

'Aina ya Makala' inafafanua aina ya makala itakayotengenezwa. Thamani ziwezekanazo: simu, faksi, ujumbe mfupi wa maneno, notisi-ndani, notisi-nje, na notisi-ripoti.

Aina Ya Mtumaji inafafanua aina ya mtumaji wa makala. Thamani ziwezekanazo: wakala, mfumo, mteja.

'AinaMaudhui' inafafanua aina ya maudhui ya makala. Thamani ziwezekanazo: 'nakala/ghafi; seti kibambo=ISO-8859-15' au seti kibambo nyingine yoyote halali na aina ya mime.

'Somo' inafafanua mada ya makala. Lazima.

'Kiini' inafafanua maudhui ya makala. Lazima.

AinaYaHistoria inafafanua aina ya ingizo la historia. Thamani ziwezekanazo: OngezaNotisi, NyarakaAlamaSasisha, Dunda, SasishaMteja, WakalaWaBaruapepe, MtejaWaBaruapepe, MudaWaKupandaMajibuTaarifuKabla, MudaWaKupandaMajibuAnza, MudaWaKupandaMajibuSitisha, MudaWaKupandaUsuluhishiTaarifuKabla, MudaWaKupandaUsuluhishiAnza, MudaWaKupandaUsuluhishiSitisha, MudaWaKupandaSasishaTaarifaKabla, MudaWaKupandaSasishaAnza, MudaWaKupandaSasishaSitisha, Ufwatiliaji, PelekaMbele, Funga, KitanziUlinzi, Unganishwa, Misc, Hamisha, TiketiMpya, MmilikiSasisha, PigaSimuWakala, PigaSimuMteja, KipaumbeleSasisha, Ondoa, JukumuSasisha, TumaTaarifaWakala, TumaJibu, TumaUfwatiliajiOtomatiki, TumaKataaKiotomatiki, TumaJibuKiotomatiki, TumaTaarifaMteja, SasishaHuduma, SetiMudaKusubiri, SasishaSLA, SasishaHali, Jiunge, MaombiYaMfumo, SasishaSehemulnayobadilikaTiketi, TiketiOngezaKiungo, TiketiFutaKiungo, MahesabuYaMuda, SasishaAina, Fungua, Jiondoe, MaombiYaTocutiMteja.

'HistoriaMaoni' inafafanua maudhui ya ingizo la historia.

'Kutoka', 'Kwa', 'Nakala' na 'JibuKwa' peleka anuani za barua pepe kwenye nukuu zilizobainishwa juu.

'KatikaMajibuKwa' na 'Marejeo' chukua Vitambulisho vya ujumbe wa barua pepe.

'HakunaWakalaArifu'-kama imesetiwa kuwa 1, taarifa ya barua pepe ya Wakala haitatumwa.

'MajibuAinaOtomatiki' inaweza kuchukua thamani zifuatazo: ufwatiliaji otomatiki, ukataaji otomatiki, uondoaji otomatiki, majibu otomatiki, majibu otomatiki/tiketi mpya.

'LazimishaTaarifaKwaKitambulichoChamtumiaji', 'TenganishaTaarifaKwaKitambulishoChamtumiaji', 'TenganishaNyamazishaTaarifaKwaKitambulishoChamtumiaji' zinaweza kuchukua orodha ya Vitambulisho vya Watumiaji ambao aidha wanapata taarifa kila wakati, hawapati taarifa au wanawekwa kwenye orodha kama wanapata taarifa lakini hawapati barua pepe ya taarifa.

2.4.5.6.3. SetiTiketiMteja

Inaseti mteja wa tiketi ya mchakato. Mfano:

```
$Self->{'Process::TransitionAction'} = {
  'TA1' => {
    Name => 'Customer Set Customer to test',
    Module => 'Kernel::System::Process::TransitionAction::TicketCustomerSet',
    Config => {
      No => 'test',
      User => 'client-user-123',
      # or in other words
      # CustomerID => 'client123',
      # CustomerUserID => 'client-user-123',
    },
  },
};
```

'Jina' inaweka bayana jina la KitendoChampito kilicho sanidiwa.

Hakuna au Kitambulisho cha Mteja inaseti kitambulisho cha Mteja.

Mtumiaji au KitambulishoChamtumiajiMteja anaseti jina la mtumiaji la mteja.

2.4.5.6.4. SetiKitasaTiketi

Inabadilisha ufunguo wa tiketi ya mchakato, Mfano:

```
$Self->{'Process::TransitionAction'} = {
  'TA1' => {
    Name => 'Set Lock to lock',
    Module => 'Kernel::System::ProcessManagement::TransitionAction::TicketLockSet',
    Config => {
      Lock => 'lock',
      # or
      LockID => 2,
    },
  },
};
```

'Jina' inaweka bayana jina la KitendoChampito kilicho sanidiwa.

'Funga' inafafanua ufungaji mpya wa tiketi ya mchakato.

'Kitambulisho cha Funga' inafafanua kitambulisho cha ndani cha ufungaji mpya.

2.4.5.6.5. SetiMwenyeTiketi

Inabadilisha mmiliki wa tiketi ya nchakato. Mfano:

```
$Self->{'Process::TransitionAction'} = {
  'TA1' => {
    Name => 'Owner Set root@localhost',
    Module => 'Kernel::System::ProcessManagement::TransitionAction::TicketOwnerSet',
    Config => {
      Owner => 'root@localhost',
      # or
      OwnerID => 1,
    },
  },
};
```

'Jina' inaweka bayana jina la KitendoChampito kilicho sanidiwa.

'Mmiliki' inaweka bayana jina la kuingia la mmiliki mpya.

'Kitambulisho cha Mmiliki' inaweka bayana kitambulisho cha ndani cha mmiliki mpya.

2.4.5.6.6. SetiFoleniTiketi

Inapeleka tiketi kwenye foleni lengwa. Mfano:

```
$Self->{'Process::TransitionAction'} = {  
  'TA1' => {  
    Name => 'Queue Move Raw',  
    Module => 'Kernel::System::ProcessManagement::TransitionAction::TicketQueueSet',  
    Config => {  
      Queue => 'Raw',  
      # or  
      # QueueID => '2',  
    },  
  },  
};
```

'Jina' inaweka bayana jina la KitendoChampito kilicho sanidiwa.

'Foleni' inaweka bayana jina la foleni lengwa.

'Kitambulisho cha Foleni' inaweka bayana kitambulisho cha ndani cha foleni lengwa.

2.4.5.6.7. SetKuwajibikaTiketi

Inabadilisha tiketi ya mchakato inayohusika. Mfano:

```
$Self->{'Process::TransitionAction'} = {  
  'TA1' => {  
    Name => 'Responsible Set root@localhost',  
    Module =>  
    'Kernel::System::ProcessManagement::TransitionAction::TicketResponsibleSet',  
    Config => {  
      Responsible => 'root@localhost',  
      # or  
      ResponsibleID => 1,  
    },  
  },  
};
```

'Jina' inaweka bayana jina la KitendoChampito kilicho sanidiwa.

'Mhusika' inaweka bayana jina la kuingia la mhusika mpya.

'Kitambulisho cha Mhusika' inaweka bayana kitambulisho cha ndani cha mhusika mpya.

2.4.5.6.8. SetiHudumaTiketi

Inagawia huduma kwa tiketi ya mchakato. Tiketi inahitaji kuwa na mteja na huduma lazima iwe imegawiwa kwa huyo mteja. Mfano:

```
$Self->{'Process::TransitionAction'} = {  
  'TA1' => {  
    Name => 'Set MyService service',  
    Module => 'Kernel::System::ProcessManagement::TransitionAction::TicketServiceSet',  
    Config => {  
      Service => 'MyService',  
      # or  
      ServiceID => 123,  
    },  
  },  
};
```

'Jina' inaweka bayana jina la KitendoChampito kilicho sanidiwa.

'Huduma' inafafanua huduma mpya ya tiketi ya mchakato. Jina kamili linahitajika (mf. HudumaBabu::HudumaBaba::HudumaMtoto).

'Kitambulisho cha Huduma' inafafanua kitambulisho cha ndani cha huduma mpya.

2.4.5.6.9. SetiSLATiketi

Inagawia makubaliano ya ngazi ya huduma kwa tiketi ya mchakato. Tiketi inahitaji kuwa na huduma na SLA lazima igawiwe kwa hiyo huduma. Mfano:

```
$Self->{'Process::TransitionAction'} = {
  'TA1' => {
    Name => 'Set MySLA SLA',
    Module => 'Kernel::System::ProcessManagement::TransitionAction::TicketSLASet',
    Config => {
      SLA => 'MyService',
      # or
      SLAID => 123,
    },
  },
};
```

'Jina' inaweka bayana jina la KitendoChaMpito kilicho sanidiwa.

'SLA' inafafanua makubaliano ya ngazi ya huduma mpya ya mchakato wa tiketi.

'Kitambulisho cha SLA' inafafanua kitambulisho cha ndani cha SLA mpya.

2.4.5.6.10. SetiHaliTiketi

Inabadilisha hali ya mchakato wa tiketi. Mfano:

```
$Self->{'Process::TransitionAction'} = {
  'TA1' => {
    Name => 'Set State to open',
    Module => 'Kernel::System::ProcessManagement::TransitionAction::TicketStateSet',
    Config => {
      State => 'open',
      # or
      StateID => 4,
      PendingTimeDiff => 123,
    },
  },
};
```

'Jina' inaweka bayana jina la KitendoChaMpito kilicho sanidiwa.

'Hali' inafafanua hali mpya ya tiketi ya mchakato.

'Kitambulisho cha Hali' inafafanua kitambulisho cha ndani cha hali mpya.

'MudaKusubiriTofauti' inatumika kwa ajili ya aina za hali za kusubiri tu, inafafanua utofauti wa muda katika sekunde yenye uhusiano (yenye uhusiano na muda wa utekelezaji wa Kitendo cha Mpito) na muda wa kusubiri wa tiketi uliosetiwa (mf. 3600 inamaanisha muda wa kusubiri ni lisaa 1 baada ya Kitendo cha Mpito kutekelezwa).

2.4.5.6.11. SetiMadaTiketi

Inaseti kichwa cha habari cha tiketi ya mchakato. Mfano:

```
$Self->{'Process::TransitionAction'} = {
  'TA1' => {
```

```

Name => 'Set Ticket Title to Ticket-title',
Module => 'Kernel::System::ProcessManagement::TransitionAction::TicketTitleSet',
Config => {
  Title => 'Ticket-title',
},
},
};

```

'Jina' inaweka bayana jina la KitendoChamPito kilicho sanidiwa.

"Kichwa cha Habari" kinaweka bayana kichwa cha habari kipya cha tiketi.

2.4.5.6.12. SetiAinaTiketi

Inaseti aina ya tiketi ya mchakato. Mfano:

```

$self->{'Process::TransitionAction'} = {
  'TA1' => {
    Name => 'Set Ticket Type to default',
    Module => 'Kernel::System::ProcessManagement::TransitionAction::TicketTypeSet',
    Config => {
      Type => 'default',
      # or
      # TypeID => '1',
    },
  },
};

```

'Jina' inaweka bayana jina la KitendoChamPito kilicho sanidiwa.

'Aina' inaweka bayana jina la aina ya tiketi.

'Kitambulisho cha Aina' inaweka bayana kitambulisho cha ndani cha aina ya tiketi.

2.4.6. Orodha Dhibiti Sikivu

Kwa usaidizi kutoka ACLs, unaweza kuweka kikomo cha vitu vya kuchaguliwa kwenye tiketi za mchakato. Tafadhali ona pia rejea ya ACL kwa maelezo kamili ya sintaksi ya ACL.

2.4.6.1. Usanidi wa ACL

ACL zinaweza kufafanuliwa kwenye Kernel/Config.pm tu. Mfano:

```

$self->{TicketAcl}->{'001-ACL-ProcessProperties'} = {
  Properties => {
    Process => {
      ProcessEntityID => ['P1'],
      ActivityEntityID => ['A1'],
      ActivityDialogEntityID => ['AD1'],
    }
  },
  Possible => {
    ActivityDialog => ['AD1', 'AD3'],
  },
  PossibleNot => {
    ActivityDialog => ['AD3'],
  },
};

```

2.4.6.2. 001-ACL-SifaMchakato

Jina la sheria ya ACL. Kwa maelezo zaidi kuhusu sheria za ACL kwa ujumla, tafadhali nenda mwongozo wa ACL.

2.4.6.3. Mchakato

Hii sehemu inatumika lulagua kama ACL laizma itumike. Kama ina thamani zilizowekwa bayana, sheria itatumika. Thamani zifuatazo zinaweza kutumika:

2.4.6.3.1. KitambulishoChaChomboChaMchakato

Kitambulisho cha mchakato ambacho mchakato. Unafanania kama tiketi ikigawiwa kwa huu mchakato.

2.4.6.3.2. KitambulishoChaChomboChaShughuli

Kitambulisho cha Shughuli ambayo tiketi ya mchakato imegawiwa kwa sasa.

2.4.6.3.3. KitambulishoChaChomboChaMaongeziYaShughuli

Kitambulisho cha Maongezi ya Shughuli ambayo yako wazi kwa tiketi ya mchakato kwa sasa.

2.4.6.4. Ynawezekana/Yasiyowezekana Maongezi ya Shughuli

Hapa unaweza kuweka bayana orodha ya Vitambulisho vya Maongezi ya Shughuli. Hii orodha itaweka ukomo wa Maongezi ya Shughuli ambayo yanaweza kugawiwa kwa mtumijai katika barakoa ya kuza tiketi.

'Inawezekana' inaorodhesha Maongezi ya Shughuli ambayo yanaruhusiwa. Mpangilio hapo juu utaruhusu 'AD1' na 'AD3' tu kati ya orodha ya Maongezi ya Shughuli yaliyosanidiwa.

'InawezekanaHapana' inaorodhesha Maongezi ya Shughuli ambayo hayaruhusiwi. Katika mfano hapo juu, mpangilio utaondoa 'AD3' kutoka kwenye orodha ya Maongezi ya Shughuli yaliyosanidiwa.

Kama zote 'Inawezekana' na 'InawezekanaHapana' zimewekwa bayana, orodha ya Maongezi ya Shughuli yatachujwa kwanza na 'Inawezekana', na kuacha 'AD1' na 'AD3' tu katika mfano wetu. Kisha 'InawezekanaHapana' itafanyika na kuchuja 'AD3', ili 'AD1' pekee ibaki na inaonyeshwa kama Maongezi ya Shughuli yanayowezekana ambayo mtumiaji anaweza kutumia.

Kama sheria zaidi ya moja za ACL zimefanana, muunganiko wa sheria zote zinazofanana utatafutwa kutengeneza Maongezi ya Shughuli yanayowezekana. Mfano:

Maongezi ya Shughuli Yaliyosanidiwa: 'AD1', 'AD2', 'AD3', 'AD4', 'AD5', 'AD6', 'AD7'.

```

$self->{TicketAcl}->{'001-ACL-Status'} = {
  Properties => {
    Ticket => {
      Status => 'new',
    }
  },
  Possible => {
    ActivityDialog => ['AD1', 'AD2', 'AD3', 'AD6', 'AD7'],
  },
};
$self->{TicketAcl}->{'002-ACL-Queue'} = {
  Properties => {
    Ticket => {
      Queue => ['Raw']
    }
  },
  Possible => {
    ActivityDialog => ['AD2', 'AD3', 'AD4', 'AD7'],
  },
};

```

```
$Self->{TicketAcl}->{'003-ACL-Priority'} = {
  Properties => {
    Ticket => {
      Priority => ['3 normal']
    }
  },
  PossibleNot => {
    ActivityDialog => ['AD3', 'AD4'],
  },
};
```

Kama tiketi ya mchakato ina hali 'mpya', iko kwenye foleni 'Mbichi' na ina kipaumbele '3 kawaida', basi sheria zote tatu za ACL zitafanana nayo.

Sheria ya kwanza inapunguza Maongezi ya Shughuli kutoka 'AD1', 'AD2', 'AD3', 'AD4', 'AD5', 'AD6', 'AD7' to 'AD1', 'AD2', 'AD3', 'AD6', 'AD7' na inakataza 'AD4' na 'AD5'.

Sheria ya pili itapunguza zaidi Maongezi ya Shughuli yaliyobaki. Katika mfano wetu, 'AD2', 'AD3', 'AD7' zitabaki.

Sasa sheria ya tatu itapunguza zaidi orodha kwa 'InawezekanaHapana'. 'AD3' inaondolewa kutoka kwenye orodha. 'AD4' haiondolewi, kwa kuwa haikuwa kwenye orodha tangu mwanzo. Mwishoni, 'AD2' na 'AD7' zitabaki kama Maongezi ya Shughuli yanayowezekana ambayo mtumiaji anaweza kutumia.

Pia inawezekana kuweka ukomo wa michakato ambayo inaweza kuonyeshwa katika skrini ya "Tiketi mpya ya mchakato", hii sifa ni sawa na kuweka ukomo wa MaongeziYaShughuli kwa ubaguzi mmoja: ACL zinaweza kujikita kwa watumiaji tu.

Ona mifano chini:

```
$Self->{TicketAcl}->{'200-ACL-Process'} = {
  # match properties
  Properties => {
    User => {
      UserID => [2, 3],
    },
  },
  Possible => {
    Process => ['P1', 'P2', 'P3'],
  },
  PossibleNot => {
    Process => ['P4'],
  },
};
```

```
$Self->{TicketAcl}->{'201-ACL-Process'} = {
  # match properties
  Properties => {
    User => {
      Group_rw => [ 'MyGroup' ],
    },
  },
  Possible => {
    Process => ['P1', 'P2', 'P3'],
  },
  PossibleNot => {
    Process => ['P4'],
  },
};
```

```
$Self->{TicketAcl}->{'202-ACL-Process'} = {
  # match properties
```

```
Properties => {
  User => {
    Role => [ 'MyRole' ],
  },
},
Possible => {
  Process => [ 'P1', 'P2', 'P3' ],
},
PossibleNot => {
  Process => [ 'P4' ],
},
};
```

3. Kutengeneza mandhari yako

Unaweza kutengeneza mandhari yako mwenyewe ili kutumia muonekano unaoupenda katika mazingira ya mbele ya tovuti ya OTRS. Kutengeneza mandhari yako, unatakiwa kugeuza matokeo ya violeza kwa mahitaji yako.

Taarifa zaidi kuhusu sintaksi na muundo wa violezo vinavyotoka zinapatikana katika Mwongozo wa Msanifu <http://otrs.github.io/doc>, hasa katika sura inayohusu *violezo*.

Kama mfano, fuata hatua zifuatazo kutengeneza mandhari mapya yanayoitwa "Kampuni":

1. Tengeneza mpangilio orodha uitwao Kernel/Output/HTML/Company na nakili mafaili yote ambayo ungependa kubadilisha, kutoka Kernel/Output/HTML/Standard kwenda kwenye kabrasha jipya.

Important

Nakili mafaili yale tu utakayobadilisha. OTRS itapata kiotomatiki mafaili yasiyokuwepo kutoka kwenye maudhui ya Kawaida. Hii itafanya uboreshaji katika ngazi ya baadaye rahisi zaidi.

2. Geuza kukufaa mafaili kwenye mpangilio orodha Kernel/Output/HTML/Company, na badilish amuonekano kwa mahitaji yako.
3. Kamilisha mandhari mpya, ziongeze kwenye SysConfig kwenye Mazingira ya mbele::Mandhari.

Sasa mandhari mpya inatakiwa kuweza kutumika. Unaweza kuichagua kupitia kiungo chako cha kurasa ya mapendeleo binafsi.

Warning

Usibadilishe mafaili ya mandhari yaliyosafirishwa na OTRS, kwani haya mabadiliko yatapotea baada ya usasishaji. Tengeneza mandhari yako mwenyewe kwa kufuata hatua zilizoenezwa hapo juu.

4. Ujanibishaji wa mazingira ya mbele ya OTRS

OTRS inatoa msaada kwa lugha nyingi kutoka kwenye kiolesura chake cha wavuti

Utaratibu wa ujanibishaji kwa ajili ya kiunzi cha OTRS, hatua za kufwatwa kutengeneza lugha mpya ya tafsiri, na pia taratibu za kugeuza kukufaa tafsiri, zinaweza kupatikana kwenye "[Tafsiri za Lugha](http://otrs.github.io/doc)" sura ya kwenye mwongozo wa muundaji <http://otrs.github.io/doc>.

Chapter 6. Kuboresha Utendaji

Inayoonyeshwa chini ni orodha ya mbinu za kuboresha utendaji wa usakinishaji wako wa OTRS, ikijumuisha usanidi, uandikaji kanuni, matumizi ya kumbukumbu, na mengine.

1. OTRS

Kuna njia tofauti za kuboresha utendaji wa OTRS.

1.1. ModuliKielelezoTiketi

Kuna moduli mbili za mazingira ya nyuma ya kielelezo cha tiketi:

- Kwa kutumia `Kernel::System::Ticket::IndexAccelerator::RuntimeDB` (chaguo-msingi), zalisha kila muonekano moja kwa moja kutoka kwenye jedwali la tiketi. Hautakuwa na matatizo ya kiutendaji mpaka labda ukiwa na tiketi 60,000 zilizofunguliwa kwenye mfumo wako.
- `Kiini::Mfumo::Tiketi::KielezoKiharakishi::DBTuli`, moduli yenye nguvu kushinda zote, inatakiwa kutumika wakati una tiketi zilizo wazi zaidi ya 80,000. Inatumia jedwali la ziada la tiketi_kielezo., ambayo inafanyakazi kama muonekano. Tumia `bin/otrs.RebuildTicketIndex.pl` kuzalisha kielezo kijenzi cha mwanzo baada ya kubadilisha mazingira ya nyuma.

Unaweza kubadilisha `IndexAccelerator` kupitia `SysConfig`.

1.2. ModuliHifadhiTiketi

Kuna moduli mbili tofauti za mazingira ya nyuma ya uhifadhi wa tiketi/makala:

- Sanidi `Kernel::System::Ticket::ArticleStorageDB` (chaguo-msingi) kuhifadhi viambatanishi, na kadh., katika hifadhidata. Tambua: Usitumie na mipangilio mkubwa.

Faida: Kama mtumiaji wako wa seva ya tovuti siyo mtumiaji wa 'otrs', tumia hii moduli kuzuia matatizo ya ruhusa za faili.

Hasara: Haishauriwi kuhifadhi viambatanisho kwenye hifadhidata yako. Chukua tahadhari kwamba hifadhidata yako inaweza kuhifadhi vitu vikubwa. Mf. Sanidi MySQL na `"set-variable = max_allowed_packet=8M"` kuhifadhi vitu vyenye 8 MB (chaguo msingi ni 2M).

- Sanidi `Kernel::System::Ticket::ArticleStorageFS` kuhifadhi viambatanishi na kadh. katika mfumo wa faili wa ndani. Tambua: Inashauriwa kwa mipangilio mikubwa

Faida: Ni ya kasi!

Hasara: Mtumiaji wako wa seva ya tovuti anatakiwa kuwa mtumiaji wa 'otrs'. Pia, kama una seva za mazingira ya mbele zaidi ya moja, unatakiwa kuhakikisha mfumo wa faili unatumia kwa pamoja kati ya seva. Iweke kwenye ushirika wa NFS au kwa mapendeleo zaidi SAN au inayofanania.

Kumbuka: unaweza kubadilisha kutoka aina moja ya mazingira ya nyuma kwenda mengine kwa haraka, Unaweza kubadilisha mazingira ya nyuma katika `SysConfig`, baada ya hapo anzisha zana ya tungo `otrs.ArticleStorageSwitch.pl` ili kuweka makala kutoka kwenye hifadhidata kwenda kwenye mfumo wa mafaili na kinyume chake. Unaweza kutumia machaguo `-s` na `-d` kuweka bayana chanzo na kifikio cha mazingira ya

nyuma. Tafadhali tambua mchakato mzima unaweza kutumia muda mwingi kufanyika, kutegemeana na idadi ya makala ulizonazo na uwezo wa kitengo kikuu cha uchakataji na/au uwezo wa mtandao.

```
shell> bin/otrs.ArticleStorageSwitch.pl -s ArticleStorageDB -d ArticleStorageFS
```

Hati: Kubadilisha mazingira ya nyuma ya hifadhi kutoka hifadhidata kuwa mfumo wa mafaili

1.3. Kuhifadhi Tiketi

Kwa kuwa OTRS inaweza kutumika kama mfumo wa kuzuia ukaguzi, kufuta tiketi zilizo-fungwa inaweza kuwa sio wazo zuri. Kwa hiyo tumetengeneza kipengele kinachokuruhusu kuhifadhi tiketi kwenye nyaraka.

Tiketi zinazofanana na vigezo fulani zinaweza kuwekewa alama kama "zilizo kwenye nyaraka". Hizi tiketi haziwezi kupatikana kama ukifanya utafutaji tiketi wa kawaida au kuanzisha kazi ya Wakala wa Ujumla. Mfumo wenyewe hautahangaika na idadi kubwa yatiketi tena kwa sababu tiketi za hivi karibuni tu ndio zinatiliwa maanani na OTRS. Hii inaweza kuleta ufanisi mkubwa katika mifumo mikubwa.

Kutumia kipengele cha nyaraka fuata hatua zifuatazo kirahisi:

1. Amilisha mfumo wa nyaraka katika SysConfig

Katika kurasa ya msimamizi, nenda kwenye AysConfig na chagua Tiketi ya kundi hilo. Katika Kiini: :Tiketi unakuta chaguo Tiketi: :MfumoNyaraka ambao umesetiwa kuwa "hapana" kwa chaguo-msingi. Badilisha mpangilio huu kuwa "ndiyo" na hifadhi mabadiliko.

2. Fafanua kazi ya WakalaWajumla

Kwenye kurasa ya Msimamizi, chagua WakalaUjumla na ongeza kazi mpya hapo.

a. Mpangilio wa kazi

Toa jina kwa

b. Chujio la Tiketi

Vichujio vya tiketi vinatafuta tiketi ambazo zinafanana na kigezo kilichochaguliwa. Inaweza kuwa wazo zuri kuweka kwenye nyaraka zile tiketi zilizo kwenye hali iliy-ofungwa na zimefungwa miezi michache nyuma.

c. Kitendo cha Tiketi

Katika kifungu hiki, seti sehemu yenye lebo "Hifadhi kwenye Nyaraka tiketi zilizochaguliwa" kuwa "hifadhi tiketi kwenye nyaraka".

d. Hifadhi kazi

Mwisho wa kurasa utapata chaguo la kuhifadhi kazi.

e. Tiketi zilizoathirika.

Mfumo utaonyesha tiketi zote zitakazohifadhiwa kwenye nyaraka wakati wa kutekeleza kazi ya Wakala wa Ujumla.

3. Tafuta Tiketi

Ukitafuta tiketi, mfumo kwa kawaida unatafuta tiketi zisizo kwenye nyaraka. Kama ukitaka kutafuta tiketi za kwenye nyaraka pia, ongeza kirahisi "tafuta nyaraka" wakati wa kufafanua vigezo vya kutafuta.

2. Hifadhidata

Masula ya DB yanategemeana na hifadhidata inayotumika. Jifunze kupitia nyaraka za hifadhidata yako au onana na msimamizi wa hifadhidata yako.

2.1. MySQL

Kama ukitumia jedwali la MySQL la aina MyISAM (ambalo ni chaguo-msingi), na ukafuta sehemu kubwa ya jedwali au kama umefanya mabadiliko mengi kwenye jedwali yenye safu mlalo zenye urefu unaobadilika (majedwali yenye safuwima VARCHAR, BLOB na NAKALA), lazima uunganishe vipande vya faili la data (majedwali) kwa kutumia amri "sadifisha"

Unatakiwa kujaribu hili kama mysqld daemon inahitaji sana kutoka kwenye muda wako wa CPU. Sadifisha majedwali - tiketi, tiketi_historia na makala (ona Hati chini).

```
shell$ mysql -u user -p database
mysql$ optimize table ticket;
mysql$ optimize table ticket_history;
mysql$ optimize table article;
```

Hati: Kuongeza ufanisi wa majedwali msingi ya data.

2.2. PostgreSQL

PostgreSQL inaboreshwa vizuri kwa kubadilisha faili postgresql.conf katika mpangilio orodha wako wa data wa PostgreSQL . Kwa ushauri wa jinsi ya kufanya hii, rejea kwenye makala zifuatazo:

- <http://www.revsys.com/writings/postgresql-performance.html>
- <http://varlena.com/GeneralBits/Tidbits/perf.html>
- http://varlena.com/GeneralBits/Tidbits/annotated_conf_e.html Type your translation here

Kama utendaji bado hauridhishi, tunashauri kwamba ujiunge na orodha ya watumiwa wa Utendaji wa PostgreSQL (<http://www.postgresql.org/community/lists/>), na kuuliza maswali hapo. Wahusika kwenye orodha ya PostgreSQL wakarimu na wanaweza kusaidia.

3. Seva ya tovuti

Bila shaka unatakiwa kutumia mod_perl 2.0 (<http://perl.apache.org/>). Ina kasi zaidi (~ * 100) zaidi ya cgi halisi. Lakini inahitaji RAM zaidi.

3.1. Miunganiko ya hifadhidata iliyotengenezwa.

Una miunganiko ya hifadhidata imewekwa tayari wakati wauanzishwaji wa seva ya tovuti. Hii inaokoa muda (pitia README.webserver).

3.2. Moduli zilizopakiwa tayari -startup.pl

Tumia hati ya uwashaji `scripts/apache2-perl-startup.pl` kwa ajili ya moduli za Perl ambazo tayari zimepakiwa/zimekusanywa-zalishwa katika seva yajo ya tovuti ya `mod_perl` kuwa ya kasi zaidi, kwa utumiaji mdogo wa kumbukumbu (ona `README.web-server`).

3.3. Pakia tena moduli za perl zinapo sasishwa kwnye diski

Kwa kawaida `Apache::Reload` inatumika katika `scripts/apache2-httpd.include.conf`. Ilemaze na utapata ongezeko la kasi kwa 8% zaidi. Lakini kumbuka kuanzisha upya seva ya tovuti kama ukisakinisha moduli zozote kupitia Meneja Kifurushi wa OTRS, au thamani zozote katika `SysConfig` yako au katika `Kernel/Config.pm`. Muhimu: hii inamaanisha pia huwezi kutumia Meneja Kifurushi wa OTRS kupitia kiolesura cha tovuti, unahitaji kutumia lahaja ya tungo amri - `bin/otrs.PackageManager.pl`.

3.4. Kuchagua mkakati sahihi

Kama una usakinishaji mkubwa, mf. zaidi ya tiketi mpya 1,000 kwa siku na zaidi ya mawakala 40, ni wazo zuri kusoma sura kuhusu Utendaji katika Mwongozo wa Mtumiaji wa `mod_perl` (<http://perl.apache.org/docs/2.0/user/index.html>).

3.5. `mod_gzip/mod_deflate`

Kama kipimo data chako ni kidogo, tumia `mod_deflate` kwa ajili ya Apache2. Kama una ukurasa wa html wenye 45k, `mod_gzip/mod_deflate` itaufinyaza kuwa takribani 7k. Hasara ni kwamba hii inaongeza mzigo kwenye upande wa seva.

Appendix A. Rasilimali za Ziada

Tunajaribu kukusaidia na taarifa mpya kuhusu OTRS. Pia tunakupa nafasi ya wewe kutupatia maoni yako.

1. Kundi la OTRS la tovuti.

Unaweza kupata tovuti ya OTRS Group, kampuni nyuma ya OTRS, katika <http://www.otrs.com>. Ina taarifa nyingi zinazohusiana na bidhaa, kama karatasi nyeupe, tini za toleo, mifano ya utafiti na kadhalika.

2. Orodha za watumiwa

Jedwali A-1 linaonyesha orodha ya watumiwa wetu wa jamii.


Table A.1. Orodhazawatumiwa

Jina	Maelezo	Ukurasa wa nyumbani
announce@otrs.org	Orodha ya hali chini ya msongamano, kwa Kiingereza, kwa ajili ya matangazo ya matoleo mapya ya OTRS na masuala ya usalama.	http://lists.otrs.org/cgi-bin/listinfo/announce
otrs@otrs.org	Orodha ya hali ya kati kwenenda juu ya msongamano, kwa Kiingereza, ambapo unaweza kupata maswali ya aina zote yanayohusika na msaada kuhusu bidhaa.	http://lists.otrs.org/cgi-bin/listinfo/otrs
otrs-de@otrs.org	Orodha ya hali ya kati kwenenda juu ya msongamano, kwa Kijerumani, ambapo unaweza kupata maswali ya aina zote yanayohusika na msaada kuhusu bidhaa.	http://lists.otrs.org/cgi-bin/listinfo/otrs-de
dev@otrs.org	Orodha ya hali ya kati, kwa Kiingereza, ambapo waundaji wa OTRS wanajadili masuala mbali mbali ya usanifu na utekelezaji.	http://lists.otrs.org/cgi-bin/listinfo/dev
i18n@otrs.org	Orodha ya hali ya chini, kwa kiingereza, kwa ajili ya maswali ya kuafanya iwe ya kimataifa na ya ujanibishaji. Kama wewe ni au unataka kuwa mtafsiri wa mradi wa OTRS au una matatizo na moja ya programu-tumizi zetu katika mazingira ya kimataifa, hapa ndipo unatakiwa kujiunganisha.	http://lists.otrs.org/cgi-bin/listinfo/i18n

Kujiunga na nojawapo kati ya hizi orodha, tembelea kiungo kifuatacho:<http://lists.otrs.org/>.

3. Ufuatiliaji makosa

Kuwasilisha makosa tembelea <http://bugs.otrs.org/> (ona Kielelezo chini). Tafadhali tambua tofauti kati ya kosa na swala la usanidi. Maswala ya usanidi ni matatizo unayokutana nayo wakati wa kupangilia mfumo, au maswali ya ujumla kuhusu utumiaji wa OTRS. Ripoti za makosa zinatakiwa kutumiwa kwa maswala ya kanuni chanzo ya OTRS yenyewe, au uendelezaji wa mafaili ya OTRS. Ripoti zako zote za makosa na maombi ya uendelezaji yanakaribishwa sana katika kifutiliaji makosa.

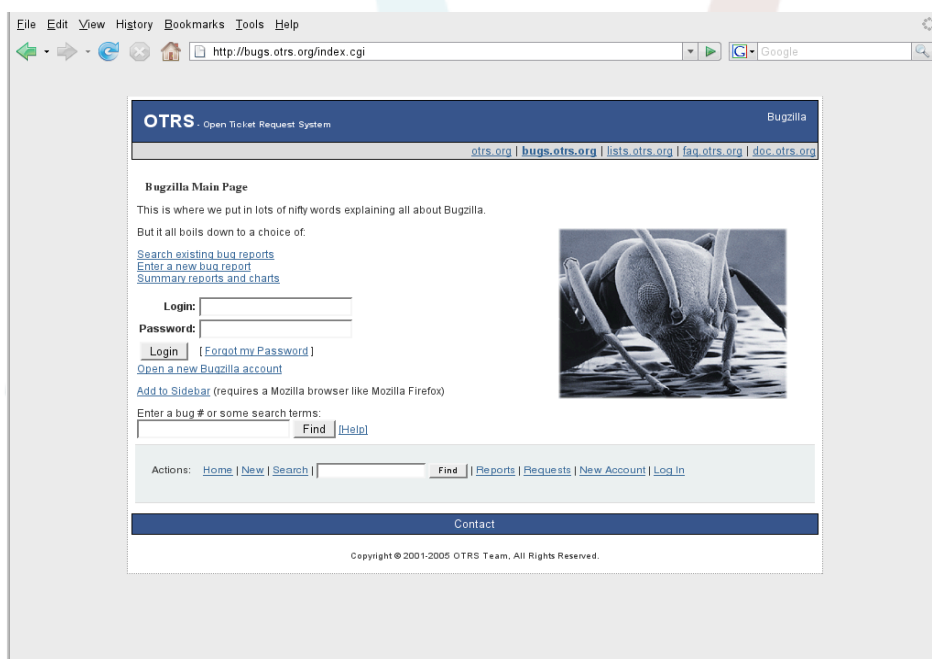

Kielelezo: Kifwatiliaji makosa .

Kwa masuala ya usanidi, unatakiwa aidha kutumia [msaada wa biashara, unaopatikana kutoka OTRS.com](http://msaada.wa.biashara.unaopatikana.kutoka.OTRS.com), au orodha ya umma ya barua.

Unatusaidia kuboresha bidhaa kwa kutuarifu kuhusu makosa. Tunakushukuru kwa mchango wako!

4. Usaidizi wa ki biashara

Kwa huduma (msaada, ushauri, uundaji, na mafunzo) unaweza kuwasiliana na kampuni iliyo nyuma ya OTRS, OTRS AG. Ofisi zetu zipo Ujerumani, USA, Mexico, Ubelgiji, na nchi nyingine. Tembelea tovuti yetu kwa taarifa za mawasiliano: <http://www.otrs.com/en/corporate-navigation/contact/>

Appendix B. Configuration Options Reference

1. DynamicFields

1.1. DynamicFields::Driver::Registration

1.1.1. DynamicFields::Driver###Text

Description:	DynamicField backend registration.
Group:	DynamicFields
SubGroup:	DynamicFields::Driver::Registration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'DynamicFields::Driver'}->{'Text'} = { 'ConfigDialog' => 'AdminDynamicFieldText', 'DisplayName' => 'Text', 'Module' => 'Kernel::System::DynamicField::Driver::Text' };</pre>

1.1.2. DynamicFields::Driver###TextArea

Description:	DynamicField backend registration.
Group:	DynamicFields
SubGroup:	DynamicFields::Driver::Registration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'DynamicFields::Driver'}->{'TextArea'} = { 'ConfigDialog' => 'AdminDynamicFieldText', 'DisplayName' => 'Textarea', 'Module' => 'Kernel::System::DynamicField::Driver::TextArea' };</pre>

1.1.3. DynamicFields::Driver###Checkbox

Description:	DynamicField backend registration.
Group:	DynamicFields
SubGroup:	DynamicFields::Driver::Registration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'DynamicFields::Driver'}->{'Checkbox'} = { 'ConfigDialog' => 'AdminDynamicFieldCheckbox', 'DisplayName' => 'Checkbox', 'Module' => 'Kernel::System::DynamicField::Driver::Checkbox' };</pre>

1.1.4. DynamicFields::Driver###Dropdown

Description:	DynamicField backend registration.
Group:	DynamicFields

SubGroup:	DynamicFields::Driver::Registration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'DynamicFields::Driver'}->{'Dropdown'} = { 'ConfigDialog' => 'AdminDynamicFieldDropdown', 'DisplayName' => 'Dropdown', 'Module' => 'Kernel::System::DynamicField::Driver::Dropdown' };</pre>

1.1.5. DynamicFields::Driver###DateTime

Description:	DynamicField backend registration.
Group:	DynamicFields
SubGroup:	DynamicFields::Driver::Registration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'DynamicFields::Driver'}->{'DateTime'} = { 'ConfigDialog' => 'AdminDynamicFieldDateTime', 'DisplayName' => 'Date / Time', 'Module' => 'Kernel::System::DynamicField::Driver::DateTime' };</pre>

1.1.6. DynamicFields::Driver###Date

Description:	DynamicField backend registration.
Group:	DynamicFields
SubGroup:	DynamicFields::Driver::Registration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'DynamicFields::Driver'}->{'Date'} = { 'ConfigDialog' => 'AdminDynamicFieldDateTime', 'DisplayName' => 'Date', 'Module' => 'Kernel::System::DynamicField::Driver::Date' };</pre>

1.1.7. DynamicFields::Driver###Multiselect

Description:	DynamicField backend registration.
Group:	DynamicFields
SubGroup:	DynamicFields::Driver::Registration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'DynamicFields::Driver'}->{'Multiselect'} = { 'ConfigDialog' => 'AdminDynamicFieldMultiselect', 'DisplayName' => 'Multiselect', 'ItemSeparator' => ', ', 'Module' => 'Kernel::System::DynamicField::Driver::Multiselect' };</pre>

1.2. DynamicFields::ObjectType::Registration

1.2.1. DynamicFields::ObjectType###Ticket

Description:	DynamicField object registration.
--------------	-----------------------------------

Group:	DynamicFields
SubGroup:	DynamicFields::ObjectType::Registration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'DynamicFields::ObjectType'}->{'Ticket'} = { 'DisplayName' => 'Ticket', 'Module' => 'Kernel::System::DynamicField::ObjectType::Ticket' };</pre>

1.2.2. DynamicFields::ObjectType###Article

Description:	DynamicField object registration.
Group:	DynamicFields
SubGroup:	DynamicFields::ObjectType::Registration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'DynamicFields::ObjectType'}->{'Article'} = { 'DisplayName' => 'Article', 'Module' => 'Kernel::System::DynamicField::ObjectType::Article' };</pre>

1.3. Frontend::Admin::ModuleRegistration

1.3.1. Frontend::Module###AdminDynamicField

Description:	Frontend module registration for the agent interface.
Group:	DynamicFields
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminDynamicField'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Loader' => { 'CSS' => ['Core.Agent.Admin.DynamicField.css'], 'JavaScript' => ['Core.Agent.Admin.DynamicField.js'] }, 'NavBarModule' => { 'Block' => 'Ticket', 'Description' => 'Create and manage dynamic fields.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Dynamic Fields', 'Prio' => '1000' }, 'NavBarName' => 'Admin', 'Title' => 'Dynamic Fields GUI' };</pre>

1.3.2. Frontend::Module###AdminDynamicFieldText

Description:	Frontend module registration for the agent interface.
Group:	DynamicFields

SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AdminDynamicFieldText'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Loader' => { 'JavaScript' => ['Core.Agent.Admin.DynamicField.js'] }, 'Title' => 'Dynamic Fields Text Backend GUI' }; </pre>

1.3.3. Frontend::Module###AdminDynamicFieldCheckbox

Description:	Frontend module registration for the agent interface.
Group:	DynamicFields
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AdminDynamicFieldCheckbox'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Loader' => { 'JavaScript' => ['Core.Agent.Admin.DynamicField.js'] }, 'Title' => 'Dynamic Fields Checkbox Backend GUI' }; </pre>

1.3.4. Frontend::Module###AdminDynamicFieldDropdown

Description:	Frontend module registration for the agent interface.
Group:	DynamicFields
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AdminDynamicFieldDropdown'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Loader' => { 'CSS' => ['Core.Agent.Admin.DynamicField.css'], 'JavaScript' => ['Core.Agent.Admin.DynamicField.js', 'Core.Agent.Admin.DynamicFieldDropdown.js'] }, }; </pre>

```
'Title' => 'Dynamic Fields Drop-down Backend GUI'
};
```

1.3.5. Frontend::Module###AdminDynamicFieldDateTime

Description:	Frontend module registration for the agent interface.
Group:	DynamicFields
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminDynamicFieldDateTime'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Loader' => { 'CSS' => ['Core.Agent.Admin.DynamicField.css'], 'JavaScript' => ['Core.Agent.Admin.DynamicField.js', 'Core.Agent.Admin.DynamicFieldDateTime.js'] }, 'Title' => 'Dynamic Fields Date Time Backend GUI' };</pre>

1.3.6. Frontend::Module###AdminDynamicFieldMultiselect

Description:	Frontend module registration for the agent interface.
Group:	DynamicFields
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminDynamicFieldMultiselect'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Loader' => { 'CSS' => ['Core.Agent.Admin.DynamicField.css'], 'JavaScript' => ['Core.Agent.Admin.DynamicField.js', 'Core.Agent.Admin.DynamicFieldMultiselect.js'] }, 'Title' => 'Dynamic Fields Multiselect Backend GUI' };</pre>

1.4. Frontend::Agent::Preferences

1.4.1. PreferencesGroups###DynamicField

Description:	Defines the config parameters of this item, to be shown in the preferences view.
--------------	--

Group:	DynamicFields
SubGroup:	Frontend::Agent::Preferences
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'PreferencesGroups'}->{'DynamicField'} = { 'Active' => '1', 'Block' => 'Input', 'Column' => 'Other Settings', 'Data' => '\$Env{"UserDynamicField_NameX"}', 'Key' => 'Default value for NameX', 'Label' => 'NameX', 'Module' => 'Kernel::Output::HTML::PreferencesGeneric', 'PrefKey' => 'UserDynamicField_NameX', 'Prio' => '7000' };</pre>

1.4.2. PreferencesGroups###DynamicFieldsOverview-PageShown

Description:	Parameters for the pages (in which the dynamic fields are shown) of the dynamic fields overview.
Group:	DynamicFields
SubGroup:	Frontend::Agent::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'PreferencesGroups'}->{'DynamicFieldsOverviewPageShown'} = { 'Active' => '0', 'Column' => 'Other Settings', 'Data' => { '10' => '10', '15' => '15', '20' => '20', '25' => '25', '30' => '30', '35' => '35' }, 'DataSelected' => '25', 'Key' => 'Dynamic fields limit per page for Dynamic Fields Overview', 'Label' => 'Dynamic Fields Overview Limit', 'Module' => 'Kernel::Output::HTML::PreferencesGeneric', 'PrefKey' => 'AdminDynamicFieldsOverviewPageShown', 'Prio' => '8000' };</pre>

2. Framework

2.1. Core

2.1.1. SecureMode

Description:	Disables the web installer (http://yourhost.example.com/otrs/installer.pl), to prevent the system from being hijacked. If set to "No", the system can be reinstalled and the current basic configuration will be used to pre-populate the questions within the installer script. If not active, it also disables the GenericAgent, PackageManager and SQL Box.
--------------	--

Group:	Framework
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SecureMode'} = '0';</code>

2.1.2. Frontend::DebugMode

Description:	Enables or disable the debug mode over frontend interface.
Group:	Framework
SubGroup:	Core
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Frontend::DebugMode'} = '0';</code>

2.1.3. ConfigLevel

Description:	Sets the configuration level of the administrator. Depending on the config level, some sysconfig options will be not shown. The config levels are in in ascending order: Expert, Advanced, Beginner. The higher the config level is (e.g. Beginner is the highest), the less likely is it that the user can accidentally configure the system in a way that it is not usable any more.
Group:	Framework
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'ConfigLevel'} = '100';</code>

2.1.4. ProductName

Description:	Defines the name of the application, shown in the web interface, tabs and title bar of the web browser.
Group:	Framework
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'ProductName'} = 'OTRS';</code>

2.1.5. SystemID

Description:	Defines the system identifier. Every ticket number and http session string contains this ID. This ensures that only tickets which belong to your system will be processed as follow-ups (useful when communicating between two instances of OTRS).
Group:	Framework
SubGroup:	Core

Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SystemID'} = '10';</code>

2.1.6. FQDN

Description:	Defines the fully qualified domain name of the system. This setting is used as a variable, OTRS_CONFIG_FQDN which is found in all forms of messaging used by the application, to build links to the tickets within your system.
Group:	Framework
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'FQDN'} = 'yourhost.example.com';</code>

2.1.7. SupportDataCollector::HTTPHostname

Description:	Defines the HTTP hostname for the support data collection with the public module 'PublicSupportDataCollector' (e.g. used from the OTRS Daemon).
Group:	Framework
SubGroup:	Core
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'SupportDataCollector::HTTPHostname'} = '';</code>

2.1.8. HttpType

Description:	Defines the type of protocol, used by the web server, to serve the application. If https protocol will be used instead of plain http, it must be specified here. Since this has no affect on the web server's settings or behavior, it will not change the method of access to the application and, if it is wrong, it will not prevent you from logging into the application. This setting is only used as a variable, OTRS_CONFIG_HttpType which is found in all forms of messaging used by the application, to build links to the tickets within your system.
Group:	Framework
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'HttpType'} = 'http';</code>

2.1.9. ScriptAlias

Description:	Sets the prefix to the scripts folder on the server, as configured on the web server. This setting is used as a variable, OTRS_CON-
--------------	---

	FIG_ScriptAlias which is found in all forms of messaging used by the application, to build links to the tickets within the system.
Group:	Framework
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'ScriptAlias'} = 'otrs/';</code>

2.1.10. AdminEmail

Description:	Defines the system administrator's email address. It will be displayed in the error screens of the application.
Group:	Framework
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'AdminEmail'} = 'admin@example.com';</code>

2.1.11. Organization

Description:	Company name which will be included in outgoing emails as an X-Header.
Group:	Framework
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Organization'} = 'Example Company';</code>

2.1.12. DefaultLanguage

Description:	Defines the default front-end language. All the possible values are determined by the available language files on the system (see the next setting).
Group:	Framework
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'DefaultLanguage'} = 'en';</code>

2.1.13. DefaultUsedLanguages

Description:	Defines all the languages that are available to the application. The Key/Content pair links the front-end display name to the appropriate language PM file. The "Key" value should be the base-name of the PM file (i.e. de.pm is the file, then de is the "Key" value). The "Content" value should be the display name for the front-end. Specify any own-defined language here (see the developer doc-
--------------	--

	umentation http://doc.otrs.org/ for more infomation). Please remember to use the HTML equivalents for non-ASCII characters (i.e. for the German oe = o umlaut, it is necessary to use the ö symbol).
Group:	Framework
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<pre> \$self->{'DefaultUsedLanguages'} = { 'ar_SA' => 'Arabic (Saudi Arabia)', 'bg' => 'Bulgarian (&#x0411;&#x044a;&#x043b;&#x0433;&#x0430;&#x0440;&#x0441;&#x043a;&#x0438;)', 'ca' => 'Catal&agrave;', 'cs' => 'Czech (&#x010c;esky)', 'da' => 'Dansk', 'de' => 'Deutsch', 'el' => 'Greek (&#x0395;&#x03bb;&#x03bb;&#x03b7;&#x03bd;&#x03b9;&#x03ba;&#x03ac;)', 'en' => 'English (United States)', 'en_CA' => 'English (Canada)', 'en_GB' => 'English (United Kingdom)', 'es' => 'Espa&ntilde;ol', 'es_CO' => 'Espa&ntilde;ol (Colombia)', 'es_MX' => 'Espa&ntilde;ol (M&eacute;xico)', 'et' => 'Eesti', 'fa' => 'Persian (&#x0641;&#x0627;&#x0631;&#x0633;&#x0649;)', 'fi' => 'Suomi', 'fr' => 'Fran&ccedil;ais', 'fr_CA' => 'Fran&ccedil;ais (Canada)', 'he' => 'Hebrew (#####)', 'hi' => 'Hindi', 'hr' => 'Hrvatski', 'hu' => 'Magyar', 'it' => 'Italiano', 'ja' => 'Japanese (&#x65e5;&#x672c;&#x8a9e)', 'lt' => 'Lietuvių kalba', 'lv' => 'Latvijas', 'ms' => 'Malay', 'nb_NO' => 'Norsk bokm&aring;l', 'nl' => 'Nederlands', 'pl' => 'Polski', 'pt' => 'Portugu&ecirc;s', 'pt_BR' => 'Portugu&ecirc;s Brasileiro', 'ru' => 'Russian (&#x0420;&#x0443;&#x0441;&#x0441;&#x043a;&#x0438;&#x0439;)', 'sk_SK' => 'Slovak (Sloven&#x010d;ina)', 'sl' => 'Slovenian (Sloven&#x0161;ina)', 'sr_Cyrl' => 'Serbian Cyrillic (srpski)', 'sr_Latn' => 'Serbian Latin (Srpski)', 'sv' => 'Svenska', 'tr' => 'T&uuml;rks&ccedil;e', 'uk' => 'Ukrainian (&#x0423;&#x043a;&#x0440;&#x0430;&#x0457;&#x043d;&#x0441;&#x044c;&#x043a;&#x0430;)', 'vi_VN' => 'Vietnam (Vi&#x0246;t Nam)', 'zh_CN' => 'Chinese (Sim.) (&#x7b80;&#x4f53;&#x4e2d;&#x6587;)', 'zh_TW' => 'Chinese (Tradi.) (&#x6b63;&#x9ad4;&#x4e2d;&#x6587;)' }; </pre>

2.1.14. DefaultTheme

Description:	Defines the default front-end (HTML) theme to be used by the agents and customers. If you like, you can add your own theme. Please refer the administrator manual located at http://doc.otrs.org/ .
Group:	Framework

SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'DefaultTheme'} = 'Standard';</code>

2.1.15. DefaultTheme::HostBased

Description:	It is possible to configure different themes, for example to distinguish between agents and customers, to be used on a per-domain basis within the application. Using a regular expression (regex), you can configure a Key/Content pair to match a domain. The value in "Key" should match the domain, and the value in "Content" should be a valid theme on your system. Please see the example entries for the proper form of the regex.
Group:	Framework
SubGroup:	Core
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'DefaultTheme::HostBased'} = { 'host1\\.example\\.com' => 'SomeTheme1', 'host2\\.example\\.com' => 'SomeTheme2' };</code>

2.1.16. CheckMXRecord

Description:	Makes the application check the MX record of email addresses before sending an email or submitting a telephone or email ticket.
Group:	Framework
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CheckMXRecord'} = '1';</code>

2.1.17. CheckMXRecord::Nameserver

Description:	Defines the address of a dedicated DNS server, if necessary, for the "CheckMXRecord" look-ups.
Group:	Framework
SubGroup:	Core
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'CheckMXRecord::Nameserver'} = 'ns.example.com';</code>

2.1.18. CheckEmailAddresses

Description:	Makes the application check the syntax of email addresses.
Group:	Framework
SubGroup:	Core

Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CheckEmailAddresses'} = '1';</code>

2.1.19. CheckEmailValidAddress

Description:	Defines a regular expression that excludes some addresses from the syntax check (if "CheckEmailAddresses" is set to "Yes"). Please enter a regex in this field for email addresses, that aren't syntactically valid, but are necessary for the system (i.e. "root@localhost").
Group:	Framework
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CheckEmailValidAddress'} = '^(root@localhost admin@localhost)\$';</code>

2.1.20. CheckEmailInvalidAddress

Description:	Defines a regular expression that filters all email addresses that should not be used in the application.
Group:	Framework
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CheckEmailInvalidAddress'} = '@(example)\.\.\.\.';</code>

2.1.21. CGILogPrefix

Description:	Specifies the text that should appear in the log file to denote a CGI script entry.
Group:	Framework
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CGILogPrefix'} = 'OTRS-CGI';</code>

2.1.22. DemoSystem

Description:	Runs the system in "Demo" mode. If set to "Yes", agents can change preferences, such as selection of language and theme via the agent web interface. These changes are only valid for the current session. It will not be possible for agents to change their passwords.
Group:	Framework
SubGroup:	Core

Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'DemoSystem'} = '0';</code>

2.1.23. SwitchToUser

Description:	Allows the administrators to login as other users, via the users administration panel.
Group:	Framework
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SwitchToUser'} = '0';</code>

2.1.24. SwitchToCustomer

Description:	Allows the administrators to login as other customers, via the customer user administration panel.
Group:	Framework
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SwitchToCustomer'} = '0';</code>

2.1.25. SwitchToCustomer::PermissionGroup

Description:	Specifies the group where the user needs rw permissions so that he can access the "SwitchToCustomer" feature.
Group:	Framework
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SwitchToCustomer::PermissionGroup'} = 'admin';</code>

2.1.26. NotificationSenderName

Description:	Specifies the name that should be used by the application when sending notifications. The sender name is used to build the complete display name for the notification master (i.e. "OTRS Notification Master" otrs@your.example.com). Notifications are messages such as en::Customer::QueueUpdate or en::Agent::Move.
Group:	Framework
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'NotificationSenderName'} = 'OTRS Notification Master';</code>

2.1.27. NotificationSenderEmail

Description:	Specifies the email address that should be used by the application when sending notifications. The email address is used to build the complete display name for the notification master (i.e. "OTRS Notification Master" otrs@your.example.com). You can use the OTRS_CONFIG_FQDN variable as set in your configuration, or choose another email address. Notifications are messages such as en::Customer::QueueUpdate or en::Agent::Move.
Group:	Framework
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'NotificationSenderEmail'} = 'otrs@<OTRS_CONFIG_FQDN>';</code>

2.1.28. System::Customer::Permission

Description:	Defines the standard permissions available for customers within the application. If more permissions are needed, you can enter them here. Permissions must be hard coded to be effective. Please ensure, when adding any of the afore mentioned permissions, that the "rw" permission remains the last entry.
Group:	Framework
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'System::Customer::Permission'} = ['ro', 'rw'];</code>

2.1.29. LanguageDebug

Description:	Debugs the translation set. If this is set to "Yes" all strings (text) without translations are written to STDERR. This can be helpful when you are creating a new translation file. Otherwise, this option should remain set to "No".
Group:	Framework
SubGroup:	Core
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'LanguageDebug'} = '0';</code>

2.1.30. Secure::DisableBanner

Description:	If enabled, the OTRS version tag will be removed from the Webinterface, the HTTP headers and the X-Headers of outgoing mails.
Group:	Framework
SubGroup:	Core
Valid:	0

Required:	0
Config-Setting:	<code>\$Self->{'Secure::DisableBanner'} = '0';</code>

2.1.31. StandardTemplate2QueueByCreating

Description:	List of default Standard Templates which are assigned automatically to new Queues upon creation.
Group:	Framework
SubGroup:	Core
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'StandardTemplate2QueueByCreating'} = [</code> <code>];</code>

2.2. Core::Cache

2.2.1. Cache::Module

Description:	Selects the cache backend to use.
Group:	Framework
SubGroup:	Core::Cache
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Cache::Module'} = 'Kernel::System::Cache::FileStorable';</code>

2.2.2. Cache::SubdirLevels

Description:	Specify how many sub directory levels to use when creating cache files. This should prevent too many cache files being in one directory.
Group:	Framework
SubGroup:	Core::Cache
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Cache::SubdirLevels'} = '2';</code>

2.3. Core::CustomerCompany

2.3.1. CustomerCompany::EventModule-Post###100-UpdateCustomerUsers

Description:	Event module that updates customer users after an update of the Customer Company.
Group:	Framework
SubGroup:	Core::CustomerCompany
Valid:	1
Required:	0

Config-Setting:	<pre>\$Self->{'CustomerCompany::EventModulePost'}->{'100-UpdateCustomerUsers'} = { 'Event' => 'CustomerCompanyUpdate', 'Module' => 'Kernel::System::CustomerCompany::Event::CustomerUserUpdate', 'Transaction' => '0' };</pre>
-----------------	---

2.4. Core::CustomerUser

2.4.1. CustomerUser::EventModulePost###100-UpdateServiceMembership

Description:	Event module that updates customer user service membership if login changes.
Group:	Framework
SubGroup:	Core::CustomerUser
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerUser::EventModulePost'}->{'100-UpdateServiceMembership'} = { 'Event' => 'CustomerUserUpdate', 'Module' => 'Kernel::System::CustomerUser::Event::ServiceMemberUpdate', 'Transaction' => '0' };</pre>

2.5. Core::LinkObject

2.5.1. LinkObject::ViewMode

Description:	Determines the way the linked objects are displayed in each zoom mask.
Group:	Framework
SubGroup:	Core::LinkObject
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'LinkObject::ViewMode'} = 'Simple';</pre>

2.5.2. LinkObject::Type###Normal

Description:	Defines the link type 'Normal'. If the source name and the target name contain the same value, the resulting link is a non-directional one; otherwise, the result is a directional link.
Group:	Framework
SubGroup:	Core::LinkObject
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'LinkObject::Type'}->{'Normal'} = { 'SourceName' => 'Normal', 'TargetName' => 'Normal' };</pre>

2.5.3. LinkObject::Type###ParentChild

Description:	Defines the link type 'ParentChild'. If the source name and the target name contain the same value, the resulting link is a non-directional one; otherwise, the result is a directional link.
Group:	Framework
SubGroup:	Core::LinkObject
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'LinkObject::Type'}->{'ParentChild'} = { 'SourceName' => 'Parent', 'TargetName' => 'Child' };</pre>

2.5.4. LinkObject::TypeGroup###0001

Description:	Defines the link type groups. The link types of the same group cancel one another. Example: If ticket A is linked per a 'Normal' link with ticket B, then these tickets could not be additionally linked with link of a 'ParentChild' relationship.
Group:	Framework
SubGroup:	Core::LinkObject
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'LinkObject::TypeGroup'}->{'0001'} = ['Normal', 'ParentChild'];</pre>

2.6. Core::Log

2.6.1. LogModule

Description:	Defines the log module for the system. "File" writes all messages in a given logfile, "SysLog" uses the syslog daemon of the system, e.g. syslogd.
Group:	Framework
SubGroup:	Core::Log
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'LogModule'} = 'Kernel::System::Log::SysLog';</pre>

2.6.2. LogModule::SysLog::Facility

Description:	If "SysLog" was selected for LogModule, a special log facility can be specified.
Group:	Framework
SubGroup:	Core::Log
Valid:	1
Required:	1

Config-Setting:	<code>\$Self->{'LogModule::SysLog::Facility'} = 'user';</code>
-----------------	---

2.6.3. LogModule::SysLog::LogSock

Description:	If "SysLog" was selected for LogModule, a special log sock can be specified (on solaris you may need to use 'stream').
Group:	Framework
SubGroup:	Core::Log
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'LogModule::SysLog::LogSock'} = 'unix';</code>

2.6.4. LogModule::SysLog::Charset

Description:	If "SysLog" was selected for LogModule, the charset that should be used for logging can be specified.
Group:	Framework
SubGroup:	Core::Log
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'LogModule::SysLog::Charset'} = 'utf-8';</code>

2.6.5. LogModule::LogFile

Description:	If "file" was selected for LogModule, a logfile must be specified. If the file doesn't exist, it will be created by the system.
Group:	Framework
SubGroup:	Core::Log
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'LogModule::LogFile'} = '/tmp/otrs.log';</code>

2.6.6. LogModule::LogFile::Date

Description:	Adds a suffix with the actual year and month to the OTRS log file. A logfile for every month will be created.
Group:	Framework
SubGroup:	Core::Log
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'LogModule::LogFile::Date'} = '0';</code>

2.7. Core::MIME-Viewer

2.7.1. MIME-Viewer###application/excel

Description:	Specifies the path to the converter that allows the view of Microsoft Excel files, in the web interface.
--------------	--

Group:	Framework
SubGroup:	Core::MIME-Viewer
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'MIME-Viewer'}->{'application/excel'} = 'xlhtml';</code>

2.7.2. MIME-Viewer###application/msword

Description:	Specifies the path to the converter that allows the view of Microsoft Word files, in the web interface.
Group:	Framework
SubGroup:	Core::MIME-Viewer
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'MIME-Viewer'}->{'application/msword'} = 'wvWare';</code>

2.7.3. MIME-Viewer###application/pdf

Description:	Specifies the path to the converter that allows the view of PDF documents, in the web interface.
Group:	Framework
SubGroup:	Core::MIME-Viewer
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'MIME-Viewer'}->{'application/pdf'} = 'pdftohtml -stdout -i';</code>

2.7.4. MIME-Viewer###text/xml

Description:	Specifies the path to the converter that allows the view of XML files, in the web interface.
Group:	Framework
SubGroup:	Core::MIME-Viewer
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'MIME-Viewer'}->{'text/xml'} = '<OTRS_CONFIG_Home>/scripts/tools/xml2html.pl';</code>

2.8. Core::MirrorDB

2.8.1. Core::MirrorDB::DSN

Description:	If you want to use a mirror database for agent ticket fulltext search or to generate stats, specify the DSN to this database.
Group:	Framework
SubGroup:	Core::MirrorDB
Valid:	0

Required:	0
Config-Setting:	<code>\$Self->{'Core::MirrorDB::DSN'} = 'DBI:mysql:database=mirrordb;host=mirrordbhost';</code>

2.8.2. Core::MirrorDB::User

Description:	If you want to use a mirror database for agent ticket fulltext search or to generate stats, the user to authenticate to this database can be specified.
Group:	Framework
SubGroup:	Core::MirrorDB
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Core::MirrorDB::User'} = 'some_user';</code>

2.8.3. Core::MirrorDB::Password

Description:	If you want to use a mirror database for agent ticket fulltext search or to generate stats, the password to authenticate to this database can be specified.
Group:	Framework
SubGroup:	Core::MirrorDB
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Core::MirrorDB::Password'} = 'some_password';</code>

2.9. Core::PDF

2.9.1. PDF

Description:	Enables PDF output. The CPAN module PDF::API2 is required, if not installed, PDF output will be disabled.
Group:	Framework
SubGroup:	Core::PDF
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PDF'} = '1';</code>

2.9.2. PDF::LogoFile

Description:	Specifies the path of the file for the logo in the page header (gif jpg png, 700 x 100 pixel).
Group:	Framework
SubGroup:	Core::PDF
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PDF::LogoFile'} = '<OTRS_CONFIG_Home>/var/logo-otrs.png';</code>

2.9.3. PDF::PageSize

Description:	Defines the standard size of PDF pages.
Group:	Framework
SubGroup:	Core::PDF
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PDF::PageSize'} = 'a4';</code>

2.9.4. PDF::MaxPages

Description:	Defines the maximum number of pages per PDF file.
Group:	Framework
SubGroup:	Core::PDF
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PDF::MaxPages'} = '100';</code>

2.9.5. PDF::TTFontFile###Proportional

Description:	Defines the path and TTF-File to handle proportional font in PDF documents.
Group:	Framework
SubGroup:	Core::PDF
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PDF::TTFontFile'}->{'Proportional'} = 'DejaVuSans.ttf';</code>

2.9.6. PDF::TTFontFile###ProportionalBold

Description:	Defines the path and TTF-File to handle bold proportional font in PDF documents.
Group:	Framework
SubGroup:	Core::PDF
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PDF::TTFontFile'}->{'ProportionalBold'} = 'DejaVuSans-Bold.ttf';</code>

2.9.7. PDF::TTFontFile###ProportionalItalic

Description:	Defines the path and TTF-File to handle italic proportional font in PDF documents.
Group:	Framework
SubGroup:	Core::PDF
Valid:	0
Required:	0

Config-Setting:	<code>\$Self->{'PDF::TTFontFile'}->{'ProportionalItalic'} = 'DejaVuSans-Oblique.ttf';</code>
-----------------	--

2.9.8. PDF::TTFontFile###ProportionalBoldItalic

Description:	Defines the path and TTF-File to handle bold italic proportional font in PDF documents.
Group:	Framework
SubGroup:	Core::PDF
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PDF::TTFontFile'}->{'ProportionalBoldItalic'} = 'DejaVuSans-BoldOblique.ttf';</code>

2.9.9. PDF::TTFontFile###Monospaced

Description:	Defines the path and TTF-File to handle monospaced font in PDF documents.
Group:	Framework
SubGroup:	Core::PDF
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PDF::TTFontFile'}->{'Monospaced'} = 'DejaVuSansMono.ttf';</code>

2.9.10. PDF::TTFontFile###MonospacedBold

Description:	Defines the path and TTF-File to handle bold monospaced font in PDF documents.
Group:	Framework
SubGroup:	Core::PDF
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'PDF::TTFontFile'}->{'MonospacedBold'} = 'DejaVuSansMono-Bold.ttf';</code>

2.9.11. PDF::TTFontFile###MonospacedItalic

Description:	Defines the path and TTF-File to handle italic monospaced font in PDF documents.
Group:	Framework
SubGroup:	Core::PDF
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'PDF::TTFontFile'}->{'MonospacedItalic'} = 'DejaVuSansMono-Oblique.ttf';</code>

2.9.12. PDF::TTFontFile###MonospacedBoldItalic

Description:	Defines the path and TTF-File to handle bold italic monospaced font in PDF documents.
--------------	---

Group:	Framework
SubGroup:	Core::PDF
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'PDF::TTFontFile'}->{'MonospacedBoldItalic'} = 'DejaVuSansMono-BoldOblique.ttf';</code>

2.10. Core::Package

2.10.1. Package::FileUpload

Description:	Enables file upload in the package manager frontend.
Group:	Framework
SubGroup:	Core::Package
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Package::FileUpload'} = '1';</code>

2.10.2. Package::RepositoryRoot

Description:	Defines the location to get online repository list for additional packages. The first available result will be used.
Group:	Framework
SubGroup:	Core::Package
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Package::RepositoryRoot'} = ['http://ftp.otrs.org/pub/otrs/misc/packages/repository.xml'];</code>

2.10.3. Package::RepositoryList

Description:	Defines the list of online repositories. Another installations can be used as repository, for example: Key="http://example.com/otrs/public.pl?Action=PublicRepository;File=" and Content="Some Name".
Group:	Framework
SubGroup:	Core::Package
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Package::RepositoryList'} = { 'ftp://ftp.example.com/pub/otrs/misc/packages/' => '[Example] ftp://ftp.example.com/' };</code>

2.10.4. Package::RepositoryAccessRegExp

Description:	Defines the IP regular expression for accessing the local repository. You need to enable this to have access to your local repository and the package::RepositoryList is required on the remote host.
--------------	---

Group:	Framework
SubGroup:	Core::Package
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Package::RepositoryAccessRegExp'} = '127\\.0\\.0\\.1';</code>

2.10.5. Package::Timeout

Description:	Sets the timeout (in seconds) for package downloads. Overwrites "WebUserAgent::Timeout".
Group:	Framework
SubGroup:	Core::Package
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Package::Timeout'} = '15';</code>

2.10.6. Package::Proxy

Description:	Fetches packages via proxy. Overwrites "WebUserAgent::Proxy".
Group:	Framework
SubGroup:	Core::Package
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Package::Proxy'} = 'http://proxy.sn.no:8001/';</code>

2.10.7. Package::ShowFeatureAddons

Description:	Toggles display of OTRS FeatureAddons list in PackageManager.
Group:	Framework
SubGroup:	Core::Package
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Package::ShowFeatureAddons'} = '1';</code>

2.10.8. Package::EventModule###99-Support-DataSend

Description:	Package event module file a scheduler task for update registration.
Group:	Framework
SubGroup:	Core::Package
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Package::EventModule'}->{'99-SupportDataSend'} = { 'Event' => '(PackageInstall PackageReinstall PackageUpgrade PackageUninstall)', 'Module' => 'Kernel::System::Package::Event::SupportDataSend', 'Transaction' => '1'</code>

```
};
```

2.11. Core::PerformanceLog

2.11.1. PerformanceLog

Description:	Enables performance log (to log the page response time). It will affect the system performance. Frontend::Module###AdminPerformanceLog must be enabled.
Group:	Framework
SubGroup:	Core::PerformanceLog
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'PerformanceLog'} = '0';</code>

2.11.2. PerformanceLog::File

Description:	Specifies the path of the file for the performance log.
Group:	Framework
SubGroup:	Core::PerformanceLog
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PerformanceLog::File'} = '<OTRS_CONFIG_Home>/var/log/Performance.log';</code>

2.11.3. PerformanceLog::FileMax

Description:	Defines the maximum size (in MB) of the log file.
Group:	Framework
SubGroup:	Core::PerformanceLog
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PerformanceLog::FileMax'} = '25';</code>

2.12. Core::ReferenceData

2.12.1. ReferenceData::OwnCountryList

Description:	This setting allows you to override the built-in country list with your own list of countries. This is particularly handy if you just want to use a small select group of countries.
Group:	Framework
SubGroup:	Core::ReferenceData
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'ReferenceData::OwnCountryList'} = { 'AT' => 'Austria', 'CH' => 'Switzerland',</code>

```
'DE' => 'Germany'
};
```

2.13. Core::SOAP

2.13.1. SOAP::User

Description:	Defines the username to access the SOAP handle (bin/cgi-bin/rpc.pl).
Group:	Framework
SubGroup:	Core::SOAP
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'SOAP::User'} = 'some_user';</code>

2.13.2. SOAP::Password

Description:	Defines the password to access the SOAP handle (bin/cgi-bin/rpc.pl).
Group:	Framework
SubGroup:	Core::SOAP
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'SOAP::Password'} = 'some_pass';</code>

2.13.3. SOAP::Keep-Alive

Description:	Enable keep-alive connection header for SOAP responses.
Group:	Framework
SubGroup:	Core::SOAP
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SOAP::Keep-Alive'} = '0';</code>

2.14. Core::Sendmail

2.14.1. SendmailModule

Description:	Defines the module to send emails. "Sendmail" directly uses the sendmail binary of your operating system. Any of the "SMTP" mechanisms use a specified (external) mailserver. "DoNotSendEmail" doesn't send emails and it is useful for test systems.
Group:	Framework
SubGroup:	Core::Sendmail
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SendmailModule'} = 'Kernel::System::Email::Sendmail';</code>

2.14.2. SendmailModule::CMD

Description:	If "Sendmail" was selected as SendmailModule, the location of the sendmail binary and the needed options must be specified.
Group:	Framework
SubGroup:	Core::Sendmail
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SendmailModule::CMD'} = '/usr/sbin/sendmail -i -f';</code>

2.14.3. SendmailModule::Host

Description:	If any of the "SMTP" mechanisms was selected as SendmailModule, the mailhost that sends out the mails must be specified.
Group:	Framework
SubGroup:	Core::Sendmail
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SendmailModule::Host'} = 'mail.example.com';</code>

2.14.4. SendmailModule::Port

Description:	If any of the "SMTP" mechanisms was selected as SendmailModule, the port where your mailserver is listening for incoming connections must be specified.
Group:	Framework
SubGroup:	Core::Sendmail
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'SendmailModule::Port'} = '25';</code>

2.14.5. SendmailModule::AuthUser

Description:	If any of the "SMTP" mechanisms was selected as SendmailModule, and authentication to the mail server is needed, an username must be specified.
Group:	Framework
SubGroup:	Core::Sendmail
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'SendmailModule::AuthUser'} = 'MailserverLogin';</code>

2.14.6. SendmailModule::AuthPassword

Description:	If any of the "SMTP" mechanisms was selected as SendmailModule, and authentication to the mail server is needed, a password must be specified.
--------------	--

Group:	Framework
SubGroup:	Core::Sendmail
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'SendmailModule::AuthPassword'} = 'MailserverPassword';</code>

2.14.7. SendmailBcc

Description:	Sends all outgoing email via bcc to the specified address. Please use this only for backup reasons.
Group:	Framework
SubGroup:	Core::Sendmail
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'SendmailBcc'} = '';</code>

2.14.8. SendmailEnvelopeFrom

Description:	If set, this address is used as envelope sender in outgoing messages (not notifications - see below). If no address is specified, the envelope sender is equal to queue e-mail address.
Group:	Framework
SubGroup:	Core::Sendmail
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'SendmailEnvelopeFrom'} = '';</code>

2.14.9. SendmailNotificationEnvelopeFrom

Description:	If set, this address is used as envelope sender header in outgoing notifications. If no address is specified, the envelope sender header is empty.
Group:	Framework
SubGroup:	Core::Sendmail
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'SendmailNotificationEnvelopeFrom'} = '';</code>

2.14.10. SendmailEncodingForce

Description:	Forces encoding of outgoing emails (7bit 8bit quoted-printable base64).
Group:	Framework
SubGroup:	Core::Sendmail
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'SendmailEncodingForce'} = 'base64';</code>

2.15. Core::Session

2.15.1. SessionModule

Description:	Defines the module used to store the session data. With "DB" the frontend server can be splitted from the db server. "FS" is faster.
Group:	Framework
SubGroup:	Core::Session
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SessionModule'} = 'Kernel::System::AuthSession::DB';</code>

2.15.2. SessionName

Description:	Defines the name of the session key. E.g. Session, SessionID or OTRS.
Group:	Framework
SubGroup:	Core::Session
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SessionName'} = 'OTRSAgentInterface';</code>

2.15.3. CustomerPanelSessionName

Description:	Defines the name of the key for customer sessions.
Group:	Framework
SubGroup:	Core::Session
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CustomerPanelSessionName'} = 'OTRSCustomerInterface';</code>

2.15.4. SessionCheckRemoteIP

Description:	Turns on the remote ip address check. It should be set to "No" if the application is used, for example, via a proxy farm or a dialup connection, because the remote ip address is mostly different for the requests.
Group:	Framework
SubGroup:	Core::Session
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SessionCheckRemoteIP'} = '1';</code>

2.15.5. SessionDeleteIfNotRemoteID

Description:	Deletes a session if the session id is used with an invalid remote IP address.
Group:	Framework

SubGroup:	Core::Session
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SessionDeleteIfNotRemoteID'} = '1';</code>

2.15.6. SessionMaxTime

Description:	Defines the maximal valid time (in seconds) for a session id.
Group:	Framework
SubGroup:	Core::Session
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SessionMaxTime'} = '57600';</code>

2.15.7. SessionMaxIdleTime

Description:	Sets the inactivity time (in seconds) to pass before a session is killed and a user is logged out.
Group:	Framework
SubGroup:	Core::Session
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SessionMaxIdleTime'} = '21600';</code>

2.15.8. SessionActiveTime

Description:	Sets the time (in seconds) a user is marked as active.
Group:	Framework
SubGroup:	Core::Session
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SessionActiveTime'} = '600';</code>

2.15.9. SessionDeleteIfTimeToOld

Description:	Deletes requested sessions if they have timed out.
Group:	Framework
SubGroup:	Core::Session
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SessionDeleteIfTimeToOld'} = '1';</code>

2.15.10. SessionUseCookie

Description:	Makes the session management use html cookies. If html cookies are disabled or if the client browser disabled html cookies, then the system will work as usual and append the session id to the links.
--------------	--

Group:	Framework
SubGroup:	Core::Session
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SessionUseCookie'} = '1';</code>

2.15.11. SessionUseCookieAfterBrowserClose

Description:	Stores cookies after the browser has been closed.
Group:	Framework
SubGroup:	Core::Session
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SessionUseCookieAfterBrowserClose'} = '0';</code>

2.15.12. SessionCSRFProtection

Description:	Protection against CSRF (Cross Site Request Forgery) exploits (for more info see http://en.wikipedia.org/wiki/Cross-site_request_forgery).
Group:	Framework
SubGroup:	Core::Session
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SessionCSRFProtection'} = '1';</code>

2.15.13. AgentSessionLimit

Description:	Sets the maximum number of active agents within the timespan defined in SessionActiveTime.
Group:	Framework
SubGroup:	Core::Session
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'AgentSessionLimit'} = '100';</code>

2.15.14. CustomerSessionLimit

Description:	Sets the maximum number of active customers within the timespan defined in SessionActiveTime.
Group:	Framework
SubGroup:	Core::Session
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'CustomerSessionLimit'} = '100';</code>

2.15.15. SessionDir

Description:	If "FS" was selected for SessionModule, a directory where the session data will be stored must be specified.
Group:	Framework
SubGroup:	Core::Session
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SessionDir'} = '<OTRS_CONFIG_Home>/var/sessions';</code>

2.15.16. SessionTable

Description:	If "DB" was selected for SessionModule, a table in database where session data will be stored must be specified.
Group:	Framework
SubGroup:	Core::Session
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SessionTable'} = 'sessions';</code>

2.16. Core::SpellChecker

2.16.1. SpellChecker

Description:	Enables spell checker support.
Group:	Framework
SubGroup:	Core::SpellChecker
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SpellChecker'} = '0';</code>

2.16.2. SpellCheckerBin

Description:	Install ispell or aspell on the system, if you want to use a spell checker. Please specify the path to the aspell or ispell binary on your operating system.
Group:	Framework
SubGroup:	Core::SpellChecker
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SpellCheckerBin'} = '/usr/bin/ispell';</code>

2.16.3. SpellCheckerDictDefault

Description:	Defines the default spell checker dictionary.
Group:	Framework
SubGroup:	Core::SpellChecker

Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SpellCheckerDictDefault'} = 'english';</code>

2.16.4. SpellCheckerIgnore

Description:	Defines a default list of words, that are ignored by the spell checker.
Group:	Framework
SubGroup:	Core::SpellChecker
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SpellCheckerIgnore'} = ['www', 'webmail', 'https', 'http', 'html', 'rfc'];</code>

2.17. Core::Stats

2.17.1. Stats::StatsHook

Description:	Sets the stats hook.
Group:	Framework
SubGroup:	Core::Stats
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::StatsHook'} = 'Stat#';</code>

2.17.2. Stats::StatsStartNumber

Description:	Start number for statistics counting. Every new stat increments this number.
Group:	Framework
SubGroup:	Core::Stats
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::StatsStartNumber'} = '10000';</code>

2.17.3. Stats::MaxXaxisAttributes

Description:	Defines the default maximum number of X-axis attributes for the time scale.
Group:	Framework
SubGroup:	Core::Stats
Valid:	0
Required:	0

Config-Setting:	<code>\$Self->{'Stats::MaxXaxisAttributes'} = '1000';</code>
-----------------	---

2.18. Core::Stats::Graph

2.18.1. Stats::Graph::t_margin

Description:	Specifies the top margin of the chart.
Group:	Framework
SubGroup:	Core::Stats::Graph
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::Graph::t_margin'} = '10';</code>

2.18.2. Stats::Graph::l_margin

Description:	Specifies the left margin of the chart.
Group:	Framework
SubGroup:	Core::Stats::Graph
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::Graph::l_margin'} = '10';</code>

2.18.3. Stats::Graph::b_margin

Description:	Specifies the bottom margin of the chart.
Group:	Framework
SubGroup:	Core::Stats::Graph
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::Graph::b_margin'} = '10';</code>

2.18.4. Stats::Graph::r_margin

Description:	Specifies the right margin of the chart.
Group:	Framework
SubGroup:	Core::Stats::Graph
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::Graph::r_margin'} = '20';</code>

2.18.5. Stats::Graph::bgclr

Description:	Specifies the background color of the picture.
Group:	Framework
SubGroup:	Core::Stats::Graph
Valid:	1
Required:	1

Config-Setting:	<code>\$Self->{'Stats::Graph::bgclr'} = 'white';</code>
-----------------	--

2.18.6. Stats::Graph::transparent

Description:	Makes the picture transparent.
Group:	Framework
SubGroup:	Core::Stats::Graph
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::Graph::transparent'} = '0';</code>

2.18.7. Stats::Graph::fgclr

Description:	Specifies the border color of the chart.
Group:	Framework
SubGroup:	Core::Stats::Graph
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::Graph::fgclr'} = 'black';</code>

2.18.8. Stats::Graph::boxclr

Description:	Specifies the background color of the chart.
Group:	Framework
SubGroup:	Core::Stats::Graph
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::Graph::boxclr'} = 'white';</code>

2.18.9. Stats::Graph::accentclr

Description:	Specifies the border color of the legend.
Group:	Framework
SubGroup:	Core::Stats::Graph
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::Graph::accentclr'} = 'black';</code>

2.18.10. Stats::Graph::legendclr

Description:	Specifies the text color of the legend.
Group:	Framework
SubGroup:	Core::Stats::Graph
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::Graph::legendclr'} = 'black';</code>

2.18.11. Stats::Graph::textclr

Description:	Specifies the text color of the chart (e. g. caption).
Group:	Framework
SubGroup:	Core::Stats::Graph
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::Graph::textclr'} = 'black';</code>

2.18.12. Stats::Graph::dclrs

Description:	Defines the colors for the graphs.
Group:	Framework
SubGroup:	Core::Stats::Graph
Valid:	1
Required:	1
Config-Setting:	<pre> \$Self->{'Stats::Graph::dclrs'} = ['red', 'green', 'blue', 'yellow', 'purple', 'orange', 'pink', 'marine', 'cyan', 'lgray', 'lblue', 'lyellow', 'lgreen', 'lred', 'lpurple', 'lorange', 'lbrown']; </pre>

2.18.13. Stats::Graph::TitleFont

Description:	Defines the title font in graphs (place custom fonts in var/fonts).
Group:	Framework
SubGroup:	Core::Stats::Graph
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::Graph::TitleFont'} = 'DejaVuSans-Bold.ttf';</code>

2.18.14. Stats::Graph::LegendFont

Description:	Defines the legend font in graphs (place custom fonts in var/fonts).
Group:	Framework
SubGroup:	Core::Stats::Graph
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::Graph::LegendFont'} = 'DejaVuSans.ttf';</code>

2.18.15. Stats::Graph::line_width

Description:	Defines the boldness of the line drawn by the graph.
Group:	Framework
SubGroup:	Core::Stats::Graph
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::Graph::line_width'} = '1';</code>

2.18.16. Stats::Graph::legend_placement

Description:	Defines the placement of the legend. This should be a two letter key of the form: 'B[LCR] R[TCB]'. The first letter indicates the placement (Bottom or Right), and the second letter the alignment (Left, Right, Center, Top, or Bottom).
Group:	Framework
SubGroup:	Core::Stats::Graph
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::Graph::legend_placement'} = 'BC';</code>

2.18.17. Stats::Graph::legend_spacing

Description:	Defines the spacing of the legends.
Group:	Framework
SubGroup:	Core::Stats::Graph
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::Graph::legend_spacing'} = '4';</code>

2.18.18. Stats::Graph::legend_marker_width

Description:	Defines the width of the legend.
Group:	Framework
SubGroup:	Core::Stats::Graph
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::Graph::legend_marker_width'} = '12';</code>

2.18.19. Stats::Graph::legend_marker_height

Description:	Defines the height of the legend.
Group:	Framework
SubGroup:	Core::Stats::Graph
Valid:	1
Required:	1

Config-Setting:	<code>\$Self->{'Stats::Graph::legend_marker_height'} = '8';</code>
-----------------	---

2.19. Core::Time

2.19.1. TimeInputFormat

Description:	Defines the date input format used in forms (option or input fields).
Group:	Framework
SubGroup:	Core::Time
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'TimeInputFormat'} = 'Option';</code>

2.19.2. TimeShowAlwaysLong

Description:	Shows time in long format (days, hours, minutes), if set to "Yes"; or in short format (days, hours), if set to "No".
Group:	Framework
SubGroup:	Core::Time
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'TimeShowAlwaysLong'} = '0';</code>

2.19.3. TimeZone

Description:	Sets the system time zone (required a system with UTC as system time). Otherwise this is a diff time to the local time.
Group:	Framework
SubGroup:	Core::Time
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'TimeZone'} = '+0';</code>

2.19.4. TimeZoneUser

Description:	Sets the user time zone per user (required a system with UTC as system time and UTC under TimeZone). Otherwise this is a diff time to the local time.
Group:	Framework
SubGroup:	Core::Time
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'TimeZoneUser'} = '0';</code>

2.19.5. TimeZoneUserBrowserAutoOffset

Description:	Sets the user time zone per user based on java script / browser time zone offset feature at login time.
--------------	---

Group:	Framework
SubGroup:	Core::Time
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'TimeZoneUserBrowserAutoOffset'} = '1';</code>

2.19.6. CalendarWeekDayStart

Description:	Define the start day of the week for the date picker.
Group:	Framework
SubGroup:	Core::Time
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CalendarWeekDayStart'} = '1';</code>

2.19.7. TimeVacationDays

Description:	Adds the permanent vacation days. Please use single digit pattern for numbers from 1 to 9 (instead of 01 - 09).
Group:	Framework
SubGroup:	Core::Time
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeVacationDays'} = { '1' => { '1' => 'New Year\'s Day' }, '12' => { '24' => 'Christmas Eve', '25' => 'First Christmas Day', '26' => 'Second Christmas Day', '31' => 'New Year\'s Eve' }, '5' => { '1' => 'International Workers\' Day' } };</pre>

2.19.8. TimeVacationDaysOneTime

Description:	Adds the one time vacation days. Please use single digit pattern for numbers from 1 to 9 (instead of 01 - 09).
Group:	Framework
SubGroup:	Core::Time
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeVacationDaysOneTime'} = { '2004' => { '1' => { '1' => 'test' } } };</pre>

2.19.9. TimeWorkingHours

Description:	Defines the hours and week days to count the working time.
Group:	Framework
SubGroup:	Core::Time
Valid:	1
Required:	1
Config-Setting:	<pre> \$self->{'TimeWorkingHours'} = { 'Fri' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18', '19', '20'], 'Mon' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18', '19', '20'], 'Sat' => [], 'Sun' => [], 'Thu' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18', '19', '20'], 'Tue' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18', '19'] } </pre>

```

    '20'
  ],
  'Wed' => [
    '8',
    '9',
    '10',
    '11',
    '12',
    '13',
    '14',
    '15',
    '16',
    '17',
    '18',
    '19',
    '20'
  ]
];

```

2.19.10. TimeShowCompleteDescription

Description:	Shows time use complete description (days, hours, minutes), if set to "Yes"; or just first letter (d, h, m), if set to "No".
Group:	Framework
SubGroup:	Core::Time
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'TimeShowCompleteDescription'} = '0';</code>

2.20. Core::Time::Calendar1

2.20.1. TimeZone::Calendar1Name

Description:	Defines the name of the indicated calendar.
Group:	Framework
SubGroup:	Core::Time::Calendar1
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'TimeZone::Calendar1Name'} = 'Calendar Name 1';</code>

2.20.2. TimeZone::Calendar1

Description:	Defines the time zone of the indicated calendar, which can be assigned later to a specific queue.
Group:	Framework
SubGroup:	Core::Time::Calendar1
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'TimeZone::Calendar1'} = '0';</code>

2.20.3. TimeVacationDays::Calendar1

Description:	Adds the permanent vacation days for the indicated calendar. Please use single digit pattern for numbers from 1 to 9 (instead of 01 - 09).
--------------	--

Group:	Framework
SubGroup:	Core::Time::Calendar1
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeVacationDays::Calendar1'} = { '1' => { '1' => 'New Year\'s Day' }, '12' => { '24' => 'Christmas Eve', '25' => 'First Christmas Day', '26' => 'Second Christmas Day', '31' => 'New Year\'s Eve' }, '5' => { '1' => 'International Workers\' Day' } }</pre>

2.20.4. TimeVacationDaysOneTime::Calendar1

Description:	Adds the one time vacation days for the indicated calendar. Please use single digit pattern for numbers from 1 to 9 (instead of 01 - 09).
Group:	Framework
SubGroup:	Core::Time::Calendar1
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeVacationDaysOneTime::Calendar1'} = { '2004' => { '1' => { '1' => 'test' } } }</pre>

2.20.5. TimeWorkingHours::Calendar1

Description:	Defines the hours and week days of the indicated calendar, to count the working time.
Group:	Framework
SubGroup:	Core::Time::Calendar1
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeWorkingHours::Calendar1'} = { 'Fri' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18', '19', '20'], }</pre>

```

'Mon' => [
  '8',
  '9',
  '10',
  '11',
  '12',
  '13',
  '14',
  '15',
  '16',
  '17',
  '18',
  '19',
  '20'
],
'Sat' => [],
'Sun' => [],
'Thu' => [
  '8',
  '9',
  '10',
  '11',
  '12',
  '13',
  '14',
  '15',
  '16',
  '17',
  '18',
  '19',
  '20'
],
'Tue' => [
  '8',
  '9',
  '10',
  '11',
  '12',
  '13',
  '14',
  '15',
  '16',
  '17',
  '18',
  '19',
  '20'
],
'Wed' => [
  '8',
  '9',
  '10',
  '11',
  '12',
  '13',
  '14',
  '15',
  '16',
  '17',
  '18',
  '19',
  '20'
]
];

```

2.21. Core::Time::Calendar2

2.21.1. TimeZone::Calendar2Name

Description:	Defines the name of the indicated calendar.
--------------	---

Group:	Framework
SubGroup:	Core::Time::Calendar2
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'TimeZone::Calendar2Name'} = 'Calendar Name 2';</code>

2.21.2. TimeZone::Calendar2

Description:	Defines the time zone of the indicated calendar, which can be assigned later to a specific queue.
Group:	Framework
SubGroup:	Core::Time::Calendar2
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'TimeZone::Calendar2'} = '0';</code>

2.21.3. TimeVacationDays::Calendar2

Description:	Adds the permanent vacation days for the indicated calendar. Please use single digit pattern for numbers from 1 to 9 (instead of 01 - 09).
Group:	Framework
SubGroup:	Core::Time::Calendar2
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeVacationDays::Calendar2'} = { '1' => { '1' => 'New Year\'s Day' }, '12' => { '24' => 'Christmas Eve', '25' => 'First Christmas Day', '26' => 'Second Christmas Day', '31' => 'New Year\'s Eve' }, '5' => { '1' => 'International Workers\' Day' } };</pre>

2.21.4. TimeVacationDaysOneTime::Calendar2

Description:	Adds the one time vacation days for the indicated calendar. Please use single digit pattern for numbers from 1 to 9 (instead of 01 - 09).
Group:	Framework
SubGroup:	Core::Time::Calendar2
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeVacationDaysOneTime::Calendar2'} = { '2004' => { '1' => {</pre>

```
'1' => 'test'
}
}
};
```

2.21.5. TimeWorkingHours::Calendar2

Description:	Defines the hours and week days of the indicated calendar, to count the working time.
Group:	Framework
SubGroup:	Core::Time::Calendar2
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeWorkingHours::Calendar2'} = { 'Fri' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18', '19', '20'], 'Mon' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18', '19', '20'], 'Sat' => [], 'Sun' => [], 'Thu' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18', '19', '20'], 'Tue' => ['8', '9', '10', '11', '12',</pre>

```

    '13',
    '14',
    '15',
    '16',
    '17',
    '18',
    '19',
    '20'
  ],
  'Wed' => [
    '8',
    '9',
    '10',
    '11',
    '12',
    '13',
    '14',
    '15',
    '16',
    '17',
    '18',
    '19',
    '20'
  ]
];

```

2.22. Core::Time::Calendar3

2.22.1. TimeZone::Calendar3Name

Description:	Defines the name of the indicated calendar.
Group:	Framework
SubGroup:	Core::Time::Calendar3
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'TimeZone::Calendar3Name'} = 'Calendar Name 3';</code>

2.22.2. TimeZone::Calendar3

Description:	Defines the time zone of the indicated calendar, which can be assigned later to a specific queue.
Group:	Framework
SubGroup:	Core::Time::Calendar3
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'TimeZone::Calendar3'} = '0';</code>

2.22.3. TimeVacationDays::Calendar3

Description:	Adds the permanent vacation days for the indicated calendar. Please use single digit pattern for numbers from 1 to 9 (instead of 01 - 09).
Group:	Framework
SubGroup:	Core::Time::Calendar3

Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeVacationDays::Calendar3'} = { '1' => { '1' => 'New Year\'s Day' }, '12' => { '24' => 'Christmas Eve', '25' => 'First Christmas Day', '26' => 'Second Christmas Day', '31' => 'New Year\'s Eve' }, '5' => { '1' => 'International Workers\' Day' } };</pre>

2.22.4. TimeVacationDaysOneTime::Calendar3

Description:	Adds the one time vacation days for the indicated calendar. Please use single digit pattern for numbers from 1 to 9 (instead of 01 - 09).
Group:	Framework
SubGroup:	Core::Time::Calendar3
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeVacationDaysOneTime::Calendar3'} = { '2004' => { '1' => { '1' => 'test' } } };</pre>

2.22.5. TimeWorkingHours::Calendar3

Description:	Defines the hours and week days of the indicated calendar, to count the working time.
Group:	Framework
SubGroup:	Core::Time::Calendar3
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeWorkingHours::Calendar3'} = { 'Fri' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18', '19', '20'], 'Mon' => ['8',</pre>


```

'9',
'10',
'11',
'12',
'13',
'14',
'15',
'16',
'17',
'18',
'19',
'20'
],
'Sat' => [],
'Sun' => [],
'Thu' => [
'8',
'9',
'10',
'11',
'12',
'13',
'14',
'15',
'16',
'17',
'18',
'19',
'20'
],
'Tue' => [
'8',
'9',
'10',
'11',
'12',
'13',
'14',
'15',
'16',
'17',
'18',
'19',
'20'
],
'Wed' => [
'8',
'9',
'10',
'11',
'12',
'13',
'14',
'15',
'16',
'17',
'18',
'19',
'20'
]
]
};

```

2.23. Core::Time::Calendar4

2.23.1. TimeZone::Calendar4Name

Description:	Defines the name of the indicated calendar.
Group:	Framework

SubGroup:	Core::Time::Calendar4
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'TimeZone::Calendar4Name'} = 'Calendar Name 4';</code>

2.23.2. TimeZone::Calendar4

Description:	Defines the time zone of the indicated calendar, which can be assigned later to a specific queue.
Group:	Framework
SubGroup:	Core::Time::Calendar4
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'TimeZone::Calendar4'} = '0';</code>

2.23.3. TimeVacationDays::Calendar4

Description:	Adds the permanent vacation days for the indicated calendar. Please use single digit pattern for numbers from 1 to 9 (instead of 01 - 09).
Group:	Framework
SubGroup:	Core::Time::Calendar4
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeVacationDays::Calendar4'} = { '1' => { '1' => 'New Year\'s Day' }, '12' => { '24' => 'Christmas Eve', '25' => 'First Christmas Day', '26' => 'Second Christmas Day', '31' => 'New Year\'s Eve' }, '5' => { '1' => 'International Workers\' Day' } };</pre>

2.23.4. TimeVacationDaysOneTime::Calendar4

Description:	Adds the one time vacation days for the indicated calendar. Please use single digit pattern for numbers from 1 to 9 (instead of 01 - 09).
Group:	Framework
SubGroup:	Core::Time::Calendar4
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeVacationDaysOneTime::Calendar4'} = { '2004' => { '1' => { '1' => 'test' } } };</pre>

```
}
}
};
```

2.23.5. TimeWorkingHours::Calendar4

Description:	Defines the hours and week days of the indicated calendar, to count the working time.
Group:	Framework
SubGroup:	Core::Time::Calendar4
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeWorkingHours::Calendar4'} = { 'Fri' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18', '19', '20'], 'Mon' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18', '19', '20'], 'Sat' => [], 'Sun' => [], 'Thu' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18', '19', '20'], 'Tue' => ['8', '9', '10', '11', '12', '13',</pre>

```
'14',
'15',
'16',
'17',
'18',
'19',
'20'
],
'Wed' => [
'8',
'9',
'10',
'11',
'12',
'13',
'14',
'15',
'16',
'17',
'18',
'19',
'20'
]
};
```

2.24. Core::Time::Calendar5

2.24.1. TimeZone::Calendar5Name

Description:	Defines the name of the indicated calendar.
Group:	Framework
SubGroup:	Core::Time::Calendar5
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'TimeZone::Calendar5Name'} = 'Calendar Name 5';</code>

2.24.2. TimeZone::Calendar5

Description:	Defines the time zone of the indicated calendar, which can be assigned later to a specific queue.
Group:	Framework
SubGroup:	Core::Time::Calendar5
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'TimeZone::Calendar5'} = '0';</code>

2.24.3. TimeVacationDays::Calendar5

Description:	Adds the permanent vacation days for the indicated calendar. Please use single digit pattern for numbers from 1 to 9 (instead of 01 - 09).
Group:	Framework
SubGroup:	Core::Time::Calendar5
Valid:	1

Required:	1
Config-Setting:	<pre>\$Self->{'TimeVacationDays::Calendar5'} = { '1' => { '1' => 'New Year\'s Day' }, '12' => { '24' => 'Christmas Eve', '25' => 'First Christmas Day', '26' => 'Second Christmas Day', '31' => 'New Year\'s Eve' }, '5' => { '1' => 'International Workers\' Day' } }</pre>

2.24.4. TimeVacationDaysOneTime::Calendar5

Description:	Adds the one time vacation days for the indicated calendar. Please use single digit pattern for numbers from 1 to 9 (instead of 01 - 09).
Group:	Framework
SubGroup:	Core::Time::Calendar5
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeVacationDaysOneTime::Calendar5'} = { '2004' => { '1' => { '1' => 'test' } } }</pre>

2.24.5. TimeWorkingHours::Calendar5

Description:	Defines the hours and week days of the indicated calendar, to count the working time.
Group:	Framework
SubGroup:	Core::Time::Calendar5
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeWorkingHours::Calendar5'} = { 'Fri' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18', '19', '20'], 'Mon' => ['8', '9', '10',] }</pre>

```

'11',
'12',
'13',
'14',
'15',
'16',
'17',
'18',
'19',
'20'
],
'Sat' => [],
'Sun' => [],
'Thu' => [
'8',
'9',
'10',
'11',
'12',
'13',
'14',
'15',
'16',
'17',
'18',
'19',
'20'
],
'Tue' => [
'8',
'9',
'10',
'11',
'12',
'13',
'14',
'15',
'16',
'17',
'18',
'19',
'20'
],
'Wed' => [
'8',
'9',
'10',
'11',
'12',
'13',
'14',
'15',
'16',
'17',
'18',
'19',
'20'
]
];

```

2.25. Core::Time::Calendar6

2.25.1. TimeZone::Calendar6Name

Description:	Defines the name of the indicated calendar.
Group:	Framework
SubGroup:	Core::Time::Calendar6

Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'TimeZone::Calendar6Name'} = 'Calendar Name 6';</code>

2.25.2. TimeZone::Calendar6

Description:	Defines the time zone of the indicated calendar, which can be assigned later to a specific queue.
Group:	Framework
SubGroup:	Core::Time::Calendar6
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'TimeZone::Calendar6'} = '0';</code>

2.25.3. TimeVacationDays::Calendar6

Description:	Adds the permanent vacation days for the indicated calendar. Please use single digit pattern for numbers from 1 to 9 (instead of 01 - 09).
Group:	Framework
SubGroup:	Core::Time::Calendar6
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeVacationDays::Calendar6'} = { '1' => { '1' => 'New Year\'s Day' }, '12' => { '24' => 'Christmas Eve', '25' => 'First Christmas Day', '26' => 'Second Christmas Day', '31' => 'New Year\'s Eve' }, '5' => { '1' => 'International Workers\' Day' } };</pre>

2.25.4. TimeVacationDaysOneTime::Calendar6

Description:	Adds the one time vacation days for the indicated calendar. Please use single digit pattern for numbers from 1 to 9 (instead of 01 - 09).
Group:	Framework
SubGroup:	Core::Time::Calendar6
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeVacationDaysOneTime::Calendar6'} = { '2004' => { '1' => { '1' => 'test' } } };</pre>

```
};
```

2.25.5. TimeWorkingHours::Calendar6

Description:	Defines the hours and week days of the indicated calendar, to count the working time.
Group:	Framework
SubGroup:	Core::Time::Calendar6
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeWorkingHours::Calendar6'} = { 'Fri' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18', '19', '20'], 'Mon' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18', '19', '20'], 'Sat' => [], 'Sun' => [], 'Thu' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18', '19', '20'], 'Tue' => ['8', '9', '10', '11', '12', '13', '14', '15',</pre>


```
'16',
'17',
'18',
'19',
'20'
],
'Wed' => [
'8',
'9',
'10',
'11',
'12',
'13',
'14',
'15',
'16',
'17',
'18',
'19',
'20'
]
];
```

2.26. Core::Time::Calendar7

2.26.1. TimeZone::Calendar7Name

Description:	Defines the name of the indicated calendar.
Group:	Framework
SubGroup:	Core::Time::Calendar7
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'TimeZone::Calendar7Name'} = 'Calendar Name 7';</code>

2.26.2. TimeZone::Calendar7

Description:	Defines the time zone of the indicated calendar, which can be assigned later to a specific queue.
Group:	Framework
SubGroup:	Core::Time::Calendar7
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'TimeZone::Calendar7'} = '0';</code>

2.26.3. TimeVacationDays::Calendar7

Description:	Adds the permanent vacation days for the indicated calendar. Please use single digit pattern for numbers from 1 to 9 (instead of 01 - 09).
Group:	Framework
SubGroup:	Core::Time::Calendar7
Valid:	1
Required:	1

Config-Setting:	<pre> \$Self->{'TimeVacationDays::Calendar7'} = { '1' => { '1' => 'New Year\'s Day' }, '12' => { '24' => 'Christmas Eve', '25' => 'First Christmas Day', '26' => 'Second Christmas Day', '31' => 'New Year\'s Eve' }, '5' => { '1' => 'International Workers\' Day' } } }; </pre>
-----------------	---

2.26.4. TimeVacationDaysOneTime::Calendar7

Description:	Adds the one time vacation days for the indicated calendar. Please use single digit pattern for numbers from 1 to 9 (instead of 01 - 09).
Group:	Framework
SubGroup:	Core::Time::Calendar7
Valid:	1
Required:	1
Config-Setting:	<pre> \$Self->{'TimeVacationDaysOneTime::Calendar7'} = { '2004' => { '1' => { '1' => 'test' } } } }; </pre>

2.26.5. TimeWorkingHours::Calendar7

Description:	Defines the hours and week days of the indicated calendar, to count the working time.
Group:	Framework
SubGroup:	Core::Time::Calendar7
Valid:	1
Required:	1
Config-Setting:	<pre> \$Self->{'TimeWorkingHours::Calendar7'} = { 'Fri' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18', '19', '20'], 'Mon' => ['8', '9', '10', '11', </pre>

```

'12',
'13',
'14',
'15',
'16',
'17',
'18',
'19',
'20'
],
'Sat' => [],
'Sun' => [],
'Thu' => [
'8',
'9',
'10',
'11',
'12',
'13',
'14',
'15',
'16',
'17',
'18',
'19',
'20'
],
'Tue' => [
'8',
'9',
'10',
'11',
'12',
'13',
'14',
'15',
'16',
'17',
'18',
'19',
'20'
],
'Wed' => [
'8',
'9',
'10',
'11',
'12',
'13',
'14',
'15',
'16',
'17',
'18',
'19',
'20'
]
];

```

2.27. Core::Time::Calendar8

2.27.1. TimeZone::Calendar8Name

Description:	Defines the name of the indicated calendar.
Group:	Framework
SubGroup:	Core::Time::Calendar8
Valid:	1

Required:	1
Config-Setting:	<code>\$Self->{'TimeZone::Calendar8Name'} = 'Calendar Name 8';</code>

2.27.2. TimeZone::Calendar8

Description:	Defines the time zone of the indicated calendar, which can be assigned later to a specific queue.
Group:	Framework
SubGroup:	Core::Time::Calendar8
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'TimeZone::Calendar8'} = '0';</code>

2.27.3. TimeVacationDays::Calendar8

Description:	Adds the permanent vacation days for the indicated calendar. Please use single digit pattern for numbers from 1 to 9 (instead of 01 - 09).
Group:	Framework
SubGroup:	Core::Time::Calendar8
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeVacationDays::Calendar8'} = { '1' => { '1' => 'New Year\'s Day' }, '12' => { '24' => 'Christmas Eve', '25' => 'First Christmas Day', '26' => 'Second Christmas Day', '31' => 'New Year\'s Eve' }, '5' => { '1' => 'International Workers\' Day' } };</pre>

2.27.4. TimeVacationDaysOneTime::Calendar8

Description:	Adds the one time vacation days for the indicated calendar. Please use single digit pattern for numbers from 1 to 9 (instead of 01 - 09).
Group:	Framework
SubGroup:	Core::Time::Calendar8
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeVacationDaysOneTime::Calendar8'} = { '2004' => { '1' => { '1' => 'test' } } };</pre>

2.27.5. TimeWorkingHours::Calendar8

Description:	Defines the hours and week days of the indicated calendar, to count the working time.
Group:	Framework
SubGroup:	Core::Time::Calendar8
Valid:	1
Required:	1
Config-Setting:	<pre> \$self->{'TimeWorkingHours::Calendar8'} = { 'Fri' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18', '19', '20'], 'Mon' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18', '19', '20'], 'Sat' => [], 'Sun' => [], 'Thu' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18', '19', '20'], 'Tue' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18',] } </pre>

```

    '19',
    '20'
  ],
  'Wed' => [
    '8',
    '9',
    '10',
    '11',
    '12',
    '13',
    '14',
    '15',
    '16',
    '17',
    '18',
    '19',
    '20'
  ]
};

```

2.28. Core::Time::Calendar9

2.28.1. TimeZone::Calendar9Name

Description:	Defines the name of the indicated calendar.
Group:	Framework
SubGroup:	Core::Time::Calendar9
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'TimeZone::Calendar9Name'} = 'Calendar Name 9';</code>

2.28.2. TimeZone::Calendar9

Description:	Defines the time zone of the indicated calendar, which can be assigned later to a specific queue.
Group:	Framework
SubGroup:	Core::Time::Calendar9
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'TimeZone::Calendar9'} = '0';</code>

2.28.3. TimeVacationDays::Calendar9

Description:	Adds the permanent vacation days for the indicated calendar. Please use single digit pattern for numbers from 1 to 9 (instead of 01 - 09).
Group:	Framework
SubGroup:	Core::Time::Calendar9
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'TimeVacationDays::Calendar9'} = { '1' => { '1' => 'New Year\'s Day' }, '12' => { '24' => 'Christmas Eve', </code>

	<pre>'25' => 'First Christmas Day', '26' => 'Second Christmas Day', '31' => 'New Year\'s Eve' }, '5' => { '1' => 'International Workers\' Day' } };</pre>
--	--

2.28.4. TimeVacationDaysOneTime::Calendar9

Description:	Adds the one time vacation days for the indicated calendar. Please use single digit pattern for numbers from 1 to 9 (instead of 01 - 09).
Group:	Framework
SubGroup:	Core::Time::Calendar9
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeVacationDaysOneTime::Calendar9'} = { '2004' => { '1' => { '1' => 'test' } } };</pre>

2.28.5. TimeWorkingHours::Calendar9

Description:	Defines the hours and week days of the indicated calendar, to count the working time.
Group:	Framework
SubGroup:	Core::Time::Calendar9
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TimeWorkingHours::Calendar9'} = { 'Fri' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18', '19', '20'], 'Mon' => ['8', '9', '10', '11', '12', '13', '14', '15', '16', '17', '18', '19',</pre>

```

    '20'
  ],
  'Sat' => [],
  'Sun' => [],
  'Thu' => [
    '8',
    '9',
    '10',
    '11',
    '12',
    '13',
    '14',
    '15',
    '16',
    '17',
    '18',
    '19',
    '20'
  ],
  'Tue' => [
    '8',
    '9',
    '10',
    '11',
    '12',
    '13',
    '14',
    '15',
    '16',
    '17',
    '18',
    '19',
    '20'
  ],
  'Wed' => [
    '8',
    '9',
    '10',
    '11',
    '12',
    '13',
    '14',
    '15',
    '16',
    '17',
    '18',
    '19',
    '20'
  ]
]
};

```

2.29. Core::Web

2.29.1. Frontend::WebPath

Description:	Defines the URL base path of icons, CSS and Java Script.
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Frontend::WebPath'} = '/otrs-web/';</code>

2.29.2. Frontend::ImagePath

Description:	Defines the URL image path of icons for navigation.
--------------	---

Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Frontend::ImagePath'} = '<OTRS_CONFIG_Frontend::WebPath>skins/Agent/default/img/';</code>

2.29.3. Frontend::CSSPath

Description:	Defines the URL CSS path.
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Frontend::CSSPath'} = '<OTRS_CONFIG_Frontend::WebPath>css/';</code>

2.29.4. Frontend::JavaScriptPath

Description:	Defines the URL java script path.
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Frontend::JavaScriptPath'} = '<OTRS_CONFIG_Frontend::WebPath>js/';</code>

2.29.5. Frontend::RichText

Description:	Uses richtext for viewing and editing: articles, salutations, signatures, standard templates, auto responses and notifications.
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Frontend::RichText'} = '1';</code>

2.29.6. Frontend::RichTextPath

Description:	Defines the URL rich text editor path.
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Frontend::RichTextPath'} = '<OTRS_CONFIG_Frontend::WebPath>js/thirdparty/ckeditor-4.4.5/';</code>

2.29.7. Frontend::RichTextWidth

Description:	Defines the width for the rich text editor component. Enter number (pixels) or percent value (relative).
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Frontend::RichTextWidth'} = '620';</code>

2.29.8. Frontend::RichTextHeight

Description:	Defines the height for the rich text editor component. Enter number (pixels) or percent value (relative).
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Frontend::RichTextHeight'} = '320';</code>

2.29.9. Frontend::RichText::DefaultCSS

Description:	Defines the default CSS used in rich text editors.
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Frontend::RichText::DefaultCSS'} = 'font-family:Geneva,Helvetica,Arial,sans-serif; font-size: 12px;';</code>

2.29.10. Frontend::RichText::EnhancedMode

Description:	Defines if the enhanced mode should be used (enables use of table, replace, subscript, superscript, paste from word, etc.).
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Frontend::RichText::EnhancedMode'} = '0';</code>

2.29.11. DisableMSIFrameSecurityRestricted

Description:	Disable restricted security for IFrames in IE. May be required for SSO to work in IE8.
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	0

Config-Setting:	<code>\$Self->{'DisableMSIFrameSecurityRestricted'} = '0';</code>
-----------------	--

2.29.12. DisableContentSecurityPolicy

Description:	Disable HTTP header "Content-Security-Policy" to allow loading of external script contents. Disabling this HTTP header can be a security issue! Only disable it, if you know what you are doing!
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'DisableContentSecurityPolicy'} = '0';</code>

2.29.13. DefaultViewNewLine

Description:	Automated line break in text messages after x number of chars.
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'DefaultViewNewLine'} = '90';</code>

2.29.14. DefaultViewLines

Description:	Sets the number of lines that are displayed in text messages (e.g. ticket lines in the QueueZoom).
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'DefaultViewLines'} = '6000';</code>

2.29.15. Frontend::AnimationEnabled

Description:	Turns on the animations used in the GUI. If you have problems with these animations (e.g. performance issues), you can turn them off here.
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Frontend::AnimationEnabled'} = '1';</code>

2.29.16. AttachmentDownloadType

Description:	Allows choosing between showing the attachments of a ticket in the browser (inline) or just make them downloadable (attachment).
--------------	--

Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'AttachmentDownloadType'} = 'attachment';</code>

2.29.17. WebMaxFileUpload

Description:	Defines the maximal size (in bytes) for file uploads via the browser. Warning: Setting this option to a value which is too low could cause many masks in your OTRS instance to stop working (probably any mask which takes input from the user).
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'WebMaxFileUpload'} = '24000000';</code>

2.29.18. WebUploadCacheModule

Description:	Selects the module to handle uploads via the web interface. "DB" stores all uploads in the database, "FS" uses the file system.
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'WebUploadCacheModule'} = 'Kernel::System::Web::UploadCache::DB';</code>

2.29.19. Frontend::Output::FilterText###AAAURL

Description:	Defines the filter that processes the text in the articles, in order to highlight URLs.
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Frontend::Output::FilterText'}->{'AAAURL'} = { 'Module' => 'Kernel::Output::HTML::OutputFilterTextURL', 'Templates' => { 'AgentTicketZoom' => '1' } };</code>

2.29.20. Frontend::Themes

Description:	Activates the available themes on the system. Value 1 means active, 0 means inactive.
Group:	Framework
SubGroup:	Core::Web

Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Themes'} = { 'Lite' => '0', 'Standard' => '1' };</pre>

2.29.21. Frontend::Output::FilterText###OutputFilterTextAutoLink

Description:	Defines a filter to process the text in the articles, in order to highlight predefined keywords.
Group:	Framework
SubGroup:	Core::Web
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Output::FilterText'}->{'OutputFilterTextAutoLink'} = { 'Module' => 'Kernel::Output::HTML::OutputFilterTextAutoLink', 'Templates' => { 'AgentTicketZoom' => '1' } };</pre>

2.29.22. Frontend::Output::OutputFilterTextAutoLink###CVE

Description:	Defines a filter for html output to add links behind CVE numbers. The element Image allows two input kinds. At once the name of an image (e.g. faq.png). In this case the OTRS image path will be used. The second possibility is to insert the link to the image.
Group:	Framework
SubGroup:	Core::Web
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Output::OutputFilterTextAutoLink'}->{'CVE'} = { 'RegExp' => ['(CVE CAN)\-\(\d{3,4})\-\(\d{2,})'], 'Templates' => { 'AgentTicketZoom' => '1' }, 'URL1' => { 'Description' => 'Mitre', 'Image' => 'http://cve.mitre.org/favicon.ico', 'Target' => '_blank', 'URL' => 'http://cve.mitre.org/cgi-bin/cvename.cgi?name=<MATCH1>-<MATCH2>-<MATCH3>' }, 'URL2' => { 'Description' => 'Google', 'Image' => 'http://www.google.de/favicon.ico', 'Target' => '_blank', 'URL' => 'http://google.com/search?q=<MATCH1>-<MATCH2>-<MATCH3>' }, 'URL3' => { 'Description' => 'US-CERT NVD', 'Image' => 'http://nvd.nist.gov/favicon.ico', } };</pre>

	<pre>'Target' => '_blank', 'URL' => 'http://nvd.nist.gov/nvd.cfm?cvename=<MATCH1>-<MATCH2>-<MATCH3>' } };</pre>
--	---

2.29.23. Frontend::Output::OutputFilterTextAutoLink###Bugtraq

Description:	Defines a filter for html output to add links behind bugtraq numbers. The element Image allows two input kinds. At once the name of an image (e.g. faq.png). In this case the OTRS image path will be used. The second possibility is to insert the link to the image.
Group:	Framework
SubGroup:	Core::Web
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Output::OutputFilterTextAutoLink'}->{'Bugtraq'} = { 'RegExp' => ['Bugtraq[\\s\\w\\t]*?ID[\\s\\w\\t]*?:[\\s\\w\\t]*?(\\d{2,8})', 'Bugtraq[\\s\\w\\t]*?ID[\\s\\w\\t]*?(\\d{2,8})', 'Bugtraq[\\s\\w\\t]*?:[\\s\\w\\t]*?(\\d{2,8})', 'Bugtraq[\\s\\w\\t]*?(\\d{2,8})', 'BID[\\s\\w\\t]*?:[\\s\\w\\t]*?(\\d{2,8})', 'BID[\\s\\w\\t]*?(\\d{2,8})'], 'Templates' => { 'AgentTicketZoom' => '1' }, 'URL1' => { 'Description' => 'Security Focus', 'Image' => 'http://www.securityfocus.com/favicon.ico', 'Target' => '_blank', 'URL' => 'http://www.securityfocus.com/bid/<MATCH1>/info' }, 'URL2' => { 'Description' => 'Google', 'Image' => 'http://www.google.de/favicon.ico', 'Target' => '_blank', 'URL' => 'http://google.com/search?q=<MATCH>' } } };</pre>

2.29.24. Frontend::Output::OutputFilterTextAutoLink###MSBulletins

Description:	Defines a filter for html output to add links behind MSBulletin numbers. The element Image allows two input kinds. At once the name of an image (e.g. faq.png). In this case the OTRS image path will be used. The second possibility is to insert the link to the image.
Group:	Framework
SubGroup:	Core::Web
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Output::OutputFilterTextAutoLink'}->{'MSBulletins'} = { 'RegExp' => ['MS[^A-Za-z]{0,5}(\\d\\d)?.?(\\d{2,4})'], </pre>

	<pre>'Templates' => { 'AgentTicketZoom' => '1' }, 'URL1' => { 'Description' => 'Microsoft Technet', 'Image' => 'http://www.microsoft.com/favicon.ico', 'Target' => '_blank', 'URL' => 'http://www.microsoft.com/technet/security/bulletin/ MS<MATCH1>-<MATCH2>.mspx' }, 'URL2' => { 'Description' => 'Google', 'Image' => 'http://www.google.de/favicon.ico', 'Target' => '_blank', 'URL' => 'http://google.com/search?q=MS<MATCH1>-<MATCH2>' } };</pre>
--	--

2.29.25. Frontend::Output::OutputFilterTextAutoLink###Setting1

Description:	Define a filter for html output to add links behind a defined string. The element Image allows two input kinds. At once the name of an image (e.g. faq.png). In this case the OTRS image path will be used. The second possibility is to insert the link to the image.
Group:	Framework
SubGroup:	Core::Web
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Output::OutputFilterTextAutoLink'}->{'Setting1'} = { 'RegExp' => ['RegExp'], 'Templates' => { 'AgentTicketZoom' => '1' }, 'URL1' => { 'Description' => 'Description', 'Image' => 'right-small.png', 'Target' => '_blank', 'URL' => 'URL' }, 'URL2' => { 'Description' => 'Description', 'Image' => 'Image', 'Target' => '_blank', 'URL' => 'URL' } };</pre>

2.29.26. Frontend::Output::OutputFilterTextAutoLink###Setting2

Description:	Defines a filter for html output to add links behind a defined string. The element Image allows two input kinds. At once the name of an image (e.g. faq.png). In this case the OTRS image path will be used. The second possibility is to insert the link to the image.
Group:	Framework
SubGroup:	Core::Web
Valid:	0

Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Output::OutputFilterTextAutoLink'}->{'Setting2'} = { 'RegExp' => ['RegExp'], 'Templates' => { 'AgentTicketZoom' => '1' }, 'URL1' => { 'Description' => 'Description', 'Image' => 'right-small.png', 'Target' => '_blank', 'URL' => 'URL' }, 'URL2' => { 'Description' => 'Description', 'Image' => 'Image', 'Target' => '_blank', 'URL' => 'URL' }, 'URL3' => { 'Description' => 'Description', 'Image' => 'Image', 'Target' => '_blank', 'URL' => 'URL' } }; </pre>

2.29.27. Loader::Enabled::CSS

Description:	If enabled, OTRS will deliver all CSS files in minified form. WARNING: If you turn this off, there will likely be problems in IE 7, because it cannot load more than 32 CSS files.
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Loader::Enabled::CSS'} = '1';</code>

2.29.28. Loader::Enabled::JS

Description:	If enabled, OTRS will deliver all JavaScript files in minified form.
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Loader::Enabled::JS'} = '1';</code>

2.29.29. Loader::Agent::CommonCSS###000-Framework

Description:	List of CSS files to always be loaded for the agent interface.
Group:	Framework
SubGroup:	Core::Web
Valid:	1

Required:	1
Config-Setting:	<pre>\$Self->{'Loader::Agent::CommonCSS'}->{'000-Framework'} = ['Core.Reset.css', 'Core.Default.css', 'Core.Header.css', 'Core.OverviewControl.css', 'Core.OverviewSmall.css', 'Core.OverviewMedium.css', 'Core.OverviewLarge.css', 'Core.Footer.css', 'Core.PageLayout.css', 'Core.Form.css', 'Core.Table.css', 'Core.Widget.css', 'Core.WidgetMenu.css', 'Core.TicketDetail.css', 'Core.Tooltip.css', 'Core.Dialog.css', 'Core.Print.css', 'thirdparty/fontawesome/font-awesome.css'];</pre>

2.29.30. Loader::Agent::CommonCSS::IE8###000-Framework

Description:	List of IE8-specific CSS files to always be loaded for the agent interface.
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Loader::Agent::CommonCSS::IE8'}->{'000-Framework'} = ['Core.OverviewSmall.IE8.css'];</pre>

2.29.31. Loader::Agent::CommonJS###000-Framework

Description:	List of JS files to always be loaded for the agent interface.
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Loader::Agent::CommonJS'}->{'000-Framework'} = ['thirdparty/jquery-1.10.0/jquery.js', 'thirdparty/jquery-browser-detection/jquery-browser-detection.js', 'thirdparty/jquery-ui-1.10.3/jquery-ui.js', 'thirdparty/jquery-validate-1.11.1/jquery.validate.js', 'thirdparty/stacktrace-0.4/stacktrace.js', 'thirdparty/jquery-pubsub/pubsub.js', 'thirdparty/jquery-jstree-v.pre1.0/jquery.jstree.js', 'thirdparty/jquery-jstree-v.pre1.0/_lib/jquery.hotkeys.js', 'Core.JavaScriptEnhancements.js', 'Core.Debug.js', 'Core.Data.js', 'Core.Config.js', 'Core.Exception.js', 'Core.JSON.js', 'Core.App.js', 'Core.AJAX.js', 'Core.UI.js',];</pre>

	<pre>'Core.UI.Accordion.js', 'Core.UI.Datepicker.js', 'Core.UI.Resizable.js', 'Core.UI.Table.js', 'Core.UI.Accessibility.js', 'Core.UI.RichTextEditor.js', 'Core.UI.Dialog.js', 'Core.UI.ActionRow.js', 'Core.UI.Popup.js', 'Core.UI.TreeSelection.js', 'Core.UI.Autocomplete.js', 'Core.Form.js', 'Core.Form.ErrorTooltips.js', 'Core.Form.Validate.js', 'Core.Agent.js', 'Core.Agent.Search.js', 'Core.Agent.CustomerInformationCenterSearch.js'];</pre>
--	---

2.29.32. Loader::Agent::CommonJS###001-JQueryMigrate

Description:	List of JS files to always be loaded for the agent interface.
Group:	Framework
SubGroup:	Core::Web
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Loader::Agent::CommonJS'}->{'001-JQueryMigrate'} = ['thirdparty/jquery-migrate-1.2.1/jquery-migrate.js'];</pre>

2.29.33. Loader::Customer::Common-CSS###000-Framework

Description:	List of CSS files to always be loaded for the customer interface.
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Loader::Customer::CommonCSS'}->{'000-Framework'} = ['Core.Reset.css', 'Core.Default.css', 'Core.Form.css', 'Core.Dialog.css', 'Core.Tooltip.css', 'Core.Login.css', 'Core.Control.css', 'Core.Table.css', 'Core.TicketZoom.css', 'Core.Print.css', 'thirdparty/fontawesome/font-awesome.css'];</pre>

2.29.34. Loader::Customer::Common-CSS::IE8###000-Framework

Description:	List of IE8-specific CSS files to always be loaded for the customer interface.
--------------	--

Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Loader::Customer::CommonCSS::IE8'}->{'000-Framework'} = [];</code>

2.29.35. Loader::Customer::CommonJS###000-Framework

Description:	List of JS files to always be loaded for the customer interface.
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Loader::Customer::CommonJS'}->{'000-Framework'} = ['thirdparty/jquery-1.10.0/jquery.js', 'thirdparty/jquery-browser-detection/jquery-browser-detection.js', 'thirdparty/jquery-validate-1.11.1/jquery.validate.js', 'thirdparty/jquery-ui-1.10.3/jquery-ui.js', 'thirdparty/stacktrace-0.4/stacktrace.js', 'thirdparty/jquery-pubsub/pubsub.js', 'thirdparty/jquery-jstree-v.pre1.0/jquery.jstree.js', 'thirdparty/jquery-jstree-v.pre1.0/_lib/jquery.hotkeys.js', 'Core.Debug.js', 'Core.Data.js', 'Core.Exception.js', 'Core.JSON.js', 'Core.JavaScriptEnhancements.js', 'Core.Config.js', 'Core.App.js', 'Core.AJAX.js', 'Core.UI.js', 'Core.UI.Accessibility.js', 'Core.UI.Dialog.js', 'Core.UI.RichTextEditor.js', 'Core.UI.Datepicker.js', 'Core.UI.Popup.js', 'Core.UI.TreeSelection.js', 'Core.UI.Autocomplete.js', 'Core.Form.js', 'Core.Form.ErrorTooltips.js', 'Core.Form.Validate.js', 'Core.Customer.js'];</code>

2.29.36. Loader::Customer::CommonJS###001-JQueryMigrate

Description:	List of JS files to always be loaded for the agent interface.
Group:	Framework
SubGroup:	Core::Web
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Loader::Customer::CommonJS'}->{'001-JQueryMigrate'} = ['thirdparty/jquery-migrate-1.2.1/jquery-migrate.js'];</code>

2.29.37. Loader::Agent::DefaultSelectedSkin

Description:	The agent skin's InternalName which should be used in the agent interface. Please check the available skins in Frontend::Agent::Skins.
Group:	Framework
SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Loader::Agent::DefaultSelectedSkin'} = 'default';</code>

2.29.38. Loader::Customer::SelectedSkin::HostBased

Description:	It is possible to configure different skins, for example to distinguish between different customers, to be used on a per-domain basis within the application. Using a regular expression (regex), you can configure a Key/Content pair to match a domain. The value in "Key" should match the domain, and the value in "Content" should be a valid skin on your system. Please see the example entries for the proper form of the regex.
Group:	Framework
SubGroup:	Core::Web
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Loader::Customer::SelectedSkin::HostBased'} = { 'host1\\.example\\.com' => 'Someskin1', 'host2\\.example\\.com' => 'Someskin2' };</code>

2.30. Core::WebUserAgent

2.30.1. WebUserAgent::Timeout

Description:	Sets the timeout (in seconds) for http/ftp downloads.
Group:	Framework
SubGroup:	Core::WebUserAgent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'WebUserAgent::Timeout'} = '15';</code>

2.30.2. WebUserAgent::Proxy

Description:	Defines the connections for http/ftp, via a proxy.
Group:	Framework
SubGroup:	Core::WebUserAgent
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'WebUserAgent::Proxy'} = 'http://proxy.sn.no:8001/';</code>

2.30.3. WebUserAgent::DisableSSLVerification

Description:	Turns off SSL certificate validation, for example if you use a transparent HTTPS proxy. Use at your own risk!
Group:	Framework
SubGroup:	Core::WebUserAgent
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'WebUserAgent::DisableSSLVerification'} = '0';</code>

2.31. Crypt::PGP

2.31.1. PGP

Description:	Enables PGP support. When PGP support is enabled for signing and encrypting mail, it is HIGHLY recommended that the web server runs as the OTRS user. Otherwise, there will be problems with the privileges when accessing .gnupg folder.
Group:	Framework
SubGroup:	Crypt::PGP
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PGP'} = '0';</code>

2.31.2. PGP::Bin

Description:	Defines the path to PGP binary.
Group:	Framework
SubGroup:	Crypt::PGP
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PGP::Bin'} = '/usr/bin/gpg';</code>

2.31.3. PGP::Options

Description:	Sets the options for PGP binary.
Group:	Framework
SubGroup:	Crypt::PGP
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PGP::Options'} = '--homedir /opt/otrs/.gnupg/ --batch --no-tty --yes';</code>

2.31.4. PGP::Key::Password

Description:	Sets the password for private PGP key.
Group:	Framework

SubGroup:	Crypt::PGP
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'PGP::Key::Password'} = { '488A0B8F' => 'SomePassword', 'D2DF79FA' => 'SomePassword' };</pre>

2.31.5. PGP::TrustedNetwork

Description:	Set this to yes if you trust in all your public and private pgp keys, even if they are not certified with a trusted signature.
Group:	Framework
SubGroup:	Crypt::PGP
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'PGP::TrustedNetwork'} = '0';</pre>

2.31.6. PGP::Log

Description:	Configure your own log text for PGP.
Group:	Framework
SubGroup:	Crypt::PGP
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'PGP::Log'} = { 'BADSIG' => 'The PGP signature with the keyid has not been verified successfully.', 'ERRSIG' => 'It was not possible to check the PGP signature, this may be caused by a missing public key or an unsupported algorithm.', 'EXPKEYSIG' => 'The PGP signature was made by an expired key.', 'GOODSIG' => 'Good PGP signature.', 'KEYREVOKED' => 'The PGP signature was made by a revoked key, this could mean that the signature is forged.', 'NODATA' => 'No valid OpenPGP data found.', 'NO_PUBKEY' => 'No public key found.', 'REVKEYSIG' => 'The PGP signature was made by a revoked key, this could mean that the signature is forged.', 'SIG_EXPIRED' => 'The PGP signature is expired.', 'SIG_ID' => 'Signature data.', 'TRUST_UNDEFINED' => 'This key is not certified with a trusted signature!.', 'VALIDSIG' => 'The PGP signature with the keyid is good.' };</pre>

2.31.7. PGP::StoreDecryptedData

Description:	If this option is enabled, then the decrypted data will be stored in the database if they are displayed in AgentTicketZoom.
Group:	Framework
SubGroup:	Crypt::PGP
Valid:	1
Required:	1

Config-Setting:	<code>\$Self->{'PGP::StoreDecryptedData'} = '1';</code>
-----------------	--

2.32. Crypt::SMIME

2.32.1. SMIME

Description:	Enables S/MIME support.
Group:	Framework
SubGroup:	Crypt::SMIME
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SMIME'} = '0';</code>

2.32.2. SMIME::Bin

Description:	Defines the path to open ssl binary. It may need a HOME env (<code>\$ENV{HOME} = '/var/lib/wwwrun';</code>).
Group:	Framework
SubGroup:	Crypt::SMIME
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SMIME::Bin'} = '/usr/bin/openssl';</code>

2.32.3. SMIME::CertPath

Description:	Specifies the directory where SSL certificates are stored.
Group:	Framework
SubGroup:	Crypt::SMIME
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SMIME::CertPath'} = '/etc/ssl/certs';</code>

2.32.4. SMIME::PrivatePath

Description:	Specifies the directory where private SSL certificates are stored.
Group:	Framework
SubGroup:	Crypt::SMIME
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SMIME::PrivatePath'} = '/etc/ssl/private';</code>

2.32.5. SMIME::CacheTTL

Description:	Cache time in seconds for the SSL certificate attributes.
Group:	Framework
SubGroup:	Crypt::SMIME
Valid:	1

Required:	1
Config-Setting:	<code>\$Self->{'SMIME::CacheTTL'} = '86400';</code>

2.32.6. SMIME::StoreDecryptedData

Description:	If this option is enabled, then the decrypted data will be stored in the database if they are displayed in AgentTicketZoom.
Group:	Framework
SubGroup:	Crypt::SMIME
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'SMIME::StoreDecryptedData'} = '1';</code>

2.33. CustomerInformationCenter

2.33.1. AgentCustomerInformationCenter::Main-Menu###010-EditCustomerID

Description:	Main menu registration.
Group:	Framework
SubGroup:	CustomerInformationCenter
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'AgentCustomerInformationCenter::MainMenu'}->{'010-EditCustomerID'} = { 'Link' => '\$Env{"Baselink"}Action=AdminCustomerCompany;Subaction=Change;CustomerID=\$LQData{"CustomerID"};Nav=0', 'Name' => 'Edit customer company' };</code>

2.34. Frontend::Admin

2.34.1. Events###Package

Description:	List of all Package events to be displayed in the GUI.
Group:	Framework
SubGroup:	Frontend::Admin
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Events'}->{'Package'} = ['PackageInstall', 'PackageReinstall', 'PackageUpgrade', 'PackageUninstall'];</code>

2.34.2. Events###CustomerUser

Description:	List of all CustomerUser events to be displayed in the GUI.
Group:	Framework

SubGroup:	Frontend::Admin
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Events'}->{'CustomerUser'} = ['CustomerUserAdd', 'CustomerUserUpdate'];</pre>

2.34.3. Events###CustomerCompany

Description:	List of all CustomerCompany events to be displayed in the GUI.
Group:	Framework
SubGroup:	Frontend::Admin
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Events'}->{'CustomerCompany'} = ['CustomerCompanyAdd', 'CustomerCompanyUpdate'];</pre>

2.35. Frontend::Admin::AdminCustomerUser

2.35.1. AdminCustomerUser::RunInitialWildcardSearch

Description:	Runs an initial wildcard search of the existing customer users when accessing the AdminCustomerUser module.
Group:	Framework
SubGroup:	Frontend::Admin::AdminCustomerUser
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'AdminCustomerUser::RunInitialWildcardSearch'} = '1';</pre>

2.36. Frontend::Admin::AdminSelectBox

2.36.1. AdminSelectBox::AllowDatabaseModification

Description:	Controls if the admin is allowed to make changes to the database via AdminSelectBox.
Group:	Framework
SubGroup:	Frontend::Admin::AdminSelectBox
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'AdminSelectBox::AllowDatabaseModification'} = '0';</pre>

2.37. Frontend::Admin::ModuleRegistration

2.37.1. Frontend::Module###Admin

Description:	Frontend module registration for the agent interface.
--------------	---

Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'Admin'} = { 'Description' => 'Admin-Area', 'Group' => ['admin'], 'Loader' => { 'CSS' => ['Core.Agent.Admin.css'], 'JavaScript' => ['Core.Agent.Admin.SysConfig.js'] }, 'NavBar' => [{ 'AccessKey' => 'a', 'Block' => 'ItemArea', 'Description' => '', 'Link' => 'Action=Admin', 'LinkOption' => '', 'Name' => 'Admin', 'NavBar' => 'Admin', 'Prio' => '10000', 'Type' => 'Menu' }], 'NavBarModule' => { 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin' }, 'NavBarName' => 'Admin', 'Title' => '' }; </pre>

2.37.2. Frontend::Module###AdminInit

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AdminInit'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarName' => '', 'Title' => 'Init' }; </pre>

2.37.3. Frontend::Module###AdminUser

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0

Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AdminUser'} = { 'Description' => 'Create and manage agents.', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Agent', 'Description' => 'Create and manage agents.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Agents', 'Prio' => '100' }, 'NavBarName' => 'Admin', 'Title' => 'Agents' }; </pre>
-----------------	--

2.37.4. Frontend::Module###AdminGroup

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AdminGroup'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Agent', 'Description' => 'Create and manage groups.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Groups', 'Prio' => '150' }, 'NavBarName' => 'Admin', 'Title' => 'Groups' }; </pre>

2.37.5. Frontend::Module###AdminUserGroup

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AdminUserGroup'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Agent', 'Description' => 'Link agents to groups.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Agents <-> Groups', 'Prio' => '200' }, 'NavBarName' => 'Admin', 'Title' => 'Agents <-> Groups' }; </pre>

2.37.6. Frontend::Module###AdminCustomerUser

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AdminCustomerUser'} = { 'Description' => 'Edit Customer Users', 'Group' => ['admin', 'users'], 'GroupRo' => [''], 'Loader' => { 'JavaScript' => ['Core.Agent.TicketAction.js'] }, 'NavBar' => [{ 'AccessKey' => '', 'Block' => 'ItemArea', 'Description' => 'Customer User Administration.', 'Link' => 'Action=AdminCustomerUser;Nav=Agent', 'LinkOption' => '', 'Name' => 'Customer User Administration', 'NavBar' => 'Customers', 'Prio' => '9000', 'Type' => '' }], 'NavBarModule' => { 'Block' => 'Customer', 'Description' => 'Create and manage customer users.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Customer User', 'Prio' => '300' }, 'NavBarName' => 'Customers', 'Title' => 'Customer Users' }; </pre>

2.37.7. Frontend::Module###AdminCustomerCompany

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AdminCustomerCompany'} = { 'Description' => 'Admin', 'Group' => ['admin', 'users'], 'GroupRo' => [''], 'NavBar' => [{ </pre>

	<pre> 'AccessKey' => '', 'Block' => 'ItemArea', 'Description' => 'Customer Company Administration.', 'Link' => 'Action=AdminCustomerCompany;Nav=Agent', 'LinkOption' => '', 'Name' => 'Customer Company Administration', 'NavBar' => 'Customers', 'Prio' => '9100', 'Type' => '' }], 'NavBarModule' => { 'Block' => 'Customer', 'Description' => 'Create and manage customers.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Customers', 'Prio' => '310' }, 'NavBarName' => 'Admin', 'Title' => 'Customer Companies' }; </pre>
--	--

2.37.8. Frontend::Module###AdminCustomerUserGroup

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'Frontend::Module'}->{'AdminCustomerUserGroup'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Customer', 'Description' => 'Link customer user to groups.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Customer User <-> Groups', 'Prio' => '400' }, 'NavBarName' => 'Admin', 'Title' => 'Customers <-> Groups' }; </pre>

2.37.9. Frontend::Module###AdminCustomerUserService

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'Frontend::Module'}->{'AdminCustomerUserService'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Customer', </pre>

	<pre>'Description' => 'Link customer user to services.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Customer User <-> Services', 'Prio' => '500' }, 'NavBarName' => 'Admin', 'Title' => 'Customer User <-> Services' };</pre>
--	--

2.37.10. Frontend::Module###AdminRole

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminRole'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Agent', 'Description' => 'Create and manage roles.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Roles', 'Prio' => '600' }, 'NavBarName' => 'Admin', 'Title' => 'Roles' };</pre>

2.37.11. Frontend::Module###AdminRoleUser

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminRoleUser'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Agent', 'Description' => 'Link agents to roles.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Agents <-> Roles', 'Prio' => '700' }, 'NavBarName' => 'Admin', 'Title' => 'Agents <-> Roles' };</pre>

2.37.12. Frontend::Module###AdminRoleGroup

Description:	Frontend module registration for the agent interface.
Group:	Framework

SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminRoleGroup'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Agent', 'Description' => 'Link roles to groups.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Roles <-> Groups', 'Prio' => '800' }, 'NavBarName' => 'Admin', 'Title' => 'Roles <-> Groups' };</pre>

2.37.13. Frontend::Module###AdminSMIME

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminSMIME'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Email', 'Description' => 'Manage S/MIME certificates for email encryption.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'S/MIME Certificates', 'Prio' => '1100' }, 'NavBarName' => 'Admin', 'Title' => 'S/MIME Management' };</pre>

2.37.14. Frontend::Module###AdminPGP

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminPGP'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Email', 'Description' => 'Manage PGP keys for email encryption.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'PGP Keys', }, };</pre>

```
'Prio' => '1200'
},
'NavBarName' => 'Admin',
'Title' => 'PGP Key Management'
};
```

2.37.15. Frontend::Module###AdminMailAccount

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminMailAccount'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Email', 'Description' => 'Manage POP3 or IMAP accounts to fetch email from.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'PostMaster Mail Accounts', 'Prio' => '100' }, 'NavBarName' => 'Admin', 'Title' => 'Mail Accounts' };</pre>

2.37.16. Frontend::Module###AdminPostMasterFilter

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminPostMasterFilter'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Email', 'Description' => 'Filter incoming emails.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'PostMaster Filters', 'Prio' => '200' }, 'NavBarName' => 'Admin', 'Title' => 'PostMaster Filters' };</pre>

2.37.17. Frontend::Module###AdminEmail

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration

Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminEmail'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'System', 'Description' => 'Send notifications to users.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Admin Notification', 'Prio' => '400' }, 'NavBarName' => 'Admin', 'Title' => 'Admin Notification' };</pre>

2.37.18. Frontend::Module###AdminSession

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminSession'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'System', 'Description' => 'Manage existing sessions.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Session Management', 'Prio' => '500' }, 'NavBarName' => 'Admin', 'Title' => 'Session Management' };</pre>

2.37.19. Frontend::Module###AdminPerformanceLog

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminPerformanceLog'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Loader' => { 'CSS' => ['Core.Agent.Admin.PerformanceLog.css'] }, 'NavBarModule' => { 'Block' => 'System',</pre>

	<pre>'Description' => 'View performance benchmark results.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Performance Log', 'Prio' => '550' }, 'NavBarName' => 'Admin', 'Title' => 'Performance Log' };</pre>
--	--

2.37.20. Frontend::Module###AdminRegistration

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminRegistration'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Loader' => { 'CSS' => ['Core.Agent.Admin.Registration.css'] }, 'NavBarModule' => { 'Block' => 'System', 'Description' => 'Manage system registration.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'System Registration', 'Prio' => '350' }, 'NavBarName' => 'Admin', 'Title' => 'System Registration' };</pre>

2.37.21. Frontend::Module###AdminServiceCenter

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminServiceCenter'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Loader' => { 'CSS' => ['Core.Agent.Admin.ServiceCenter.css'] }, 'NavBarModule' => { 'Block' => 'System', 'Description' => 'Manage OTRS Group services.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Service Center', 'Prio' => '351' }, 'NavBarName' => 'Admin', };</pre>

	<pre>'Title' => 'Service Center' };</pre>
--	--

2.37.22. Frontend::Module###AdminLog

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminLog'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'System', 'Description' => 'View system log messages.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'System Log', 'Prio' => '600' }, 'NavBarName' => 'Admin', 'Title' => 'System Log' };</pre>

2.37.23. Frontend::Module###AdminSelectBox

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminSelectBox'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'System', 'Description' => 'Execute SQL statements.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'SQL Box', 'Prio' => '700' }, 'NavBarName' => 'Admin', 'Title' => 'SQL Box' };</pre>

2.37.24. Frontend::Module###AdminPackageManager

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminPackageManager'} = {</pre>

```
'Description' => 'Software Package Manager',
'Group' => [
  'admin'
],
'NavBarModule' => {
  'Block' => 'System',
  'Description' => 'Update and extend your system with software
packages.',
  'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin',
  'Name' => 'Package Manager',
  'Prio' => '1000'
},
'NavBarName' => 'Admin',
'Title' => 'Package Manager'
};
```

2.38. Frontend::Agent

2.38.1. AgentLogo

Description:	The logo shown in the header of the agent interface. The URL to the image can be a relative URL to the skin image directory, or a full URL to a remote web server.
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'AgentLogo'} = { 'StyleHeight' => '67px', 'StyleRight' => '38px', 'StyleTop' => '-4px', 'StyleWidth' => '244px', 'URL' => 'skins/Agent/default/img/logo_bg.png' };</pre>

2.38.2. AgentLoginLogo

Description:	The logo shown on top of the login box of the agent interface. The URL to the image must be relative URL to the skin image directory.
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'AgentLoginLogo'} = { 'StyleHeight' => '100px', 'URL' => 'skins/Agent/default/img/loginlogo_default.png' };</pre>

2.38.3. LoginURL

Description:	Defines an alternate URL, where the login link refers to.
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	0
Required:	0

Config-Setting:	<code>\$Self->{'LoginURL'} = 'http://host.example.com/login.html';</code>
-----------------	--

2.38.4. LogoutURL

Description:	Defines an alternate URL, where the logout link refers to.
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'LogoutURL'} = 'http://host.example.com/thanks-for-using-otrs.html';</code>

2.38.5. PreApplicationModule###AgentInfo

Description:	Defines a useful module to load specific user options or to display news.
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'PreApplicationModule'}->{'AgentInfo'} = 'Kernel::Modules::AgentInfo';</code>

2.38.6. InfoKey

Description:	Defines the key to be checked with Kernel::Modules::AgentInfo module. If this user preferences key is true, the message is accepted by the system.
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'InfoKey'} = 'wpt22';</code>

2.38.7. InfoFile

Description:	File that is displayed in the Kernel::Modules::AgentInfo module, if located under Kernel/Output/HTML/Standard/AgentInfo.dtl.
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'InfoFile'} = 'AgentInfo';</code>

2.38.8. LostPassword

Description:	Activates lost password feature for agents, in the agent interface.
--------------	---

Group:	Framework
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'LostPassword'} = '1';</code>

2.38.9. ShowMotd

Description:	Shows the message of the day on login screen of the agent interface.
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'ShowMotd'} = '0';</code>

2.38.10. NotificationSubjectLostPasswordToken

Description:	Defines the subject for notification mails sent to agents, with token about new requested password.
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'NotificationSubjectLostPasswordToken'} = 'New OTRS password request';</code>

2.38.11. NotificationBodyLostPasswordToken

Description:	Defines the body text for notification mails sent to agents, with token about new requested password (after using this link the new password will be sent).
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<pre> \$Self->{'NotificationBodyLostPasswordToken'} = 'Hi <OTRS_USERFIRSTNAME>, You or someone impersonating you has requested to change your OTRS password. If you want to do this, click on the link below. You will receive another email containing the password. <OTRS_CONFIG_HttpType>://<OTRS_CONFIG_FQDN>/ <OTRS_CONFIG_ScriptAlias>index.pl? Action=LostPassword;Token=<OTRS_TOKEN> If you did not request a new password, please ignore this email. '; </pre>

2.38.12. NotificationSubjectLostPassword

Description:	Defines the subject for notification mails sent to agents, about new password.
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'NotificationSubjectLostPassword'} = 'New OTRS password';</code>

2.38.13. NotificationBodyLostPassword

Description:	Defines the body text for notification mails sent to agents, about new password (after using this link the new password will be sent).
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<pre> \$Self->{'NotificationBodyLostPassword'} = 'Hi <OTRS_USERFIRSTNAME>, Here\'s your new OTRS password. New password: <OTRS_NEWPW> You can log in via the following URL: <OTRS_CONFIG_ContentType>://<OTRS_CONFIG_FQDN>/ <OTRS_CONFIG_ScriptAlias>index.pl '; </pre>

2.38.14. OpenMainMenuOnHover

Description:	If enabled, the first level of the main menu opens on mouse hover (instead of click only).
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'OpenMainMenuOnHover'} = '0';</code>

2.38.15. FirstnameLastnameOrder

Description:	Specifies the order in which the firstname and the lastname of agents will be displayed.
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	1
Required:	1

Config-Setting:	<code>\$Self->{'FirstnameLastnameOrder'} = '0';</code>
-----------------	---

2.38.16. Loader::::Skin###000-default

Description:	Default skin for the agent interface.
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Loader::<agent>::Skin'}->{'000-default'} = { 'Description' => 'This is the default orange - black skin.', 'HomePage' => 'www.otrs.org', 'InternalName' => 'default', 'VisibleName' => 'Default' };</agent></code>

2.38.17. Loader::::Skin###001-slim

Description:	Default skin for the agent interface (slim version).
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Loader::<agent>::Skin'}->{'001-slim'} = { 'Description' => "Slim" skin which tries to save screen space for power users., 'HomePage' => 'www.otrs.org', 'InternalName' => 'slim', 'VisibleName' => 'Default (Slim)' };</agent></code>

2.38.18. Loader::::Skin###001-ivory

Description:	Balanced white skin by Felix Niklas.
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Loader::<agent>::Skin'}->{'001-ivory'} = { 'Description' => 'Balanced white skin by Felix Niklas.', 'HomePage' => 'www.felixniklas.de', 'InternalName' => 'ivory', 'VisibleName' => 'Ivory' };</agent></code>

2.38.19. Loader::::Skin###001-ivory-slim

Description:	Balanced white skin by Felix Niklas (slim version).
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	1
Required:	0

Config-Setting:	<pre>\$Self->{'Loader::Agent::Skin'}->{'001-ivory-slim'} = { 'Description' => 'Balanced white skin by Felix Niklas (slim version).', 'HomePage' => 'www.felixniklas.de', 'InternalName' => 'ivory-slim', 'VisibleName' => 'Ivory (Slim)' };</pre>
-----------------	---

2.38.20. Loader::Agent::DefaultSelectedSkin::Host-Based

Description:	It is possible to configure different skins, for example to distinguish between different agents, to be used on a per-domain basis within the application. Using a regular expression (regex), you can configure a Key/Content pair to match a domain. The value in "Key" should match the domain, and the value in "Content" should be a valid skin on your system. Please see the example entries for the proper form of the regex.
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Loader::Agent::DefaultSelectedSkin::HostBased'} = { 'host1\\.example\\.com' => 'SomeSkin1', 'host2\\.example\\.com' => 'SomeSkin2' };</pre>

2.38.21. AutoComplete::Agent###Default

Description:	Defines the config options for the autocompletion feature.
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'AutoComplete::Agent'}->{'Default'} = { 'AutoCompleteActive' => '1', 'ButtonText' => 'Search', 'MaxResultsDisplayed' => '20', 'MinQueryLength' => '2', 'QueryDelay' => '100' };</pre>

2.38.22. AutoComplete::Agent###CustomerSearch

Description:	Defines the config options for the autocompletion feature.
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'AutoComplete::Agent'}->{'CustomerSearch'} = { 'AutoCompleteActive' => '1', 'ButtonText' => 'Search Customer', 'MaxResultsDisplayed' => '20', 'MinQueryLength' => '2', 'QueryDelay' => '100' };</pre>

```
};
```

2.38.23. AutoComplete::Agent###UserSearch

Description:	Defines the config options for the autocompletion feature.
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'AutoComplete::Agent'}->{'UserSearch'} = { 'AutoCompleteActive' => '1', 'ButtonText' => 'Search User', 'MaxResultsDisplayed' => '20', 'MinQueryLength' => '2', 'QueryDelay' => '100' };</pre>

2.38.24. PossibleNextActions

Description:	Defines the list of possible next actions on an error screen.
Group:	Framework
SubGroup:	Frontend::Agent
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'PossibleNextActions'} = { 'Go to dashboard!' => '\$Env{"CGIHandle"}?Action=AgentDashboard' };</pre>

2.39. Frontend::Agent::Dashboard

2.39.1. AgentCustomerInformationCenter::Backend###0600-CIC-CustomerCompanyInformation

Description:	Parameters for the dashboard backend of the customer company information of the agent interface . "Group" is used to restrict the access to the plugin (e. g. Group: admin;group1;group2;). "Default" determines if the plugin is enabled by default or if the user needs to enable it manually. "CacheTTLLocal" is the cache time in minutes for the plugin.
Group:	Framework
SubGroup:	Frontend::Agent::Dashboard
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'AgentCustomerInformationCenter::Backend'}->{'0600-CIC-CustomerCompanyInformation'} = { 'Attributes' => '', 'Block' => 'ContentSmall', 'Default' => '1', 'Description' => 'Customer Company Information', 'Group' => '', 'Module' => 'Kernel::Output::HTML::DashboardCustomerCompanyInformation', 'Title' => 'Customer Company Information' };</pre>

2.39.2. DashboardBackend###0000-ProductNotify

Description:	Defines the parameters for the dashboard backend. "Group" is used to restrict access to the plugin (e. g. Group: admin;group1;group2;). "Default" indicates if the plugin is enabled by default or if the user needs to enable it manually. "CacheTTLLocal" defines the cache expiration period in minutes for the plugin.
Group:	Framework
SubGroup:	Frontend::Agent::Dashboard
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'DashboardBackend'}->{'0000-ProductNotify'} = { 'Block' => 'ContentLarge', 'CacheTTLLocal' => '1440', 'Default' => '1', 'Description' => 'News about OTRS releases!', 'Group' => 'admin', 'Module' => 'Kernel::Output::HTML::DashboardProductNotify', 'Title' => 'Product News', 'URL' => 'http://www.otrs.com/product.xml' }; </pre>

2.39.3. DashboardBackend###0390-UserOutOfOffice

Description:	Defines the parameters for the dashboard backend. "Limit" defines the number of entries displayed by default. "Group" is used to restrict access to the plugin (e. g. Group: admin;group1;group2;). "Default" indicates if the plugin is enabled by default or if the user needs to enable it manually. "CacheTTLLocal" defines the cache expiration period in minutes for the plugin.
Group:	Framework
SubGroup:	Frontend::Agent::Dashboard
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'DashboardBackend'}->{'0390-UserOutOfOffice'} = { 'Block' => 'ContentSmall', 'CacheTTLLocal' => '5', 'Default' => '1', 'Description' => '', 'Group' => '', 'IdleMinutes' => '60', 'Limit' => '10', 'Module' => 'Kernel::Output::HTML::DashboardUserOutOfOffice', 'SortBy' => 'UserFullname', 'Title' => 'Out Of Office' }; </pre>

2.39.4. DashboardBackend###0400-UserOnline

Description:	Defines the parameters for the dashboard backend. "Limit" defines the number of entries displayed by default. "Group" is used to restrict access to the plugin (e. g. Group: admin;group1;group2;). "Default" indicates if the plugin is enabled by default or if the user needs to enable it manually. "CacheTTLLocal" defines the cache expiration period in minutes for the plugin.
Group:	Framework

SubGroup:	Frontend::Agent::Dashboard
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'DashboardBackend'}->{'0400-UserOnline'} = { 'Block' => 'ContentSmall', 'CacheTTLLocal' => '5', 'Default' => '0', 'Description' => '', 'Filter' => 'Agent', 'Group' => '', 'IdleMinutes' => '60', 'Limit' => '10', 'Module' => 'Kernel::Output::HTML::DashboardUserOnline', 'ShowEmail' => '0', 'SortBy' => 'UserFullname', 'Title' => 'Online' }; </pre>

2.39.5. DashboardBackend###0410-RSS

Description:	Defines the parameters for the dashboard backend. "Limit" defines the number of entries displayed by default. "Group" is used to restrict access to the plugin (e. g. Group: admin;group1;group2;). "Default" indicates if the plugin is enabled by default or if the user needs to enable it manually. "CacheTTL" indicates the cache expiration period in minutes for the plugin.
Group:	Framework
SubGroup:	Frontend::Agent::Dashboard
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'DashboardBackend'}->{'0410-RSS'} = { 'Block' => 'ContentSmall', 'CacheTTL' => '360', 'Default' => '1', 'Description' => '', 'Group' => '', 'Limit' => '6', 'Module' => 'Kernel::Output::HTML::DashboardRSS', 'Title' => 'OTRS News', 'URL' => 'http://www.otrs.com/en/rss.xml', 'URL_de' => 'http://www.otrs.com/de/rss.xml', 'URL_es' => 'http://www.otrs.com/es/rss.xml', 'URL_nl' => 'http://www.otrs.com/nl/rss.xml', 'URL_ru' => 'http://www.otrs.com/ru/rss.xml', 'URL_zh' => 'http://www.otrs.com/cn/rss.xml' }; </pre>

2.39.6. DashboardBackend###0200-Image

Description:	Defines the parameters for the dashboard backend. "Group" is used to restrict access to the plugin (e. g. Group: admin;group1;group2;). "Default" indicates if the plugin is enabled by default or if the user needs to enable it manually. "CacheTTL" indicates the cache expiration period in minutes for the plugin.
Group:	Framework
SubGroup:	Frontend::Agent::Dashboard
Valid:	0
Required:	0

Config-Setting:	<pre> \$Self->{'DashboardBackend'}->{'0200-Image'} = { 'Block' => 'ContentLarge', 'Default' => '1', 'Description' => 'Some picture description!', 'Group' => '', 'Height' => '140', 'Link' => 'http://otrs.org/', 'LinkTitle' => 'http://otrs.org/', 'Module' => 'Kernel::Output::HTML::DashboardImage', 'Title' => 'A picture', 'URL' => 'http://www.otrs.com/uploads/pics/ jointhecommunity_02.jpg', 'Width' => '198' }; </pre>
-----------------	--

2.39.7. DashboardBackend###0210-MOTD

Description:	Shows the message of the day (MOTD) in the agent dashboard. "Group" is used to restrict access to the plugin (e. g. Group: admin;group1;group2;). "Default" indicates if the plugin is enabled by default or if the user needs to enable it manually.
Group:	Framework
SubGroup:	Frontend::Agent::Dashboard
Valid:	0
Required:	0
Config-Setting:	<pre> \$Self->{'DashboardBackend'}->{'0210-MOTD'} = { 'Block' => 'ContentLarge', 'Default' => '1', 'Group' => '', 'Module' => 'Kernel::Output::HTML::DashboardMOTD', 'Title' => 'Message of the Day' }; </pre>

2.39.8. DashboardBackend###0300-IFrame

Description:	Defines the parameters for the dashboard backend. "Group" is used to restrict access to the plugin (e. g. Group: admin;group1;group2;). "Default" indicates if the plugin is enabled by default or if the user needs to enable it manually. "CacheTTL" indicates the cache expiration period in minutes for the plugin.
Group:	Framework
SubGroup:	Frontend::Agent::Dashboard
Valid:	0
Required:	0
Config-Setting:	<pre> \$Self->{'DashboardBackend'}->{'0300-IFrame'} = { 'Align' => 'left', 'Block' => 'ContentLarge', 'Default' => '1', 'Description' => 'Some description!', 'Frameborder' => '1', 'Group' => '', 'Height' => '800', 'Link' => 'http://otrs.org/', 'LinkTitle' => 'OTRS.org/', 'Marginheight' => '5', 'Marginwidth' => '5', 'Module' => 'Kernel::Output::HTML::DashboardIFrame', 'Scrolling' => 'auto', 'Title' => 'A Website', 'URL' => 'http://www.otrs.org/', 'Width' => '1024' }; </pre>

```
};
```

2.39.9. AgentCustomerInformationCenter::Backend###0050-CIC-CustomerUserList

Description:	Parameters for the dashboard backend of the customer user list overview of the agent interface . "Limit" is the number of entries shown by default. "Group" is used to restrict the access to the plugin (e. g. Group: admin;group1;group2;). "Default" determines if the plugin is enabled by default or if the user needs to enable it manually. "CacheTTLLocal" is the cache time in minutes for the plugin.
Group:	Framework
SubGroup:	Frontend::Agent::Dashboard
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'AgentCustomerInformationCenter::Backend'}->{'0050-CIC-CustomerUserList'} = { 'Attributes' => '', 'Block' => 'ContentLarge', 'CacheTTLLocal' => '0.5', 'Default' => '1', 'Description' => 'All customer users of a CustomerID', 'Group' => '', 'Limit' => '10', 'Module' => 'Kernel::Output::HTML::DashboardCustomerUserList', 'Permission' => 'ro', 'Title' => 'Customer Users' };</pre>

2.40. Frontend::Agent::LinkObject

2.40.1. Frontend::AgentLinkObject::WildcardSearch

Description:	Starts a wildcard search of the active object after the link object mask is started.
Group:	Framework
SubGroup:	Frontend::Agent::LinkObject
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Frontend::AgentLinkObject::WildcardSearch'} = '0';</pre>

2.41. Frontend::Agent::ModuleMetaHead

2.41.1. Frontend::HeaderMetaModule###100-Refresh

Description:	Defines the module to generate html refresh headers of html sites.
Group:	Framework
SubGroup:	Frontend::Agent::ModuleMetaHead
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Frontend::HeaderMetaModule'}->{'100-Refresh'} = { 'Module' => 'Kernel::Output::HTML::HeaderMetaRefresh'</pre>

```
};
```

2.42. Frontend::Agent::ModuleNotify

2.42.1. Frontend::NotifyModule###200-UID-Check

Description:	Defines the module to display a notification in the agent interface, if the system is used by the admin user (normally you shouldn't work as admin).
Group:	Framework
SubGroup:	Frontend::Agent::ModuleNotify
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Frontend::NotifyModule'}->{'200-UID-Check'} = { 'Module' => 'Kernel::Output::HTML::NotificationUIDCheck' };</pre>

2.42.2. Frontend::NotifyModule###300-ShowAgentOnline

Description:	Defines the module that shows all the currently logged in agents in the agent interface.
Group:	Framework
SubGroup:	Frontend::Agent::ModuleNotify
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::NotifyModule'}->{'300-ShowAgentOnline'} = { 'IdleMinutes' => '60', 'Module' => 'Kernel::Output::HTML::NotificationAgentOnline', 'ShowEmail' => '1' };</pre>

2.42.3. Frontend::NotifyModule###400-ShowCustomerOnline

Description:	Defines the module that shows all the currently logged in customers in the agent interface.
Group:	Framework
SubGroup:	Frontend::Agent::ModuleNotify
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::NotifyModule'}->{'400-ShowCustomerOnline'} = { 'IdleMinutes' => '60', 'Module' => 'Kernel::Output::HTML::NotificationCustomerOnline', 'ShowEmail' => '1' };</pre>

2.42.4. Frontend::NotifyModule###500-OutofOffice-Check

Description:	Defines the module to display a notification in the agent interface, if the agent is logged in while having out-of-office active.
--------------	---

Group:	Framework
SubGroup:	Frontend::Agent::ModuleNotify
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Frontend::NotifyModule'}->{'500-OutofOffice-Check'} = { 'Module' => 'Kernel::Output::HTML::NotificationOutofOfficeCheck' };</pre>

2.42.5. Frontend::NotifyModule###900-Generic

Description:	Defines the module that shows a generic notification in the agent interface. Either "Text" - if configured - or the contents of "File" will be displayed.
Group:	Framework
SubGroup:	Frontend::Agent::ModuleNotify
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::NotifyModule'}->{'900-Generic'} = { 'File' => '<OTRS_CONFIG_Home>/var/notify.txt', 'Link' => 'http://www.otrs.com', 'Module' => 'Kernel::Output::HTML::NotificationGeneric', 'Priority' => 'Warning', 'Text' => 'The OTRS Website' };</pre>

2.43. Frontend::Agent::ModuleRegistration

2.43.1. Frontend::Module###Logout

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'Logout'} = { 'Description' => 'Logout', 'NavBarName' => '', 'Title' => '' };</pre>

2.43.2. Frontend::Module###AgentDashboard

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentDashboard'} = { 'Description' => 'Agent Dashboard', 'Loader' => { 'CSS' => ['Core.Agent.Dashboard.css',] } };</pre>


```

'Core.AllocationList.css',
'thirdparty/fullcalendar-1.6.1/fullcalendar.css',
'thirdparty/d3js/nv.d3.css'
],
'JavaScript' => [
'thirdparty/flot-0.8.1/excanvas.js',
'thirdparty/flot-0.8.1/jquery.flot.js',
'thirdparty/fullcalendar-1.6.1/fullcalendar.min.js',
'thirdparty/d3js/d3.v3.min.js',
'thirdparty/d3js/nv.d3.min.js',
'thirdparty/d3js/models/OTRSmultiBarChart.js',
'thirdparty/d3js/models/OTRSstackedAreaChart.js',
'Core.UI.Chart.js',
'Core.UI.AdvancedChart.js',
'Core.UI.DnD.js',
'Core.UI.AllocationList.js',
'Core.Agent.TableFilters.js',
'Core.Agent.Dashboard.js'
]
},
'NavBar' => [
{
'AccessKey' => 'd',
'Block' => 'ItemArea',
'Description' => '',
'Link' => 'Action=AgentDashboard',
'LinkOption' => '',
'Name' => 'Dashboard',
'NavBar' => 'Dashboard',
'Prio' => '50',
'Type' => 'Menu'
}
],
'NavBarName' => 'Dashboard',
'Title' => ''
};

```

2.43.3. Frontend::Module###AgentCustomerInformationCenter

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'Frontend::Module'}->{'AgentCustomerInformationCenter'} = { 'Description' => 'Customer Information Center', 'Loader' => { 'CSS' => ['Core.AllocationList.css'] }, 'JavaScript' => ['thirdparty/flot-0.8.1/excanvas.js', 'thirdparty/flot-0.8.1/jquery.flot.js', 'Core.UI.Chart.js', 'Core.UI.DnD.js', 'Core.UI.AllocationList.js', 'Core.Agent.Dashboard.js', 'Core.Agent.TableFilters.js'] }, 'NavBar' => [{ 'AccessKey' => '', 'Block' => 'ItemArea', 'Description' => 'Customer Information Center.', </pre>

```

    'Link' => 'Action=AgentCustomerInformationCenter',
    'LinkOption' => 'onclick="window.setTimeout(function()
{Core.Agent.CustomerInformationCenterSearch.OpenSearchDialog();},
0); return false;"',
    'Name' => 'Customer Information Center',
    'NavBar' => 'Customers',
    'Prio' => '50',
    'Type' => ''
  },
  {
    'AccessKey' => 'c',
    'Block' => 'ItemArea',
    'Description' => 'Customer Information Center.',
    'Link' => 'Action=AgentCustomerInformationCenter',
    'LinkOption' => '',
    'Name' => 'Customers',
    'NavBar' => 'Customers',
    'Prio' => '60',
    'Type' => 'Menu'
  }
],
'NavBarName' => 'Customer Information Center',
'Title' => ''
};

```

2.43.4. Frontend::Module###AgentCustomerInformationCenterSearch

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'Frontend::Module'}-> {'AgentCustomerInformationCenterSearch'} = { 'Description' => 'Customer Information Center Search', 'Title' => '' }; </pre>

2.43.5. Frontend::Module###AgentPreferences

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'Frontend::Module'}->{'AgentPreferences'} = { 'Description' => 'Agent Preferences', 'NavBarName' => 'Preferences', 'Title' => '' }; </pre>

2.43.6. Frontend::Module###PictureUpload

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1

Required:	1
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'PictureUpload'} = { 'Description' => 'Picture upload module', 'NavBarName' => 'Ticket', 'Title' => 'Picture-Upload' };</pre>

2.43.7. Frontend::Module###AgentSpelling

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentSpelling'} = { 'Description' => 'Spell checker', 'Loader' => { 'JavaScript' => ['Core.Agent.TicketAction.js'] }, 'NavBarName' => '', 'Title' => 'Spell Checker' };</pre>

2.43.8. Frontend::Module###SpellingInline

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'SpellingInline'} = { 'Description' => 'Spell checker', 'NavBarName' => '', 'Title' => 'Spell Checker' };</pre>

2.43.9. Frontend::Module###AgentBook

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentBook'} = { 'Description' => 'Address book of CustomerUser sources', 'Loader' => { 'JavaScript' => ['Core.Agent.CustomerSearch.js', 'Core.Agent.TicketAction.js'] }, 'NavBarName' => '', 'Title' => 'Address Book' };</pre>

2.43.10. Frontend::Module###AgentLinkObject

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentLinkObject'} = { 'Description' => 'Link Object', 'NavBarName' => '', 'Title' => 'Link Object' };</pre>

2.43.11. Frontend::Module###AgentInfo

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentInfo'} = { 'Description' => 'Generic Info module', 'NavBarName' => '', 'Title' => 'Info' };</pre>

2.43.12. Frontend::Module###AgentSearch

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentSearch'} = { 'Description' => 'Global Search Module', 'NavBarName' => '', 'Title' => 'Search' };</pre>

2.43.13. CustomerFrontend::Module###SpellingInline

Description:	Frontend module registration for the customer interface.
Group:	Framework
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerFrontend::Module'}->{'SpellingInline'} = { 'Description' => 'Spell checker', 'NavBarName' => '', 'Title' => 'Spell Checker' };</pre>

2.43.14. Frontend::Module###AgentHTMLReference

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentHTMLReference'} = { 'Description' => 'HTML Reference', 'Group' => ['users'], 'GroupRo' => ['users'], 'Loader' => { 'CSS' => ['Core.Agent.HTMLReference.css'] }, 'NavBarName' => '', 'Title' => 'HTML Reference' };</pre>

2.43.15. Frontend::Module###AgentStats

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentStats'} = { 'Description' => 'Stats', 'Group' => ['stats'], 'GroupRo' => ['stats'], 'Loader' => { 'JavaScript' => ['Core.Agent.Stats.js'] }, 'NavBar' => [{ 'AccessKey' => '', 'Block' => 'ItemArea', 'Description' => '', 'Link' => 'Action=AgentStats;Subaction=0overview', 'LinkOption' => '', 'Name' => 'Statistics', 'NavBar' => 'Stats', 'Prio' => '8500', 'Type' => 'Menu' }, { 'AccessKey' => '', 'Block' => '', 'Description' => '0overview', 'GroupRo' => ['stats'],]], };</pre>

```

'Link' => 'Action=AgentStats;Subaction=Overview',
'LinkOption' => '',
'Name' => 'Overview',
'NavBar' => 'Stats',
'Prio' => '100',
'Type' => ''
},
{
'AccessKey' => '',
'Block' => '',
'Description' => 'New',
'Group' => [
'stats'
],
'Link' => 'Action=AgentStats;Subaction=Add',
'LinkOption' => '',
'Name' => 'New',
'NavBar' => 'Stats',
'Prio' => '200',
'Type' => ''
},
{
'AccessKey' => '',
'Block' => '',
'Description' => 'Import',
'Group' => [
'stats'
],
'Link' => 'Action=AgentStats;Subaction=Import',
'LinkOption' => '',
'Name' => 'Import',
'NavBar' => 'Stats',
'Prio' => '300',
'Type' => ''
}
],
'NavBarName' => 'Stats',
'Title' => 'Stats'
};

```

2.44. Frontend::Agent::NavBarModule

2.44.1. Frontend::NavBarModule###6-CustomerCompany

Description:	Frontend module registration (disable company link if no company feature is used).
Group:	Framework
SubGroup:	Frontend::Agent::NavBarModule
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::NavBarModule'}->{'6-CustomerCompany'} = { 'Module' => 'Kernel::Output::HTML::NavBarCustomerCompany' };</pre>

2.45. Frontend::Agent::Preferences

2.45.1. PreferencesTableValue

Description:	Defines the name of the column to store the data in the preferences table.
--------------	--

Group:	Framework
SubGroup:	Frontend::Agent::Preferences
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PreferencesTableValue'} = 'preferences_value';</code>

2.45.2. PreferencesTableUserID

Description:	Defines the name of the column to store the user identifier in the preferences table.
Group:	Framework
SubGroup:	Frontend::Agent::Preferences
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PreferencesTableUserID'} = 'user_id';</code>

2.45.3. PreferencesView

Description:	Sets the display order of the different items in the preferences view.
Group:	Framework
SubGroup:	Frontend::Agent::Preferences
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PreferencesView'} = ['User Profile', 'Email Settings', 'Other Settings'];</code>

2.45.4. PreferencesGroups###Password

Description:	Defines the config parameters of this item, to be shown in the preferences view.
Group:	Framework
SubGroup:	Frontend::Agent::Preferences
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'PreferencesGroups'}->{'Password'} = { 'Active' => '1', 'Area' => 'Agent', 'Column' => 'User Profile', 'Label' => 'Change password', 'Module' => 'Kernel::Output::HTML::PreferencesPassword', 'PasswordMaxLoginFailed' => '0', 'PasswordMin2Characters' => '0', 'PasswordMin2Lower2UpperCharacters' => '0', 'PasswordMinSize' => '0', 'PasswordNeedDigit' => '0', 'PasswordRegExp' => '', 'Prio' => '0500' };</code>

2.45.5. PreferencesGroups###SpellDict

Description:	Defines the config parameters of this item, to be shown in the preferences view. Take care to maintain the dictionaries installed in the system in the data section.
Group:	Framework
SubGroup:	Frontend::Agent::Preferences
Valid:	0
Required:	0
Config-Setting:	<pre> \$self->{'PreferencesGroups'}->{'SpellDict'} = { 'Active' => '1', 'Column' => 'User Profile', 'Data' => { 'deutsch' => 'Deutsch', 'english' => 'English' }, 'DataSelected' => 'english', 'Key' => 'Default spelling dictionary', 'Label' => 'Spelling Dictionary', 'Module' => 'Kernel::Output::HTML::PreferencesGeneric', 'PrefKey' => 'UserSpellDict', 'Prio' => '2000' }; </pre>

2.45.6. PreferencesGroups###Comment

Description:	Defines the config parameters of this item, to be shown in the preferences view.
Group:	Framework
SubGroup:	Frontend::Agent::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'PreferencesGroups'}->{'Comment'} = { 'Active' => '0', 'Block' => 'Input', 'Column' => 'Other Settings', 'Data' => '\$Env{"UserComment"}', 'Key' => 'Comment', 'Label' => 'Comment', 'Module' => 'Kernel::Output::HTML::PreferencesGeneric', 'PrefKey' => 'UserComment', 'Prio' => '6000' }; </pre>

2.45.7. PreferencesGroups###Language

Description:	Defines the config parameters of this item, to be shown in the preferences view.
Group:	Framework
SubGroup:	Frontend::Agent::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'PreferencesGroups'}->{'Language'} = { 'Active' => '1', 'Column' => 'User Profile', 'Key' => 'Frontend language', 'Label' => 'Language', }; </pre>

	<pre>'Module' => 'Kernel::Output::HTML::PreferencesLanguage', 'PrefKey' => 'UserLanguage', 'Prio' => '1000' };</pre>
--	---

2.45.8. PreferencesGroups###Skin

Description:	Defines the config parameters of this item, to be shown in the preferences view.
Group:	Framework
SubGroup:	Frontend::Agent::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'PreferencesGroups'}->{'Skin'} = { 'Active' => '1', 'Column' => 'User Profile', 'Key' => 'Wear this frontend skin', 'Label' => 'Skin', 'Module' => 'Kernel::Output::HTML::PreferencesSkin', 'PrefKey' => 'UserSkin', 'Prio' => '2000' };</pre>

2.45.9. PreferencesGroups###Theme

Description:	Defines the config parameters of this item, to be shown in the preferences view.
Group:	Framework
SubGroup:	Frontend::Agent::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'PreferencesGroups'}->{'Theme'} = { 'Active' => '1', 'Column' => 'User Profile', 'Key' => 'Frontend theme', 'Label' => 'Theme', 'Module' => 'Kernel::Output::HTML::PreferencesTheme', 'PrefKey' => 'UserTheme', 'Prio' => '3000' };</pre>

2.45.10. PreferencesGroups###OutOfOffice

Description:	Defines the config parameters of this item, to be shown in the preferences view.
Group:	Framework
SubGroup:	Frontend::Agent::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'PreferencesGroups'}->{'OutOfOffice'} = { 'Active' => '1', 'Block' => 'OutOfOffice', 'Column' => 'User Profile', 'Key' => '', 'Label' => 'Out Of Office Time', 'Module' => 'Kernel::Output::HTML::PreferencesOutOfOffice', 'PrefKey' => 'UserOutOfOffice', };</pre>

	'Prio' => '4000' };
--	------------------------

2.45.11. PreferencesGroups###TimeZone

Description:	Defines the config parameters of this item, to be shown in the preferences view.
Group:	Framework
SubGroup:	Frontend::Agent::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'PreferencesGroups'}->{'TimeZone'} = { 'Active' => '1', 'Column' => 'User Profile', 'Key' => 'Time Zone', 'Label' => 'Time Zone', 'Module' => 'Kernel::Output::HTML::PreferencesTimeZone', 'PrefKey' => 'UserTimeZone', 'Prio' => '5000' };</pre>

2.45.12. PreferencesGroups###CSVSeparator

Description:	Gives end users the possibility to override the separator character for CSV files, defined in the translation files.
Group:	Framework
SubGroup:	Frontend::Agent::Preferences
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'PreferencesGroups'}->{'CSVSeparator'} = { 'Active' => '1', 'Column' => 'Other Settings', 'Data' => { ' ' => ' ', ':' => ':', ';' => ';', '\\t' => 'tab', ' ' => ' ' }, 'DataSelected' => '0', 'Desc' => 'Select the separator character used in CSV files (stats and searches). If you don\'t select a separator here, the default separator for your language will be used.', 'Key' => 'CSV Separator', 'Label' => 'CSV Separator', 'Module' => 'Kernel::Output::HTML::PreferencesGeneric', 'PrefKey' => 'UserCSVSeparator', 'Prio' => '4000' };</pre>

2.46. Frontend::Agent::SearchRouter

2.46.1. Frontend::SearchDefault

Description:	Search backend default router.
Group:	Framework
SubGroup:	Frontend::Agent::SearchRouter

Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Frontend::SearchDefault'} = 'Action=AgentTicketSearch;Subaction=AJAX';</code>

2.47. Frontend::Agent::Stats

2.47.1. Stats::SearchPageShown

Description:	Defines the default maximum number of search results shown on the overview page.
Group:	Framework
SubGroup:	Frontend::Agent::Stats
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::SearchPageShown'} = '20';</code>

2.47.2. Stats::DefaultSelectedDynamicObject

Description:	Defines the default selection at the drop down menu for dynamic objects (Form: Common Specification).
Group:	Framework
SubGroup:	Frontend::Agent::Stats
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::DefaultSelectedDynamicObject'} = 'Ticket';</code>

2.47.3. Stats::DefaultSelectedPermissions

Description:	Defines the default selection at the drop down menu for permissions (Form: Common Specification).
Group:	Framework
SubGroup:	Frontend::Agent::Stats
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::DefaultSelectedPermissions'} = ['stats'];</code>

2.47.4. Stats::DefaultSelectedFormat

Description:	Defines the default selection at the drop down menu for stats format (Form: Common Specification). Please insert the format key (see Stats::Format).
Group:	Framework
SubGroup:	Frontend::Agent::Stats
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::DefaultSelectedFormat'} = [</code>

	<pre>'Print', 'CSV'];</pre>
--	------------------------------

2.47.5. Stats::SearchLimit

Description:	Defines the search limit for the stats.
Group:	Framework
SubGroup:	Frontend::Agent::Stats
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::SearchLimit'} = '500';</code>

2.47.6. Stats::Format

Description:	Defines all the possible stats output formats.
Group:	Framework
SubGroup:	Frontend::Agent::Stats
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Stats::Format'} = { 'CSV' => 'CSV', 'GD::Graph::area' => 'graph-area', 'GD::Graph::bars' => 'graph-bars', 'GD::Graph::hbars' => 'graph-hbars', 'GD::Graph::lines' => 'graph-lines', 'GD::Graph::linespoints' => 'graph-lines-points', 'GD::Graph::pie' => 'graph-pie', 'GD::Graph::points' => 'graph-points', 'Print' => 'Print' };</pre>

2.47.7. Stats::GraphSize

Description:	Sets the size of the statistic graph.
Group:	Framework
SubGroup:	Frontend::Agent::Stats
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Stats::GraphSize'} = { '1200x800' => '1200x800', '1600x1200' => '1600x1200', '800x600' => '800x600' };</pre>

2.47.8. Stats::TimeType

Description:	Sets the time type which should be shown.
Group:	Framework
SubGroup:	Frontend::Agent::Stats
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Stats::TimeType'} = 'Extended';</code>

2.47.9. Stats::ExchangeAxis

Description:	Allows agents to exchange the axis of a stat if they generate one.
Group:	Framework
SubGroup:	Frontend::Agent::Stats
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Stats::ExchangeAxis'} = '0';</code>

2.47.10. Stats::UseAgentElementInStats

Description:	Allows agents to generate individual-related stats.
Group:	Framework
SubGroup:	Frontend::Agent::Stats
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Stats::UseAgentElementInStats'} = '0';</code>

2.47.11. Stats::UseInvalidAgentInStats

Description:	Allows invalid agents to generate individual-related stats.
Group:	Framework
SubGroup:	Frontend::Agent::Stats
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Stats::UseInvalidAgentInStats'} = '1';</code>

2.47.12. Stats::CustomerIDAsMultiSelect

Description:	Shows all the customer identifiers in a multi-select field (not useful if you have a lot of customer identifiers).
Group:	Framework
SubGroup:	Frontend::Agent::Stats
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Stats::CustomerIDAsMultiSelect'} = '1';</code>

2.48. Frontend::Customer

2.48.1. CustomerHeadline

Description:	The headline shown in the customer interface.
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CustomerHeadline'} = 'Example Company Support';</code>

2.48.2. CustomerLogo

Description:	The logo shown in the header of the customer interface. The URL to the image can be a relative URL to the skin image directory, or a full URL to a remote web server.
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerLogo'} = { 'StyleHeight' => '50px', 'StyleRight' => '25px', 'StyleTop' => '2px', 'StyleWidth' => '135px', 'URL' => 'skins/Customer/default/img/logo.png' };</pre>

2.48.3. CustomerPanelUserID

Description:	Defines the user identifier for the customer panel.
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'CustomerPanelUserID'} = '1';</pre>

2.48.4. CustomerGroupSupport

Description:	Activates support for customer groups.
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'CustomerGroupSupport'} = '0';</pre>

2.48.5. CustomerGroupAlwaysGroups

Description:	Defines the groups every customer user will be in (if CustomerGroupSupport is enabled and you don't want to manage every user for these groups).
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'CustomerGroupAlwaysGroups'} = ['users'];</pre>

2.48.6. CustomerPanelLoginURL

Description:	Defines an alternate login URL for the customer panel..
--------------	---

Group:	Framework
SubGroup:	Frontend::Customer
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'CustomerPanelLoginURL'} = 'http://host.example.com/cgi-bin/login.pl';</code>

2.48.7. CustomerPanelLogoutURL

Description:	Defines an alternate logout URL for the customer panel.
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'CustomerPanelLogoutURL'} = 'http://host.example.com/cgi-bin/login.pl';</code>

2.48.8. Frontend::CustomerUser::Item###1-GoogleMaps

Description:	Defines a customer item, which generates a google maps icon at the end of a customer info block.
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Frontend::CustomerUser::Item'}->{'1-GoogleMaps'} = { 'Attributes' => 'UserStreet;UserCity;UserCountry;', 'CSS' => 'Core.Agent.CustomerUser.GoogleMaps.css', 'CSSClass' => 'GoogleMaps', 'Module' => 'Kernel::Output::HTML::CustomerUserGeneric', 'Required' => 'UserStreet;UserCity;', 'Target' => '_blank', 'Text' => 'Location', 'URL' => 'http://maps.google.com/maps?z=7&q=' };</code>

2.48.9. Frontend::CustomerUser::Item###2-Google

Description:	Defines a customer item, which generates a google icon at the end of a customer info block.
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Frontend::CustomerUser::Item'}->{'2-Google'} = { 'Attributes' => 'UserFirstname;UserLastname;', 'CSS' => 'Core.Agent.CustomerUser.Google.css', 'CSSClass' => 'Google', 'Module' => 'Kernel::Output::HTML::CustomerUserGeneric', 'Required' => 'UserFirstname;UserLastname;', 'Target' => '_blank', };</code>

	<pre>'Text' => 'Google', 'URL' => 'http://google.com/search?q=' };</pre>
--	--

2.48.10. Frontend::CustomerUser::Item###2-LinkedIn

Description:	Defines a customer item, which generates a LinkedIn icon at the end of a customer info block.
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::CustomerUser::Item'}->{'2-LinkedIn'} = { 'Attributes' => 'UserFirstname;UserLastname;', 'CSS' => 'Core.Agent.CustomerUser.Linkedin.css', 'CSSClass' => 'LinkedIn', 'Module' => 'Kernel::Output::HTML::CustomerUserGeneric', 'Required' => 'UserFirstname;UserLastname;', 'Target' => '_blank', 'Text' => 'LinkedIn', 'URL' => 'http://www.linkedin.com/commonSearch? type=people&keywords=' };</pre>

2.48.11. Frontend::CustomerUser::Item###3-XING

Description:	Defines a customer item, which generates a XING icon at the end of a customer info block.
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::CustomerUser::Item'}->{'3-XING'} = { 'Attributes' => 'UserFirstname;UserLastname;', 'CSS' => 'Core.Agent.CustomerUser.Xing.css', 'CSSClass' => 'Xing', 'Module' => 'Kernel::Output::HTML::CustomerUserGeneric', 'Required' => 'UserFirstname;UserLastname;', 'Target' => '_blank', 'Text' => 'XING', 'URL' => 'https://www.xing.com/app/search?op=search;keywords=' };</pre>

2.48.12. CustomerPanelPreApplicationModule###CustomerAccept

Description:	This module and its PreRun() function will be executed, if defined, for every request. This module is useful to check some user options or to display news about new applications.
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerPanelPreApplicationModule'}->{'CustomerAccept'} = 'Kernel::Modules::CustomerAccept';</pre>

2.48.13. CustomerPanel::InfoKey

Description:	Defines the key to check with CustomerAccept. If this user preferences key is true, then the message is accepted by the system.
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'CustomerPanel::InfoKey'} = 'CustomerAccept1';</code>

2.48.14. CustomerPanel::InfoFile

Description:	Defines the path of the shown info file, that is located under Kernel/Output/HTML/Standard/CustomerAccept.dtl.
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'CustomerPanel::InfoFile'} = 'CustomerAccept';</code>

2.48.15. CustomerPanelLostPassword

Description:	Activates lost password feature for customers.
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CustomerPanelLostPassword'} = '1';</code>

2.48.16. CustomerPanelCreateAccount

Description:	Enables customers to create their own accounts.
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CustomerPanelCreateAccount'} = '1';</code>

2.48.17. CustomerPanelSubjectLostPasswordToken

Description:	Defines the subject for notification mails sent to customers, with token about new requested password.
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	1
Required:	1

Config-Setting:	<code>\$Self->{'CustomerPanelSubjectLostPasswordToken'} = 'New OTRS password request';</code>
-----------------	--

2.48.18. CustomerPanelBodyLostPasswordToken

Description:	Defines the body text for notification mails sent to customers, with token about new requested password (after using this link the new password will be sent).
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	1
Required:	1
Config-Setting:	<pre> \$Self->{'CustomerPanelBodyLostPasswordToken'} = 'Hi <OTRS_USERFIRSTNAME>, You or someone impersonating you has requested to change your OTRS password. If you want to do this, click on this link. You will receive another email containing the password. <OTRS_CONFIG_ContentType>://<OTRS_CONFIG_FQDN>/ <OTRS_CONFIG_ScriptAlias>customer.pl? Action=CustomerLostPassword;Token=<OTRS_TOKEN> If you did not request a new password, please ignore this email. '; </pre>

2.48.19. CustomerPanelSubjectLostPassword

Description:	Defines the subject for notification mails sent to customers, about new password.
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CustomerPanelSubjectLostPassword'} = 'New OTRS password';</code>

2.48.20. CustomerPanelBodyLostPassword

Description:	Defines the body text for notification mails sent to customers, about new password (after using this link the new password will be sent).
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	1
Required:	1
Config-Setting:	<pre> \$Self->{'CustomerPanelBodyLostPassword'} = 'Hi <OTRS_USERFIRSTNAME>, New password: <OTRS_NEWPW> <OTRS_CONFIG_ContentType>://<OTRS_CONFIG_FQDN>/ <OTRS_CONFIG_ScriptAlias>customer.pl '; </pre>

2.48.21. CustomerPanelSubjectNewAccount

Description:	Defines the subject for notification mails sent to customers, about new account.
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CustomerPanelSubjectNewAccount'} = 'New OTRS Account!';</code>

2.48.22. CustomerPanelBodyNewAccount

Description:	Defines the body text for notification mails sent to customers, about new account.
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	1
Required:	1
Config-Setting:	<pre> \$Self->{'CustomerPanelBodyNewAccount'} = 'Hi <OTRS_USERFIRSTNAME>, You or someone impersonating you has created a new OTRS account for you. Full name: <OTRS_USERFIRSTNAME> <OTRS_USERLASTNAME> User name: <OTRS_USERLOGIN> Password : <OTRS_USERPASSWORD> You can log in via the following URL. We encourage you to change your password via the Preferences button after logging in. <OTRS_CONFIG_HttpType>://<OTRS_CONFIG_FQDN>/ <OTRS_CONFIG_ScriptAlias>customer.pl '; </pre>

2.48.23. Loader::Customer::Skin###000-default

Description:	Default skin for OTRS 3.0 interface.
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Loader::Customer::Skin'}->{'000-default'} = { 'Description' => 'This is the default orange - black skin for OTRS 3.0.', 'HomePage' => 'www.otrs.org', 'InternalName' => 'default', 'VisibleName' => 'Default' }; </pre>

2.48.24. Loader::Customer::SelectedSkin

Description:	The customer skin's InternalName which should be used in the customer interface. Please check the available skins in Frontend::Customer::Skins.
--------------	---

Group:	Framework
SubGroup:	Frontend::Customer
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Loader::Customer::SelectedSkin'} = 'default';</code>

2.48.25. autoComplete::Customer###Default

Description:	Defines the config options for the auto completion feature.
Group:	Framework
SubGroup:	Frontend::Customer
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'AutoComplete::Customer'}->{'Default'} = { 'AutoCompleteActive' => '1', 'ButtonText' => 'Search', 'MaxResultsDisplayed' => '20', 'MinQueryLength' => '2', 'QueryDelay' => '100' };</code>

2.49. Frontend::Customer::Auth

2.49.1. Customer::AuthModule

Description:	Defines the module to authenticate customers.
Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Customer::AuthModule'} = 'Kernel::System::CustomerAuth::DB';</code>

2.49.2. Customer::AuthModule::DB::CryptType

Description:	If "DB" was selected for Customer::AuthModule, the crypt type of passwords must be specified.
Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Customer::AuthModule::DB::CryptType'} = 'sha2';</code>

2.49.3. Customer::AuthModule::DB::Table

Description:	If "DB" was selected for Customer::AuthModule, the name of the table where your customer data should be stored must be specified.
--------------	---

Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Customer::AuthModule::DB::Table'} = 'customer_user';</code>

2.49.4. Customer::AuthModule::DB::CustomerKey

Description:	If "DB" was selected for Customer::AuthModule, the name of the column for the CustomerKey in the customer table must be specified.
Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Customer::AuthModule::DB::CustomerKey'} = 'login';</code>

2.49.5. Customer::AuthModule::DB::CustomerPassword

Description:	If "DB" was selected for Customer::AuthModule, the column name for the CustomerPassword in the customer table must be specified.
Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Customer::AuthModule::DB::CustomerPassword'} = 'pw';</code>

2.49.6. Customer::AuthModule::DB::DSN

Description:	If "DB" was selected for Customer::AuthModule, the DSN for the connection to the customer table must be specified.
Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Customer::AuthModule::DB::DSN'} = 'DBI:mysql:database=customerdb;host=customerdbhost';</code>

2.49.7. Customer::AuthModule::DB::User

Description:	If "DB" was selected for Customer::AuthModule, a username to connect to the customer table can be specified.
Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	0
Required:	0

Config-Setting:	<code>\$Self->{'Customer::AuthModule::DB::User'} = 'some_user';</code>
-----------------	---

2.49.8. Customer::AuthModule::DB::Password

Description:	If "DB" was selected for Customer::AuthModule, a password to connect to the customer table can be specified.
Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Customer::AuthModule::DB::Password'} = 'some_password';</code>

2.49.9. Customer::AuthModule::DB::Type

Description:	If "DB" was selected for Customer::AuthModule, a database driver (normally autodetection is used) can be specified.
Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Customer::AuthModule::DB::Type'} = 'mysql';</code>

2.49.10. Customer::AuthModule::HTTPBasicAuth::Replace

Description:	If "HTTPBasicAuth" was selected for Customer::AuthModule, you can specify to strip leading parts of user names (e. g. for domains like example_domain\user to user).
Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Customer::AuthModule::HTTPBasicAuth::Replace'} = 'example_domain\\\\';</code>

2.49.11. Customer::AuthModule::HTTPBasicAuth::ReplaceRegExp

Description:	If "HTTPBasicAuth" was selected for Customer::AuthModule, you can specify (by using a RegExp) to strip parts of REMOTE_USER (e. g. for to remove trailing domains). RegExp-Note, \$1 will be the new Login.
Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Customer::AuthModule::HTTPBasicAuth::ReplaceRegExp'} = '^(.+?)@.+?\$';</code>

2.49.12. Customer::AuthModule::LDAP::Host

Description:	If "LDAP" was selected for Customer::AuthModule, the LDAP host can be specified.
Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Customer::AuthModule::LDAP::Host'} = 'ldap.example.com';</code>

2.49.13. Customer::AuthModule::LDAP::BaseDN

Description:	If "LDAP" was selected for Customer::AuthModule, the BaseDN must be specified.
Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Customer::AuthModule::LDAP::BaseDN'} = 'dc=example,dc=com';</code>

2.49.14. Customer::AuthModule::LDAP::UID

Description:	If "LDAP" was selected for Customer::AuthModule, the user identifier must be specified.
Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Customer::AuthModule::LDAP::UID'} = 'uid';</code>

2.49.15. Customer::AuthModule::LDAP::GroupDN

Description:	If "LDAP" was selected for Customer::Authmodule, you can check if the user is allowed to authenticate because he is in a posixGroup, e.g. user needs to be in a group xyz to use OTRS. Specify the group, who may access the system.
Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Customer::AuthModule::LDAP::GroupDN'} = 'cn=otrsallow,ou=posixGroups,dc=example,dc=com';</code>

2.49.16. Customer::AuthModule::LDAP::AccessAttr

Description:	If "LDAP" was selected for Customer::AuthModule, you can specify access attributes here.
Group:	Framework

SubGroup:	Frontend::Customer::Auth
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Customer::AuthModule::LDAP::AccessAttr'} = 'memberUid';</code>

2.49.17. Customer::AuthModule::LDAP::UserAttr

Description:	If "LDAP" was selected for Customer::AuthModule, user attributes can be specified. For LDAP posixGroups use UID, for non LDAP posixGroups use full user DN.
Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Customer::AuthModule::LDAP::UserAttr'} = 'UID';</code>

2.49.18. Customer::AuthModule::LDAP::SearchUserDN

Description:	If "LDAP" was selected for Customer::AuthModule and your users have only anonymous access to the LDAP tree, but you want to search through the data, you can do this with a user who has access to the LDAP directory. Specify the username for this special user here.
Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Customer::AuthModule::LDAP::SearchUserDN'} = 'cn=binduser,ou=users,dc=example,dc=com';</code>

2.49.19. Customer::AuthModule::LDAP::SearchUserPw

Description:	If "LDAP" was selected for Customer::AuthModule and your users have only anonymous access to the LDAP tree, but you want to search through the data, you can do this with a user who has access to the LDAP directory. Specify the password for this special user here.
Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Customer::AuthModule::LDAP::SearchUserPw'} = 'some_password';</code>

2.49.20. Customer::AuthModule::LDAP::AlwaysFilter

Description:	If "LDAP" was selected, you can add a filter to each LDAP query, e.g. (mail=*), (objectclass=user) or (!objectclass=computer).
Group:	Framework

SubGroup:	Frontend::Customer::Auth
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Customer::AuthModule::LDAP::AlwaysFilter'} = '(!objectclass=computer)';</code>

2.49.21. Customer::AuthModule::LDAP::UserSuffix

Description:	If "LDAP" was selected for Customer::AuthModule and if you want to add a suffix to every customer login name, specify it here, e. g. you just want to write the username user but in your LDAP directory exists user@domain.
Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Customer::AuthModule::LDAP::UserSuffix'} = '@domain.com';</code>

2.49.22. Customer::AuthModule::LDAP::Params

Description:	If "LDAP" was selected for Customer::AuthModule and special paramaters are needed for the Net::LDAP perl module, you can specify them here. See "perldoc Net::LDAP" for more information about the parameters.
Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Customer::AuthModule::LDAP::Params'} = { 'async' => '0', 'port' => '389', 'timeout' => '120', 'version' => '3' };</code>

2.49.23. Customer::AuthModule::LDAP::Die

Description:	If "LDAP" was selected for Customer::AuthModule, you can specify if the applications will stop if e. g. a connection to a server can't be established due to network problems.
Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Customer::AuthModule::LDAP::Die'} = '1';</code>

2.49.24. Customer::AuthModule::Radius::Host

Description:	If "Radius" was selected for Customer::AuthModule, the radius host must be specified.
Group:	Framework

SubGroup:	Frontend::Customer::Auth
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Customer::AuthModule::Radius::Host'} = 'radiushost';</code>

2.49.25. Customer::AuthModule::Radius::Password

Description:	If "Radius" was selected for Customer::AuthModule, the password to authenticate to the radius host must be specified.
Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Customer::AuthModule::Radius::Password'} = 'radiussecret';</code>

2.49.26. Customer::AuthModule::Radius::Die

Description:	If "Radius" was selected for Customer::AuthModule, you can specify if the applications will stop if e. g. a connection to a server can't be established due to network problems.
Group:	Framework
SubGroup:	Frontend::Customer::Auth
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Customer::AuthModule::Radius::Die'} = '1';</code>

2.50. Frontend::Customer::ModuleMetaHead

2.50.1. CustomerFrontend::HeaderMetaModule###1-Refresh

Description:	Defines the module to generate html refresh headers of html sites, in the customer interface.
Group:	Framework
SubGroup:	Frontend::Customer::ModuleMetaHead
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CustomerFrontend::HeaderMetaModule'}->{'1-Refresh'} = { 'Module' => 'Kernel::Output::HTML::HeaderMetaRefresh' };</code>

2.51. Frontend::Customer::ModuleNotify

2.51.1. CustomerFrontend::NotifyModule###1-ShowAgentOnline

Description:	Defines the module that shows the currently logged in agents in the customer interface.
--------------	---

Group:	Framework
SubGroup:	Frontend::Customer::ModuleNotify
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerFrontend::NotifyModule'}->{'1-ShowAgentOnline'} = { 'IdleMinutes' => '60', 'Module' => 'Kernel::Output::HTML::NotificationAgentOnline', 'ShowEmail' => '1' };</pre>

2.51.2. CustomerFrontend::NotifyModule###1-Show-CustomerOnline

Description:	Defines the module that shows the currently logged in customers in the customer interface.
Group:	Framework
SubGroup:	Frontend::Customer::ModuleNotify
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerFrontend::NotifyModule'}->{'1-ShowCustomerOnline'} = { 'Module' => 'Kernel::Output::HTML::NotificationCustomerOnline', 'ShowEmail' => '1' };</pre>

2.52. Frontend::Customer::ModuleRegistration

2.52.1. CustomerFrontend::Module###Logout

Description:	Frontend module registration for the customer interface.
Group:	Framework
SubGroup:	Frontend::Customer::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerFrontend::Module'}->{'Logout'} = { 'Description' => 'Logout of customer panel', 'NavBarName' => '', 'Title' => '' };</pre>

2.52.2. CustomerFrontend::Module###CustomerPreferences

Description:	Frontend module registration for the customer interface.
Group:	Framework
SubGroup:	Frontend::Customer::ModuleRegistration
Valid:	1
Required:	0

Config-Setting:	<pre>\$Self->{'CustomerFrontend::Module'}->{'CustomerPreferences'} = { 'Description' => 'Customer preferences', 'NavBarName' => '', 'Title' => 'Preferences' };</pre>
-----------------	--

2.52.3. CustomerFrontend::Module###CustomerAccept

Description:	Frontend module registration for the customer interface.
Group:	Framework
SubGroup:	Frontend::Customer::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerFrontend::Module'}->{'CustomerAccept'} = { 'Description' => 'To accept login information, such as an EULA or license.', 'NavBarName' => '', 'Title' => 'Info' };</pre>

2.52.4. CustomerFrontend::Module###PictureUpload

Description:	Frontend module registration for the customer interface.
Group:	Framework
SubGroup:	Frontend::Customer::ModuleRegistration
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'CustomerFrontend::Module'}->{'PictureUpload'} = { 'Description' => 'Picture upload module', 'NavBarName' => 'Ticket', 'Title' => 'Picture-Upload' };</pre>

2.53. Frontend::Customer::Preferences

2.53.1. PreferencesTable

Description:	Defines the name of the table, where the customer preferences are stored.
Group:	Framework
SubGroup:	Frontend::Customer::Preferences
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'PreferencesTable'} = 'user_preferences';</pre>

2.53.2. PreferencesTableKey

Description:	Defines the column to store the keys for the preferences table.
Group:	Framework
SubGroup:	Frontend::Customer::Preferences

Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PreferencesTableKey'} = 'preferences_key';</code>

2.53.3. CustomerPreferences

Description:	Defines the parameters for the customer preferences table.
Group:	Framework
SubGroup:	Frontend::Customer::Preferences
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CustomerPreferences'} = { 'Module' => 'Kernel::System::CustomerUser::Preferences::DB', 'Params' => { 'Table' => 'customer_preferences', 'TableKey' => 'preferences_key', 'TableUserID' => 'user_id', 'TableValue' => 'preferences_value' } };</code>

2.53.4. CustomerPreferencesView

Description:	Sets the order of the different items in the customer preferences view.
Group:	Framework
SubGroup:	Frontend::Customer::Preferences
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CustomerPreferencesView'} = ['User Profile', 'Other Settings'];</code>

2.53.5. CustomerPreferencesGroups###Password

Description:	Defines all the parameters for this item in the customer preferences.
Group:	Framework
SubGroup:	Frontend::Customer::Preferences
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'CustomerPreferencesGroups'}->{'Password'} = { 'Active' => '1', 'Area' => 'Customer', 'Column' => 'Other Settings', 'Label' => 'Change password', 'Module' => 'Kernel::Output::HTML::PreferencesPassword', 'PasswordMin2Characters' => '0', 'PasswordMin2Lower2UpperCharacters' => '0', 'PasswordMinSize' => '0', 'PasswordNeedDigit' => '0', 'PasswordRegExp' => '', 'Prio' => '1000' };</code>

```
};
```

2.53.6. CustomerPreferencesGroups###Language

Description:	Defines all the parameters for this item in the customer preferences.
Group:	Framework
SubGroup:	Frontend::Customer::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerPreferencesGroups'}->{'Language'} = { 'Active' => '1', 'Column' => 'User Profile', 'Key' => 'Language', 'Label' => 'Interface language', 'Module' => 'Kernel::Output::HTML::PreferencesLanguage', 'PrefKey' => 'UserLanguage', 'Prio' => '2000' };</pre>

2.53.7. CustomerPreferencesGroups###Theme

Description:	Defines all the parameters for this item in the customer preferences.
Group:	Framework
SubGroup:	Frontend::Customer::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerPreferencesGroups'}->{'Theme'} = { 'Active' => '0', 'Column' => 'User Profile', 'Key' => 'Select your frontend Theme.', 'Label' => 'Theme', 'Module' => 'Kernel::Output::HTML::PreferencesTheme', 'PrefKey' => 'UserTheme', 'Prio' => '1000' };</pre>

2.53.8. CustomerPreferencesGroups###TimeZone

Description:	Defines all the parameters for this item in the customer preferences.
Group:	Framework
SubGroup:	Frontend::Customer::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerPreferencesGroups'}->{'TimeZone'} = { 'Active' => '1', 'Column' => 'User Profile', 'Key' => 'Time Zone', 'Label' => 'Time Zone', 'Module' => 'Kernel::Output::HTML::PreferencesTimeZone', 'PrefKey' => 'UserTimeZone', 'Prio' => '5000' };</pre>

2.53.9. CustomerPreferencesGroups###PGP

Description:	Defines all the parameters for this item in the customer preferences.
Group:	Framework
SubGroup:	Frontend::Customer::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerPreferencesGroups'}->{'PGP'} = { 'Active' => '1', 'Column' => 'Other Settings', 'Key' => 'PGP Key Upload', 'Label' => 'PGP Key', 'Module' => 'Kernel::Output::HTML::PreferencesPGP', 'PrefKey' => 'UserPGPKey', 'Prio' => '10000' };</pre>

2.53.10. CustomerPreferencesGroups###SMIME

Description:	Defines all the parameters for this item in the customer preferences.
Group:	Framework
SubGroup:	Frontend::Customer::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerPreferencesGroups'}->{'SMIME'} = { 'Active' => '1', 'Column' => 'Other Settings', 'Key' => 'S/MIME Certificate Upload', 'Label' => 'S/MIME Certificate', 'Module' => 'Kernel::Output::HTML::PreferencesSMIME', 'PrefKey' => 'UserSMIMEKey', 'Prio' => '11000' };</pre>

2.54. Frontend::Public

2.54.1. PublicFrontend::CommonParam###Action

Description:	Defines the default value for the action parameter for the public frontend. The action parameter is used in the scripts of the system.
Group:	Framework
SubGroup:	Frontend::Public
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'PublicFrontend::CommonParam'}->{'Action'} = 'PublicDefault';</pre>

2.55. Frontend::Public::ModuleRegistration

2.55.1. PublicFrontend::Module###PublicDefault

Description:	Frontend module registration for the agent interface.
--------------	---

Group:	Framework
SubGroup:	Frontend::Public::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'PublicFrontend::Module'}->{'PublicDefault'} = { 'Description' => 'PublicDefault', 'NavBarName' => '', 'Title' => 'PublicDefault' };</pre>

2.55.2. PublicFrontend::Module###PublicRepository

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Public::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'PublicFrontend::Module'}->{'PublicRepository'} = { 'Description' => 'PublicRepository', 'NavBarName' => '', 'Title' => 'PublicRepository' };</pre>

2.55.3. PublicFrontend::Module###PublicSupportDataCollector

Description:	Frontend module registration for the agent interface.
Group:	Framework
SubGroup:	Frontend::Public::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'PublicFrontend::Module'}->{'PublicSupportDataCollector'} = { 'Description' => 'PublicSupportDataCollector', 'NavBarName' => '', 'Title' => 'PublicSupportDataCollector' };</pre>

3. GenericInterface

3.1. Core::CustomerCompany

3.1.1. CustomerCompany::EventModule-Post###1000-GenericInterface

Description:	Performs the configured action for each event (as an Invoker) for each configured Webservice.
Group:	GenericInterface
SubGroup:	Core::CustomerCompany
Valid:	1
Required:	0

Config-Setting:	<pre>\$Self->{'CustomerCompany::EventModulePost'}->{'1000- GenericInterface'} = { 'Event' => '', 'Module' => 'Kernel::GenericInterface::Event::Handler', 'Transaction' => '1' };</pre>
-----------------	---

3.2. Core::CustomerUser

3.2.1. CustomerUser::EventModule-Post###1000-GenericInterface

Description:	Performs the configured action for each event (as an Invoker) for each configured Webservice.
Group:	GenericInterface
SubGroup:	Core::CustomerUser
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerUser::EventModulePost'}->{'1000-GenericInterface'} = { 'Event' => '', 'Module' => 'Kernel::GenericInterface::Event::Handler', 'Transaction' => '1' };</pre>

3.3. Core::Package

3.3.1. Package::EventModulePost###1000-GenericInterface

Description:	Performs the configured action for each event (as an Invoker) for each configured Webservice.
Group:	GenericInterface
SubGroup:	Core::Package
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Package::EventModulePost'}->{'1000-GenericInterface'} = { 'Event' => '', 'Module' => 'Kernel::GenericInterface::Event::Handler', 'Transaction' => '1' };</pre>

3.4. Core::Ticket

3.4.1. Ticket::EventModulePost###1000-GenericInterface

Description:	Performs the configured action for each event (as an Invoker) for each configured Webservice.
Group:	GenericInterface
SubGroup:	Core::Ticket
Valid:	1

Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::EventModulePost'}->{'1000-GenericInterface'} = { 'Event' => '', 'Module' => 'Kernel::GenericInterface::Event::Handler', 'Transaction' => '1' };</pre>

3.5. Frontend::Admin::ModuleRegistration

3.5.1. Frontend::Module###AdminGenericInterfaceDebugger

Description:	Frontend module registration for the agent interface.
Group:	GenericInterface
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminGenericInterfaceDebugger'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Loader' => { 'CSS' => ['Core.Agent.Admin.GenericInterface.css'], 'CSS_IE7' => 'Core.Agent.Admin.GenericInterface.IE7.css', 'JavaScript' => ['Core.Agent.Admin.GenericInterfaceDebugger.js'] }, 'Title' => 'GenericInterface Debugger GUI' };</pre>

3.5.2. Frontend::Module###AdminGenericInterfaceWebservice

Description:	Frontend module registration for the agent interface.
Group:	GenericInterface
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminGenericInterfaceWebservice'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Loader' => { 'CSS' => ['Core.Agent.Admin.GenericInterface.css'], 'JavaScript' => ['Core.Agent.Admin.GenericInterfaceWebservice.js'] }, 'NavBarModule' => { 'Block' => 'System', 'Description' => 'Create and manage web services.', } };</pre>

```
'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin',
'Name' => 'Web Services',
'Prio' => '1000'
},
'NavBarName' => 'Admin',
'Title' => 'GenericInterface Web Service GUI'
};
```

3.5.3. Frontend::Module###AdminGenericInterface-TransportHTTPSAP

Description:	Frontend module registration for the agent interface.
Group:	GenericInterface
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}- >{'AdminGenericInterfaceTransportHTTPSAP'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Loader' => { 'CSS' => ['Core.Agent.Admin.GenericInterface.css'] }, 'Title' => 'GenericInterface TransportHTTPSAP GUI' };</pre>

3.5.4. Frontend::Module###AdminGenericInterfaceWebserviceHistory

Description:	Frontend module registration for the agent interface.
Group:	GenericInterface
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}- >{'AdminGenericInterfaceWebserviceHistory'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Loader' => { 'CSS' => ['Core.Agent.Admin.GenericInterface.css'], 'JavaScript' => ['Core.Agent.Admin.GenericInterfaceWebserviceHistory.js'] }, 'Title' => 'GenericInterface Webservice History GUI' };</pre>

3.5.5. Frontend::Module###AdminGenericInterfaceOperationDefault

Description:	Frontend module registration for the agent interface.
--------------	---

Group:	GenericInterface
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}- >{'AdminGenericInterfaceOperationDefault'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Loader' => { 'CSS' => ['Core.Agent.Admin.GenericInterface.css'], 'JavaScript' => ['Core.Agent.Admin.GenericInterfaceOperation.js'] }, 'Title' => 'GenericInterface Operation GUI' }; </pre>

3.5.6. Frontend::Module###AdminGenericInterfaceInvokerDefault

Description:	Frontend module registration for the agent interface.
Group:	GenericInterface
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}- >{'AdminGenericInterfaceInvokerDefault'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Loader' => { 'CSS' => ['Core.Agent.Admin.GenericInterface.css'], 'JavaScript' => ['Core.Agent.Admin.GenericInterfaceInvoker.js'] }, 'Title' => 'GenericInterface Invoker GUI' }; </pre>

3.5.7. Frontend::Module###AdminGenericInterfaceMappingSimple

Description:	Frontend module registration for the agent interface.
Group:	GenericInterface
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AdminGenericInterfaceMappingSimple'} = { 'Description' => 'Admin', </pre>

```
'Group' => [
  'admin'
],
'Loader' => {
  'CSS' => [
    'Core.Agent.Admin.GenericInterface.css'
  ],
  'CSS_IE7' => 'Core.Agent.Admin.GenericInterface.IE7.css',
  'JavaScript' => [
    'Core.Agent.Admin.GenericInterfaceMappingSimple.js'
  ]
},
'Title' => 'GenericInterface Webservice Mapping GUI'
};
```

3.6. GenericInterface::Invoker::ModuleRegistration

3.6.1. GenericInterface::Invoker::Module###Test::Test

Description:	GenericInterface module registration for the invoker layer.
Group:	GenericInterface
SubGroup:	GenericInterface::Invoker::ModuleRegistration
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'GenericInterface::Invoker::Module'}->{'Test::Test'} = { 'ConfigDialog' => 'AdminGenericInterfaceInvokerDefault', 'Controller' => 'Test', 'Name' => 'Test' };</pre>

3.6.2. GenericInterface::Invoker::Module###Test::TestSimple

Description:	GenericInterface module registration for the invoker layer.
Group:	GenericInterface
SubGroup:	GenericInterface::Invoker::ModuleRegistration
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'GenericInterface::Invoker::Module'}->{'Test::TestSimple'} = { 'ConfigDialog' => 'AdminGenericInterfaceInvokerDefault', 'Controller' => 'Test', 'Name' => 'TestSimple' };</pre>

3.7. GenericInterface::Mapping::ModuleRegistration

3.7.1. GenericInterface::Mapping::Module###Test

Description:	GenericInterface module registration for the mapping layer.
Group:	GenericInterface

SubGroup:	GenericInterface::Mapping::ModuleRegistration
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'GenericInterface::Mapping::Module'}->{'Test'} = { 'ConfigDialog' => '' };</pre>

3.7.2. GenericInterface::Mapping::Module###Simple

Description:	GenericInterface module registration for the mapping layer.
Group:	GenericInterface
SubGroup:	GenericInterface::Mapping::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'GenericInterface::Mapping::Module'}->{'Simple'} = { 'ConfigDialog' => 'AdminGenericInterfaceMappingSimple' };</pre>

3.8. GenericInterface::Operation::ModuleRegistration

3.8.1. GenericInterface::Operation::Module###Test::Test

Description:	GenericInterface module registration for the operation layer.
Group:	GenericInterface
SubGroup:	GenericInterface::Operation::ModuleRegistration
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'GenericInterface::Operation::Module'}->{'Test::Test'} = { 'ConfigDialog' => 'AdminGenericInterfaceOperationDefault', 'Controller' => 'Test', 'Name' => 'Test' };</pre>

3.8.2. GenericInterface::Operation::Module###Session::SessionCreate

Description:	GenericInterface module registration for the operation layer.
Group:	GenericInterface
SubGroup:	GenericInterface::Operation::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'GenericInterface::Operation::Module'}->{'Session::SessionCreate'} = { 'ConfigDialog' => 'AdminGenericInterfaceOperationDefault', 'Controller' => 'Session', 'Name' => 'SessionCreate' };</pre>

3.8.3. GenericInterface::Operation::Module###Ticket::TicketCreate

Description:	GenericInterface module registration for the operation layer.
Group:	GenericInterface
SubGroup:	GenericInterface::Operation::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'GenericInterface::Operation::Module'}- >{'Ticket::TicketCreate'} = { 'ConfigDialog' => 'AdminGenericInterfaceOperationDefault', 'Controller' => 'Ticket', 'Name' => 'TicketCreate' };</pre>

3.8.4. GenericInterface::Operation::Module###Ticket::TicketUpdate

Description:	GenericInterface module registration for the operation layer.
Group:	GenericInterface
SubGroup:	GenericInterface::Operation::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'GenericInterface::Operation::Module'}- >{'Ticket::TicketUpdate'} = { 'ConfigDialog' => 'AdminGenericInterfaceOperationDefault', 'Controller' => 'Ticket', 'Name' => 'TicketUpdate' };</pre>

3.8.5. GenericInterface::Operation::Module###Ticket::TicketGet

Description:	GenericInterface module registration for the operation layer.
Group:	GenericInterface
SubGroup:	GenericInterface::Operation::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'GenericInterface::Operation::Module'}- >{'Ticket::TicketGet'} = { 'ConfigDialog' => 'AdminGenericInterfaceOperationDefault', 'Controller' => 'Ticket', 'Name' => 'TicketGet' };</pre>

3.8.6. GenericInterface::Operation::Module###Ticket::TicketSearch

Description:	GenericInterface module registration for the operation layer.
Group:	GenericInterface

SubGroup:	GenericInterface::Operation::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'GenericInterface::Operation::Module'}- >{'Ticket::TicketSearch'} = { 'ConfigDialog' => 'AdminGenericInterfaceOperationDefault', 'Controller' => 'Ticket', 'Name' => 'TicketGet' };</pre>

3.9. GenericInterface::Operation::TicketCreate

3.9.1. GenericInterface::Operation::TicketCreate###ArticleType

Description:	Defines the default type of the article for this operation.
Group:	GenericInterface
SubGroup:	GenericInterface::Operation::TicketCreate
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'GenericInterface::Operation::TicketCreate'}- >{'ArticleType'} = 'webrequest';</pre>

3.9.2. GenericInterface::Operation::TicketCreate###HistoryType

Description:	Defines the history type for this operation, which gets used for ticket history in the agent interface.
Group:	GenericInterface
SubGroup:	GenericInterface::Operation::TicketCreate
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'GenericInterface::Operation::TicketCreate'}- >{'HistoryType'} = 'NewTicket';</pre>

3.9.3. GenericInterface::Operation::TicketCreate###HistoryComment

Description:	Defines the history comment for this operation, which gets used for ticket history in the agent interface.
Group:	GenericInterface
SubGroup:	GenericInterface::Operation::TicketCreate
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'GenericInterface::Operation::TicketCreate'}- >{'HistoryComment'} = '%GenericInterface Create';</pre>

3.9.4. GenericInterface::Operation::TicketCreate###AutoResponseType

Description:	Defines the default auto response type of the article for this operation.
Group:	GenericInterface
SubGroup:	GenericInterface::Operation::TicketCreate
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'GenericInterface::Operation::TicketCreate'}->{'AutoResponseType'} = 'auto reply';</code>

3.10. GenericInterface::Operation::TicketSearch

3.10.1. GenericInterface::Operation::TicketSearch###SearchLimit

Description:	Maximum number of tickets to be displayed in the result of this operation.
Group:	GenericInterface
SubGroup:	GenericInterface::Operation::TicketSearch
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'GenericInterface::Operation::TicketSearch'}->{'SearchLimit'} = '500';</code>

3.10.2. GenericInterface::Operation::TicketSearch###SortBy::Default

Description:	Defines the default ticket attribute for ticket sorting of the ticket search result of this operation.
Group:	GenericInterface
SubGroup:	GenericInterface::Operation::TicketSearch
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'GenericInterface::Operation::TicketSearch'}->{'SortBy::Default'} = 'Age';</code>

3.10.3. GenericInterface::Operation::TicketSearch###Order::Default

Description:	Defines the default ticket order in the ticket search result of the this operation. Up: oldest on top. Down: latest on top.
Group:	GenericInterface
SubGroup:	GenericInterface::Operation::TicketSearch
Valid:	1

Required:	1
Config-Setting:	<code>\$Self->{'GenericInterface::Operation::TicketSearch'}->{'Order::Default'} = 'Down';</code>

3.11. GenericInterface::Operation::TicketUpdate

3.11.1. GenericInterface::Operation::TicketUpdate###ArticleType

Description:	Defines the default type of the article for this operation.
Group:	GenericInterface
SubGroup:	GenericInterface::Operation::TicketUpdate
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'GenericInterface::Operation::TicketUpdate'}->{'ArticleType'} = 'webrequest';</code>

3.11.2. GenericInterface::Operation::TicketUpdate###HistoryType

Description:	Defines the history type for this operation, which gets used for ticket history in the agent interface.
Group:	GenericInterface
SubGroup:	GenericInterface::Operation::TicketUpdate
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'GenericInterface::Operation::TicketUpdate'}->{'HistoryType'} = 'AddNote';</code>

3.11.3. GenericInterface::Operation::TicketUpdate###HistoryComment

Description:	Defines the history comment for this operation, which gets used for ticket history in the agent interface.
Group:	GenericInterface
SubGroup:	GenericInterface::Operation::TicketUpdate
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'GenericInterface::Operation::TicketUpdate'}->{'HistoryComment'} = '%GenericInterface Note';</code>

3.11.4. GenericInterface::Operation::TicketUpdate###AutoResponseType

Description:	Defines the default auto response type of the article for this operation.
--------------	---

Group:	GenericInterface
SubGroup:	GenericInterface::Operation::TicketUpdate
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'GenericInterface::Operation::TicketUpdate'}->{'AutoResponseType'} = 'auto follow up';</code>

3.12. GenericInterface::Transport::ModuleRegistration

3.12.1. GenericInterface::Transport::Module###HTTP::SOAP

Description:	GenericInterface module registration for the transport layer.
Group:	GenericInterface
SubGroup:	GenericInterface::Transport::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'GenericInterface::Transport::Module'}->{'HTTP::SOAP'} = { 'ConfigDialog' => 'AdminGenericInterfaceTransportHTTPSOAP', 'Name' => 'SOAP', 'Protocol' => 'HTTP' };</code>

3.12.2. GenericInterface::Transport::Module###HTTP::Test

Description:	GenericInterface module registration for the transport layer.
Group:	GenericInterface
SubGroup:	GenericInterface::Transport::ModuleRegistration
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'GenericInterface::Transport::Module'}->{'HTTP::Test'} = { 'ConfigDialog' => 'AdminGenericInterfaceTransportHTTPTest', 'Name' => 'Test', 'Protocol' => 'HTTP' };</code>

3.13. GenericInterface::Webservice

3.13.1. GenericInterface::WebserviceConfig::CacheTTL

Description:	Cache time in seconds for the web service config backend.
Group:	GenericInterface
SubGroup:	GenericInterface::Webservice
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'GenericInterface::WebserviceConfig::CacheTTL'} = '86400';</code>

3.13.2. GenericInterface::Operation::Common::CachedAuth::AgentCacheTTL

Description:	Cache time in seconds for agent authentication in the GenericInterface.
Group:	GenericInterface
SubGroup:	GenericInterface::Webservice
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'GenericInterface::Operation::Common::CachedAuth::AgentCacheTTL'} = '300';</code>

3.13.3. GenericInterface::Operation::Common::CachedAuth::CustomerCacheTTL

Description:	Cache time in seconds for customer authentication in the GenericInterface.
Group:	GenericInterface
SubGroup:	GenericInterface::Webservice
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'GenericInterface::Operation::Common::CachedAuth::CustomerCacheTTL'} = '300';</code>

3.13.4. GenericInterface::Webservice::Path::Separator

Description:	Webservice path separator.
Group:	GenericInterface
SubGroup:	GenericInterface::Webservice
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'GenericInterface::Webservice::Path::Separator'} = '>';</code>

4. ProcessManagement

4.1. Core

4.1.1. Process::DynamicFieldProcessManagement-ProcessID

Description:	This option defines the dynamic field in which a Process Management process entity id is stored.
Group:	ProcessManagement
SubGroup:	Core
Valid:	1

Required:	1
Config-Setting:	<code>\$Self->{'Process::DynamicFieldProcessManagementProcessID'} = 'ProcessManagementProcessID';</code>

4.1.2. Process::DynamicFieldProcessManagementActivityID

Description:	This option defines the dynamic field in which a Process Management activity entity id is stored.
Group:	ProcessManagement
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Process::DynamicFieldProcessManagementActivityID'} = 'ProcessManagementActivityID';</code>

4.1.3. Process::DefaultQueue

Description:	This option defines the process tickets default queue.
Group:	ProcessManagement
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Process::DefaultQueue'} = 'Raw';</code>

4.1.4. Process::DefaultState

Description:	This option defines the process tickets default state.
Group:	ProcessManagement
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Process::DefaultState'} = 'new';</code>

4.1.5. Process::DefaultLock

Description:	This option defines the process tickets default lock.
Group:	ProcessManagement
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Process::DefaultLock'} = 'unlock';</code>

4.1.6. Process::DefaultPriority

Description:	This option defines the process tickets default priority.
--------------	---

Group:	ProcessManagement
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Process::DefaultPriority'} = '3 normal';</code>

4.1.7. Process::Entity::Prefix

Description:	Default ProcessManagement entity prefixes for entity IDs that are automatically generated.
Group:	ProcessManagement
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Process::Entity::Prefix'} = { 'Activity' => 'A', 'ActivityDialog' => 'AD', 'Process' => 'P', 'Transition' => 'T', 'TransitionAction' => 'TA' };</code>

4.1.8. Process::CacheTTL

Description:	Cache time in seconds for the DB process backend.
Group:	ProcessManagement
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Process::CacheTTL'} = '3600';</code>

4.1.9. Process::NavBarOutput::CacheTTL

Description:	Cache time in seconds for the ticket process navigation bar output module.
Group:	ProcessManagement
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Process::NavBarOutput::CacheTTL'} = '900';</code>

4.2. Core::Ticket

4.2.1. Ticket::EventModulePost###TicketProcessTransitions

Description:	Event module registration. For more performance you can define a trigger event (e. g. Event => TicketCreate).
--------------	---

Group:	ProcessManagement
SubGroup:	Core::Ticket
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::EventModulePost'}->{'TicketProcessTransitions'} = { 'Event' => '', 'Module' => 'Kernel::System::Ticket::Event::TicketProcessTransitions', 'Transaction' => '1' };</pre>

4.3. Frontend::Admin::ModuleRegistration

4.3.1. Frontend::Module###AdminProcessManagement

Description:	Frontend module registration for the agent interface.
Group:	ProcessManagement
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminProcessManagement'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Loader' => { 'CSS' => ['Core.Agent.Admin.ProcessManagement.css', 'Core.AllocationList.css'], 'JavaScript' => ['thirdparty/jsplumb-1.5.5/jsplumb.js', 'thirdparty/farahey-0.1/farahey.js', 'thirdparty/jsplumb-labelspacer/label-spacer.js', 'Core.Agent.Admin.ProcessManagement.js', 'Core.Agent.Admin.ProcessManagement.Canvas.js', 'Core.UI.AllocationList.js'] }, 'NavBarModule' => { 'Block' => 'System', 'Description' => 'Configure Processes.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Process Management', 'Prio' => '750' }, 'NavBarName' => 'Admin', 'Title' => 'Process Management' };</pre>

4.3.2. Frontend::Module###AdminProcessManagementActivity

Description:	Frontend module registration for the agent interface.
Group:	ProcessManagement
SubGroup:	Frontend::Admin::ModuleRegistration

Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AdminProcessManagementActivity'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Loader' => { 'CSS' => ['Core.Agent.Admin.ProcessManagement.css', 'Core.AllocationList.css'], 'JavaScript' => ['Core.Agent.Admin.ProcessManagement.js', 'Core.UI.AllocationList.js'] }, 'Title' => 'Process Management Activity GUI' }; </pre>

4.3.3. Frontend::Module###AdminProcessManagementActivityDialog

Description:	Frontend module registration for the agent interface.
Group:	ProcessManagement
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AdminProcessManagementActivityDialog'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Loader' => { 'CSS' => ['Core.Agent.Admin.ProcessManagement.css', 'Core.AllocationList.css'], 'JavaScript' => ['Core.Agent.Admin.ProcessManagement.js', 'Core.UI.AllocationList.js'] }, 'Title' => 'Process Management Activity Dialog GUI' }; </pre>

4.3.4. Frontend::Module###AdminProcessManagementTransition

Description:	Frontend module registration for the agent interface.
Group:	ProcessManagement
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AdminProcessManagementTransition'} = { </pre>


```
'Description' => 'Admin',
'Group' => [
  'admin'
],
'Loader' => {
  'CSS' => [
    'Core.Agent.Admin.ProcessManagement.css'
  ],
  'JavaScript' => [
    'Core.Agent.Admin.ProcessManagement.js'
  ]
},
'Title' => 'Process Management Transition GUI'
};
```

4.3.5. Frontend::Module###AdminProcessManagementTransitionAction

Description:	Frontend module registration for the agent interface.
Group:	ProcessManagement
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminProcessManagementTransitionAction'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Loader' => { 'CSS' => ['Core.Agent.Admin.ProcessManagement.css'], 'JavaScript' => ['Core.Agent.Admin.ProcessManagement.js'] }, 'Title' => 'Process Management Transition Action GUI' };</pre>

4.3.6. Frontend::Module###AdminProcessManagementPath

Description:	Frontend module registration for the agent interface.
Group:	ProcessManagement
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminProcessManagementPath'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Loader' => { 'CSS' => ['Core.Agent.Admin.ProcessManagement.css', 'Core.AllocationList.css'], 'JavaScript' => ['Core.Agent.Admin.ProcessManagement.js', </pre>

```

    'Core.UI.AllocationList.js'
  ]
},
'Title' => 'Process Management Path GUI'
};

```

4.4. Frontend::Agent::ModuleRegistration

4.4.1. Frontend::Module###AgentTicketProcess

Description:	Frontend module registration for the agent interface.
Group:	ProcessManagement
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'Frontend::Module'}->{'AgentTicketProcess'} = { 'Description' => 'Create new process ticket', 'Loader' => { 'CSS' => ['Core.Agent.TicketProcess.css'], 'JavaScript' => ['Core.Agent.CustomerSearch.js', 'Core.Agent.TicketAction.js'] }, 'NavBar' => [{ 'AccessKey' => 'p', 'Block' => '', 'Description' => 'Create New process ticket', 'Link' => 'Action=AgentTicketProcess', 'LinkOption' => '', 'Name' => 'New process ticket', 'NavBar' => 'Ticket', 'Prio' => '220', 'Type' => '' }], 'NavBarName' => 'Ticket', 'Title' => 'New process ticket' }; </pre>

4.5. Frontend::Agent::NavBarModule

4.5.1. Frontend::NavBarOutputModule###1-Ticket-Processes

Description:	Frontend module registration (disable ticket processes screen if no process available).
Group:	ProcessManagement
SubGroup:	Frontend::Agent::NavBarModule
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'Frontend::NavBarOutputModule'}->{'1-TicketProcesses'} = { 'Module' => 'Kernel::Output::HTML::NavBarOutputModuleAgentTicketProcess' }; </pre>

```
};
```

4.6. Frontend::Agent::Ticket::ViewProcess

4.6.1. Ticket::Frontend::AgentTicketProcess###State-Type

Description:	Determines the next possible ticket states, for process tickets in the agent interface.
Group:	ProcessManagement
SubGroup:	Frontend::Agent::Ticket::ViewProcess
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketProcess'}->{'StateType'} = ['new', 'open', 'pending auto', 'pending reminder', 'closed'];</pre>

4.6.2. Ticket::Frontend::CustomerTicketProcess###StateType

Description:	Determines the next possible ticket states, for process tickets in the agent interface.
Group:	ProcessManagement
SubGroup:	Frontend::Agent::Ticket::ViewProcess
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::CustomerTicketProcess'}->{'StateType'} = ['new', 'open'];</pre>

4.7. Frontend::Agent::Ticket::ViewZoom

4.7.1. Ticket::Frontend::AgentTicketZoom###Process-Display

Description:	Display settings to override defaults for Process Tickets.
Group:	ProcessManagement
SubGroup:	Frontend::Agent::Ticket::ViewZoom
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketZoom'}->{'ProcessDisplay'} = { 'NavBarName' => 'Processes', 'WidgetTitle' => 'Process Information' };</pre>

4.7.2. Ticket::Frontend::AgentTicketZoom###ProcessWidgetDynamicFieldGroups

Description:	Dynamic fields groups for process widget. The key is the name of the group, the value contains the fields to be shown. Example: 'Key => My Group', 'Content: Name_X, NameY'.
Group:	ProcessManagement
SubGroup:	Frontend::Agent::Ticket::ViewZoom
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketZoom'}->{'ProcessWidgetDynamicFieldGroups'} = {};</code>

4.7.3. Ticket::Frontend::AgentTicketZoom###ProcessWidgetDynamicField

Description:	Dynamic fields shown in the process widget in ticket zoom screen of the agent interface. Possible settings: 0 = Disabled, 1 = Enabled.
Group:	ProcessManagement
SubGroup:	Frontend::Agent::Ticket::ViewZoom
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketZoom'}->{'ProcessWidgetDynamicField'} = {};</code>

4.8. Frontend::Customer::ModuleRegistration

4.8.1. CustomerFrontend::Module###CustomerTicketProcess

Description:	Frontend module registration for the customer interface.
Group:	ProcessManagement
SubGroup:	Frontend::Customer::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerFrontend::Module'}->{'CustomerTicketProcess'} = { 'Description' => 'Process Ticket', 'Loader' => { 'CSS' => ['Core.Customer.TicketProcess.css'] }, 'NavBar' => [{ 'AccessKey' => 'o', 'Block' => '', 'Description' => 'Create new process ticket', 'Link' => 'Action=CustomerTicketProcess', 'LinkOption' => '', 'Name' => 'New process ticket', 'NavBar' => 'Ticket', 'Prio' => '220', 'Type' => 'Submenu' }] }</pre>

```

    }
  ],
  'NavBarName' => 'Ticket',
  'Title' => 'Process ticket'
};

```

4.9. Frontend::Customer::NavBarModule

4.9.1. CustomerFrontend::NavBarModule###10-CustomerTicketProcesses

Description:	Frontend module registration (disable ticket processes screen if no process available) for Customer.
Group:	ProcessManagement
SubGroup:	Frontend::Customer::NavBarModule
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerFrontend::NavBarModule'}->{'10-CustomerTicketProcesses'} = { 'Module' => 'Kernel::Output::HTML::NavBarOutputModuleCustomerTicketProcess' };</pre>

5. Scheduler

5.1. Core

5.1.1. Scheduler::SleepTime

Description:	Defines scheduler sleep time in seconds after processing all available tasks (floating point number).
Group:	Scheduler
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Scheduler::SleepTime'} = '1.0';</pre>

5.1.2. Scheduler::PIDUpdateTime

Description:	Defines scheduler PID update time in seconds.
Group:	Scheduler
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Scheduler::PIDUpdateTime'} = '600';</pre>

5.1.3. Scheduler::RestartAfterSeconds

Description:	Defines the time in seconds after which the Scheduler performs an automatic self-restart.
--------------	---

Group:	Scheduler
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Scheduler::RestartAfterSeconds'} = '86400';</code>

5.1.4. Scheduler::TaskDataLength

Description:	Defines the maximum length (in characters) for a scheduler task data. WARNING: Do not modify this setting unless you are sure of the current Database length for 'task_data' filed from 'scheduler_data_list' table.
Group:	Scheduler
SubGroup:	Core
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Scheduler::TaskDataLength'} = '8000';</code>

5.2. Core::Log

5.2.1. Scheduler::LogPath

Description:	Defines the path for scheduler to store its console output (SchedulerOUT.log and SchedulerERR.log).
Group:	Scheduler
SubGroup:	Core::Log
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Scheduler::LogPath'} = '<OTRS_CONFIG_Home>/var/log';</code>

5.2.2. Scheduler::Log::DaysToKeep

Description:	Defines the time in days to keep log backup files.
Group:	Scheduler
SubGroup:	Core::Log
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Scheduler::Log::DaysToKeep'} = '10';</code>

5.3. Core::Web

5.3.1. Loader::Agent::CommonJS###000-GenericInterface

Description:	List of JS files to always be loaded for the agent interface.
Group:	Scheduler

SubGroup:	Core::Web
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Loader::Agent::CommonJS'}->{'000-GenericInterface'} = ['Core.Agent.Admin.Scheduler.js'];</pre>

5.4. Frontend::Admin::ModuleRegistration

5.4.1. Frontend::Module###AdminScheduler

Description:	Frontend module registration for the agent interface.
Group:	Scheduler
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminScheduler'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Title' => 'GenericInterface Webservice Mapping GUI' };</pre>

5.5. Frontend::Agent::ModuleNotify

5.5.1. Frontend::NotifyModule###800-Scheduler-Check

Description:	Defines the module to display a notification in the agent interface if the scheduler is not running.
Group:	Scheduler
SubGroup:	Frontend::Agent::ModuleNotify
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::NotifyModule'}->{'800-Scheduler-Check'} = { 'Module' => 'Kernel::Output::HTML::NotificationSchedulerCheck' };</pre>

6. Ticket

6.1. Core

6.1.1. OTRSEscalationEvents::DecayTime

Description:	The duration in minutes after emitting an event, in which the new escalation notify and start events are suppressed.
Group:	Ticket
SubGroup:	Core

Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'OTRSEscalationEvents::DecayTime'} = '1440';</code>

6.2. Core::CustomerCompany

6.2.1. CustomerCompany::EventModulePost###110-UpdateTickets

Description:	Event module that updates tickets after an update of the Customer Company.
Group:	Ticket
SubGroup:	Core::CustomerCompany
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'CustomerCompany::EventModulePost'}->{'110-UpdateTickets'} = { 'Event' => 'CustomerCompanyUpdate', 'Module' => 'Kernel::System::CustomerCompany::Event::TicketUpdate', 'Transaction' => '0' };</code>

6.2.2. CustomerUser::EventModulePost###120-UpdateTickets

Description:	Event module that updates tickets after an update of the Customer User.
Group:	Ticket
SubGroup:	Core::CustomerCompany
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'CustomerUser::EventModulePost'}->{'120-UpdateTickets'} = { 'Event' => 'CustomerUserUpdate', 'Module' => 'Kernel::System::CustomerUser::Event::TicketUpdate', 'Transaction' => '0' };</code>

6.3. Core::FulltextSearch

6.3.1. Ticket::SearchIndexModule

Description:	Helps to extend your articles full-text search (From, To, Cc, Subject and Body search). Runtime will do full-text searches on live data (it works fine for up to 50.000 tickets). StaticDB will strip all articles and will build an index after article creation, increasing fulltext searches about 50%. To create an initial index use "bin/otrs.RebuildFulltextIndex.pl".
Group:	Ticket
SubGroup:	Core::FulltextSearch

Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::SearchIndexModule'} = 'Kernel::System::Ticket::ArticleSearchIndex::RuntimeDB';</code>

6.3.2. Ticket::SearchIndex::Attribute

Description:	Basic fulltext index settings. Execute "bin/otrs.RebuildFulltextIndex.pl" in order to generate a new index.
Group:	Ticket
SubGroup:	Core::FulltextSearch
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::SearchIndex::Attribute'} = { 'WordCountMax' => '1000', 'WordLengthMax' => '30', 'WordLengthMin' => '3' };</code>

6.3.3. Ticket::SearchIndex::Filters

Description:	Fulltext index regex filters to remove parts of the text.
Group:	Ticket
SubGroup:	Core::FulltextSearch
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::SearchIndex::Filters'} = ['[,\\&\\<\\>\\?\"\\!*\\ \\;\\[\\]\\(\\)\\+\\\$\\^=]', '^\\[\\'\\.\\.] \\[\\'\\.\\.]\$'];</code>

6.3.4. Ticket::SearchIndex::StopWords

Description:	Stop words for fulltext index. These words will be removed.
Group:	Ticket
SubGroup:	Core::FulltextSearch
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::SearchIndex::StopWords'} = { 'a' => '1', 'als' => '1', 'and' => '1', 'auf' => '1', 'das' => '1', 'den' => '1', 'der' => '1', 'die' => '1', 'for' => '1', 'im' => '1', 'in' => '1', 'is' => '1', 'of' => '1', 'the' => '1', 'to' => '1', 'und' => '1', };</code>

	<pre>'vom' => '1', 'zu' => '1' };</pre>
--	---

6.3.5. Ticket::EventModulePost###98-ArticleSearchIndex

Description:	Builds an article index right after the article's creation.
Group:	Ticket
SubGroup:	Core::FulltextSearch
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::EventModulePost'}->{'98-ArticleSearchIndex'} = { 'Event' => '(ArticleCreate ArticleUpdate)', 'Module' => 'Kernel::System::Ticket::Event::ArticleSearchIndex' };</pre>

6.4. Core::LinkObject

6.4.1. LinkObject::PossibleLink###0200

Description:	Links 2 tickets with a "Normal" type link.
Group:	Ticket
SubGroup:	Core::LinkObject
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'LinkObject::PossibleLink'}->{'0200'} = { 'Object1' => 'Ticket', 'Object2' => 'Ticket', 'Type' => 'Normal' };</pre>

6.4.2. LinkObject::PossibleLink###0201

Description:	Links 2 tickets with a "ParentChild" type link.
Group:	Ticket
SubGroup:	Core::LinkObject
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'LinkObject::PossibleLink'}->{'0201'} = { 'Object1' => 'Ticket', 'Object2' => 'Ticket', 'Type' => 'ParentChild' };</pre>

6.5. Core::PostMaster

6.5.1. PostmasterMaxEmails

Description:	Maximal auto email responses to own email-address a day (Loop-Protection).
--------------	--

Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PostmasterMaxEmails'} = '40';</code>

6.5.2. PostMasterMaxEmailSize

Description:	Maximal size in KBytes for mails that can be fetched via POP3/POP3S/IMAP/IMAPS (KBytes).
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PostMasterMaxEmailSize'} = '16384';</code>

6.5.3. PostMasterReconnectMessage

Description:	The "bin/PostMasterMailAccount.pl" will reconnect to POP3/POP3S/IMAP/IMAPS host after the specified count of messages.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PostMasterReconnectMessage'} = '20';</code>

6.5.4. LoopProtectionModule

Description:	Default loop protection module.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'LoopProtectionModule'} = 'Kernel::System::PostMaster::LoopProtection::DB';</code>

6.5.5. LoopProtectionLog

Description:	Path for the log file (it only applies if "FS" was selected for LoopProtectionModule and it is mandatory).
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'LoopProtectionLog'} = '<OTRS_CONFIG_Home>/var/log/LoopProtection';</code>

6.5.6. PostmasterAutoHTML2Text

Description:	Converts HTML mails into text messages.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PostmasterAutoHTML2Text'} = '1';</code>

6.5.7. PostmasterFollowUpSearchInReferences

Description:	Executes follow up checks on In-Reply-To or References headers for mails that don't have a ticket number in the subject.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PostmasterFollowUpSearchInReferences'} = '0';</code>

6.5.8. PostmasterFollowUpSearchInBody

Description:	Executes follow up mail body checks in mails that don't have a ticket number in the subject.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PostmasterFollowUpSearchInBody'} = '0';</code>

6.5.9. PostmasterFollowUpSearchInAttachment

Description:	Executes follow up mail attachments checks in mails that don't have a ticket number in the subject.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PostmasterFollowUpSearchInAttachment'} = '0';</code>

6.5.10. PostmasterFollowUpSearchInRaw

Description:	Executes follow up plain/raw mail checks in mails that don't have a ticket number in the subject.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	1

Config-Setting:	<code>\$Self->{'PostmasterFollowUpSearchInRaw'} = '0';</code>
-----------------	--

6.5.11. PostmasterUserID

Description:	Specifies user id of the postmaster data base.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PostmasterUserID'} = '1';</code>

6.5.12. PostmasterDefaultQueue

Description:	Defines the postmaster default queue.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PostmasterDefaultQueue'} = 'Raw';</code>

6.5.13. PostmasterDefaultPriority

Description:	Defines the default priority of new tickets.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PostmasterDefaultPriority'} = '3 normal';</code>

6.5.14. PostmasterDefaultState

Description:	Defines the default state of new tickets.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PostmasterDefaultState'} = 'new';</code>

6.5.15. PostmasterFollowUpState

Description:	Defines the state of a ticket if it gets a follow-up.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PostmasterFollowUpState'} = 'open';</code>

6.5.16. PostmasterFollowUpStateClosed

Description:	Defines the state of a ticket if it gets a follow-up and the ticket was already closed.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'PostmasterFollowUpStateClosed'} = 'open';</code>

6.5.17. PostmasterFollowUpOnUnlockAgentNotifyOnlyToOwner

Description:	Sends agent follow-up notification only to the owner, if a ticket is unlocked (the default is to send the notification to all agents).
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PostmasterFollowUpOnUnlockAgentNotifyOnlyToOwner'} = '0';</code>

6.5.18. PostmasterX-Header

Description:	Defines all the X-headers that should be scanned.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'PostmasterX-Header'} = ['From', 'To', 'Cc', 'Reply-To', 'ReplyTo', 'Subject', 'Message-ID', 'Message-Id', 'Resent-To', 'Resent-From', 'Precedence', 'Mailing-List', 'List-Id', 'List-Archive', 'Errors-To', 'References', 'In-Reply-To', 'Auto-Submitted', 'X-Loop', 'X-Spam-Flag', 'X-Spam-Level', 'X-Spam-Score', 'X-Spam-Status', 'X-No-Loop', 'X-Priority', 'Importance', 'X-Mailer',</code>

```
'User-Agent',
'Organization',
'X-Original-To',
'Delivered-To',
'Envelope-To',
'Return-Path',
'X-OTRS-Owner',
'X-OTRS-OwnerID',
'X-OTRS-Responsible',
'X-OTRS-ResponsibleID',
'X-OTRS-Loop',
'X-OTRS-Priority',
'X-OTRS-Queue',
'X-OTRS-Lock',
'X-OTRS-Ignore',
'X-OTRS-State',
'X-OTRS-State-PendingTime',
'X-OTRS-Type',
'X-OTRS-Service',
'X-OTRS-SLA',
'X-OTRS-CustomerNo',
'X-OTRS-CustomerUser',
'X-OTRS-SenderType',
'X-OTRS-ArticleType',
'X-OTRS-FollowUp-Priority',
'X-OTRS-FollowUp-Queue',
'X-OTRS-FollowUp-Lock',
'X-OTRS-FollowUp-State',
'X-OTRS-FollowUp-State-PendingTime',
'X-OTRS-FollowUp-Type',
'X-OTRS-FollowUp-Service',
'X-OTRS-FollowUp-SLA',
'X-OTRS-FollowUp-SenderType',
'X-OTRS-FollowUp-ArticleType'
];
```

6.5.19. PostMaster::PreFilterModule###1-Match

Description:	Module to filter and manipulate incoming messages. Block/ignore all spam email with From: noreply@ address.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'PostMaster::PreFilterModule'}->{'1-Match'} = { 'Match' => { 'From' => 'noreply@' }, 'Module' => 'Kernel::System::PostMaster::Filter::Match', 'Set' => { 'X-OTRS-Ignore' => 'yes' }, 'StopAfterMatch' => '0' };</pre>

6.5.20. PostMaster::PreFilterModule###2-Match

Description:	Module to filter and manipulate incoming messages. Get a 4 digit number to ticket free text, use regex in Match e. g. From => '(.+?)@.+?', and use () as [***] in Set =>.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	0

Required:	0
Config-Setting:	<pre>\$Self->{'PostMaster::PreFilterModule'}->{'2-Match'} = { 'Match' => { 'Subject' => 'SomeNumber:(\\d\\d\\d\\d\\d)' }, 'Module' => 'Kernel::System::PostMaster::Filter::Match', 'Set' => { 'X-OTRS-DynamicField-TicketFreeKey1' => 'SomeNumber', 'X-OTRS-DynamicField-TicketFreeText1' => '***' }, 'StopAfterMatch' => '0' };</pre>

6.5.21. PostMaster::PreFilterModule###3-NewTicketReject

Description:	Blocks all the incoming emails that do not have a valid ticket number in subject with From: @example.com address.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'PostMaster::PreFilterModule'}->{'3-NewTicketReject'} = { 'Match' => { 'From' => '@example.com' }, 'Module' => 'Kernel::System::PostMaster::Filter::NewTicketReject', 'Set' => { 'X-OTRS-Ignore' => 'yes' }, 'StopAfterMatch' => '0' };</pre>

6.5.22. PostMaster::PreFilterModule::NewTicketReject::Sender

Description:	Defines the sender for rejected emails.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'PostMaster::PreFilterModule::NewTicketReject::Sender'} = 'noreply@example.com';</pre>

6.5.23. PostMaster::PreFilterModule::NewTicketReject::Subject

Description:	Defines the subject for rejected emails.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'PostMaster::PreFilterModule::NewTicketReject::Subject'} = 'Email Rejected';</pre>

6.5.24. PostMaster::PreFilterModule::NewTicketReject::Body

Description:	Defines the body text for rejected emails.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'PostMaster::PreFilterModule::NewTicketReject::Body'} = ' Dear Customer, Unfortunately we could not detect a valid ticket number in your subject, so this email can\'t be processed. Please create a new ticket via the customer panel. Thanks for your help! Your Helpdesk Team ';</pre>

6.5.25. PostMaster::PreFilterModule###4-CMD

Description:	CMD example setup. Ignores emails where external CMD returns some output on STDOUT (email will be piped into STDIN of some.bin).
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'PostMaster::PreFilterModule'}->{'4-CMD'} = { 'CMD' => '/usr/bin/some.bin', 'Module' => 'Kernel::System::PostMaster::Filter::CMD', 'Set' => { 'X-OTRS-Ignore' => 'yes' } };</pre>

6.5.26. PostMaster::PreFilterModule###5-SpamAssassin

Description:	Spam Assassin example setup. Ignores emails that are marked with SpamAssassin.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'PostMaster::PreFilterModule'}->{'5-SpamAssassin'} = { 'CMD' => '/usr/bin/spamassassin grep -i "X-Spam-Status: yes"', 'Module' => 'Kernel::System::PostMaster::Filter::CMD', 'Set' => { 'X-OTRS-Ignore' => 'yes' } };</pre>

6.5.27. PostMaster::PreFilterModule###6-SpamAssassin

Description:	Spam Assassin example setup. Moves marked mails to spam queue.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'PostMaster::PreFilterModule'}->{'6-SpamAssassin'} = { 'CMD' => '/usr/bin/spamassassin grep -i "X-Spam-Status: yes"', 'Module' => 'Kernel::System::PostMaster::Filter::CMD', 'Set' => { 'X-OTRS-Queue' => 'spam' } };</pre>

6.5.28. PostMaster::PreFilterModule###000-MatchDBSource

Description:	Module to use database filter storage.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'PostMaster::PreFilterModule'}->{'000-MatchDBSource'} = { 'Module' => 'Kernel::System::PostMaster::Filter::MatchDBSource' };</pre>

6.5.29. PostMaster::PostFilterModule###000-FollowUpArticleTypeCheck

Description:	Module to check if arrived emails should be marked as email-internal (because of original forwarded internal email). ArticleType and SenderType define the values for the arrived email/article.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'PostMaster::PostFilterModule'}->{'000-FollowUpArticleTypeCheck'} = { 'ArticleType' => 'email-internal', 'Module' => 'Kernel::System::PostMaster::Filter::FollowUpArticleTypeCheck', 'SenderType' => 'customer' };</pre>

6.5.30. PostMaster::PreFilterModule###000-ExternalTicketNumberRecognition1

Description:	Recognize if a ticket is a follow up to an existing ticket using an external ticket number.
--------------	---

Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	0
Required:	0
Config-Setting:	<pre> \$Self->{'PostMaster::PreFilterModule'}->{'000-ExternalTicketNumberRecognition1'} = { 'ArticleType' => 'note-report', 'DynamicFieldName' => 'Name_X', 'FromAddressRegExp' => '\\s*@example.com', 'Module' => 'Kernel::System::PostMaster::Filter::ExternalTicketNumberRecognition', 'Name' => 'Some Description', 'NumberRegExp' => '\\s*Incident-(\\d.*)\\s*', 'SearchInBody' => '1', 'SearchInSubject' => '1', 'SenderType' => 'system', 'TicketStateTypes' => 'new;open' }; </pre>

6.5.31. PostMaster::PreFilterModule###000-ExternalTicketNumberRecognition2

Description:	Recognize if a ticket is a follow up to an existing ticket using an external ticket number.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	0
Required:	0
Config-Setting:	<pre> \$Self->{'PostMaster::PreFilterModule'}->{'000-ExternalTicketNumberRecognition2'} = { 'ArticleType' => 'note-report', 'DynamicFieldName' => 'Name_X', 'FromAddressRegExp' => '\\s*@example.com', 'Module' => 'Kernel::System::PostMaster::Filter::ExternalTicketNumberRecognition', 'Name' => 'Some Description', 'NumberRegExp' => '\\s*Incident-(\\d.*)\\s*', 'SearchInBody' => '1', 'SearchInSubject' => '1', 'SenderType' => 'system', 'TicketStateTypes' => 'new;open' }; </pre>

6.5.32. PostMaster::PreFilterModule###000-ExternalTicketNumberRecognition3

Description:	Recognize if a ticket is a follow up to an existing ticket using an external ticket number.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	0
Required:	0
Config-Setting:	<pre> \$Self->{'PostMaster::PreFilterModule'}->{'000-ExternalTicketNumberRecognition3'} = { 'ArticleType' => 'note-report', 'DynamicFieldName' => 'Name_X', 'FromAddressRegExp' => '\\s*@example.com', </pre>

	<pre>'Module' => 'Kernel::System::PostMaster::Filter::ExternalTicketNumberRecognition', 'Name' => 'Some Description', 'NumberRegExp' => '\\s*Incident-(\\d.*)\\s*', 'SearchInBody' => '1', 'SearchInSubject' => '1', 'SenderType' => 'system', 'TicketStateTypes' => 'new;open' };</pre>
--	---

6.5.33. PostMaster::PreFilterModule###000-ExternalTicketNumberRecognition4

Description:	Recognize if a ticket is a follow up to an existing ticket using an external ticket number.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'PostMaster::PreFilterModule'}->{'000-ExternalTicketNumberRecognition4'} = { 'ArticleType' => 'note-report', 'DynamicFieldName' => 'Name_X', 'FromAddressRegExp' => '\\s*@example.com', 'Module' => 'Kernel::System::PostMaster::Filter::ExternalTicketNumberRecognition', 'Name' => 'Some Description', 'NumberRegExp' => '\\s*Incident-(\\d.*)\\s*', 'SearchInBody' => '1', 'SearchInSubject' => '1', 'SenderType' => 'system', 'TicketStateTypes' => 'new;open' };</pre>

6.5.34. SendNoAutoResponseRegExp

Description:	If this regex matches, no message will be send by the autoresponder.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'SendNoAutoResponseRegExp'} = '(MAILER-DAEMON postmaster abuse)@.+?\\..+?';</pre>

6.5.35. AutoResponseForWebTickets

Description:	If this option is set to 'Yes', tickets created via the web interface, via Customers or Agents, will receive an autoresponse if configured. If this option is set to 'No', no autoresponses will be sent.
Group:	Ticket
SubGroup:	Core::PostMaster
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'AutoResponseForWebTickets'} = '1';</pre>

6.6. Core::Stats

6.6.1. Stats::DynamicObjectRegistration###Ticket

Description:	Module to generate ticket statistics.
Group:	Ticket
SubGroup:	Core::Stats
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Stats::DynamicObjectRegistration'}->{'Ticket'} = { 'Module' => 'Kernel::System::Stats::Dynamic::Ticket' };</pre>

6.6.2. Stats::DynamicObjectRegistration###TicketList

Description:	Determines if the statistics module may generate ticket lists.
Group:	Ticket
SubGroup:	Core::Stats
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Stats::DynamicObjectRegistration'}->{'TicketList'} = { 'Module' => 'Kernel::System::Stats::Dynamic::TicketList' };</pre>

6.6.3. Stats::DynamicObjectRegistration###TicketAccountedTime

Description:	Module to generate accounted time ticket statistics.
Group:	Ticket
SubGroup:	Core::Stats
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Stats::DynamicObjectRegistration'}->{'TicketAccountedTime'} = { 'Module' => 'Kernel::System::Stats::Dynamic::TicketAccountedTime' };</pre>

6.6.4. Stats::DynamicObjectRegistration###TicketSolutionResponseTime

Description:	Module to generate ticket solution and response time statistics.
Group:	Ticket
SubGroup:	Core::Stats
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Stats::DynamicObjectRegistration'}->{'TicketSolutionResponseTime'} = { 'Module' => 'Kernel::System::Stats::Dynamic::TicketSolutionResponseTime' };</pre>

6.7. Core::Ticket

6.7.1. Ticket::Hook

Description:	The identifier for a ticket, e.g. Ticket#, Call#, MyTicket#. The default is Ticket#.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Hook'} = 'Ticket#';</code>

6.7.2. Ticket::HookDivider

Description:	The divider between TicketHook and ticket number. E.g ' ':
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::HookDivider'} = '';</code>

6.7.3. Ticket::SubjectSize

Description:	Max size of the subjects in an email reply.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::SubjectSize'} = '100';</code>

6.7.4. Ticket::SubjectRe

Description:	The text at the beginning of the subject in an email reply, e.g. RE, AW, or AS.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::SubjectRe'} = 'Re';</code>

6.7.5. Ticket::SubjectFwd

Description:	The text at the beginning of the subject when an email is forwarded, e.g. FW, Fwd, or WG.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1

Required:	1
Config-Setting:	<code>\$Self->{'Ticket::SubjectFwd'} = 'Fwd';</code>

6.7.6. Ticket::SubjectFormat

Description:	The format of the subject. 'Left' means '[TicketHook#:12345] Some Subject', 'Right' means 'Some Subject [TicketHook#:12345]', 'None' means 'Some Subject' and no ticket number. In the last case you should enable PostmasterFollowupSearchInRaw or PostmasterFollowUpSearchInReferences to recognize followups based on email headers and/or body.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::SubjectFormat'} = 'Left';</code>

6.7.7. Ticket::CustomQueue

Description:	Name of custom queue. The custom queue is a queue selection of your preferred queues and can be selected in the preferences settings.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::CustomQueue'} = 'My Queues';</code>

6.7.8. Ticket::NewArticleIgnoreSystemSender

Description:	Ignore article with system sender type for new article feature (e.g. auto responses or email notifications).
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::NewArticleIgnoreSystemSender'} = '0';</code>

6.7.9. Ticket::ChangeOwnerToEveryone

Description:	Changes the owner of tickets to everyone (useful for ASP). Normally only agent with rw permissions in the queue of the ticket will be shown.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::ChangeOwnerToEveryone'} = '0';</code>

6.7.10. Ticket::**Responsible**

Description:	Enables ticket responsible feature, to keep track of a specific ticket.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Responsible'} = '0';</code>

6.7.11. Ticket::**ResponsibleAutoSet**

Description:	Automatically sets the owner of a ticket as the responsible for it (if ticket responsible feature is enabled).
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::ResponsibleAutoSet'} = '1';</code>

6.7.12. Ticket::**Type**

Description:	Allows defining new types for ticket (if ticket type feature is enabled).
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Type'} = '0';</code>

6.7.13. Ticket::**Service**

Description:	Allows defining services and SLAs for tickets (e. g. email, desktop, network, ...), and escalation attributes for SLAs (if ticket service/SLA feature is enabled).
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Service'} = '0';</code>

6.7.14. Ticket::**Service::Default::UnknownCustomer**

Description:	Allows default services to be selected also for non existing customers.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1

Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Service::Default::UnknownCustomer'} = '0';</code>

6.7.15. Ticket::ArchiveSystem

Description:	Activates the ticket archive system to have a faster system by moving some tickets out of the daily scope. To search for these tickets, the archive flag has to be enabled in the ticket search.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::ArchiveSystem'} = '0';</code>

6.7.16. Ticket::ArchiveSystem::RemoveSeenFlags

Description:	Controls if the ticket and article seen flags are removed when a ticket is archived.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::ArchiveSystem::RemoveSeenFlags'} = '1';</code>

6.7.17. Ticket::ArchiveSystem::RemoveTicketWatchers

Description:	Removes the ticket watcher information when a ticket is archived.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::ArchiveSystem::RemoveTicketWatchers'} = '1';</code>

6.7.18. Ticket::CustomerArchiveSystem

Description:	Activates the ticket archive system search in the customer interface.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::CustomerArchiveSystem'} = '0';</code>

6.7.19. Ticket::NumberGenerator

Description:	Selects the ticket number generator module. "AutoIncrement" increments the ticket number, the SystemID and the counter are used with SystemID.counter format (e.g. 1010138, 1010139).
--------------	---

	With "Date" the ticket numbers will be generated by the current date, the SystemID and the counter. The format looks like Year.Month.Day.SystemID.counter (e.g. 200206231010138, 200206231010139). With "DateChecksum" the counter will be appended as checksum to the string of date and SystemID. The checksum will be rotated on a daily basis. The format looks like Year.Month.Day.SystemID.Counter.CheckSum (e.g. 2002070110101520, 2002070110101535). "Random" generates randomized ticket numbers in the format "SystemID.Random" (e.g. 100057866352, 103745394596).
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::NumberGenerator'} = 'Kernel::System::Ticket::Number::DateChecksum';</code>

6.7.20. Ticket::NumberGenerator::CheckSystemID

Description:	Checks the SystemID in ticket number detection for follow-ups (use "No" if SystemID has been changed after using the system).
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::NumberGenerator::CheckSystemID'} = '1';</code>

6.7.21. Ticket::NumberGenerator::MinCounterSize

Description:	Sets the minimal ticket counter size (if "AutoIncrement" was selected as TicketNumberGenerator). Default is 5, this means the counter starts from 10000.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::NumberGenerator::MinCounterSize'} = '5';</code>

6.7.22. Ticket::NumberGenerator::Date::UseFormattedCounter

Description:	Enables the minimal ticket counter size (if "Date" was selected as TicketNumberGenerator).
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::NumberGenerator::Date::UseFormattedCounter'} = '0';</code>

6.7.23. Ticket::CounterLog

Description:	Log file for the ticket counter.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::CounterLog'} = '<OTRS_CONFIG_Home>/var/log/TicketCounter.log';</code>

6.7.24. Ticket::IndexModule

Description:	IndexAccelerator: to choose your backend TicketViewAccelerator module. "RuntimeDB" generates each queue view on the fly from ticket table (no performance problems up to approx. 60.000 tickets in total and 6.000 open tickets in the system). "StaticDB" is the most powerful module, it uses an extra ticket-index table that works like a view (recommended if more than 80.000 and 6.000 open tickets are stored in the system). Use the script "bin/otrs.RebuildTicketIndex.pl" for initial index update.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::IndexModule'} = 'Kernel::System::Ticket::IndexAccelerator::RuntimeDB';</code>

6.7.25. Ticket::StorageModule

Description:	Saves the attachments of articles. "DB" stores all data in the database (not recommended for storing big attachments). "FS" stores the data on the filesystem; this is faster but the webserver should run under the OTRS user. You can switch between the modules even on a system that is already in production without any loss of data.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::StorageModule'} = 'Kernel::System::Ticket::ArticleStorageDB';</code>

6.7.26. ArticleDir

Description:	Specifies the directory to store the data in, if "FS" was selected for TicketStorageModule.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1

Config-Setting:	<code>\$Self->{'ArticleDir'} = '<OTRS_CONFIG_Home>/var/article';</code>
-----------------	--

6.7.27. Ticket::EventModulePost###100-ArchiveRestore

Description:	Restores a ticket from the archive (only if the event is a state change, from closed to any open available state).
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::EventModulePost'}->{'100-ArchiveRestore'} = { 'Event' => 'TicketStateUpdate', 'Module' => 'Kernel::System::Ticket::Event::ArchiveRestore' };</code>

6.7.28. Ticket::EventModulePost###110-AcceleratorUpdate

Description:	Updates the ticket index accelerator.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::EventModulePost'}->{'110-AcceleratorUpdate'} = { 'Event' => 'TicketStateUpdate TicketQueueUpdate TicketLockUpdate', 'Module' => 'Kernel::System::Ticket::Event::TicketAcceleratorUpdate' };</code>

6.7.29. Ticket::EventModulePost###120-ForceOwnerResetOnMove

Description:	Resets and unlocks the owner of a ticket if it was moved to another queue.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::EventModulePost'}->{'120-ForceOwnerResetOnMove'} = { 'Event' => 'TicketQueueUpdate', 'Module' => 'Kernel::System::Ticket::Event::ForceOwnerReset' };</code>

6.7.30. Ticket::EventModulePost###130-ForceStateChangeOnLock

Description:	Forces to choose a different ticket state (from current) after lock action. Define the current state as key, and the next state after lock action as content.
--------------	---

Group:	Ticket
SubGroup:	Core::Ticket
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::EventModulePost'}->{'130-ForceStateChangeOnLock'} = { 'Event' => 'TicketLockUpdate', 'Module' => 'Kernel::System::Ticket::Event::ForceState', 'new' => 'open' };</pre>

6.7.31. Ticket::EventModulePost###140-ResponsibleAutoSet

Description:	Automatically sets the responsible of a ticket (if it is not set yet) after the first owner update.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::EventModulePost'}->{'140-ResponsibleAutoSet'} = { 'Event' => 'TicketOwnerUpdate', 'Module' => 'Kernel::System::Ticket::Event::ResponsibleAutoSet' };</pre>

6.7.32. Ticket::EventModulePost###150-TicketPendingTimeReset

Description:	Sets the PendingTime of a ticket to 0 if the state is changed to a non-pending state.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::EventModulePost'}->{'150-TicketPendingTimeReset'} = { 'Event' => 'TicketStateUpdate', 'Module' => 'Kernel::System::Ticket::Event::TicketPendingTimeReset' };</pre>

6.7.33. Ticket::EventModulePost###500-Notification-Event

Description:	Sends the notifications which are configured in the admin interface under "Notification (Event)".
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::EventModulePost'}->{'500-NotificationEvent'} = { 'Event' => '', </pre>

```
'Module' => 'Kernel::System::Ticket::Event::NotificationEvent',
'Transaction' => '1'
};
```

6.7.34. Ticket::EventModulePost###900-EscalationIndex

Description:	Updates the ticket escalation index after a ticket attribute got updated.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::EventModulePost'}->{'900-EscalationIndex'} = { 'Event' => 'TicketSLAUpdate TicketQueueUpdate TicketStateUpdate TicketCreate ArticleCreate', 'Module' => 'Kernel::System::Ticket::Event::TicketEscalationIndex' };</pre>

6.7.35. Ticket::EventModulePost###900-EscalationStopEvents

Description:	Ticket event module that triggers the escalation stop events.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::EventModulePost'}->{'900-EscalationStopEvents'} = { 'Event' => 'TicketSLAUpdate TicketQueueUpdate TicketStateUpdate ArticleCreate', 'Module' => 'Kernel::System::Ticket::Event::TriggerEscalationStopEvents' };</pre>

6.7.36. Ticket::EventModulePost###910-ForceUnlockOnMove

Description:	Forces to unlock tickets after being moved to another queue.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::EventModulePost'}->{'910-ForceUnlockOnMove'} = { 'Event' => 'TicketQueueUpdate', 'Module' => 'Kernel::System::Ticket::Event::ForceUnlock' };</pre>

6.7.37. Ticket::EventModulePost###920-TicketArticleNewMessageUpdate

Description:	Update Ticket "Seen" flag if every article got seen or a new Article got created.
--------------	---

Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::EventModulePost'}->{'920-TicketArticleNewMessageUpdate'} = { 'Event' => 'ArticleCreate ArticleFlagSet', 'Module' => 'Kernel::System::Ticket::Event::TicketNewMessageUpdate' };</pre>

6.7.38. DynamicFieldFromCustomerUser::Mapping

Description:	Define a mapping between variables of the customer user data (keys) and dynamic fields of a ticket (values). The purpose is to store customer user data in ticket dynamic fields. The dynamic fields must be present in the system and should be enabled for AgentTicketFreeText, so that they can be set/updated manually by the agent. They mustn't be enabled for AgentTicketPhone, AgentTicketEmail and AgentTicketCustomer. If they were, they would have precedence over the automatically set values. To use this mapping, you have to also activate the next setting below.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'DynamicFieldFromCustomerUser::Mapping'} = { 'UserFirstname' => 'CustomerFirstname' };</pre>

6.7.39. Ticket::EventModulePost###930-DynamicFieldFromCustomerUser

Description:	This event module stores attributes from CustomerUser as DynamicFields tickets. Please see the setting above for how to configure the mapping.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::EventModulePost'}->{'930-DynamicFieldFromCustomerUser'} = { 'Event' => '(TicketCreate TicketCustomerUpdate)', 'Module' => 'Kernel::System::Ticket::Event::DynamicFieldFromCustomerUser' };</pre>

6.7.40. Ticket::CustomModule###001-CustomModule

Description:	Overloads (redefines) existing functions in Kernel::System::Ticket. Used to easily add customizations.
Group:	Ticket

SubGroup:	Core::Ticket
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::CustomModule'}->{'001-CustomModule'} = 'Kernel::System::Ticket::Custom';</code>

6.7.41. Ticket::ViewableSenderTypes

Description:	Defines the default viewable sender types of a ticket (default: customer).
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::ViewableSenderTypes'} = ['\customer\'];</code>

6.7.42. Ticket::ViewableLocks

Description:	Defines the viewable locks of a ticket. Default: unlock, tmp_lock.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::ViewableLocks'} = ['\unlock\' , '\tmp_lock\'];</code>

6.7.43. Ticket::ViewableStateType

Description:	Defines the valid state types for a ticket.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::ViewableStateType'} = ['new', 'open', 'pending reminder', 'pending auto'];</code>

6.7.44. Ticket::UnlockStateType

Description:	Defines the valid states for unlocked tickets. To unlock tickets the script "bin/otrs.UnlockTickets.pl" can be used.
Group:	Ticket
SubGroup:	Core::Ticket

Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::UnlockStateType'} = ['new', 'open'];</pre>

6.7.45. Ticket::PendingNotificationOnlyToOwner

Description:	Sends reminder notifications of unlocked ticket after reaching the reminder date (only sent to ticket owner).
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::PendingNotificationOnlyToOwner'} = '0';</pre>

6.7.46. Ticket::PendingNotificationNotToResponsible

Description:	Disables sending reminder notifications to the responsible agent of a ticket (Ticket::Responsible needs to be activated).
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::PendingNotificationNotToResponsible'} = '0';</pre>

6.7.47. Ticket::PendingReminderStateType

Description:	Defines the state type of the reminder for pending tickets.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::PendingReminderStateType'} = ['pending reminder'];</pre>

6.7.48. Ticket::PendingAutoStateType

Description:	Determines the possible states for pending tickets that changed state after reaching time limit.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::PendingAutoStateType'} = ['pending auto'];</pre>

];
--	----

6.7.49. Ticket::StateAfterPending

Description:	Defines which states should be set automatically (Content), after the pending time of state (Key) has been reached.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::StateAfterPending'} = { 'pending auto close+' => 'closed successful', 'pending auto close-' => 'closed unsuccessful' };</pre>

6.7.50. System::Permission

Description:	Standard available permissions for agents within the application. If more permissions are needed, they can be entered here. Permissions must be defined to be effective. Some other good permissions have also been provided built-in: note, close, pending, customer, freetext, move, compose, responsible, forward, and bounce. Make sure that "rw" is always the last registered permission.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'System::Permission'} = ['ro', 'move_into', 'create', 'note', 'owner', 'priority', 'rw'];</pre>

6.7.51. Ticket::Permission###1-OwnerCheck

Description:	Module to check the owner of a ticket.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Permission'}->{'1-OwnerCheck'} = { 'Granted' => '1', 'Module' => 'Kernel::System::Ticket::Permission::OwnerCheck', 'Required' => '0' };</pre>

6.7.52. Ticket::Permission###2-ResponsibleCheck

Description:	Module to check the agent responsible of a ticket.
--------------	--

Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Permission'}->{'2-ResponsibleCheck'} = { 'Granted' => '1', 'Module' => 'Kernel::System::Ticket::Permission::ResponsibleCheck', 'Required' => '0' };</pre>

6.7.53. Ticket::Permission###3-GroupCheck

Description:	Module to check if a user is in a special group. Access is granted, if the user is in the specified group and has ro and rw permissions.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Permission'}->{'3-GroupCheck'} = { 'Granted' => '1', 'Module' => 'Kernel::System::Ticket::Permission::GroupCheck', 'Required' => '0' };</pre>

6.7.54. Ticket::Permission###4-WatcherCheck

Description:	Module to check the watcher agents of a ticket.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Permission'}->{'4-WatcherCheck'} = { 'Granted' => '1', 'Module' => 'Kernel::System::Ticket::Permission::WatcherCheck', 'Required' => '0' };</pre>

6.7.55. CustomerTicket::Permission###1-GroupCheck

Description:	Module to check the group permissions for the access to customer tickets.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerTicket::Permission'}->{'1-GroupCheck'} = { 'Granted' => '0', 'Module' => 'Kernel::System::Ticket::CustomerPermission::GroupCheck', 'Required' => '1' };</pre>

6.7.56. CustomerTicket::Permission###2-CustomerUserIDCheck

Description:	Grants access, if the customer ID of the ticket matches the customer user's ID and the customer user has group permissions on the queue the ticket is in.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerTicket::Permission'}->{'2-CustomerUserIDCheck'} = { 'Granted' => '1', 'Module' => 'Kernel::System::Ticket::CustomerPermission::CustomerUserIDCheck', 'Required' => '0' };</pre>

6.7.57. CustomerTicket::Permission###3-CustomerID-Check

Description:	Module to check customer permissions.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerTicket::Permission'}->{'3-CustomerIDCheck'} = { 'Granted' => '1', 'Module' => 'Kernel::System::Ticket::CustomerPermission::CustomerIDCheck', 'Required' => '0' };</pre>

6.7.58. Ticket::DefineEmailFrom

Description:	Defines how the From field from the emails (sent from answers and email tickets) should look like.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::DefineEmailFrom'} = 'SystemAddressName';</pre>

6.7.59. Ticket::DefineEmailFromSeparator

Description:	Defines the separator between the agents real name and the given queue email address.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1

Required:	1
Config-Setting:	<code>\$Self->{'Ticket::DefineEmailFromSeparator'} = 'via';</code>

6.7.60. CustomerNotifyJustToRealCustomer

Description:	Sends customer notifications just to the mapped customer. Normally, if no customer is mapped, the latest customer sender gets the notification.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CustomerNotifyJustToRealCustomer'} = '0';</code>

6.7.61. AgentSelfNotifyOnAction

Description:	Specifies if an agent should receive email notification of his own actions.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'AgentSelfNotifyOnAction'} = '0';</code>

6.7.62. Ticket::EventModulePost###900-GenericAgent

Description:	Event module registration. For more performance you can define a trigger event (e. g. Event => TicketCreate).
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::EventModulePost'}->{'900-GenericAgent'} = { 'Event' => '', 'Module' => 'Kernel::System::Ticket::Event::GenericAgent', 'Transaction' => '1' };</code>

6.7.63. StandardTemplate::Types

Description:	Defines the list of types for templates.
Group:	Ticket
SubGroup:	Core::Ticket
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'StandardTemplate::Types'} = { 'Answer' => 'Answer', 'Create' => 'Create', 'Forward' => 'Forward', 'PhoneCall' => 'Phone call' };</code>

```
};
```

6.8. Core::TicketACL

6.8.1. Ticket::Acl::Module###1-Ticket::Acl::Module

Description:	ACL module that allows closing parent tickets only if all its children are already closed ("State" shows which states are not available for the parent ticket until all child tickets are closed).
Group:	Ticket
SubGroup:	Core::TicketACL
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Acl::Module'}->{'1-Ticket::Acl::Module'} = { 'Module' => 'Kernel::System::Ticket::Acl::CloseParentAfterClosedChilds', 'State' => ['closed successful', 'closed unsuccessful'] };</pre>

6.8.2. TicketACL::Default::Action

Description:	Default ACL values for ticket actions.
Group:	Ticket
SubGroup:	Core::TicketACL
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'TicketACL::Default::Action'} = {};</pre>

6.8.3. ACLKeysLevel1Match

Description:	Defines which items are available in first level of the ACL structure.
Group:	Ticket
SubGroup:	Core::TicketACL
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'ACLKeysLevel1Match'} = { 'Properties' => 'Properties', 'PropertiesDatabase' => 'PropertiesDatabase' };</pre>

6.8.4. ACLKeysLevel1Change

Description:	Defines which items are available in first level of the ACL structure.
Group:	Ticket
SubGroup:	Core::TicketACL
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'ACLKeysLevel1Change'} = {</pre>

	<pre>'Possible' => 'Possible', 'PossibleNot' => 'PossibleNot' };</pre>
--	--

6.8.5. ACLKeysLevel2::Possible

Description:	Defines which items are available in second level of the ACL structure.
Group:	Ticket
SubGroup:	Core::TicketACL
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'ACLKeysLevel2::Possible'} = { 'Action' => 'Action', 'ActivityDialog' => 'ActivityDialog', 'Process' => 'Process', 'Ticket' => 'Ticket' };</pre>

6.8.6. ACLKeysLevel2::PossibleNot

Description:	Defines which items are available in second level of the ACL structure.
Group:	Ticket
SubGroup:	Core::TicketACL
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'ACLKeysLevel2::PossibleNot'} = { 'ActivityDialog' => 'ActivityDialog', 'Process' => 'Process', 'Ticket' => 'Ticket' };</pre>

6.8.7. ACLKeysLevel2::Properties

Description:	Defines which items are available in second level of the ACL structure.
Group:	Ticket
SubGroup:	Core::TicketACL
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'ACLKeysLevel2::Properties'} = { 'CustomerUser' => 'CustomerUser', 'DynamicField' => 'DynamicField', 'Frontend' => 'Frontend', 'Owner' => 'Owner', 'Priority' => 'Priority', 'Process' => 'Process', 'Queue' => 'Queue', 'Responsible' => 'Responsible', 'SLA' => 'SLA', 'Service' => 'Service', 'State' => 'State', 'Ticket' => 'Ticket', 'Type' => 'Type', 'User' => 'User' };</pre>

```
};
```

6.8.8. ACLKeysLevel2::PropertiesDatabase

Description:	Defines which items are available in second level of the ACL structure.
Group:	Ticket
SubGroup:	Core::TicketACL
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'ACLKeysLevel2::PropertiesDatabase'} = { 'CustomerUser' => 'CustomerUser', 'DynamicField' => 'DynamicField', 'Owner' => 'Owner', 'Priority' => 'Priority', 'Process' => 'Process', 'Queue' => 'Queue', 'Responsible' => 'Responsible', 'SLA' => 'SLA', 'Service' => 'Service', 'State' => 'State', 'Ticket' => 'Ticket', 'Type' => 'Type', 'User' => 'User' };</pre>

6.8.9. ACLKeysLevel3::Actions###100-Default

Description:	Defines which items are available for 'Action' in third level of the ACL structure.
Group:	Ticket
SubGroup:	Core::TicketACL
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'ACLKeysLevel3::Actions'}->{'100-Default'} = ['AgentTicketBounce', 'AgentTicketClose', 'AgentTicketCompose', 'AgentTicketCustomer', 'AgentTicketForward', 'AgentTicketFreeText', 'AgentTicketHistory', 'AgentTicketLink', 'AgentTicketLock', 'AgentTicketMerge', 'AgentTicketMove', 'AgentTicketNote', 'AgentTicketOwner', 'AgentTicketPending', 'AgentTicketPhone', 'AgentTicketPhoneInbound', 'AgentTicketPhoneOutbound', 'AgentTicketPrint', 'AgentTicketPriority', 'AgentTicketResponsible', 'AgentTicketWatcher', 'AgentTicketZoom', 'AgentLinkObject', 'CustomerTicketMessage', 'CustomerTicketPrint', 'CustomerTicketProcess', 'CustomerTicketZoom'];</pre>

];
--	----

6.8.10. ACL::CacheTTL

Description:	Cache time in seconds for the DB ACL backend.
Group:	Ticket
SubGroup:	Core::TicketACL
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'ACL::CacheTTL'} = '3600';</code>

6.9. Core::TicketBulkAction

6.9.1. Ticket::Frontend::BulkFeature

Description:	Enables ticket bulk action feature for the agent frontend to work on more than one ticket at a time.
Group:	Ticket
SubGroup:	Core::TicketBulkAction
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::BulkFeature'} = '1';</code>

6.9.2. Ticket::Frontend::BulkFeatureGroup

Description:	Enables ticket bulk action feature only for the listed groups.
Group:	Ticket
SubGroup:	Core::TicketBulkAction
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::BulkFeatureGroup'} = ['admin', 'users'];</code>

6.10. Core::TicketDynamicFieldDefault

6.10.1. Ticket::EventModulePost###TicketDynamicFieldDefault

Description:	Event module registration. For more performance you can define a trigger event (e. g. Event => TicketCreate). This is only possible if all Ticket dynamic fields need the same event.
Group:	Ticket
SubGroup:	Core::TicketDynamicFieldDefault
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::EventModulePost'}->{'TicketDynamicFieldDefault'} = {</code>

```
'Module' =>
'Kernel::System::Ticket::Event::TicketDynamicFieldDefault',
'Transaction' => '1'
};
```

6.10.2. Ticket::TicketDynamicFieldDefault###Element1

Description:	Configures a default TicketDynamicField setting. "Name" defines the dynamic field which should be used, "Value" is the data that will be set, and "Event" defines the trigger event. Please check the developer manual (http://doc.otrs.org/), chapter "Ticket Event Module".
Group:	Ticket
SubGroup:	Core::TicketDynamicFieldDefault
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::TicketDynamicFieldDefault'}->{'Element1'} = { 'Event' => 'TicketCreate', 'Name' => 'Field1', 'Value' => 'Default' };</pre>

6.10.3. Ticket::TicketDynamicFieldDefault###Element2

Description:	Configures a default TicketDynamicField setting. "Name" defines the dynamic field which should be used, "Value" is the data that will be set, and "Event" defines the trigger event. Please check the developer manual (http://doc.otrs.org/), chapter "Ticket Event Module".
Group:	Ticket
SubGroup:	Core::TicketDynamicFieldDefault
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::TicketDynamicFieldDefault'}->{'Element2'} = { 'Event' => '', 'Name' => '', 'Value' => '' };</pre>

6.10.4. Ticket::TicketDynamicFieldDefault###Element3

Description:	Configures a default TicketDynamicField setting. "Name" defines the dynamic field which should be used, "Value" is the data that will be set, and "Event" defines the trigger event. Please check the developer manual (http://doc.otrs.org/), chapter "Ticket Event Module".
Group:	Ticket
SubGroup:	Core::TicketDynamicFieldDefault
Valid:	0
Required:	0

Config-Setting:	<pre>\$Self->{'Ticket::TicketDynamicFieldDefault'}->{'Element3'} = { 'Event' => '', 'Name' => '', 'Value' => '' };</pre>
-----------------	---

6.10.5. Ticket::TicketDynamicFieldDefault###Element4

Description:	Configures a default TicketDynamicField setting. "Name" defines the dynamic field which should be used, "Value" is the data that will be set, and "Event" defines the trigger event. Please check the developer manual (http://doc.otrs.org/), chapter "Ticket Event Module".
Group:	Ticket
SubGroup:	Core::TicketDynamicFieldDefault
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::TicketDynamicFieldDefault'}->{'Element4'} = { 'Event' => '', 'Name' => '', 'Value' => '' };</pre>

6.10.6. Ticket::TicketDynamicFieldDefault###Element5

Description:	Configures a default TicketDynamicField setting. "Name" defines the dynamic field which should be used, "Value" is the data that will be set, and "Event" defines the trigger event. Please check the developer manual (http://doc.otrs.org/), chapter "Ticket Event Module".
Group:	Ticket
SubGroup:	Core::TicketDynamicFieldDefault
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::TicketDynamicFieldDefault'}->{'Element5'} = { 'Event' => '', 'Name' => '', 'Value' => '' };</pre>

6.10.7. Ticket::TicketDynamicFieldDefault###Element6

Description:	Configures a default TicketDynamicField setting. "Name" defines the dynamic field which should be used, "Value" is the data that will be set, and "Event" defines the trigger event. Please check the developer manual (http://doc.otrs.org/), chapter "Ticket Event Module".
Group:	Ticket
SubGroup:	Core::TicketDynamicFieldDefault
Valid:	0

Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::TicketDynamicFieldDefault'}->{'Element6'} = { 'Event' => '', 'Name' => '', 'Value' => '' };</pre>

6.10.8. Ticket::TicketDynamicFieldDefault###Element7

Description:	Configures a default TicketDynamicField setting. "Name" defines the dynamic field which should be used, "Value" is the data that will be set, and "Event" defines the trigger event. Please check the developer manual (http://doc.otrs.org/), chapter "Ticket Event Module".
Group:	Ticket
SubGroup:	Core::TicketDynamicFieldDefault
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::TicketDynamicFieldDefault'}->{'Element7'} = { 'Event' => '', 'Name' => '', 'Value' => '' };</pre>

6.10.9. Ticket::TicketDynamicFieldDefault###Element8

Description:	Configures a default TicketDynamicField setting. "Name" defines the dynamic field which should be used, "Value" is the data that will be set, and "Event" defines the trigger event. Please check the developer manual (http://doc.otrs.org/), chapter "Ticket Event Module".
Group:	Ticket
SubGroup:	Core::TicketDynamicFieldDefault
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::TicketDynamicFieldDefault'}->{'Element8'} = { 'Event' => '', 'Name' => '', 'Value' => '' };</pre>

6.10.10. Ticket::TicketDynamicFieldDefault###Element9

Description:	Configures a default TicketDynamicField setting. "Name" defines the dynamic field which should be used, "Value" is the data that will be set, and "Event" defines the trigger event. Please check the developer manual (http://doc.otrs.org/), chapter "Ticket Event Module".
Group:	Ticket
SubGroup:	Core::TicketDynamicFieldDefault

Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::TicketDynamicFieldDefault'}->{'Element9'} = { 'Event' => '', 'Name' => '', 'Value' => '' };</pre>

6.10.11. Ticket::TicketDynamicFieldDefault###Element10

Description:	Configures a default TicketDynamicField setting. "Name" defines the dynamic field which should be used, "Value" is the data that will be set, and "Event" defines the trigger event. Please check the developer manual (http://doc.otrs.org/), chapter "Ticket Event Module".
Group:	Ticket
SubGroup:	Core::TicketDynamicFieldDefault
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::TicketDynamicFieldDefault'}->{'Element10'} = { 'Event' => '', 'Name' => '', 'Value' => '' };</pre>

6.10.12. Ticket::TicketDynamicFieldDefault###Element11

Description:	Configures a default TicketDynamicField setting. "Name" defines the dynamic field which should be used, "Value" is the data that will be set, and "Event" defines the trigger event. Please check the developer manual (http://doc.otrs.org/), chapter "Ticket Event Module".
Group:	Ticket
SubGroup:	Core::TicketDynamicFieldDefault
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::TicketDynamicFieldDefault'}->{'Element11'} = { 'Event' => '', 'Name' => '', 'Value' => '' };</pre>

6.10.13. Ticket::TicketDynamicFieldDefault###Element12

Description:	Configures a default TicketDynamicField setting. "Name" defines the dynamic field which should be used, "Value" is the data that will be set, and "Event" defines the trigger event. Please check the developer manual (http://doc.otrs.org/), chapter "Ticket Event Module".
Group:	Ticket

SubGroup:	Core::TicketDynamicFieldDefault
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::TicketDynamicFieldDefault'}->{'Element12'} = { 'Event' => '', 'Name' => '', 'Value' => '' };</pre>

6.10.14. Ticket::TicketDynamicFieldDefault###Element13

Description:	Configures a default TicketDynamicField setting. "Name" defines the dynamic field which should be used, "Value" is the data that will be set, and "Event" defines the trigger event. Please check the developer manual (http://doc.otrs.org/), chapter "Ticket Event Module".
Group:	Ticket
SubGroup:	Core::TicketDynamicFieldDefault
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::TicketDynamicFieldDefault'}->{'Element13'} = { 'Event' => '', 'Name' => '', 'Value' => '' };</pre>

6.10.15. Ticket::TicketDynamicFieldDefault###Element14

Description:	Configures a default TicketDynamicField setting. "Name" defines the dynamic field which should be used, "Value" is the data that will be set, and "Event" defines the trigger event. Please check the developer manual (http://doc.otrs.org/), chapter "Ticket Event Module".
Group:	Ticket
SubGroup:	Core::TicketDynamicFieldDefault
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::TicketDynamicFieldDefault'}->{'Element14'} = { 'Event' => '', 'Name' => '', 'Value' => '' };</pre>

6.10.16. Ticket::TicketDynamicFieldDefault###Element15

Description:	Configures a default TicketDynamicField setting. "Name" defines the dynamic field which should be used, "Value" is the data that will be set, and "Event" defines the trigger event. Please check the developer manual (http://doc.otrs.org/), chapter "Ticket Event Module".
--------------	--

Group:	Ticket
SubGroup:	Core::TicketDynamicFieldDefault
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::TicketDynamicFieldDefault'}->{'Element15'} = { 'Event' => '', 'Name' => '', 'Value' => '' };</pre>

6.10.17. Ticket::TicketDynamicFieldDefault###Element16

Description:	Configures a default TicketDynamicField setting. "Name" defines the dynamic field which should be used, "Value" is the data that will be set, and "Event" defines the trigger event. Please check the developer manual (http://doc.otrs.org/), chapter "Ticket Event Module".
Group:	Ticket
SubGroup:	Core::TicketDynamicFieldDefault
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::TicketDynamicFieldDefault'}->{'Element16'} = { 'Event' => '', 'Name' => '', 'Value' => '' };</pre>

6.11. Core::TicketWatcher

6.11.1. Ticket::Watcher

Description:	Enables or disables the ticket watcher feature, to keep track of tickets without being the owner nor the responsible.
Group:	Ticket
SubGroup:	Core::TicketWatcher
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::Watcher'} = '0';</pre>

6.11.2. Ticket::WatcherGroup

Description:	Enables ticket watcher feature only for the listed groups.
Group:	Ticket
SubGroup:	Core::TicketWatcher
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::WatcherGroup'} = ['admin', 'users'</pre>

];

6.12. Frontend::Admin

6.12.1. Events###Ticket

Description:	List of all ticket events to be displayed in the GUI.
Group:	Ticket
SubGroup:	Frontend::Admin
Valid:	1
Required:	1
Config-Setting:	<pre> \$self->{'Events'}->{'Ticket'} = ['TicketCreate', 'TicketDelete', 'TicketTitleUpdate', 'TicketUnlockTimeoutUpdate', 'TicketQueueUpdate', 'TicketTypeUpdate', 'TicketServiceUpdate', 'TicketSLAUpdate', 'TicketCustomerUpdate', 'TicketPendingTimeUpdate', 'TicketLockUpdate', 'TicketArchiveFlagUpdate', 'TicketStateUpdate', 'TicketOwnerUpdate', 'TicketResponsibleUpdate', 'TicketPriorityUpdate', 'HistoryAdd', 'HistoryDelete', 'TicketAccountTime', 'TicketMerge', 'TicketSubscribe', 'TicketUnsubscribe', 'TicketFlagSet', 'TicketFlagDelete', 'TicketSlaveLinkAdd', 'TicketSlaveLinkDelete', 'TicketMasterLinkDelete', 'EscalationResponseTimeNotifyBefore', 'EscalationUpdateTimeNotifyBefore', 'EscalationSolutionTimeNotifyBefore', 'EscalationResponseTimeStart', 'EscalationUpdateTimeStart', 'EscalationSolutionTimeStart', 'EscalationResponseTimeStop', 'EscalationUpdateTimeStop', 'EscalationSolutionTimeStop']; </pre>

6.12.2. Events###Article

Description:	List of all article events to be displayed in the GUI.
Group:	Ticket
SubGroup:	Frontend::Admin
Valid:	1
Required:	1
Config-Setting:	<pre> \$self->{'Events'}->{'Article'} = ['ArticleCreate', 'ArticleUpdate', 'ArticleSend',]; </pre>

	<pre>'ArticleBounce', 'ArticleAgentNotification', 'ArticleCustomerNotification', 'ArticleAutoResponse', 'ArticleFlagSet', 'ArticleFlagDelete', 'ArticleAgentNotification', 'ArticleCustomerNotification'];</pre>
--	---

6.13. Frontend::Admin::ModuleRegistration

6.13.1. Frontend::Module###AdminACL

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminACL'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Loader' => { 'CSS' => ['Core.Agent.Admin.ACL.css'], 'JavaScript' => ['Core.Agent.Admin.ACL.js'] }, 'NavBarModule' => { 'Block' => 'Ticket', 'Description' => 'Configure and manage ACLs.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Access Control Lists (ACL)', 'Prio' => '750' }, 'NavBarName' => 'Admin', 'Title' => 'Access Control Lists (ACL)' };</pre>

6.13.2. Frontend::Module###AdminQueue

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminQueue'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Queue', 'Description' => 'Create and manage queues.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Queues', 'Prio' => '100' } };</pre>

```

},
'NavBarName' => 'Admin',
'Title' => 'Queues'
};

```

6.13.3. Frontend::Module###AdminTemplate

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'Frontend::Module'}->{'AdminTemplate'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Queue', 'Description' => 'Create and manage templates.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Templates', 'Prio' => '200' }, 'NavBarName' => 'Admin', 'Title' => 'Templates' }; </pre>

6.13.4. Frontend::Module###AdminQueueTemplates

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'Frontend::Module'}->{'AdminQueueTemplates'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Queue', 'Description' => 'Link templates to queues.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Templates <-> Queues', 'Prio' => '300' }, 'NavBarName' => 'Admin', 'Title' => 'Templates <-> Queues' }; </pre>

6.13.5. Frontend::Module###AdminAutoResponse

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0

Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AdminAutoResponse'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Queue', 'Description' => 'Create and manage responses that are automatically sent.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Auto Responses', 'Prio' => '400' }, 'NavBarName' => 'Admin', 'Title' => 'Auto Responses' }; </pre>
-----------------	---

6.13.6. Frontend::Module###AdminQueueAutoResponse

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AdminQueueAutoResponse'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Queue', 'Description' => 'Link queues to auto responses.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Auto Responses <-> Queues', 'Prio' => '500' }, 'NavBarName' => 'Admin', 'Title' => 'Auto Responses <-> Queues' }; </pre>

6.13.7. Frontend::Module###AdminAttachment

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AdminAttachment'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Queue', 'Description' => 'Create and manage attachments.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Attachments', 'Prio' => '600' }, 'NavBarName' => 'Admin', }; </pre>

```
'Title' => 'Attachments'
};
```

6.13.8. Frontend::Module###AdminTemplateAttachment

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminTemplateAttachment'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Queue', 'Description' => 'Link attachments to templates.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Attachments <-> Templates', 'Prio' => '700' }, 'NavBarName' => 'Admin', 'Title' => 'Attachments <-> Templates' };</pre>

6.13.9. Frontend::Module###AdminSalutation

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminSalutation'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Queue', 'Description' => 'Create and manage salutations.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Salutations', 'Prio' => '800' }, 'NavBarName' => 'Admin', 'Title' => 'Salutations' };</pre>

6.13.10. Frontend::Module###AdminSignature

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0

Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AdminSignature'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Queue', 'Description' => 'Create and manage signatures.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Signatures', 'Prio' => '900' }, 'NavBarName' => 'Admin', 'Title' => 'Signatures' }; </pre>
-----------------	---

6.13.11. Frontend::Module###AdminSystemAddress

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AdminSystemAddress'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Email', 'Description' => 'Set sender email addresses for this system.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Email Addresses', 'Prio' => '300' }, 'NavBarName' => 'Admin', 'Title' => 'Email Addresses' }; </pre>

6.13.12. Frontend::Module###AdminNotification

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AdminNotification'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Ticket', 'Description' => 'Manage notifications that are sent to agents.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Agent Notifications', 'Prio' => '400' }, 'NavBarName' => 'Admin', 'Title' => 'Agent Notifications' }; </pre>

6.13.13. Frontend::Module###AdminNotificationEvent

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminNotificationEvent'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Ticket', 'Description' => 'Create and manage event based notifications.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Notifications (Event)', 'Prio' => '400' }, 'NavBarName' => 'Admin', 'Title' => 'Notifications (Event)' };</pre>

6.13.14. Frontend::Module###AdminService

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminService'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Ticket', 'Description' => 'Create and manage services.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Services', 'Prio' => '900' }, 'NavBarName' => 'Admin', 'Title' => 'Services' };</pre>

6.13.15. Frontend::Module###AdminSLA

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminSLA'} = { 'Description' => 'Admin', 'Group' => ['admin'], };</pre>

	<pre>'NavBarModule' => { 'Block' => 'Ticket', 'Description' => 'Create and manage Service Level Agreements (SLAs).', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Service Level Agreements', 'Prio' => '1000' }, 'NavBarName' => 'Admin', 'Title' => 'Service Level Agreements' };</pre>
--	---

6.13.16. Frontend::Module###AdminType

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminType'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Ticket', 'Description' => 'Create and manage ticket types.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Types', 'Prio' => '700' }, 'NavBarName' => 'Admin', 'Title' => 'Types' };</pre>

6.13.17. Frontend::Module###AdminState

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AdminState'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Ticket', 'Description' => 'Create and manage ticket states.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'States', 'Prio' => '800' }, 'NavBarName' => 'Admin', 'Title' => 'States' };</pre>

6.13.18. Frontend::Module###AdminPriority

Description:	Frontend module registration for the agent interface.
--------------	---

Group:	Ticket
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AdminPriority'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'NavBarModule' => { 'Block' => 'Ticket', 'Description' => 'Create and manage ticket priorities.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'Priorities', 'Prio' => '850' }, 'NavBarName' => 'Admin', 'Title' => 'Priorities' }; </pre>

6.13.19. Frontend::Module###AdminGenericAgent

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Admin::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AdminGenericAgent'} = { 'Description' => 'Admin', 'Group' => ['admin'], 'Loader' => { 'JavaScript' => ['Core.Agent.Admin.GenericAgent.js'] }, 'NavBarModule' => { 'Block' => 'System', 'Description' => 'Manage tasks triggered by event or time based execution.', 'Module' => 'Kernel::Output::HTML::NavBarModuleAdmin', 'Name' => 'GenericAgent', 'Prio' => '300' }, 'NavBarName' => 'Admin', 'Title' => 'GenericAgent' }; </pre>

6.14. Frontend::Agent

6.14.1. Ticket::Frontend::PendingDiffTime

Description:	Time in seconds that gets added to the actual time if setting a pending-state (default: 86400 = 1 day).
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1

Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::PendingDiffTime'} = '86400';</code>

6.14.2. Ticket::Frontend::MaxQueueLevel

Description:	Define the max depth of queues.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::MaxQueueLevel'} = '5';</code>

6.14.3. Ticket::Frontend::ListType

Description:	Shows existing parent/child queue lists in the system in the form of a tree or a list.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::ListType'} = 'tree';</code>

6.14.4. Ticket::Frontend::TextAreaEmail

Description:	Permitted width for compose email windows.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::TextAreaEmail'} = '82';</code>

6.14.5. Ticket::Frontend::TextAreaNote

Description:	Permitted width for compose note windows.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::TextAreaNote'} = '78';</code>

6.14.6. Ticket::Frontend::InformAgentMaxSize

Description:	Max size (in rows) of the informed agents box in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1

Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::InformAgentMaxSize'} = '3';</code>

6.14.7. Ticket::Frontend::InvolvedAgentMaxSize

Description:	Max size (in rows) of the involved agents box in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::InvolvedAgentMaxSize'} = '3';</code>

6.14.8. Ticket::Frontend::CustomerInfoCompose

Description:	Shows the customer user information (phone and email) in the compose screen.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerInfoCompose'} = '1';</code>

6.14.9. Ticket::Frontend::CustomerInfoComposeMaxSize

Description:	Max size (in characters) of the customer information table (phone and email) in the compose screen.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerInfoComposeMaxSize'} = '22';</code>

6.14.10. Ticket::Frontend::CustomerInfoZoom

Description:	Shows the customer user's info in the ticket zoom view.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerInfoZoom'} = '1';</code>

6.14.11. Ticket::Frontend::CustomerInfoZoomMaxSize

Description:	Maximum size (in characters) of the customer information table in the ticket zoom view.
--------------	---

Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerInfoZoomMaxSize'} = '22';</code>

6.14.12. Ticket::Frontend::DynamicFieldsZoom- MaxSizeSidebar

Description:	Maximum length (in characters) of the dynamic field in the sidebar of the ticket zoom view.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::DynamicFieldsZoomMaxSizeSidebar'} = '18';</code>

6.14.13. Ticket::Frontend::DynamicFieldsZoom- MaxSizeArticle

Description:	Maximum length (in characters) of the dynamic field in the article of the ticket zoom view.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::DynamicFieldsZoomMaxSizeArticle'} = '160';</code>

6.14.14. Ticket::Frontend::AccountTime

Description:	Activates time accounting.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AccountTime'} = '1';</code>

6.14.15. Ticket::Frontend::TimeUnits

Description:	Sets the preferred time units (e.g. work units, hours, minutes).
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::TimeUnits'} = ' (work units)';</code>

6.14.16. Ticket::Frontend::NeedAccountedTime

Description:	Defines if time accounting is mandatory in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::NeedAccountedTime'} = '0';</code>

6.14.17. Ticket::Frontend::BulkAccountedTime

Description:	Defines if time accounting must be set to all tickets in bulk action.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::BulkAccountedTime'} = '1';</code>

6.14.18. Ticket::Frontend::NeedSpellCheck

Description:	Defines if composed messages have to be spell checked in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::NeedSpellCheck'} = '0';</code>

6.14.19. Ticket::Frontend::NewOwnerSelection

Description:	Shows an owner selection in phone and email tickets in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::NewOwnerSelection'} = '1';</code>

6.14.20. Ticket::Frontend::NewResponsibleSelection

Description:	Show a responsible selection in phone and email tickets in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1

Config-Setting:	<code>\$Self->{'Ticket::Frontend::NewResponsibleSelection'} = '1';</code>
-----------------	--

6.14.21. Ticket::Frontend::NewQueueSelectionType

Description:	Defines the receipt target of the phone ticket and the sender of the email ticket ("Queue" shows all queues, "SystemAddress" displays all system addresses) in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::NewQueueSelectionType'} = 'Queue';</code>

6.14.22. Ticket::Frontend::NewQueueSelectionString

Description:	Determines the strings that will be shown as receipt (To:) of the phone ticket and as sender (From:) of the email ticket in the agent interface. For Queue as NewQueueSelectionType "<Queue>" shows the names of the queues and for SystemAddress "<Realname> <<Email>>" shows the name and email of the receipt.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::NewQueueSelectionString'} = '<Queue>';</code>

6.14.23. Ticket::Frontend::NewQueueOwnSelection

Description:	Determines which options will be valid of the receipt (phone ticket) and the sender (email ticket) in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::NewQueueOwnSelection'} = { '1' => 'First Queue!', '2' => 'Second Queue!' };</code>

6.14.24. Ticket::Frontend::ShowCustomerTickets

Description:	Shows customer history tickets in AgentTicketPhone, AgentTicketEmail and AgentTicketCustomer.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::ShowCustomerTickets'} = '1';</code>

6.14.25. NewTicketInNewWindow::Enabled

Description:	If enabled, TicketPhone and TicketEmail will be open in new windows.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'NewTicketInNewWindow::Enabled'} = '0';</code>

6.14.26. CustomerDBLink

Description:	Defines an external link to the database of the customer (e.g. 'http://yourhost/customer.php?CID=\$Data{"CustomerID"}' or ").
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CustomerDBLink'} = '\$Env{"CGIHandle"}?Action=AgentCustomerInformationCenter;CustomerID=\$LQData{"CustomerID"}';</code>

6.14.27. CustomerDBLinkTarget

Description:	Defines the target attribute in the link to external customer database. E.g. 'target="cdb"'.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CustomerDBLinkTarget'} = '';</code>

6.14.28. CustomerDBLinkClass

Description:	Defines the target attribute in the link to external customer database. E.g. 'AsPopup PopupType_TicketAction'.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CustomerDBLinkClass'} = '';</code>

6.14.29. Frontend::CommonObject###QueueObject

Description:	Path of the file that stores all the settings for the QueueObject object for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent

Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Frontend::CommonObject'}->{'QueueObject'} = 'Kernel::System::Queue';</code>

6.14.30. Frontend::CommonObject###TicketObject

Description:	Path of the file that stores all the settings for the TicketObject for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Frontend::CommonObject'}->{'TicketObject'} = 'Kernel::System::Ticket';</code>

6.14.31. Frontend::CommonParam###Action

Description:	Defines the default used Frontend-Module if no Action parameter given in the url on the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Frontend::CommonParam'}->{'Action'} = 'AgentDashboard';</code>

6.14.32. Frontend::CommonParam###QueueID

Description:	Default queue ID used by the system in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Frontend::CommonParam'}->{'QueueID'} = '0';</code>

6.14.33. Frontend::CommonParam###TicketID

Description:	Default ticket ID used by the system in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Frontend::CommonParam'}->{'TicketID'} = '';</code>

6.14.34. DefaultOverviewColumns

Description:	General ticket data shown in the ticket overviews (fall-back). Possible settings: 0 = Disabled, 1 = Available, 2 = Enabled by default.
--------------	--

	Note that TicketNumber can not be disabled, because it is necessary.
Group:	Ticket
SubGroup:	Frontend::Agent
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'DefaultOverviewColumns'} = { 'Age' => '2', 'Changed' => '1', 'CustomerID' => '2', 'CustomerName' => '1', 'CustomerUserID' => '1', 'EscalationResponseTime' => '1', 'EscalationSolutionTime' => '1', 'EscalationTime' => '1', 'EscalationUpdateTime' => '1', 'Lock' => '2', 'Owner' => '2', 'PendingTime' => '1', 'Priority' => '1', 'Queue' => '2', 'Responsible' => '1', 'SLA' => '1', 'Service' => '1', 'State' => '2', 'TicketNumber' => '2', 'Title' => '2', 'Type' => '1' };</pre>

6.15. Frontend::Agent::Dashboard

6.15.1. DashboardBackend###0100-TicketPendingReminder

Description:	Parameters for the dashboard backend of the ticket pending reminder overview of the agent interface . "Limit" is the number of entries shown by default. "Group" is used to restrict the access to the plugin (e. g. Group: admin;group1;group2;). "Default" determines if the plugin is enabled by default or if the user needs to enable it manually. "CacheTTLLocal" is the cache time in minutes for the plugin. Note: Only Ticket attributes and Dynamic Fields (DynamicField_NameX) are allowed for DefaultColumns. Possible settings: 0 = Disabled, 1 = Available, 2 = Enabled by default.
Group:	Ticket
SubGroup:	Frontend::Agent::Dashboard
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'DashboardBackend'}->{'0100-TicketPendingReminder'} = { 'Attributes' => 'TicketPendingTimeOlderMinutes=1;StateType=pending reminder;SortBy=PendingTime;OrderBy=Down;', 'Block' => 'ContentLarge', 'CacheTTLLocal' => '0.5', 'Default' => '1', 'DefaultColumns' => { 'Age' => '2', 'Changed' => '1', 'CustomerID' => '1', 'CustomerName' => '1', 'CustomerUserID' => '1',</pre>


```

'EscalationResponseTime' => '1',
'EscalationSolutionTime' => '1',
'EscalationTime' => '1',
'EscalationUpdateTime' => '1',
'Lock' => '1',
'Owner' => '1',
'PendingTime' => '1',
'Priority' => '1',
'Queue' => '1',
'Responsible' => '1',
'SLA' => '1',
'Service' => '1',
'State' => '1',
'TicketNumber' => '2',
'Title' => '2',
'Type' => '1'
},
'Description' => 'All tickets with a reminder set where the
reminder date has been reached',
'Filter' => 'Locked',
'Group' => '',
'Limit' => '10',
'Module' => 'Kernel::Output::HTML::DashboardTicketGeneric',
'Permission' => 'rw',
'Time' => 'UntilTime',
'Title' => 'Reminder Tickets'
};

```

6.15.2. DashboardBackend###0110-TicketEscalation

Description:	Parameters for the dashboard backend of the ticket escalation overview of the agent interface . "Limit" is the number of entries shown by default. "Group" is used to restrict the access to the plugin (e. g. Group: admin;group1;group2;). "Default" determines if the plugin is enabled by default or if the user needs to enable it manually. "CacheTTLLocal" is the cache time in minutes for the plugin. Note: Only Ticket attributes and Dynamic Fields (Dynamic-Field_NameX) are allowed for DefaultColumns. Possible settings: 0 = Disabled, 1 = Available, 2 = Enabled by default.
Group:	Ticket
SubGroup:	Frontend::Agent::Dashboard
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'DashboardBackend'}->{'0110-TicketEscalation'} = { 'Attributes' => 'TicketEscalationTimeOlderMinutes=1;SortBy=EscalationTime;OrderBy=Down;', 'Block' => 'ContentLarge', 'CacheTTLLocal' => '0.5', 'Default' => '1', 'DefaultColumns' => { 'Age' => '2', 'Changed' => '1', 'CustomerID' => '1', 'CustomerName' => '1', 'CustomerUserID' => '1', 'EscalationResponseTime' => '1', 'EscalationSolutionTime' => '1', 'EscalationTime' => '1', 'EscalationUpdateTime' => '1', 'Lock' => '1', 'Owner' => '1', 'PendingTime' => '1', 'Priority' => '1', 'Queue' => '1', 'Responsible' => '1', 'SLA' => '1', </pre>

```

    'Service' => '1',
    'State' => '1',
    'TicketNumber' => '2',
    'Title' => '2',
    'Type' => '1'
  },
  'Description' => 'All escalated tickets',
  'Filter' => 'All',
  'Group' => '',
  'Limit' => '10',
  'Module' => 'Kernel::Output::HTML::DashboardTicketGeneric',
  'Permission' => 'rw',
  'Time' => 'EscalationTime',
  'Title' => 'Escalated Tickets'
};

```

6.15.3. DashboardBackend###0120-TicketNew

Description:	Parameters for the dashboard backend of the new tickets overview of the agent interface. "Limit" is the number of entries shown by default. "Group" is used to restrict the access to the plugin (e. g. Group: admin;group1;group2;). "Default" determines if the plugin is enabled by default or if the user needs to enable it manually. "CacheTTLLocal" is the cache time in minutes for the plugin. Note: Only Ticket attributes and Dynamic Fields (DynamicField_NameX) are allowed for DefaultColumns. Possible settings: 0 = Disabled, 1 = Available, 2 = Enabled by default.
Group:	Ticket
SubGroup:	Frontend::Agent::Dashboard
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'DashboardBackend'}->{'0120-TicketNew'} = { 'Attributes' => 'StateType=new;', 'Block' => 'ContentLarge', 'CacheTTLLocal' => '0.5', 'Default' => '1', 'DefaultColumns' => { 'Age' => '2', 'Changed' => '1', 'CustomerID' => '1', 'CustomerName' => '1', 'CustomerUserID' => '1', 'EscalationResponseTime' => '1', 'EscalationSolutionTime' => '1', 'EscalationTime' => '1', 'EscalationUpdateTime' => '1', 'Lock' => '1', 'Owner' => '1', 'PendingTime' => '1', 'Priority' => '1', 'Queue' => '1', 'Responsible' => '1', 'SLA' => '1', 'Service' => '1', 'State' => '1', 'TicketNumber' => '2', 'Title' => '2', 'Type' => '1' }, 'Description' => 'All new tickets, these tickets have not been worked on yet', 'Filter' => 'All', 'Group' => '', 'Limit' => '10', 'Module' => 'Kernel::Output::HTML::DashboardTicketGeneric', 'Permission' => 'rw', </pre>

```
'Time' => 'Age',
'Title' => 'New Tickets'
};
```

6.15.4. DashboardBackend###0130-TicketOpen

Description:	Parameters for the dashboard backend of the ticket pending reminder overview of the agent interface. "Limit" is the number of entries shown by default. "Group" is used to restrict the access to the plugin (e. g. Group: admin;group1;group2;). "Default" determines if the plugin is enabled by default or if the user needs to enable it manually. "CacheTTLLocal" is the cache time in minutes for the plugin. Note: Only Ticket attributes and Dynamic Fields (DynamicField_NameX) are allowed for DefaultColumns. Possible settings: 0 = Disabled, 1 = Available, 2 = Enabled by default.
Group:	Ticket
SubGroup:	Frontend::Agent::Dashboard
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'DashboardBackend'}->{'0130-TicketOpen'} = { 'Attributes' => 'StateType=open;', 'Block' => 'ContentLarge', 'CacheTTLLocal' => '0.5', 'Default' => '1', 'DefaultColumns' => { 'Age' => '2', 'Changed' => '1', 'CustomerID' => '1', 'CustomerName' => '1', 'CustomerUserID' => '1', 'EscalationResponseTime' => '1', 'EscalationSolutionTime' => '1', 'EscalationTime' => '1', 'EscalationUpdateTime' => '1', 'Lock' => '1', 'Owner' => '1', 'PendingTime' => '1', 'Priority' => '1', 'Queue' => '1', 'Responsible' => '1', 'SLA' => '1', 'Service' => '1', 'State' => '1', 'TicketNumber' => '2', 'Title' => '2', 'Type' => '1' }, 'Description' => 'All open tickets, these tickets have already been worked on, but need a response', 'Filter' => 'All', 'Group' => '', 'Limit' => '10', 'Module' => 'Kernel::Output::HTML::DashboardTicketGeneric', 'Permission' => 'rw', 'Time' => 'Age', 'Title' => 'Open Tickets / Need to be answered' };</pre>

6.15.5. DashboardBackend###0250-TicketStats

Description:	Parameters for the dashboard backend of the ticket stats of the agent interface. "Limit" is the number of entries shown by default. "Group" is used to restrict the access to the plugin (e. g. Group:
--------------	--

	admin;group1;group2;). "Default" determines if the plugin is enabled by default or if the user needs to enable it manually. "CacheTTLLocal" is the cache time in minutes for the plugin.
Group:	Ticket
SubGroup:	Frontend::Agent::Dashboard
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'DashboardBackend'}->{'0250-TicketStats'} = { 'Block' => 'ContentSmall', 'CacheTTL' => '30', 'Changed' => '1', 'Closed' => '1', 'Default' => '1', 'Group' => '', 'Module' => 'Kernel::Output::HTML::DashboardTicketStatsGeneric', 'Permission' => 'rw', 'Title' => '7 Day Stats' }; </pre>

6.15.6. DashboardBackend###0260-TicketCalendar

Description:	Parameters for the dashboard backend of the ticket calendar of the agent interface. "Limit" is the number of entries shown by default. "Group" is used to restrict the access to the plugin (e. g. Group: admin;group1;group2;). "Default" determines if the plugin is enabled by default or if the user needs to enable it manually. "CacheTTLLocal" is the cache time in minutes for the plugin.
Group:	Ticket
SubGroup:	Frontend::Agent::Dashboard
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'DashboardBackend'}->{'0260-TicketCalendar'} = { 'Block' => 'ContentSmall', 'CacheTTL' => '2', 'Default' => '1', 'Group' => '', 'Limit' => '6', 'Module' => 'Kernel::Output::HTML::DashboardCalendar', 'OwnerOnly' => '', 'Permission' => 'rw', 'Title' => 'Upcoming Events' }; </pre>

6.15.7. DashboardBackend###0270-TicketQueueOverview

Description:	Parameters for the dashboard backend of the queue overview widget of the agent interface. "Group" is used to restrict the access to the plugin (e. g. Group: admin;group1;group2;). "QueuePermissionGroup" is not mandatory, queues are only listed if they belong to this permission group if you enable it. "States" is a list of states, the key is the sort order of the state in the widget. "Default" determines if the plugin is enabled by default or if the user needs to enable it manually. "CacheTTLLocal" is the cache time in minutes for the plugin.
Group:	Ticket

SubGroup:	Frontend::Agent::Dashboard
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'DashboardBackend'}->{'0270-TicketQueueOverview'} = { 'Block' => 'ContentLarge', 'CacheTTLLocal' => '0.5', 'Default' => '1', 'Description' => 'Provides a matrix overview of the tickets per state per queue.', 'Group' => '', 'Module' => 'Kernel::Output::HTML::DashboardTicketQueueOverview', 'Permission' => 'rw', 'QueuePermissionGroup' => 'users', 'Sort' => 'SortBy=Age;OrderBy=Up', 'States' => { '1' => 'new', '4' => 'open', '6' => 'pending reminder' }, 'Title' => 'Ticket Queue Overview' }; </pre>

6.15.8. DashboardBackend###0280-DashboardEventsTicketCalendar

Description:	Parameters for the dashboard backend of the ticket stats of the agent interface. "Limit" is the number of entries shown by default. "Group" is used to restrict the access to the plugin (e. g. Group: admin;group1;group2;). "Default" determines if the plugin is enabled by default or if the user needs to enable it manually. "CacheTTLLocal" is the cache time in minutes for the plugin.
Group:	Ticket
SubGroup:	Frontend::Agent::Dashboard
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'DashboardBackend'}->{'0280-DashboardEventsTicketCalendar'} = { 'Block' => 'ContentLarge', 'CacheTTL' => '0', 'Default' => '0', 'Group' => '', 'Module' => 'Kernel::Output::HTML::DashboardEventsTicketCalendar', 'Title' => 'Events Ticket Calendar' }; </pre>

6.15.9. AgentCustomerInformationCenter::Backend###0100-CIC-TicketPendingReminder

Description:	Parameters for the dashboard backend of the ticket pending reminder overview of the agent interface . "Limit" is the number of entries shown by default. "Group" is used to restrict the access to the plugin (e. g. Group: admin;group1;group2;). "Default" determines if the plugin is enabled by default or if the user needs to enable it manually. "CacheTTLLocal" is the cache time in minutes for the plugin. Note: Only Ticket attributes and Dynamic Fields (DynamicField_NameX) are allowed for DefaultColumns. Possible settings: 0 = Disabled, 1 = Available, 2 = Enabled by default.
Group:	Ticket

SubGroup:	Frontend::Agent::Dashboard
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'AgentCustomerInformationCenter::Backend'}->{'0100-CIC-TicketPendingReminder'} = { 'Attributes' => 'TicketPendingTimeOlderMinutes=1;StateType=pending reminder;SortBy=PendingTime;OrderBy=Down;', 'Block' => 'ContentLarge', 'CacheTTLLocal' => '0.5', 'Default' => '1', 'DefaultColumns' => { 'Age' => '2', 'Changed' => '1', 'CustomerID' => '1', 'CustomerName' => '1', 'CustomerUserID' => '1', 'EscalationResponseTime' => '1', 'EscalationSolutionTime' => '1', 'EscalationTime' => '1', 'EscalationUpdateTime' => '1', 'Lock' => '1', 'Owner' => '1', 'PendingTime' => '1', 'Priority' => '1', 'Queue' => '1', 'Responsible' => '1', 'SLA' => '1', 'Service' => '1', 'State' => '1', 'TicketNumber' => '2', 'Title' => '2', 'Type' => '1' }, 'Description' => 'All tickets with a reminder set where the reminder date has been reached', 'Filter' => 'Locked', 'Group' => '', 'Limit' => '10', 'Module' => 'Kernel::Output::HTML::DashboardTicketGeneric', 'Permission' => 'ro', 'Time' => 'UntilTime', 'Title' => 'Reminder Tickets' }; </pre>

6.15.10. AgentCustomerInformationCenter::Backend###0110-CIC-TicketEscalation

Description:	Parameters for the dashboard backend of the ticket escalation overview of the agent interface . "Limit" is the number of entries shown by default. "Group" is used to restrict the access to the plugin (e. g. Group: admin;group1;group2;). "Default" determines if the plugin is enabled by default or if the user needs to enable it manually. "CacheTTLLocal" is the cache time in minutes for the plugin. Note: Only Ticket attributes and Dynamic Fields (DynamicField_NameX) are allowed for DefaultColumns. Possible settings: 0 = Disabled, 1 = Available, 2 = Enabled by default.
Group:	Ticket
SubGroup:	Frontend::Agent::Dashboard
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'AgentCustomerInformationCenter::Backend'}->{'0110-CIC-TicketEscalation'} = { </pre>

```
'Attributes' =>
'TicketEscalationTimeOlderMinutes=1;SortBy=EscalationTime;OrderBy=Down;',
'Block' => 'ContentLarge',
'CacheTTLLocal' => '0.5',
'Default' => '1',
'DefaultColumns' => {
  'Age' => '2',
  'Changed' => '1',
  'CustomerID' => '1',
  'CustomerName' => '1',
  'CustomerUserID' => '1',
  'EscalationResponseTime' => '1',
  'EscalationSolutionTime' => '1',
  'EscalationTime' => '1',
  'EscalationUpdateTime' => '1',
  'Lock' => '1',
  'Owner' => '1',
  'PendingTime' => '1',
  'Priority' => '1',
  'Queue' => '1',
  'Responsible' => '1',
  'SLA' => '1',
  'Service' => '1',
  'State' => '1',
  'TicketNumber' => '2',
  'Title' => '2',
  'Type' => '1'
},
'Description' => 'All escalated tickets',
'Filter' => 'All',
'Group' => '',
'Limit' => '10',
'Module' => 'Kernel::Output::HTML::DashboardTicketGeneric',
'Permission' => 'ro',
'Time' => 'EscalationTime',
'Title' => 'Escalated Tickets'
};
```

6.15.11. AgentCustomerInformationCenter::Backend###0120-CIC-TicketNew

Description:	Parameters for the dashboard backend of the new tickets overview of the agent interface. "Limit" is the number of entries shown by default. "Group" is used to restrict the access to the plugin (e. g. Group: admin;group1;group2;). "Default" determines if the plugin is enabled by default or if the user needs to enable it manually. "CacheTTLLocal" is the cache time in minutes for the plugin. Note: Only Ticket attributes and Dynamic Fields (DynamicField_NameX) are allowed for DefaultColumns. Possible settings: 0 = Disabled, 1 = Available, 2 = Enabled by default.
Group:	Ticket
SubGroup:	Frontend::Agent::Dashboard
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'AgentCustomerInformationCenter::Backend'}->{'0120-CIC-TicketNew'} = { 'Attributes' => 'StateType=new;', 'Block' => 'ContentLarge', 'CacheTTLLocal' => '0.5', 'Default' => '1', 'DefaultColumns' => { 'Age' => '2', 'Changed' => '1', 'CustomerID' => '1', 'CustomerName' => '1',</code>

```

'CustomerUserID' => '1',
'EscalationResponseTime' => '1',
'EscalationSolutionTime' => '1',
'EscalationTime' => '1',
'EscalationUpdateTime' => '1',
'Lock' => '1',
'Owner' => '1',
'PendingTime' => '1',
'Priority' => '1',
'Queue' => '1',
'Responsible' => '1',
'SLA' => '1',
'Service' => '1',
'State' => '1',
'TicketNumber' => '2',
'Title' => '2',
'Type' => '1'
},
'Description' => 'All new tickets, these tickets have not been
worked on yet',
'Filter' => 'All',
'Group' => '',
'Limit' => '10',
'Module' => 'Kernel::Output::HTML::DashboardTicketGeneric',
'Permission' => 'ro',
'Time' => 'Age',
'Title' => 'New Tickets'
};

```

6.15.12. AgentCustomerInformationCenter::Backend###0130-CIC-TicketOpen

Description:	Parameters for the dashboard backend of the ticket pending reminder overview of the agent interface. "Limit" is the number of entries shown by default. "Group" is used to restrict the access to the plugin (e. g. Group: admin;group1;group2;). "Default" determines if the plugin is enabled by default or if the user needs to enable it manually. "CacheTTLLocal" is the cache time in minutes for the plugin. Note: Only Ticket attributes and Dynamic Fields (DynamicField_NameX) are allowed for DefaultColumns. Possible settings: 0 = Disabled, 1 = Available, 2 = Enabled by default.
Group:	Ticket
SubGroup:	Frontend::Agent::Dashboard
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'AgentCustomerInformationCenter::Backend'}->{'0130-CIC-TicketOpen'} = { 'Attributes' => 'StateType=open;', 'Block' => 'ContentLarge', 'CacheTTLLocal' => '0.5', 'Default' => '1', 'DefaultColumns' => { 'Age' => '2', 'Changed' => '1', 'CustomerID' => '1', 'CustomerName' => '1', 'CustomerUserID' => '1', 'EscalationResponseTime' => '1', 'EscalationSolutionTime' => '1', 'EscalationTime' => '1', 'EscalationUpdateTime' => '1', 'Lock' => '1', 'Owner' => '1', 'PendingTime' => '1', 'Priority' => '1', </pre>


```

'Queue' => '1',
'Responsible' => '1',
'SLA' => '1',
'Service' => '1',
'State' => '1',
'TicketNumber' => '2',
'Title' => '2',
'Type' => '1'
},
'Description' => 'All open tickets, these tickets have already
been worked on, but need a response',
'Filter' => 'All',
'Group' => '',
'Limit' => '10',
'Module' => 'Kernel::Output::HTML::DashboardTicketGeneric',
'Permission' => 'ro',
'Time' => 'Age',
'Title' => 'Open Tickets / Need to be answered'
};

```

6.15.13. AgentCustomerInformationCenter::Backend###0500-CIC-CustomerIDStatus

Description:	Parameters for the dashboard backend of the customer id status widget of the agent interface . "Group" is used to restrict the access to the plugin (e. g. Group: admin;group1;group2;). "Default" determines if the plugin is enabled by default or if the user needs to enable it manually. "CacheTTLLocal" is the cache time in minutes for the plugin.
Group:	Ticket
SubGroup:	Frontend::Agent::Dashboard
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'AgentCustomerInformationCenter::Backend'}->{'0500-CIC-CustomerIDStatus'} = { 'Attributes' => '', 'Block' => 'ContentSmall', 'CacheTTLLocal' => '0.5', 'Default' => '1', 'Description' => 'Company Status', 'Group' => '', 'Module' => 'Kernel::Output::HTML::DashboardCustomerIDStatus', 'Permission' => 'ro', 'Title' => 'Company Status' }; </pre>

6.16. Frontend::Agent::Dashboard::Event-sTicketCalendar

6.16.1. DashboardEventsTicketCalendar###Calendar-Width

Description:	Defines the calendar width in percent. Default is 95%.
Group:	Ticket
SubGroup:	Frontend::Agent::Dashboard::EventsTicketCalendar
Valid:	1
Required:	1

Config-Setting:	<code>\$Self->{'DashboardEventsTicketCalendar'}->{'CalendarWidth'} = '95';</code>
-----------------	---

6.16.2. DashboardEventsTicketCalendar###Queues

Description:	Defines queues that's tickets are used for displaying as calendar events.
Group:	Ticket
SubGroup:	Frontend::Agent::Dashboard::EventsTicketCalendar
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'DashboardEventsTicketCalendar'}->{'Queues'} = ['Raw'];</code>

6.16.3. DashboardEventsTicketCalendar::DynamicFieldStartTime

Description:	Define dynamic field name for start time. This field has to be manually added to the system as Ticket: "Date / Time" and must be activated in ticket creation screens and/or in any other ticket action screens.
Group:	Ticket
SubGroup:	Frontend::Agent::Dashboard::EventsTicketCalendar
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'DashboardEventsTicketCalendar::DynamicFieldStartTime'} = 'TicketCalendarStartTime';</code>

6.16.4. DashboardEventsTicketCalendar::DynamicFieldEndTime

Description:	Define dynamic field name for end time. This field has to be manually added to the system as Ticket: "Date / Time" and must be activated in ticket creation screens and/or in any other ticket action screens.
Group:	Ticket
SubGroup:	Frontend::Agent::Dashboard::EventsTicketCalendar
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'DashboardEventsTicketCalendar::DynamicFieldEndTime'} = 'TicketCalendarEndTime';</code>

6.16.5. DashboardEventsTicketCalendar::DynamicFieldsForEvents

Description:	Defines the dynamic fields that are used for displaying on calendar events.
Group:	Ticket
SubGroup:	Frontend::Agent::Dashboard::EventsTicketCalendar

Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'DashboardEventsTicketCalendar::DynamicFieldsForEvents'} = ['TicketCalendarStartTime', 'TicketCalendarEndTime'];</pre>

6.16.6. DashboardEventsTicketCalendar::TicketFieldsForEvents

Description:	Defines the ticket fields that are going to be displayed calendar events. The "Key" defines the field or ticket attribute and the "Content" defines the display name.
Group:	Ticket
SubGroup:	Frontend::Agent::Dashboard::EventsTicketCalendar
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'DashboardEventsTicketCalendar::TicketFieldsForEvents'} = { 'CustomerID' => 'Customer ID', 'CustomerUserID' => 'Customer user', 'Priority' => 'Priority', 'Queue' => 'Queue', 'SLA' => 'SLA', 'Service' => 'Service', 'State' => 'State', 'Title' => 'Title', 'Type' => 'Type' };</pre>

6.17. Frontend::Agent::Dashboard::TicketFilters

6.17.1. OnlyValuesOnTicket

Description:	Defines if the list for filters should be retrieve just from current tickets in system. Just for clarification, Customers list will always came from system's tickets.
Group:	Ticket
SubGroup:	Frontend::Agent::Dashboard::TicketFilters
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'OnlyValuesOnTicket'} = '1';</pre>

6.18. Frontend::Agent::ModuleMetaHead

6.18.1. Frontend::HeaderMetaModule###2-TicketSearch

Description:	Module to generate html OpenSearch profile for short ticket search in the agent interface.
--------------	--

Group:	Ticket
SubGroup:	Frontend::Agent::ModuleMetaHead
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::HeaderMetaModule'}->{'2-TicketSearch'} = { 'Action' => 'AgentTicketSearch', 'Module' => 'Kernel::Output::HTML::HeaderMetaTicketSearch' };</pre>

6.19. Frontend::Agent::ModuleNotify

6.19.1. Frontend::NotifyModule###5-Ticket::TicketEscalation

Description:	Module to show notifications and escalations (ShownMax: max. shown escalations, EscalationInMinutes: Show ticket which will escalation in, CacheTime: Cache of calculated escalations in seconds).
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleNotify
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::NotifyModule'}->{'5-Ticket::TicketEscalation'} = { 'CacheTime' => '40', 'EscalationInMinutes' => '120', 'Module' => 'Kernel::Output::HTML::NotificationAgentTicketEscalation', 'ShownMax' => '25' };</pre>

6.20. Frontend::Agent::ModuleRegistration

6.20.1. Frontend::Module###AgentTicketQueue

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketQueue'} = { 'Description' => 'Overview of all open Tickets', 'Loader' => { 'CSS' => ['Core.AgentTicketQueue.css', 'Core.AllocationList.css'], 'JavaScript' => ['Core.UI.AllocationList.js', 'Core.Agent.TableFilters.js'] }, 'NavBar' => [{ 'AccessKey' => 'o', </pre>

```

'Block' => '',
'Description' => 'Overview of all open Tickets',
'Link' => 'Action=AgentTicketQueue',
'LinkOption' => '',
'Name' => 'Queue view',
'NavBar' => 'Ticket',
'Prio' => '100',
'Type' => ''
},
{
'AccessKey' => 't',
'Block' => 'ItemArea',
'Description' => '',
'Link' => 'Action=AgentTicketQueue',
'LinkOption' => '',
'Name' => 'Tickets',
'NavBar' => 'Ticket',
'Prio' => '200',
'Type' => 'Menu'
}
],
'NavBarName' => 'Ticket',
'Title' => 'QueueView'
};

```

6.20.2. Frontend::Module###AgentTicketPhone

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'Frontend::Module'}->{'AgentTicketPhone'} = { 'Description' => 'Create new phone ticket', 'Loader' => { 'JavaScript' => ['Core.Agent.CustomerSearch.js', 'Core.Agent.TicketAction.js'] }, 'NavBar' => [{ 'AccessKey' => 'n', 'Block' => '', 'Description' => 'Create new phone ticket (inbound)', 'Link' => 'Action=AgentTicketPhone', 'LinkOption' => '', 'Name' => 'New phone ticket', 'NavBar' => 'Ticket', 'Prio' => '200', 'Type' => '' }], 'NavBarName' => 'Ticket', 'Title' => 'New phone ticket' }; </pre>

6.20.3. Frontend::Module###AgentTicketPhoneOutbound

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration

Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketPhoneOutbound'} = { 'Description' => 'Phone Call', 'Loader' => { 'JavaScript' => ['Core.Agent.TicketAction.js'] }, 'NavBarName' => 'Ticket', 'Title' => 'Phone-Ticket' };</pre>

6.20.4. Frontend::Module###AgentTicketPhoneInbound

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketPhoneInbound'} = { 'Description' => 'Incoming Phone Call', 'Loader' => { 'JavaScript' => ['Core.Agent.TicketAction.js'] }, 'NavBarName' => 'Ticket', 'Title' => 'Phone-Ticket' };</pre>

6.20.5. Frontend::Module###AgentTicketEmail

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketEmail'} = { 'Description' => 'Create new email ticket', 'Loader' => { 'JavaScript' => ['Core.Agent.CustomerSearch.js', 'Core.Agent.TicketAction.js'] }, 'NavBar' => [{ 'AccessKey' => 'm', 'Block' => '', 'Description' => 'Create new email ticket and send this out (outbound)', 'Link' => 'Action=AgentTicketEmail', 'LinkOption' => '', 'Name' => 'New email ticket', 'NavBar' => 'Ticket', 'Prio' => '210', 'Type' => '' }] };</pre>

```

    }
  ],
  'NavBarName' => 'Ticket',
  'Title' => 'New email ticket'
};

```

6.20.6. Frontend::Module###AgentTicketSearch

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'Frontend::Module'}->{'AgentTicketSearch'} = { 'Description' => 'Search Ticket', 'Loader' => { 'JavaScript' => ['Core.UI.AllocationList.js', 'Core.Agent.TableFilters.js'] }, 'NavBar' => [{ 'AccessKey' => 's', 'Block' => '', 'Description' => 'Search Tickets', 'Link' => 'Action=AgentTicketSearch', 'LinkOption' => 'onclick="window.setTimeout(function() {Core.Agent.Search.OpenSearchDialog(\'AgentTicketSearch\')});', 0); return false;";', 'Name' => 'Search', 'NavBar' => 'Ticket', 'Prio' => '300', 'Type' => '' }], 'NavBarName' => 'Ticket', 'Title' => 'Search' }; </pre>

6.20.7. Frontend::Module###AgentTicketLockedView

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'Frontend::Module'}->{'AgentTicketLockedView'} = { 'Description' => 'Locked Tickets', 'Loader' => { 'CSS' => ['Core.AgentTicketQueue.css', 'Core.AllocationList.css'], 'JavaScript' => ['Core.UI.AllocationList.js', 'Core.Agent.TableFilters.js'] }, 'NavBarName' => 'Ticket', 'Title' => 'Locked Tickets' }; </pre>

6.20.8. Frontend::Module###AgentTicketResponsibleView

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'Frontend::Module'}->{'AgentTicketResponsibleView'} = { 'Description' => 'Responsible Tickets', 'Loader' => { 'CSS' => ['Core.AllocationList.css'], 'JavaScript' => ['Core.UI.AllocationList.js', 'Core.Agent.TableFilters.js'] }, 'NavBarName' => 'Ticket', 'Title' => 'Responsible Tickets' }; </pre>

6.20.9. Frontend::Module###AgentTicketWatchView

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'Frontend::Module'}->{'AgentTicketWatchView'} = { 'Description' => 'Watched Tickets', 'Loader' => { 'CSS' => ['Core.AgentTicketQueue.css', 'Core.AllocationList.css'], 'JavaScript' => ['Core.UI.AllocationList.js', 'Core.Agent.TableFilters.js'] }, 'NavBarName' => 'Ticket', 'Title' => 'Watched Tickets' }; </pre>

6.20.10. Frontend::Module###AgentCustomerSearch

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'Frontend::Module'}->{'AgentCustomerSearch'} = { 'Description' => 'AgentCustomerSearch', 'NavBarName' => 'Ticket', 'Title' => 'AgentCustomerSearch' }; </pre>


```
};
```

6.20.11. Frontend::Module###AgentUserSearch

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentUserSearch'} = { 'Description' => 'AgentUserSearch', 'NavBarName' => 'Ticket', 'Title' => 'AgentUserSearch' };</pre>

6.20.12. Frontend::Module###AgentTicketStatusView

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketStatusView'} = { 'Description' => 'Overview of all open tickets', 'Loader' => { 'CSS' => ['Core.AllocationList.css'], 'JavaScript' => ['Core.UI.AllocationList.js', 'Core.Agent.TableFilters.js'] }, 'NavBar' => [{ 'AccessKey' => 'v', 'Block' => '', 'Description' => 'Overview of all open Tickets.', 'Link' => 'Action=AgentTicketStatusView', 'LinkOption' => '', 'Name' => 'Status view', 'NavBar' => 'Ticket', 'Prio' => '110', 'Type' => '' }], 'NavBarName' => 'Ticket', 'Title' => 'Status view' };</pre>

6.20.13. Frontend::Module###AgentTicketEscalation-View

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1

Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AgentTicketEscalationView'} = { 'Description' => 'Overview of all escalated tickets', 'Loader' => { 'CSS' => ['Core.AllocationList.css'], 'JavaScript' => ['Core.UI.AllocationList.js', 'Core.Agent.TableFilters.js'] }, 'NavBar' => [{ 'AccessKey' => 'e', 'Block' => '', 'Description' => 'Overview Escalated Tickets', 'Link' => 'Action=AgentTicketEscalationView', 'LinkOption' => '', 'Name' => 'Escalation view', 'NavBar' => 'Ticket', 'Prio' => '120', 'Type' => '' }], 'NavBarName' => 'Ticket', 'Title' => 'Escalation view' }; </pre>

6.20.14. Frontend::Module###AgentZoom

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AgentZoom'} = { 'Description' => 'compat module for AgentZoom to AgentTicketZoom', 'NavBarName' => 'Ticket', 'Title' => '' }; </pre>

6.20.15. Frontend::Module###AgentTicketZoom

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Frontend::Module'}->{'AgentTicketZoom'} = { 'Description' => 'Ticket Zoom', 'Loader' => { 'CSS' => ['Core.Agent.TicketProcess.css'], 'JavaScript' => ['thirdparty/jquery-tablesorter-2.0.5/jquery.tablesorter.js', 'Core.UI.Table.Sort.js', 'Core.Agent.TicketZoom.js'] }, }; </pre>

	<pre>'NavBarName' => 'Ticket', 'Title' => 'Zoom' };</pre>
--	---

6.20.16. Frontend::Module###AgentTicketAttachment

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketAttachment'} = { 'Description' => 'To download attachments', 'NavBarName' => 'Ticket', 'Title' => '' };</pre>

6.20.17. Frontend::Module###AgentTicketPlain

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketPlain'} = { 'Description' => 'Ticket plain view of an email', 'NavBarName' => 'Ticket', 'Title' => 'Plain' };</pre>

6.20.18. Frontend::Module###AgentTicketNote

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketNote'} = { 'Description' => 'Ticket Note', 'Loader' => { 'JavaScript' => ['Core.Agent.TicketAction.js'] }, 'NavBarName' => 'Ticket', 'Title' => 'Note' };</pre>

6.20.19. Frontend::Module###AgentTicketMerge

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration

Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketMerge'} = { 'Description' => 'Ticket Merge', 'NavBarName' => 'Ticket', 'Title' => 'Merge' };</pre>

6.20.20. Frontend::Module###AgentTicketPending

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketPending'} = { 'Description' => 'Ticket Pending', 'Loader' => { 'JavaScript' => ['Core.Agent.TicketAction.js'] }, 'NavBarName' => 'Ticket', 'Title' => 'Pending' };</pre>

6.20.21. Frontend::Module###AgentTicketWatcher

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketWatcher'} = { 'Description' => 'A TicketWatcher Module', 'NavBarName' => 'Ticket-Watcher', 'Title' => 'Ticket-Watcher' };</pre>

6.20.22. Frontend::Module###AgentTicketPriority

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketPriority'} = { 'Description' => 'Ticket Priority', 'Loader' => { 'JavaScript' => ['Core.Agent.TicketAction.js'] }, 'NavBarName' => 'Ticket', 'Title' => 'Priority' };</pre>

6.20.23. Frontend::Module###AgentTicketLock

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketLock'} = { 'Description' => 'Ticket Lock', 'NavBarName' => 'Ticket', 'Title' => 'Lock' };</pre>

6.20.24. Frontend::Module###AgentTicketMove

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketMove'} = { 'Description' => 'Ticket Move', 'Loader' => { 'JavaScript' => ['Core.Agent.TicketAction.js'] }, 'NavBarName' => 'Ticket', 'Title' => 'Move' };</pre>

6.20.25. Frontend::Module###AgentTicketHistory

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketHistory'} = { 'Description' => 'Ticket History', 'NavBarName' => 'Ticket', 'Title' => 'History' };</pre>

6.20.26. Frontend::Module###AgentTicketOwner

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketOwner'} = { 'Description' => 'Ticket Owner',</pre>

	<pre>'Loader' => { 'JavaScript' => ['Core.Agent.TicketAction.js'] }, 'NavBarName' => 'Ticket', 'Title' => 'Owner' };</pre>
--	--

6.20.27. Frontend::Module###AgentTicketResponsible

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketResponsible'} = { 'Description' => 'Ticket Responsible', 'Loader' => { 'JavaScript' => ['Core.Agent.TicketAction.js'] }, 'NavBarName' => 'Ticket', 'Title' => 'Responsible' };</pre>

6.20.28. Frontend::Module###AgentTicketCompose

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketCompose'} = { 'Description' => 'Ticket Compose email Answer', 'Loader' => { 'JavaScript' => ['Core.Agent.CustomerSearch.js', 'Core.Agent.TicketAction.js'] }, 'NavBarName' => 'Ticket', 'Title' => 'Compose' };</pre>

6.20.29. Frontend::Module###AgentTicketBounce

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketBounce'} = { 'Description' => 'Ticket Compose Bounce Email', 'NavBarName' => 'Ticket', 'Title' => 'Bounce' };</pre>

```
};
```

6.20.30. Frontend::Module###AgentTicketForward

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketForward'} = { 'Description' => 'Ticket Forward Email', 'Loader' => { 'JavaScript' => ['Core.Agent.CustomerSearch.js', 'Core.Agent.TicketAction.js'] }, 'NavBarName' => 'Ticket', 'Title' => 'Forward' };</pre>

6.20.31. Frontend::Module###AgentTicketCustomer

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketCustomer'} = { 'Description' => 'Ticket Customer', 'Loader' => { 'JavaScript' => ['Core.Agent.CustomerSearch.js', 'Core.Agent.TicketAction.js'] }, 'NavBarName' => 'Ticket', 'Title' => 'Customer' };</pre>

6.20.32. Frontend::Module###AgentTicketClose

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketClose'} = { 'Description' => 'Ticket Close', 'Loader' => { 'JavaScript' => ['Core.Agent.TicketAction.js'] }, 'NavBarName' => 'Ticket', 'Title' => 'Close' };</pre>

6.20.33. Frontend::Module###AgentTicketFreeText

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketFreeText'} = { 'Description' => 'Ticket FreeText', 'Loader' => { 'JavaScript' => ['Core.Agent.TicketAction.js'] }, 'NavBarName' => 'Ticket', 'Title' => 'Free Fields' };</pre>

6.20.34. Frontend::Module###AgentTicketPrint

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketPrint'} = { 'Description' => 'Ticket Print', 'NavBarName' => 'Ticket', 'Title' => 'Print' };</pre>

6.20.35. Frontend::Module###AgentTicketBulk

Description:	Frontend module registration for the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Module'}->{'AgentTicketBulk'} = { 'Description' => 'Ticket bulk module', 'Loader' => { 'JavaScript' => ['Core.Agent.TicketAction.js'] }, 'NavBarName' => 'Ticket', 'Title' => 'Bulk-Action' };</pre>

6.21. Frontend::Agent::Preferences

6.21.1. PreferencesGroups###NewTicketNotify

Description:	Parameters for the NewTicketNotify object in the preferences view of the agent interface.
--------------	---

Group:	Ticket
SubGroup:	Frontend::Agent::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'PreferencesGroups'}->{'NewTicketNotify'} = { 'Active' => '1', 'Column' => 'Email Settings', 'Data' => { '0' => 'No', '1' => 'Yes' }, 'DataSelected' => '0', 'Desc' => 'Send me a notification if there is a new ticket in "My Queues".', 'Key' => 'Send new ticket notifications', 'Label' => 'New ticket notification', 'Module' => 'Kernel::Output::HTML::PreferencesGeneric', 'PrefKey' => 'UserSendNewTicketNotification', 'Prio' => '1000' }; </pre>

6.21.2. PreferencesGroups###FollowUpNotify

Description:	Parameters for the FollowUpNotify object in the preference view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'PreferencesGroups'}->{'FollowUpNotify'} = { 'Active' => '1', 'Column' => 'Email Settings', 'Data' => { '0' => 'No', '1' => 'Yes' }, 'DataSelected' => '0', 'Desc' => 'Send me a notification if a customer sends a follow up and I\'m the owner of the ticket or the ticket is unlocked and is in one of my subscribed queues.', 'Key' => 'Send ticket follow up notifications', 'Label' => 'Ticket follow up notification', 'Module' => 'Kernel::Output::HTML::PreferencesGeneric', 'PrefKey' => 'UserSendFollowUpNotification', 'Prio' => '2000' }; </pre>

6.21.3. PreferencesGroups###LockTimeoutNotify

Description:	Parameters for the LockTimeoutNotify object in the preference view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'PreferencesGroups'}->{'LockTimeoutNotify'} = { 'Active' => '1', 'Column' => 'Email Settings', 'Data' => { </pre>

	<pre> '0' => 'No', '1' => 'Yes' }, 'DataSelected' => '0', 'Desc' => 'Send me a notification if a ticket is unlocked by the system.', 'Key' => 'Send ticket lock timeout notifications', 'Label' => 'Ticket lock timeout notification', 'Module' => 'Kernel::Output::HTML::PreferencesGeneric', 'PrefKey' => 'UserSendLockTimeoutNotification', 'Prio' => '3000' }; </pre>
--	--

6.21.4. PreferencesGroups###MoveNotify

Description:	Parameters for the MoveNotify object in the preference view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'PreferencesGroups'}->{'MoveNotify'} = { 'Active' => '1', 'Column' => 'Email Settings', 'Data' => { '0' => 'No', '1' => 'Yes' }, 'DataSelected' => '0', 'Desc' => 'Send me a notification if a ticket is moved into one of "My Queues".', 'Key' => 'Send ticket move notifications', 'Label' => 'Ticket move notification', 'Module' => 'Kernel::Output::HTML::PreferencesGeneric', 'PrefKey' => 'UserSendMoveNotification', 'Prio' => '4000' }; </pre>

6.21.5. PreferencesGroups###WatcherNotify

Description:	Parameters for the WatcherNotify object in the preference view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'PreferencesGroups'}->{'WatcherNotify'} = { 'Active' => '1', 'Column' => 'Email Settings', 'Data' => { '0' => 'No', '1' => 'Yes' }, 'DataSelected' => '0', 'Desc' => 'Send me the same notifications for my watched tickets that the ticket owners will get.', 'Key' => 'Send ticket watch notifications', 'Label' => 'Ticket watch notification', 'Module' => 'Kernel::Output::HTML::PreferencesTicketWatcher', 'PrefKey' => 'UserSendWatcherNotification', 'Prio' => '5000' }; </pre>

6.21.6. PreferencesGroups###CustomQueue

Description:	Parameters for the CustomQueue object in the preference view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'PreferencesGroups'}->{'CustomQueue'} = { 'Active' => '1', 'Column' => 'Other Settings', 'Desc' => 'Your queue selection of your favorite queues. You also get notified about those queues via email if enabled.', 'Key' => 'My Queues', 'Label' => 'My Queues', 'Module' => 'Kernel::Output::HTML::PreferencesCustomQueue', 'Permission' => 'ro', 'Prio' => '1000' }; </pre>

6.21.7. PreferencesGroups###RefreshTime

Description:	Parameters for the RefreshTime object in the preference view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'PreferencesGroups'}->{'RefreshTime'} = { 'Active' => '1', 'Column' => 'Other Settings', 'Data' => { '0' => 'off', '10' => '10 minutes', '15' => '15 minutes', '2' => ' 2 minutes', '5' => ' 5 minutes', '7' => ' 7 minutes' }, 'DataSelected' => '0', 'Desc' => 'If enabled, the different overviews (Dashboard, LockedView, QueueView) will automatically refresh after the specified time.', 'Key' => 'Refresh Overviews after', 'Label' => 'Overview Refresh Time', 'Module' => 'Kernel::Output::HTML::PreferencesGeneric', 'PrefKey' => 'UserRefreshTime', 'Prio' => '2000' }; </pre>

6.21.8. PreferencesGroups###TicketOverviewSmall-PageShown

Description:	Parameters for the pages (in which the tickets are shown) of the small ticket overview.
Group:	Ticket
SubGroup:	Frontend::Agent::Preferences

Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'PreferencesGroups'}->{'TicketOverviewSmallPageShown'} = { 'Active' => '0', 'Column' => 'Other Settings', 'Data' => { '10' => '10', '15' => '15', '20' => '20', '25' => '25', '30' => '30', '35' => '35' }, 'DataSelected' => '25', 'Key' => 'Ticket limit per page for Ticket Overview "Small"', 'Label' => 'Ticket Overview "Small" Limit', 'Module' => 'Kernel::Output::HTML::PreferencesGeneric', 'PrefKey' => 'UserTicketOverviewSmallPageShown', 'Prio' => '8000' };</pre>

6.21.9. PreferencesGroups###TicketOverviewFilterSettings

Description:	Parameters for .
Group:	Ticket
SubGroup:	Frontend::Agent::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'PreferencesGroups'}->{'TicketOverviewFilterSettings'} = { 'Active' => '0', 'Column' => 'Other Settings', 'Key' => 'Column ticket filters for Ticket Overviews type "Small".', 'Label' => 'Enabled filters.', 'Module' => 'Kernel::Output::HTML::PreferencesColumnFilters', 'PrefKey' => 'UserFilterColumnsEnabled', 'Prio' => '8100' };</pre>

6.21.10. PreferencesGroups###TicketOverviewMediumPageShown

Description:	Parameters for the pages (in which the tickets are shown) of the medium ticket overview.
Group:	Ticket
SubGroup:	Frontend::Agent::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'PreferencesGroups'}->{'TicketOverviewMediumPageShown'} = { 'Active' => '0', 'Column' => 'Other Settings', 'Data' => { '10' => '10', '15' => '15', '20' => '20', '25' => '25', '30' => '30',</pre>

	<pre> '35' => '35' }, 'DataSelected' => '20', 'Key' => 'Ticket limit per page for Ticket Overview "Medium"', 'Label' => 'Ticket Overview "Medium" Limit', 'Module' => 'Kernel::Output::HTML::PreferencesGeneric', 'PrefKey' => 'UserTicketOverviewMediumPageShown', 'Prio' => '8100' }; </pre>
--	---

6.21.11. PreferencesGroups###TicketOverviewPreviewPageShown

Description:	Parameters for the pages (in which the tickets are shown) of the ticket preview overview.
Group:	Ticket
SubGroup:	Frontend::Agent::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'PreferencesGroups'}->{'TicketOverviewPreviewPageShown'} = { 'Active' => '0', 'Column' => 'Other Settings', 'Data' => { '10' => '10', '15' => '15', '20' => '20', '25' => '25', '30' => '30', '35' => '35' }, 'DataSelected' => '15', 'Key' => 'Ticket limit per page for Ticket Overview "Preview"', 'Label' => 'Ticket Overview "Preview" Limit', 'Module' => 'Kernel::Output::HTML::PreferencesGeneric', 'PrefKey' => 'UserTicketOverviewPreviewPageShown', 'Prio' => '8200' }; </pre>

6.21.12. PreferencesGroups###CreateNextMask

Description:	Parameters for the CreateNextMask object in the preference view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre> \$self->{'PreferencesGroups'}->{'CreateNextMask'} = { 'Active' => '1', 'Column' => 'Other Settings', 'Data' => { '' => 'CreateTicket', 'AgentTicketZoom' => 'TicketZoom' }, 'DataSelected' => '', 'Key' => 'Show this screen after I created a new ticket', 'Label' => 'Screen after new ticket', 'Module' => 'Kernel::Output::HTML::PreferencesGeneric', 'PrefKey' => 'UserCreateNextMask', 'Prio' => '3000' }; </pre>

6.22. Frontend::Agent::SearchRouter

6.22.1. Frontend::Search###AgentCustomerInformationCenter

Description:	Search backend router.
Group:	Ticket
SubGroup:	Frontend::Agent::SearchRouter
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Search'}->{'AgentCustomerInformationCenter'} = { '^AgentCustomerInformationCenter' => 'Action=AgentCustomerInformationCenterSearch' };</pre>

6.22.2. Frontend::Search###Ticket

Description:	Search backend router.
Group:	Ticket
SubGroup:	Frontend::Agent::SearchRouter
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::Search'}->{'Ticket'} = { '^AgentTicket' => 'Action=AgentTicketSearch;Subaction=AJAX' };</pre>

6.23. Frontend::Agent::Ticket::ArticleAttachmentModule

6.23.1. Ticket::Frontend::ArticleAttachmentModule###1-Download

Description:	Shows a link to download article attachments in the zoom view of the article in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ArticleAttachmentModule
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::ArticleAttachmentModule'}->{'1- Download'} = { 'Module' => 'Kernel::Output::HTML::ArticleAttachmentDownload' };</pre>

6.23.2. Ticket::Frontend::ArticleAttachmentModule###2-HTML-Viewer

Description:	Shows a link to access article attachments via a html online viewer in the zoom view of the article in the agent interface.
Group:	Ticket

SubGroup:	Frontend::Agent::Ticket::ArticleAttachmentModule
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::ArticleAttachmentModule'}->{'2-HTML-Viewer'} = { 'Module' => 'Kernel::Output::HTML::ArticleAttachmentHTMLViewer' };</pre>

6.24. Frontend::Agent::Ticket::ArticleComposeModule

6.24.1. Ticket::Frontend::ArticleComposeModule###1-SignEmail

Description:	Module to compose signed messages (PGP or S/MIME).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ArticleComposeModule
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::ArticleComposeModule'}->{'1-SignEmail'} = { 'Module' => 'Kernel::Output::HTML::ArticleComposeSign' };</pre>

6.24.2. Ticket::Frontend::ArticleComposeModule###2-CryptEmail

Description:	Module to crypt composed messages (PGP or S/MIME).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ArticleComposeModule
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::ArticleComposeModule'}->{'2-CryptEmail'} = { 'Module' => 'Kernel::Output::HTML::ArticleComposeCrypt' };</pre>

6.25. Frontend::Agent::Ticket::ArticleViewModule

6.25.1. Ticket::Frontend::ArticleViewModule###1-PGP

Description:	Agent interface article notification module to check PGP.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ArticleViewModule
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::ArticleViewModule'}->{'1-PGP'} = { 'Module' => 'Kernel::Output::HTML::ArticleCheckPGP' };</pre>

```
};
```

6.25.2. Ticket::Frontend::ArticleViewModule###1-SMIME

Description:	Agent interface module to check incoming emails in the Ticket-Zoom-View if the S/MIME-key is available and true.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ArticleViewModule
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::ArticleViewModule'}->{'1-SMIME'} = { 'Module' => 'Kernel::Output::HTML::ArticleCheckSMIME' };</pre>

6.26. Frontend::Agent::Ticket::ArticleViewModulePre

6.26.1. Ticket::Frontend::ArticlePreViewModule###1-PGP

Description:	Agent interface article notification module to check PGP.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ArticleViewModulePre
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::ArticlePreViewModule'}->{'1-PGP'} = { 'Module' => 'Kernel::Output::HTML::ArticleCheckPGP' };</pre>

6.26.2. Ticket::Frontend::ArticlePreViewModule###1-SMIME

Description:	Agent interface article notification module to check S/MIME.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ArticleViewModulePre
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::ArticlePreViewModule'}->{'1-SMIME'} = { 'Module' => 'Kernel::Output::HTML::ArticleCheckSMIME' };</pre>

6.27. Frontend::Agent::Ticket::MenuModule

6.27.1. Ticket::Frontend::MenuModule###000-Back

Description:	Shows a link in the menu to go back in the ticket zoom view of the agent interface.
Group:	Ticket

SubGroup:	Frontend::Agent::Ticket::MenuModule
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Ticket::Frontend::MenuModule'}->{'000-Back'} = { 'Action' => '', 'Description' => 'Back', 'Link' => '\$Env{"LastScreenOverview"};TicketID= \$QData{"TicketID"}', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'Back', 'PopupType' => '', 'Target' => '' }; </pre>

6.27.2. Ticket::Frontend::MenuModule###100-Lock

Description:	Shows a link in the menu to lock/unlock tickets in the ticket zoom view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModule
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Ticket::Frontend::MenuModule'}->{'100-Lock'} = { 'Action' => 'AgentTicketLock', 'Module' => 'Kernel::Output::HTML::TicketMenuLock', 'Name' => 'Lock', 'Target' => '' }; </pre>

6.27.3. Ticket::Frontend::MenuModule###200-History

Description:	Shows a link in the menu to access the history of a ticket in the ticket zoom view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModule
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Ticket::Frontend::MenuModule'}->{'200-History'} = { 'Action' => 'AgentTicketHistory', 'Description' => 'Show the ticket history', 'Link' => 'Action=AgentTicketHistory;TicketID=\$QData{"TicketID"}', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'History', 'PopupType' => 'TicketHistory', 'Target' => '' }; </pre>

6.27.4. Ticket::Frontend::MenuModule###210-Print

Description:	Shows a link in the menu to print a ticket or an article in the ticket zoom view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModule
Valid:	1
Required:	0

Config-Setting:	<pre> \$Self->{'Ticket::Frontend::MenuModule'}->{'210-Print'} = { 'Action' => 'AgentTicketPrint', 'Description' => 'Print this ticket', 'Link' => 'Action=AgentTicketPrint;TicketID=\$QData{"TicketID"}', 'LinkParam' => 'target="print"', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'Print', 'PopupType' => 'TicketAction', 'Target' => '' }; </pre>
-----------------	--

6.27.5. Ticket::Frontend::MenuModule###300-Priority

Description:	Shows a link in the menu to see the priority of a ticket in the ticket zoom view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModule
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Ticket::Frontend::MenuModule'}->{'300-Priority'} = { 'Action' => 'AgentTicketPriority', 'Description' => 'Change the ticket priority', 'Link' => 'Action=AgentTicketPriority;TicketID=\$QData{"TicketID"}', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'Priority', 'PopupType' => 'TicketAction', 'Target' => '' }; </pre>

6.27.6. Ticket::Frontend::MenuModule###310-Free-Text

Description:	Shows a link in the menu to add a free text field in the ticket zoom view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModule
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Ticket::Frontend::MenuModule'}->{'310-FreeText'} = { 'Action' => 'AgentTicketFreeText', 'Description' => 'Change the free fields for this ticket', 'Link' => 'Action=AgentTicketFreeText;TicketID=\$QData{"TicketID"}', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'Free Fields', 'PopupType' => 'TicketAction', 'Target' => '' }; </pre>

6.27.7. Ticket::Frontend::MenuModule###320-Link

Description:	Shows a link in the menu that allows linking a ticket with another object in the ticket zoom view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModule
Valid:	1

Required:	0
Config-Setting:	<pre> \$Self->{'Ticket::Frontend::MenuModule'}->{'320-Link'} = { 'Action' => 'AgentLinkObject', 'Description' => 'Link this ticket to other objects', 'Link' => 'Action=AgentLinkObject;SourceObject=Ticket;SourceKey= \$QData{"TicketID"}', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'Link', 'PopupType' => 'TicketAction', 'Target' => '' }; </pre>

6.27.8. Ticket::Frontend::MenuModule###400-Owner

Description:	Shows a link in the menu to see the owner of a ticket in the ticket zoom view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModule
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Ticket::Frontend::MenuModule'}->{'400-Owner'} = { 'Action' => 'AgentTicketOwner', 'Description' => 'Change the owner for this ticket', 'Link' => 'Action=AgentTicketOwner;TicketID=\$QData{"TicketID"}', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'Owner', 'PopupType' => 'TicketAction', 'Target' => '' }; </pre>

6.27.9. Ticket::Frontend::MenuModule###410-Responsible

Description:	Shows a link in the menu to see the responsible agent of a ticket in the ticket zoom view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModule
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Ticket::Frontend::MenuModule'}->{'410-Responsible'} = { 'Action' => 'AgentTicketResponsible', 'Description' => 'Change the responsible person for this ticket', 'Link' => 'Action=AgentTicketResponsible;TicketID= \$QData{"TicketID"}', 'Module' => 'Kernel::Output::HTML::TicketMenuResponsible', 'Name' => 'Responsible', 'PopupType' => 'TicketAction', 'Target' => '' }; </pre>

6.27.10. Ticket::Frontend::MenuModule###420-Customer

Description:	Shows a link in the menu to see the customer who requested the ticket in the ticket zoom view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModule

Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::MenuModule'}->{'420-Customer'} = { 'Action' => 'AgentTicketCustomer', 'Description' => 'Change the customer for this ticket', 'Link' => 'Action=AgentTicketCustomer;TicketID= \$QData{"TicketID"}', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'Customer', 'PopupType' => 'TicketAction', 'Target' => '' };</pre>

6.27.11. Ticket::Frontend::MenuModule###420-Note

Description:	Shows a link in the menu to add a note in the ticket zoom view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModule
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::MenuModule'}->{'420-Note'} = { 'Action' => 'AgentTicketNote', 'Description' => 'Add a note to this ticket', 'Link' => 'Action=AgentTicketNote;TicketID=\$QData{"TicketID"}', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'Note', 'PopupType' => 'TicketAction', 'Target' => '' };</pre>

6.27.12. Ticket::Frontend::MenuModule###425-Phone Call Outbound

Description:	Shows a link in the menu to add a note in the ticket zoom view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModule
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::MenuModule'}->{'425-Phone Call Outbound'} = { 'Action' => 'AgentTicketPhoneOutbound', 'Description' => 'Phone Call Outbound', 'Link' => 'Action=AgentTicketPhoneOutbound;TicketID= \$QData{"TicketID"}', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'Phone Call Outbound', 'PopupType' => 'TicketAction', 'Target' => '' };</pre>

6.27.13. Ticket::Frontend::MenuModule###426-Phone Call Inbound

Description:	Shows a link in the menu to add a note in the ticket zoom view of the agent interface.
--------------	--

Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModule
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::MenuModule'}->{'426-Phone Call Inbound'} = { 'Action' => 'AgentTicketPhoneInbound', 'Description' => 'Phone Call Inbound', 'Link' => 'Action=AgentTicketPhoneInbound;TicketID=\$QData{"TicketID"}', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'Phone Call Inbound', 'PopupType' => 'TicketAction', 'Target' => '' };</pre>

6.27.14. Ticket::Frontend::MenuModule###430-Merge

Description:	Shows a link in the menu that allows merging tickets in the ticket zoom view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModule
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::MenuModule'}->{'430-Merge'} = { 'Action' => 'AgentTicketMerge', 'Description' => 'Merge into a different ticket', 'Link' => 'Action=AgentTicketMerge;TicketID=\$QData{"TicketID"}', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'Merge', 'PopupType' => 'TicketAction', 'Target' => '' };</pre>

6.27.15. Ticket::Frontend::MenuModule###440-Pending

Description:	Shows a link in the menu to set a ticket as pending in the ticket zoom view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModule
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::MenuModule'}->{'440-Pending'} = { 'Action' => 'AgentTicketPending', 'Description' => 'Set this ticket to pending', 'Link' => 'Action=AgentTicketPending;TicketID=\$QData{"TicketID"}', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'Pending', 'PopupType' => 'TicketAction', 'Target' => '' };</pre>

6.27.16. Ticket::Frontend::MenuModule###448-Watch

Description:	Shows a link in the menu for subscribing / unsubscribing from a ticket in the ticket zoom view of the agent interface.
--------------	--

Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModule
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::MenuModule'}->{'448-Watch'} = { 'Action' => 'AgentTicketWatcher', 'Module' => 'Kernel::Output::HTML::TicketMenuTicketWatcher', 'Name' => 'Watch', 'Target' => '' };</pre>

6.27.17. Ticket::Frontend::MenuModule###450-Close

Description:	Shows a link in the menu to close a ticket in the ticket zoom view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModule
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::MenuModule'}->{'450-Close'} = { 'Action' => 'AgentTicketClose', 'Description' => 'Close this ticket', 'Link' => 'Action=AgentTicketClose;TicketID=\$QData{"TicketID"}', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'Close', 'PopupType' => 'TicketAction', 'Target' => '' };</pre>

6.27.18. Ticket::Frontend::MenuModule###460-Delete

Description:	Shows a link in the menu to delete a ticket in the ticket zoom view of the agent interface. Additional access control to show or not show this link can be done by using Key "Group" and Content like "rw:group1;move_into:group2".
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModule
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::MenuModule'}->{'460-Delete'} = { 'Action' => 'AgentTicketMove', 'Description' => 'Delete this ticket', 'Link' => 'Action=AgentTicketMove;TicketID=\$Data{"TicketID"};DestQueue=Delete', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'Delete', 'PopupType' => '', 'Target' => '' };</pre>

6.27.19. Ticket::Frontend::MenuModule###470-Spam

Description:	Shows a link to set a ticket as spam in the ticket zoom view of the agent interface. Additional access control to show or not
--------------	---

	show this link can be done by using Key "Group" and Content like "rw:group1;move_into:group2".
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModule
Valid:	0
Required:	0
Config-Setting:	<pre> \$Self->{'Ticket::Frontend::MenuModule'}->{'470-Spam'} = { 'Action' => 'AgentTicketMove', 'Description' => 'Mark as Spam!', 'Link' => 'Action=AgentTicketMove;TicketID= \$data{"TicketID"};DestQueue=Delete', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'Spam', 'PopupType' => '', 'Target' => '' }; </pre>

6.28. Frontend::Agent::Ticket::MenuModulePre

6.28.1. Ticket::Frontend::PreMenuModule###100-Lock

Description:	Shows a link in the menu to lock / unlock a ticket in the ticket overviews of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModulePre
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Ticket::Frontend::PreMenuModule'}->{'100-Lock'} = { 'Action' => 'AgentTicketLock', 'Module' => 'Kernel::Output::HTML::TicketMenuLock', 'Name' => 'Lock', 'PopupType' => '', 'Target' => '' }; </pre>

6.28.2. Ticket::Frontend::PreMenuModule###200-Zoom

Description:	Shows a link in the menu to zoom a ticket in the ticket overviews of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModulePre
Valid:	1
Required:	0
Config-Setting:	<pre> \$Self->{'Ticket::Frontend::PreMenuModule'}->{'200-Zoom'} = { 'Action' => 'AgentTicketZoom', 'Description' => 'Look into a ticket!', 'Link' => 'Action=AgentTicketZoom;TicketID=\$QData{"TicketID"}', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'Zoom', 'PopupType' => '', 'Target' => '' }; </pre>

6.28.3. Ticket::Frontend::PreMenuModule###210-History

Description:	Shows a link in the menu to see the history of a ticket in every ticket overview of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModulePre
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::PreMenuModule'}->{'210-History'} = { 'Action' => 'AgentTicketHistory', 'Description' => 'Show the ticket history', 'Link' => 'Action=AgentTicketHistory;TicketID=\$QData{"TicketID"}', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'History', 'PopupType' => 'TicketHistory', 'Target' => '' };</pre>

6.28.4. Ticket::Frontend::PreMenuModule###300-Priority

Description:	Shows a link in the menu to set the priority of a ticket in every ticket overview of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModulePre
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::PreMenuModule'}->{'300-Priority'} = { 'Action' => 'AgentTicketPriority', 'Description' => 'Change the priority for this ticket', 'Link' => 'Action=AgentTicketPriority;TicketID= \$QData{"TicketID"}', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'Priority', 'PopupType' => 'TicketAction', 'Target' => '' };</pre>

6.28.5. Ticket::Frontend::PreMenuModule###420-Note

Description:	Shows a link in the menu to add a note to a ticket in every ticket overview of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModulePre
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::PreMenuModule'}->{'420-Note'} = { 'Action' => 'AgentTicketNote', 'Description' => 'Add a note to this ticket', 'Link' => 'Action=AgentTicketNote;TicketID=\$QData{"TicketID"}', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'Note', 'PopupType' => 'TicketAction', 'Target' => '' };</pre>

6.28.6. Ticket::Frontend::PreMenuModule###440-Close

Description:	Shows a link in the menu to close a ticket in every ticket overview of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModulePre
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::PreMenuModule'}->{'440-Close'} = { 'Action' => 'AgentTicketClose', 'Description' => 'Close this ticket', 'Link' => 'Action=AgentTicketClose;TicketID=\$QData{"TicketID"}', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'Close', 'PopupType' => 'TicketAction', 'Target' => '' };</pre>

6.28.7. Ticket::Frontend::PreMenuModule###445-Move

Description:	Shows a link in the menu to move a ticket in every ticket overview of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModulePre
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::PreMenuModule'}->{'445-Move'} = { 'Action' => 'AgentTicketMove', 'Description' => 'Change queue!', 'Module' => 'Kernel::Output::HTML::TicketMenuMove', 'Name' => 'Move' };</pre>

6.28.8. Ticket::Frontend::PreMenuModule###450-Delete

Description:	Shows a link in the menu to delete a ticket in every ticket overview of the agent interface. Additional access control to show or not show this link can be done by using Key "Group" and Content like "rw:group1;move_into:group2".
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModulePre
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::PreMenuModule'}->{'450-Delete'} = { 'Action' => 'AgentTicketMove', 'Description' => 'Delete this ticket', 'Link' => 'Action=AgentTicketMove;TicketID=\$Data{"TicketID"};DestQueue=Delete', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'Delete', 'PopupType' => '', 'Target' => '' };</pre>

```
};
```

6.28.9. Ticket::Frontend::PreMenuModule###460-Spam

Description:	Shows a link in the menu to set a ticket as spam in every ticket overview of the agent interface. Additional access control to show or not show this link can be done by using Key "Group" and Content like "rw:group1;move_into:group2".
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::MenuModulePre
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::PreMenuModule'}->{'460-Spam'} = { 'Action' => 'AgentTicketMove', 'Description' => 'Mark as Spam!', 'Link' => 'Action=AgentTicketMove;TicketID= \$Data{"TicketID"};DestQueue=Delete', 'Module' => 'Kernel::Output::HTML::TicketMenuGeneric', 'Name' => 'Spam', 'PopupType' => '', 'Target' => '' };</pre>

6.29. Frontend::Agent::Ticket::OverviewMenuModule

6.29.1. Ticket::Frontend::OverviewMenuModule###001-Sort

Description:	Shows a select of ticket attributes to order the queue view ticket list. The possible selections can be configured via 'TicketOverviewMenuSort###SortAttributes'.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::OverviewMenuModule
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::OverviewMenuModule'}->{'001-Sort'} = { 'Module' => 'Kernel::Output::HTML::TicketOverviewMenuSort' };</pre>

6.29.2. TicketOverviewMenuSort###SortAttributes

Description:	Defines from which ticket attributes the agent can select the result order.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::OverviewMenuModule
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'TicketOverviewMenuSort'}->{'SortAttributes'} = { 'Age' => '1', 'Title' => '1' };</pre>

6.30. Frontend::Agent::Ticket::ViewBounce

6.30.1. Ticket::Frontend::AgentTicketBounce###Permission

Description:	Required permissions to use the ticket bounce screen in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewBounce
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketBounce'}->{'Permission'} = 'bounce';</code>

6.30.2. Ticket::Frontend::AgentTicketBounce###RequiredLock

Description:	Defines if a ticket lock is required in the ticket bounce screen of the agent interface (if the ticket isn't locked yet, the ticket gets locked and the current agent will be set automatically as its owner).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewBounce
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketBounce'}->{'RequiredLock'} = '1';</code>

6.30.3. Ticket::Frontend::AgentTicketBounce###StateDefault

Description:	Defines the default next state of a ticket after being bounced, in the ticket bounce screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewBounce
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketBounce'}->{'StateDefault'} = 'closed_successful';</code>

6.30.4. Ticket::Frontend::AgentTicketBounce###StateType

Description:	Defines the next state of a ticket after being bounced, in the ticket bounce screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewBounce
Valid:	1
Required:	1

Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketBounce'}->{'StateType'} = ['open', 'closed'];</pre>
-----------------	---

6.30.5. Ticket::Frontend::BounceText

Description:	Defines the default ticket bounced notification for customer/sender in the ticket bounce screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewBounce
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::BounceText'} = 'Your email with ticket number "<OTRS_TICKET>" is bounced to "<OTRS_BOUNCE_TO>". Contact this address for further information.';</pre>

6.31. Frontend::Agent::Ticket::ViewBulk

6.31.1. Ticket::Frontend::AgentTicketBulk###RequiredLock

Description:	Automatically lock and set owner to current Agent after selecting for an Bulk Action.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewBulk
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketBulk'}->{'RequiredLock'} = '1';</pre>

6.31.2. Ticket::Frontend::AgentTicketBulk###Ticket-Type

Description:	Sets the ticket type in the ticket bulk screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewBulk
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketBulk'}->{'TicketType'} = '1';</pre>

6.31.3. Ticket::Frontend::AgentTicketBulk###Owner

Description:	Sets the ticket owner in the ticket bulk screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewBulk
Valid:	1
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketBulk'}->{'Owner'} = '1';</code>
-----------------	--

6.31.4. Ticket::Frontend::AgentTicketBulk###Responsible

Description:	Sets the responsible agent of the ticket in the ticket bulk screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewBulk
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketBulk'}->{'Responsible'} = '1';</code>

6.31.5. Ticket::Frontend::AgentTicketBulk###State

Description:	If a note is added by an agent, sets the state of a ticket in the ticket bulk screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewBulk
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketBulk'}->{'State'} = '1';</code>

6.31.6. Ticket::Frontend::AgentTicketBulk###State-Type

Description:	Defines the next state of a ticket after adding a note, in the ticket bulk screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewBulk
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketBulk'}->{'StateType'} = ['open', 'closed', 'pending reminder', 'pending auto'];</code>

6.31.7. Ticket::Frontend::AgentTicketBulk###StateDefault

Description:	Defines the default next state of a ticket after adding a note, in the ticket bulk screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewBulk
Valid:	0
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketBulk'}->{'StateDefault'} = 'open';</code>
-----------------	--

6.31.8. Ticket::Frontend::AgentTicketBulk###Priority

Description:	Shows the ticket priority options in the ticket bulk screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewBulk
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketBulk'}->{'Priority'} = '1';</code>

6.31.9. Ticket::Frontend::AgentTicketBulk###Priority-Default

Description:	Defines the default ticket priority in the ticket bulk screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewBulk
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketBulk'}->{'PriorityDefault'} = '3 normal';</code>

6.31.10. Ticket::Frontend::AgentTicketBulk###Article-TypeDefault

Description:	Defines the default type of the note in the ticket bulk screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewBulk
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketBulk'}->{'ArticleTypeDefault'} = 'note-internal';</code>

6.31.11. Ticket::Frontend::AgentTicketBulk###Article-Types

Description:	Specifies the different note types that will be used in the system.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewBulk
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketBulk'}->{'ArticleTypes'} = { 'note-external' => '1', 'note-internal' => '1', 'note-report' => '0'</code>

```
};
```

6.32. Frontend::Agent::Ticket::ViewClose

6.32.1. Ticket::Frontend::AgentTicketClose###Permission

Description:	Required permissions to use the close ticket screen in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'Permission'} = 'close';</code>

6.32.2. Ticket::Frontend::AgentTicketClose###RequiredLock

Description:	Defines if a ticket lock is required in the close ticket screen of the agent interface (if the ticket isn't locked yet, the ticket gets locked and the current agent will be set automatically as its owner).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'RequiredLock'} = '1';</code>

6.32.3. Ticket::Frontend::AgentTicketClose###Ticket-Type

Description:	Sets the ticket type in the close ticket screen of the agent interface (Ticket::Type needs to be activated).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'TicketType'} = '0';</code>

6.32.4. Ticket::Frontend::AgentTicketClose###Service

Description:	Sets the service in the close ticket screen of the agent interface (Ticket::Service needs to be activated).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'Service'} = '0';</code>
-----------------	---

6.32.5. Ticket::Frontend::AgentTicketClose###Service-Mandatory

Description:	Sets if service must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'ServiceMandatory'} = '0';</code>

6.32.6. Ticket::Frontend::AgentTicketClose###SLA-Mandatory

Description:	Sets if SLA must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'SLAMandatory'} = '0';</code>

6.32.7. Ticket::Frontend::AgentTicketClose###Queue

Description:	Sets the queue in the ticket close screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'Queue'} = '0';</code>

6.32.8. Ticket::Frontend::AgentTicketClose###Owner

Description:	Sets the ticket owner in the close ticket screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'Owner'} = '0';</code>

6.32.9. Ticket::Frontend::AgentTicketClose###Owner-Mandatory

Description:	Sets if ticket owner must be selected by the agent.
--------------	---

Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'OwnerMandatory'} = '0';</code>

6.32.10. Ticket::Frontend::AgentTicketClose###Responsible

Description:	Sets the responsible agent of the ticket in the close ticket screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'Responsible'} = '0';</code>

6.32.11. Ticket::Frontend::AgentTicketClose###State

Description:	If a note is added by an agent, sets the state of a ticket in the close ticket screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'State'} = '1';</code>

6.32.12. Ticket::Frontend::AgentTicketClose###State-Type

Description:	Defines the next state of a ticket after adding a note, in the close ticket screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'StateType'} = ['closed'];</code>

6.32.13. Ticket::Frontend::AgentTicketClose###StateDefault

Description:	Defines the default next state of a ticket after adding a note, in the close ticket screen of the agent interface.
Group:	Ticket

SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'StateDefault'} = 'closed successful';</code>

6.32.14. Ticket::Frontend::AgentTicketClose###Note

Description:	Allows adding notes in the close ticket screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'Note'} = '1';</code>

6.32.15. Ticket::Frontend::AgentTicketClose###Note-Mandatory

Description:	Sets if note must be filled in by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'NoteMandatory'} = '1';</code>

6.32.16. Ticket::Frontend::AgentTicketClose###Subject

Description:	Sets the default subject for notes added in the close ticket screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'Subject'} = '\$Text{"Close"}';</code>

6.32.17. Ticket::Frontend::AgentTicketClose###Body

Description:	Sets the default body text for notes added in the close ticket screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'Body'} = '';</code>
-----------------	---

6.32.18. Ticket::Frontend::AgentTicketClose###InvolvedAgent

Description:	Shows a list of all the involved agents on this ticket, in the close ticket screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'InvolvedAgent'} = '0';</code>

6.32.19. Ticket::Frontend::AgentTicketClose###InformAgent

Description:	Shows a list of all the possible agents (all agents with note permissions on the queue/ticket) to determine who should be informed about this note, in the close ticket screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'InformAgent'} = '0';</code>

6.32.20. Ticket::Frontend::AgentTicketClose###ArticleTypeDefault

Description:	Defines the default type of the note in the close ticket screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'ArticleTypeDefault'} = 'note-internal';</code>

6.32.21. Ticket::Frontend::AgentTicketClose###ArticleTypes

Description:	Specifies the available note types for this ticket mask. If the option is deselected, ArticleTypeDefault is used and the option is removed from the mask.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1

Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'ArticleTypes'} = { 'note-external' => '0', 'note-internal' => '1', 'note-report' => '0' };</pre>

6.32.22. Ticket::Frontend::AgentTicketClose###Priority

Description:	Shows the ticket priority options in the close ticket screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'Priority'} = '0';</pre>

6.32.23. Ticket::Frontend::AgentTicketClose###PriorityDefault

Description:	Defines the default ticket priority in the close ticket screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'PriorityDefault'} = '3 normal';</pre>

6.32.24. Ticket::Frontend::AgentTicketClose###Title

Description:	Shows the title fields in the close ticket screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'Title'} = '0';</pre>

6.32.25. Ticket::Frontend::AgentTicketClose###HistoryType

Description:	Defines the history type for the close ticket screen action, which gets used for ticket history in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1

Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'HistoryType'} = 'AddNote';</code>

6.32.26. Ticket::Frontend::AgentTicketClose###HistoryComment

Description:	Defines the history comment for the close ticket screen action, which gets used for ticket history in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'HistoryComment'} = '%Close';</code>

6.32.27. Ticket::Frontend::AgentTicketClose###DynamicField

Description:	Dynamic fields shown in the ticket close screen of the agent interface. Possible settings: 0 = Disabled, 1 = Enabled, 2 = Enabled and required.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'DynamicField'} = {};</code>

6.32.28. Ticket::Frontend::AgentTicketClose###RichTextWidth

Description:	Defines the width for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'RichTextWidth'} = '620';</code>

6.32.29. Ticket::Frontend::AgentTicketClose###RichTextHeight

Description:	Defines the height for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewClose
Valid:	1

Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketClose'}->{'RichTextHeight'} = '100';</code>

6.33. Frontend::Agent::Ticket::ViewCompose

6.33.1. Ticket::Frontend::AgentTicketCompose###Permission

Description:	Required permissions to use the ticket compose screen in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewCompose
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketCompose'}->{'Permission'} = 'compose';</code>

6.33.2. Ticket::Frontend::AgentTicketCompose###RequiredLock

Description:	Defines if a ticket lock is required in the ticket compose screen of the agent interface (if the ticket isn't locked yet, the ticket gets locked and the current agent will be set automatically as its owner).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewCompose
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketCompose'}->{'RequiredLock'} = '1';</code>

6.33.3. Ticket::Frontend::AgentTicketCompose###StateDefault

Description:	Defines the default next state of a ticket if it is composed / answered in the ticket compose screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewCompose
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketCompose'}->{'StateDefault'} = 'open';</code>

6.33.4. Ticket::Frontend::AgentTicketCompose###StateType

Description:	Defines the next possible states after composing / answering a ticket in the ticket compose screen of the agent interface.
--------------	--

Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewCompose
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketCompose'}->{'StateType'} = ['open', 'closed', 'pending auto', 'pending reminder'];</pre>

6.33.5. Ticket::Frontend::AgentTicketCompose###ArticleTypes

Description:	Specifies the different article types that will be used in the system.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewCompose
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketCompose'}->{'ArticleTypes'} = ['email-external', 'email-internal'];</pre>

6.33.6. Ticket::Frontend::AgentTicketCompose###DefaultArticleType

Description:	Specifies the default article type for the ticket compose screen in the agent interface if the article type cannot be automatically detected.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewCompose
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketCompose'}->{'DefaultArticleType'} = 'email-external';</pre>

6.33.7. Ticket::Frontend::ResponseFormat

Description:	Defines the format of responses in the ticket compose screen of the agent interface (\$QData{"OrigFrom"} is From 1:1, \$QData{"OrigFromName"} is only realname of From).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewCompose
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::ResponseFormat'} = \$QData{"Salutation"} \$QData{"StdResponse"} \$QData{"Signature"}</pre>

	<pre>\$TimeShort{"\$QData{"Created"}} - \$QData{"OrigFromName"} \$Text{"wrote"}: \$QData{"Body"} ';</pre>
--	---

6.33.8. Ticket::Frontend::Quote

Description:	Defines the used character for plaintext email quotes in the ticket compose screen of the agent interface. If this is empty or inactive, original emails will not be quoted but appended to the response.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewCompose
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::Quote'} = '>';</code>

6.33.9. Ticket::Frontend::ResponseQuoteMaxLines

Description:	Defines the maximum number of quoted lines to be added to responses.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewCompose
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::ResponseQuoteMaxLines'} = '99';</code>

6.33.10. Ticket::Frontend::ComposeAddCustomerAddress

Description:	Adds customers email addresses to recipients in the ticket compose screen of the agent interface. The customers email address won't be added if the article type is email-internal.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewCompose
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::ComposeAddCustomerAddress'} = '1';</code>

6.33.11. Ticket::Frontend::ComposeReplaceSenderAddress

Description:	Replaces the original sender with current customer's email address on compose answer in the ticket compose screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewCompose
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::ComposeReplaceSenderAddress'} = '0';</code>

6.33.12. Ticket::Frontend::ComposeExcludeCcRecipients

Description:	Uses Cc recipients in reply Cc list on compose an email answer in the ticket compose screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewCompose
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::ComposeExcludeCcRecipients'} = '0';</code>

6.33.13. Ticket::Frontend::AgentTicketCompose###DynamicField

Description:	Dynamic fields shown in the ticket compose screen of the agent interface. Possible settings: 0 = Disabled, 1 = Enabled, 2 = Enabled and required.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewCompose
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketCompose'}->{'DynamicField'} = {};</code>

6.34. Frontend::Agent::Ticket::ViewCustomer

6.34.1. Ticket::Frontend::AgentTicketCustomer###Permission

Description:	Required permissions to change the customer of a ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewCustomer
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketCustomer'}->{'Permission'} = 'customer';</code>

6.34.2. Ticket::Frontend::AgentTicketCustomer###RequiredLock

Description:	Defines if a ticket lock is required to change the customer of a ticket in the agent interface (if the ticket isn't locked yet, the ticket gets locked and the current agent will be set automatically as its owner).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewCustomer
Valid:	1

Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketCustomer'}->{'RequiredLock'} = '0';</code>

6.35. Frontend::Agent::Ticket::ViewEmailNew

6.35.1. Ticket::Frontend::AgentTicketEmail###Priority

Description:	Sets the default priority for new email tickets in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewEmailNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketEmail'}->{'Priority'} = '3 normal';</code>

6.35.2. Ticket::Frontend::AgentTicketEmail###Article-Type

Description:	Sets the default article type for new email tickets in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewEmailNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketEmail'}->{'ArticleType'} = 'email-external';</code>

6.35.3. Ticket::Frontend::AgentTicketEmail###Sender-Type

Description:	Sets the default sender type for new email tickets in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewEmailNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketEmail'}->{'SenderType'} = 'agent';</code>

6.35.4. Ticket::Frontend::AgentTicketEmail###Subject

Description:	Sets the default subject for new email tickets (e.g. 'email Outbound') in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewEmailNew
Valid:	1

Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketEmail'}->{'Subject'} = '';</code>

6.35.5. Ticket::Frontend::AgentTicketEmail###Body

Description:	Sets the default text for new email tickets in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewEmailNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketEmail'}->{'Body'} = '';</code>

6.35.6. Ticket::Frontend::AgentTicketEmail###StateDefault

Description:	Sets the default next ticket state, after the creation of an email ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewEmailNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketEmail'}->{'StateDefault'} = 'open';</code>

6.35.7. Ticket::Frontend::AgentTicketEmail###State-Type

Description:	Determines the next possible ticket states, after the creation of a new email ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewEmailNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketEmail'}->{'StateType'} = ['open', 'pending auto', 'pending reminder', 'closed'];</code>

6.35.8. Ticket::Frontend::AgentTicketEmail###History-Type

Description:	Defines the history type for the email ticket screen action, which gets used for ticket history in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewEmailNew
Valid:	1

Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketEmail'}->{'HistoryType'} = 'EmailAgent';</code>

6.35.9. Ticket::Frontend::AgentTicketEmail###HistoryComment

Description:	Defines the history comment for the email ticket screen action, which gets used for ticket history in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewEmailNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketEmail'}->{'HistoryComment'} = '';</code>

6.35.10. Ticket::Frontend::AgentTicketEmail###ServiceMandatory

Description:	Sets if service must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewEmailNew
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketEmail'}->{'ServiceMandatory'} = '0';</code>

6.35.11. Ticket::Frontend::AgentTicketEmail###SLAMandatory

Description:	Sets if SLA must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewEmailNew
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketEmail'}->{'SLAMandatory'} = '0';</code>

6.35.12. Ticket::Frontend::AgentTicketEmail###DynamicField

Description:	Dynamic fields shown in the ticket email screen of the agent interface. Possible settings: 0 = Disabled, 1 = Enabled, 2 = Enabled and required.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewEmailNew
Valid:	1
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketEmail'}->{'DynamicField'} = {};</code>
-----------------	---

6.35.13. Ticket::Frontend::AgentTicketEmail###Rich-TextWidth

Description:	Defines the width for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewEmailNew
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketEmail'}->{'RichTextWidth'} = '620';</code>

6.35.14. Ticket::Frontend::AgentTicketEmail###Rich-TextHeight

Description:	Defines the height for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewEmailNew
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketEmail'}->{'RichTextHeight'} = '320';</code>

6.36. Frontend::Agent::Ticket::ViewEscalation

6.36.1. Ticket::Frontend::AgentTicketEscalation-View###TicketPermission

Description:	Defines the required permission to show a ticket in the escalation view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewEscalation
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketEscalationView'}->{'TicketPermission'} = 'rw';</code>

6.36.2. Ticket::Frontend::AgentTicketEscalation-View###ViewableTicketsPage

Description:	Shows all open tickets (even if they are locked) in the escalation view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewEscalation

Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketEscalationView'}->{'ViewableTicketsPage'} = '50';</code>

6.36.3. Ticket::Frontend::AgentTicketEscalation-View###SortBy::Default

Description:	Defines the default ticket attribute for ticket sorting in the escalation view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewEscalation
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketEscalationView'}->{'SortBy::Default'} = 'EscalationTime';</code>

6.36.4. Ticket::Frontend::AgentTicketEscalation-View###Order::Default

Description:	Defines the default ticket order (after priority sort) in the escalation view of the agent interface. Up: oldest on top. Down: latest on top.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewEscalation
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketEscalationView'}->{'Order::Default'} = 'Up';</code>

6.36.5. Ticket::Frontend::AgentTicketEscalation-View###DefaultColumns

Description:	Columns that can be filtered in the escalation view of the agent interface. Possible settings: 0 = Disabled, 1 = Available, 2 = Enabled by default. Note: Only Ticket attributes and Dynamic Fields (DynamicField_NameX) are allowed.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewEscalation
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketEscalationView'}->{'DefaultColumns'} = { 'Age' => '2', 'Changed' => '1', 'CustomerID' => '2', 'CustomerName' => '1', 'CustomerUserID' => '1', 'EscalationResponseTime' => '1', 'EscalationSolutionTime' => '1', 'EscalationTime' => '2', 'EscalationUpdateTime' => '1',</code>

```
'Lock' => '2',
'Owner' => '2',
'PendingTime' => '1',
'Priority' => '1',
'Queue' => '2',
'Responsible' => '1',
'SLA' => '1',
'Service' => '1',
'State' => '2',
'TicketNumber' => '2',
'Title' => '2',
'Type' => '1'
};
```

6.37. Frontend::Agent::Ticket::ViewForward

6.37.1. Ticket::Frontend::AgentTicketForward###Permission

Description:	Required permissions to use the ticket forward screen in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewForward
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketForward'}->{'Permission'} = 'forward';</code>

6.37.2. Ticket::Frontend::AgentTicketForward###RequiredLock

Description:	Defines if a ticket lock is required in the ticket forward screen of the agent interface (if the ticket isn't locked yet, the ticket gets locked and the current agent will be set automatically as its owner).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewForward
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketForward'}->{'RequiredLock'} = '1';</code>

6.37.3. Ticket::Frontend::AgentTicketForward###StateDefault

Description:	Defines the default next state of a ticket after being forwarded, in the ticket forward screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewForward
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketForward'}->{'StateDefault'} = 'closed successful';</code>

6.37.4. Ticket::Frontend::AgentTicketForward###StateType

Description:	Defines the next possible states after forwarding a ticket in the ticket forward screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewForward
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketForward'}->{'StateType'} = ['open', 'closed', 'pending reminder', 'pending auto'];</pre>

6.37.5. Ticket::Frontend::AgentTicketForward###ArticleTypeDefault

Description:	Defines the default type of forwarded message in the ticket forward screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewForward
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketForward'}->{'ArticleTypeDefault'} = 'email-external';</pre>

6.37.6. Ticket::Frontend::AgentTicketForward###ArticleTypes

Description:	Specifies the different article types that will be used in the system.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewForward
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketForward'}->{'ArticleTypes'} = ['email-external', 'email-internal'];</pre>

6.37.7. Ticket::Frontend::AgentTicketForward###DynamicField

Description:	Dynamic fields shown in the ticket forward screen of the agent interface. Possible settings: 0 = Disabled, 1 = Enabled, 2 = Enabled and required.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewForward
Valid:	1

Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketForward'}->{'DynamicField'} = {};</code>

6.37.8. Ticket::Frontend::AgentTicketForward###Rich-TextWidth

Description:	Defines the width for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewForward
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketForward'}->{'RichTextWidth'} = '620';</code>

6.37.9. Ticket::Frontend::AgentTicketForward###Rich-TextHeight

Description:	Defines the height for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewForward
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketForward'}->{'RichTextHeight'} = '100';</code>

6.38. Frontend::Agent::Ticket::ViewFreeText

6.38.1. Ticket::Frontend::AgentTicketFreeText###Permission

Description:	Required permissions to use the ticket free text screen in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'Permission'} = 'rw';</code>

6.38.2. Ticket::Frontend::AgentTicketFreeText###RequiredLock

Description:	Defines if a ticket lock is required in the ticket free text screen of the agent interface (if the ticket isn't locked yet, the ticket gets locked and the current agent will be set automatically as its owner).
--------------	---

Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'RequiredLock'} = '0';</code>

6.38.3. Ticket::Frontend::AgentTicketFreeText###TicketType

Description:	Sets the ticket type in the ticket free text screen of the agent interface (Ticket::Type needs to be activated).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'TicketType'} = '1';</code>

6.38.4. Ticket::Frontend::AgentTicketFreeText###Service

Description:	Sets the service in the ticket free text screen of the agent interface (Ticket::Service needs to be activated).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'Service'} = '1';</code>

6.38.5. Ticket::Frontend::AgentTicketFreeText###ServiceMandatory

Description:	Sets if service must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'ServiceMandatory'} = '0';</code>

6.38.6. Ticket::Frontend::AgentTicketFreeText###SLAMandatory

Description:	Sets if SLA must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText

Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'SLAMandatory'} = '0';</code>

6.38.7. Ticket::Frontend::AgentTicketFreeText###Queue

Description:	Sets the queue in the ticket free text screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'Queue'} = '0';</code>

6.38.8. Ticket::Frontend::AgentTicketFreeText###Owner

Description:	Sets the ticket owner in the ticket free text screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'Owner'} = '0';</code>

6.38.9. Ticket::Frontend::AgentTicketFreeText###OwnerMandatory

Description:	Sets if ticket owner must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'OwnerMandatory'} = '0';</code>

6.38.10. Ticket::Frontend::AgentTicketFreeText###Responsible

Description:	Sets the responsible agent of the ticket in the ticket free text screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	1
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'Responsible'} = '0';</code>
-----------------	--

6.38.11. Ticket::Frontend::AgentTicketFreeText###State

Description:	If a note is added by an agent, sets the state of a ticket in the ticket free text screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'State'} = '0';</code>

6.38.12. Ticket::Frontend::AgentTicketFreeText###StateType

Description:	Defines the next state of a ticket after adding a note, in the ticket free text screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'StateType'} = ['open', 'closed', 'pending reminder', 'pending auto'];</code>

6.38.13. Ticket::Frontend::AgentTicketFreeText###StateDefault

Description:	Defines the default next state of a ticket after adding a note, in the ticket free text screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'StateDefault'} = 'open';</code>

6.38.14. Ticket::Frontend::AgentTicketFreeText###Note

Description:	Allows adding notes in the ticket free text screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText

Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'Note'} = '0';</code>

6.38.15. Ticket::Frontend::AgentTicketFreeText###NoteMandatory

Description:	Sets if note must be filled in by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'NoteMandatory'} = '0';</code>

6.38.16. Ticket::Frontend::AgentTicketFreeText###Subject

Description:	Defines the default subject of a note in the ticket free text screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'Subject'} = '\$Text{"Note"}';</code>

6.38.17. Ticket::Frontend::AgentTicketFreeText###Body

Description:	Defines the default body of a note in the ticket free text screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'Body'} = '';</code>

6.38.18. Ticket::Frontend::AgentTicketFreeText###InvolvedAgent

Description:	Shows a list of all the involved agents on this ticket, in the ticket free text screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	0
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'InvolvedAgent'} = '0';</code>
-----------------	--

6.38.19. Ticket::Frontend::AgentTicketFreeText###InformAgent

Description:	Shows a list of all the possible agents (all agents with note permissions on the queue/ticket) to determine who should be informed about this note, in the ticket free text screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'InformAgent'} = '0';</code>

6.38.20. Ticket::Frontend::AgentTicketFreeText###ArticleTypeDefault

Description:	Defines the default type of the note in the ticket free text screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'ArticleTypeDefault'} = 'note-internal';</code>

6.38.21. Ticket::Frontend::AgentTicketFreeText###ArticleTypes

Description:	Specifies the available note types for this ticket mask. If the option is deselected, ArticleTypeDefault is used and the option is removed from the mask.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'ArticleTypes'} = { 'note-external' => '1', 'note-internal' => '1', 'note-report' => '0' };</code>

6.38.22. Ticket::Frontend::AgentTicketFreeText###Priority

Description:	Shows the ticket priority options in the ticket free text screen of the agent interface.
--------------	--

Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'Priority'} = '0';</code>

6.38.23. Ticket::Frontend::AgentTicketFreeText###PriorityDefault

Description:	Defines the default ticket priority in the ticket free text screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'PriorityDefault'} = '3 normal';</code>

6.38.24. Ticket::Frontend::AgentTicketFreeText###Title

Description:	Shows the title fields in the ticket free text screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'Title'} = '1';</code>

6.38.25. Ticket::Frontend::AgentTicketFreeText###HistoryType

Description:	Defines the history type for the ticket free text screen action, which gets used for ticket history.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'HistoryType'} = 'AddNote';</code>

6.38.26. Ticket::Frontend::AgentTicketFreeText###HistoryComment

Description:	Defines the history comment for the ticket free text screen action, which gets used for ticket history.
Group:	Ticket

SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'HistoryComment'} = '%FreeText';</code>

6.38.27. Ticket::Frontend::AgentTicketFreeText###DynamicField

Description:	Dynamic fields shown in the ticket free text screen of the agent interface. Possible settings: 0 = Disabled, 1 = Enabled, 2 = Enabled and required.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'DynamicField'} = {};</code>

6.38.28. Ticket::Frontend::AgentTicketFreeText###RichTextWidth

Description:	Defines the width for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'RichTextWidth'} = '620';</code>

6.38.29. Ticket::Frontend::AgentTicketFreeText###RichTextHeight

Description:	Defines the height for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewFreeText
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketFreeText'}->{'RichTextHeight'} = '100';</code>

6.39. Frontend::Agent::Ticket::ViewHistory

6.39.1. Ticket::Frontend::HistoryOrder

Description:	Shows the ticket history (reverse ordered) in the agent interface.
--------------	--

Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewHistory
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::HistoryOrder'} = 'normal';</code>

6.40. Frontend::Agent::Ticket::ViewLocked

6.40.1. Ticket::Frontend::AgentTicketLocked-View###SortBy::Default

Description:	Defines the default ticket attribute for ticket sorting in the locked ticket view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewLocked
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketLockedView'}->{'SortBy::Default'} = 'Age';</code>

6.40.2. Ticket::Frontend::AgentTicketLocked-View###Order::Default

Description:	Defines the default ticket order in the ticket locked view of the agent interface. Up: oldest on top. Down: latest on top.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewLocked
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketLockedView'}->{'Order::Default'} = 'Up';</code>

6.40.3. Ticket::Frontend::AgentTicketLocked-View###DefaultColumns

Description:	Columns that can be filtered in the locked view of the agent interface. Possible settings: 0 = Disabled, 1 = Available, 2 = Enabled by default. Note: Only Ticket attributes and Dynamic Fields (DynamicField_NameX) are allowed.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewLocked
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketLockedView'}->{'DefaultColumns'} = { 'Age' => '2', 'Changed' => '1', 'CustomerID' => '2', 'CustomerName' => '1',</code>

```
'CustomerUserID' => '1',
'EscalationResponseTime' => '1',
'EscalationSolutionTime' => '1',
'EscalationTime' => '1',
'EscalationUpdateTime' => '1',
'Lock' => '2',
'Owner' => '2',
'PendingTime' => '1',
'Priority' => '1',
'Queue' => '2',
'Responsible' => '1',
'SLA' => '1',
'Service' => '1',
'State' => '2',
'TicketNumber' => '2',
'Title' => '2',
'Type' => '1'
};
```

6.41. Frontend::Agent::Ticket::ViewMerge

6.41.1. Ticket::Frontend::AgentTicketMerge###Permission

Description:	Required permissions to use the ticket merge screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewMerge
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketMerge'}->{'Permission'} = 'rw';</code>

6.41.2. Ticket::Frontend::AgentTicketMerge###RequiredLock

Description:	Defines if a ticket lock is required in the ticket merge screen of a zoomed ticket in the agent interface (if the ticket isn't locked yet, the ticket gets locked and the current agent will be set automatically as its owner).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewMerge
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketMerge'}->{'RequiredLock'} = '1';</code>

6.41.3. Ticket::Frontend::MergeText

Description:	When tickets are merged, the customer can be informed per email by setting the check box "Inform Sender". In this text area, you can define a pre-formatted text which can later be modified by the agents.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewMerge

Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::MergeText'} = 'Your email with ticket number "<OTRS_TICKET>" is merged to "<OTRS_MERGE_TO_TICKET>";</code>

6.41.4. Ticket::Frontend::AutomaticMergeSubject

Description:	When tickets are merged, a note will be added automatically to the ticket which is no longer active. Here you can define the subject of this note (this subject cannot be changed by the agent).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewMerge
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AutomaticMergeSubject'} = 'Ticket Merged';</code>

6.41.5. Ticket::Frontend::AutomaticMergeText

Description:	When tickets are merged, a note will be added automatically to the ticket which is no longer active. Here you can define the body of this note (this text cannot be changed by the agent).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewMerge
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AutomaticMergeText'} = 'Merged Ticket <OTRS_TICKET> to <OTRS_MERGE_TO_TICKET>.';</code>

6.41.6. Ticket::Frontend::AgentTicketMerge###Rich-TextWidth

Description:	Defines the width for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewMerge
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketMerge'}->{'RichTextWidth'} = '620';</code>

6.41.7. Ticket::Frontend::AgentTicketMerge###Rich-TextHeight

Description:	Defines the height for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewMerge
Valid:	1

Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketMerge'}->{'RichTextHeight'} = '100';</code>

6.42. Frontend::Agent::Ticket::ViewMove

6.42.1. Ticket::Frontend::MoveType

Description:	Determines if the list of possible queues to move to ticket into should be displayed in a dropdown list or in a new window in the agent interface. If "New Window" is set you can add a move note to the ticket.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewMove
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::MoveType'} = 'form';</code>

6.42.2. Ticket::Frontend::AgentTicketMove###State

Description:	Allows to set a new ticket state in the move ticket screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewMove
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketMove'}->{'State'} = '1';</code>

6.42.3. Ticket::Frontend::AgentTicketMove###State-Type

Description:	Defines the next state of a ticket after being moved to another queue, in the move ticket screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewMove
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketMove'}->{'StateType'} = ['open', 'closed'];</code>

6.42.4. Ticket::Frontend::AgentTicketMove###Priority

Description:	Shows the ticket priority options in the move ticket screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewMove
Valid:	0

Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketMove'}->{'Priority'} = '0';</code>

6.42.5. Ticket::Frontend::AgentTicketMove###RequiredLock

Description:	Automatically lock and set owner to current Agent after opening the move ticket screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewMove
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketMove'}->{'RequiredLock'} = '1';</code>

6.42.6. Ticket::Frontend::AgentTicketMove###NextScreen

Description:	Determines the next screen after the ticket is moved. LastScreen-Overview will return the last overview screen (e.g. search results, queueview, dashboard). TicketZoom will return to the TicketZoom.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewMove
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketMove'}->{'NextScreen'} = 'TicketZoom';</code>

6.42.7. Ticket::Frontend::AgentTicketMove###Subject

Description:	Sets the default subject for notes added in the ticket move screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewMove
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketMove'}->{'Subject'} = '\$Text{"Change Queue"}';</code>

6.42.8. Ticket::Frontend::AgentTicketMove###Body

Description:	Sets the default body text for notes added in the ticket move screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewMove
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketMove'}->{'Body'} = '';</code>

6.42.9. Ticket::Frontend::AgentTicketMove###Rich-TextWidth

Description:	Defines the width for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewMove
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketMove'}->{'RichTextWidth'} = '620';</code>

6.42.10. Ticket::Frontend::AgentTicketMove###Rich-TextHeight

Description:	Defines the height for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewMove
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketMove'}->{'RichTextHeight'} = '100';</code>

6.42.11. Ticket::Frontend::AgentTicketMove###DynamicField

Description:	Dynamic fields shown in the ticket move screen of the agent interface. Possible settings: 0 = Disabled, 1 = Enabled, 2 = Enabled and required.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewMove
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketMove'}->{'DynamicField'} = {};</code>

6.43. Frontend::Agent::Ticket::ViewNote

6.43.1. Ticket::Frontend::AgentTicketNote###Permission

Description:	Required permissions to use the ticket note screen in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	1

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'Permission'} = 'note';</code>
-----------------	--

6.43.2. Ticket::Frontend::AgentTicketNote###RequiredLock

Description:	Defines if a ticket lock is required in the ticket note screen of the agent interface (if the ticket isn't locked yet, the ticket gets locked and the current agent will be set automatically as its owner).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'RequiredLock'} = '0';</code>

6.43.3. Ticket::Frontend::AgentTicketNote###Ticket-Type

Description:	Sets the ticket type in the ticket note screen of the agent interface (Ticket::Type needs to be activated).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'TicketType'} = '0';</code>

6.43.4. Ticket::Frontend::AgentTicketNote###Service

Description:	Sets the service in the ticket note screen of the agent interface (Ticket::Service needs to be activated).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'Service'} = '0';</code>

6.43.5. Ticket::Frontend::AgentTicketNote###Service-Mandatory

Description:	Sets if service must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'ServiceMandatory'} = '0';</code>

6.43.6. Ticket::Frontend::AgentTicketNote###SLA-Mandatory

Description:	Sets if SLA must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'SLAMandatory'} = '0';</code>

6.43.7. Ticket::Frontend::AgentTicketNote###Queue

Description:	Sets the queue in the ticket note screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'Queue'} = '0';</code>

6.43.8. Ticket::Frontend::AgentTicketNote###Owner

Description:	Sets the ticket owner in the ticket note screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'Owner'} = '0';</code>

6.43.9. Ticket::Frontend::AgentTicketNote###Owner-Mandatory

Description:	Sets if ticket owner must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'OwnerMandatory'} = '0';</code>

6.43.10. Ticket::Frontend::AgentTicketNote###Responsible

Description:	Sets the responsible agent of the ticket in the ticket note screen of the agent interface.
--------------	--

Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'Responsible'} = '0';</code>

6.43.11. Ticket::Frontend::AgentTicketNote###State

Description:	If a note is added by an agent, sets the state of a ticket in the ticket note screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'State'} = '0';</code>

6.43.12. Ticket::Frontend::AgentTicketNote###State-Type

Description:	Defines the next state of a ticket after adding a note, in the ticket note screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'StateType'} = ['open', 'closed', 'pending reminder', 'pending auto'];</code>

6.43.13. Ticket::Frontend::AgentTicketNote###StateDefault

Description:	Defines the default next state of a ticket after adding a note, in the ticket note screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'StateDefault'} = 'open';</code>

6.43.14. Ticket::Frontend::AgentTicketNote###Note

Description:	Allows adding notes in the ticket note screen of the agent interface.
--------------	---

Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'Note'} = '1';</code>

6.43.15. Ticket::Frontend::AgentTicketNote###Note-Mandatory

Description:	Sets if note must be filled in by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'NoteMandatory'} = '1';</code>

6.43.16. Ticket::Frontend::AgentTicketNote###Subject

Description:	Sets the default subject for notes added in the ticket note screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'Subject'} = '\$Text{"Note"}';</code>

6.43.17. Ticket::Frontend::AgentTicketNote###Body

Description:	Sets the default body text for notes added in the ticket note screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'Body'} = '';</code>

6.43.18. Ticket::Frontend::AgentTicketNote###InvolvedAgent

Description:	Shows a list of all the involved agents on this ticket, in the ticket note screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	0
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'InvolvedAgent'} = '0';</code>
-----------------	--

6.43.19. Ticket::Frontend::AgentTicketNote###InformAgent

Description:	Shows a list of all the possible agents (all agents with note permissions on the queue/ticket) to determine who should be informed about this note, in the ticket note screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'InformAgent'} = '0';</code>

6.43.20. Ticket::Frontend::AgentTicketNote###ArticleTypeDefault

Description:	Defines the default type of the note in the ticket note screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'ArticleTypeDefault'} = 'note-internal';</code>

6.43.21. Ticket::Frontend::AgentTicketNote###ArticleTypes

Description:	Specifies the available note types for this ticket mask. If the option is deselected, ArticleTypeDefault is used and the option is removed from the mask.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'ArticleTypes'} = { 'note-external' => '1', 'note-internal' => '1', 'note-report' => '0' };</code>

6.43.22. Ticket::Frontend::AgentTicketNote###Priority

Description:	Shows the ticket priority options in the ticket note screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote

Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'Priority'} = '0';</code>

6.43.23. Ticket::Frontend::AgentTicketNote###PriorityDefault

Description:	Defines the default ticket priority in the ticket note screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'PriorityDefault'} = '3 normal';</code>

6.43.24. Ticket::Frontend::AgentTicketNote###Title

Description:	Shows the title fields in the ticket note screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'Title'} = '0';</code>

6.43.25. Ticket::Frontend::AgentTicketNote###HistoryType

Description:	Defines the history type for the ticket note screen action, which gets used for ticket history in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'HistoryType'} = 'AddNote';</code>

6.43.26. Ticket::Frontend::AgentTicketNote###HistoryComment

Description:	Defines the history comment for the ticket note screen action, which gets used for ticket history in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'HistoryComment'} = '%%Note';</code>
-----------------	--

6.43.27. Ticket::Frontend::AgentTicketNote###DynamicField

Description:	Dynamic fields shown in the ticket note screen of the agent interface. Possible settings: 0 = Disabled, 1 = Enabled, 2 = Enabled and required.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'DynamicField'} = {};</code>

6.43.28. Ticket::Frontend::AgentTicketNote###RichTextWidth

Description:	Defines the width for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'RichTextWidth'} = '620';</code>

6.43.29. Ticket::Frontend::AgentTicketNote###RichTextHeight

Description:	Defines the height for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewNote
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketNote'}->{'RichTextHeight'} = '100';</code>

6.44. Frontend::Agent::Ticket::ViewOwner

6.44.1. Ticket::Frontend::AgentTicketOwner###Permission

Description:	Required permissions to use the ticket owner screen of a zoomed ticket in the agent interface.
Group:	Ticket

SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'Permission'} = 'owner';</code>

6.44.2. Ticket::Frontend::AgentTicketOwner###RequiredLock

Description:	Defines if a ticket lock is required in the ticket owner screen of a zoomed ticket in the agent interface (if the ticket isn't locked yet, the ticket gets locked and the current agent will be set automatically as its owner).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'RequiredLock'} = '0';</code>

6.44.3. Ticket::Frontend::AgentTicketOwner###TicketType

Description:	Sets the ticket type in the ticket owner screen of a zoomed ticket in the agent interface (Ticket::Type needs to be activated).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'TicketType'} = '0';</code>

6.44.4. Ticket::Frontend::AgentTicketOwner###Service

Description:	Sets the service in the ticket owner screen of a zoomed ticket in the agent interface (Ticket::Service needs to be activated).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'Service'} = '0';</code>

6.44.5. Ticket::Frontend::AgentTicketOwner###ServiceMandatory

Description:	Sets if service must be selected by the agent.
--------------	--

Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'ServiceMandatory'} = '0';</code>

6.44.6. Ticket::Frontend::AgentTicketOwner###SLA-Mandatory

Description:	Sets if SLA must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'SLAMandatory'} = '0';</code>

6.44.7. Ticket::Frontend::AgentTicketOwner###Queue

Description:	Sets the queue in the ticket owner screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'Queue'} = '0';</code>

6.44.8. Ticket::Frontend::AgentTicketOwner###Owner

Description:	Sets the ticket owner in the ticket owner screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'Owner'} = '1';</code>

6.44.9. Ticket::Frontend::AgentTicketOwner###OwnerMandatory

Description:	Sets if ticket owner must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'OwnerMandatory'} = '1';</code>
-----------------	--

6.44.10. Ticket::Frontend::AgentTicketOwner###Responsible

Description:	Sets the responsible agent of the ticket in the ticket owner screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'Responsible'} = '0';</code>

6.44.11. Ticket::Frontend::AgentTicketOwner###State

Description:	If a note is added by an agent, sets the state of the ticket in the ticket owner screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'State'} = '0';</code>

6.44.12. Ticket::Frontend::AgentTicketOwner###StateType

Description:	Defines the next state of a ticket after adding a note, in the ticket owner screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'StateType'} = ['open', 'pending reminder', 'pending auto'];</code>

6.44.13. Ticket::Frontend::AgentTicketOwner###StateDefault

Description:	Defines the default next state of a ticket after adding a note, in the ticket owner screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1

Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'StateDefault'} = 'open';</code>

6.44.14. Ticket::Frontend::AgentTicketOwner###Note

Description:	Allows adding notes in the ticket owner screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'Note'} = '1';</code>

6.44.15. Ticket::Frontend::AgentTicketOwner###Note-Mandatory

Description:	Sets if note must be filled in by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'NoteMandatory'} = '1';</code>

6.44.16. Ticket::Frontend::AgentTicketOwner###Subject

Description:	Sets the default subject for notes added in the ticket owner screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'Subject'} = '\$Text{"Owner Update"}!';</code>

6.44.17. Ticket::Frontend::AgentTicketOwner###Body

Description:	Sets the default body text for notes added in the ticket owner screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'Body'} = '';</code>

6.44.18. Ticket::Frontend::AgentTicketOwner###InvolvedAgent

Description:	Shows a list of all the involved agents on this ticket, in the ticket owner screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'InvolvedAgent'} = '0';</code>

6.44.19. Ticket::Frontend::AgentTicketOwner###InformAgent

Description:	Shows a list of all the possible agents (all agents with note permissions on the queue/ticket) to determine who should be informed about this note, in the ticket owner screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'InformAgent'} = '0';</code>

6.44.20. Ticket::Frontend::AgentTicketOwner###ArticleTypeDefault

Description:	Defines the default type of the note in the ticket owner screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'ArticleTypeDefault'} = 'note-internal';</code>

6.44.21. Ticket::Frontend::AgentTicketOwner###ArticleTypes

Description:	Specifies the available note types for this ticket mask. If the option is deselected, ArticleTypeDefault is used and the option is removed from the mask.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	0

Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'ArticleTypes'} = { 'note-external' => '0', 'note-internal' => '1', 'note-report' => '0' };</pre>
-----------------	--

6.44.22. Ticket::Frontend::AgentTicketOwner###Priority

Description:	Shows the ticket priority options in the ticket owner screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'Priority'} = '0';</pre>

6.44.23. Ticket::Frontend::AgentTicketOwner###PriorityDefault

Description:	Defines the default ticket priority in the ticket owner screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'PriorityDefault'} = '3 normal';</pre>

6.44.24. Ticket::Frontend::AgentTicketOwner###Title

Description:	Shows the title fields in the ticket owner screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'Title'} = '0';</pre>

6.44.25. Ticket::Frontend::AgentTicketOwner###HistoryType

Description:	Defines the history type for the ticket owner screen action, which gets used for ticket history in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'HistoryType'} = 'AddNote';</code>
-----------------	---

6.44.26. Ticket::Frontend::AgentTicketOwner###HistoryComment

Description:	Defines the history comment for the ticket owner screen action, which gets used for ticket history in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'HistoryComment'} = '%Owner';</code>

6.44.27. Ticket::Frontend::AgentTicketOwner###DynamicField

Description:	Dynamic fields shown in the ticket owner screen of the agent interface. Possible settings: 0 = Disabled, 1 = Enabled, 2 = Enabled and required.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'DynamicField'} = {};</code>

6.44.28. Ticket::Frontend::AgentTicketOwner###RichTextWidth

Description:	Defines the width for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'RichTextWidth'} = '620';</code>

6.44.29. Ticket::Frontend::AgentTicketOwner###RichTextHeight

Description:	Defines the height for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewOwner
Valid:	1

Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketOwner'}->{'RichTextHeight'} = '100';</code>

6.45. Frontend::Agent::Ticket::ViewPending

6.45.1. Ticket::Frontend::AgentTicketPending###Permission

Description:	Required permissions to use the ticket pending screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'Permission'} = 'pending';</code>

6.45.2. Ticket::Frontend::AgentTicketPending###RequiredLock

Description:	Defines if a ticket lock is required in the ticket pending screen of a zoomed ticket in the agent interface (if the ticket isn't locked yet, the ticket gets locked and the current agent will be set automatically as its owner).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'RequiredLock'} = '1';</code>

6.45.3. Ticket::Frontend::AgentTicketPending###TicketType

Description:	Sets the ticket type in the ticket pending screen of a zoomed ticket in the agent interface (Ticket::Type needs to be activated).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'TicketType'} = '0';</code>

6.45.4. Ticket::Frontend::AgentTicketPending###Service

Description:	Sets the service in the ticket pending screen of a zoomed ticket in the agent interface (Ticket::Service needs to be activated).
--------------	--

Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'Service'} = '0';</code>

6.45.5. Ticket::Frontend::AgentTicketPending###ServiceMandatory

Description:	Sets if service must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'ServiceMandatory'} = '0';</code>

6.45.6. Ticket::Frontend::AgentTicketPending###SLAMandatory

Description:	Sets if SLA must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'SLAMandatory'} = '0';</code>

6.45.7. Ticket::Frontend::AgentTicketPending###Queue

Description:	Sets the queue in the ticket pending screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'Queue'} = '0';</code>

6.45.8. Ticket::Frontend::AgentTicketPending###Owner

Description:	Sets the ticket owner in the ticket pending screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending

Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'Owner'} = '0';</code>

6.45.9. Ticket::Frontend::AgentTicketPending###OwnerMandatory

Description:	Sets if ticket owner must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'OwnerMandatory'} = '0';</code>

6.45.10. Ticket::Frontend::AgentTicketPending###Responsible

Description:	Sets the responsible agent of the ticket in the ticket pending screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'Responsible'} = '0';</code>

6.45.11. Ticket::Frontend::AgentTicketPending###State

Description:	If a note is added by an agent, sets the state of the ticket in the ticket pending screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'State'} = '1';</code>

6.45.12. Ticket::Frontend::AgentTicketPending###StateType

Description:	Defines the next state of a ticket after adding a note, in the ticket pending screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	1

Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'StateType'} = ['pending reminder', 'pending auto'];</pre>
-----------------	--

6.45.13. Ticket::Frontend::AgentTicketPending###StateDefault

Description:	Defines the default next state of a ticket after adding a note, in the ticket pending screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'StateDefault'} = 'pending reminder';</pre>

6.45.14. Ticket::Frontend::AgentTicketPending###Note

Description:	Allows adding notes in the ticket pending screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'Note'} = '1';</pre>

6.45.15. Ticket::Frontend::AgentTicketPending###NoteMandatory

Description:	Sets if note must be filled in by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'NoteMandatory'} = '1';</pre>

6.45.16. Ticket::Frontend::AgentTicketPending###Subject

Description:	Sets the default subject for notes added in the ticket pending screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'Subject'} = '\$Text{"Pending"}!';</code>
-----------------	--

6.45.17. Ticket::Frontend::AgentTicketPending###Body

Description:	Sets the default body text for notes added in the ticket pending screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'Body'} = '';</code>

6.45.18. Ticket::Frontend::AgentTicketPending###InvolvedAgent

Description:	Shows a list of all the involved agents on this ticket, in the ticket pending screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'InvolvedAgent'} = '0';</code>

6.45.19. Ticket::Frontend::AgentTicketPending###InformAgent

Description:	Shows a list of all the possible agents (all agents with note permissions on the queue/ticket) to determine who should be informed about this note, in the ticket pending screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'InformAgent'} = '0';</code>

6.45.20. Ticket::Frontend::AgentTicketPending###ArticleTypeDefault

Description:	Defines the default type of the note in the ticket pending screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1

Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'ArticleTypeDefault'} = 'note-internal';</code>

6.45.21. Ticket::Frontend::AgentTicketPending###ArticleTypes

Description:	Specifies the available note types for this ticket mask. If the option is deselected, ArticleTypeDefault is used and the option is removed from the mask.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'ArticleTypes'} = { 'note-external' => '0', 'note-internal' => '1', 'note-report' => '0' };</code>

6.45.22. Ticket::Frontend::AgentTicketPending###Priority

Description:	Shows the ticket priority options in the ticket pending screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'Priority'} = '0';</code>

6.45.23. Ticket::Frontend::AgentTicketPending###PriorityDefault

Description:	Defines the default ticket priority in the ticket pending screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'PriorityDefault'} = '3 normal';</code>

6.45.24. Ticket::Frontend::AgentTicketPending###Title

Description:	Shows the title fields in the ticket pending screen of a zoomed ticket in the agent interface.
--------------	--

Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'Title'} = '0';</code>

6.45.25. Ticket::Frontend::AgentTicketPending###HistoryType

Description:	Defines the history type for the ticket pending screen action, which gets used for ticket history in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'HistoryType'} = 'AddNote';</code>

6.45.26. Ticket::Frontend::AgentTicketPending###HistoryComment

Description:	Defines the history comment for the ticket pending screen action, which gets used for ticket history in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'HistoryComment'} = '%Pending';</code>

6.45.27. Ticket::Frontend::AgentTicketPending###DynamicField

Description:	Dynamic fields shown in the ticket pending screen of the agent interface. Possible settings: 0 = Disabled, 1 = Enabled, 2 = Enabled and required.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'DynamicField'} = {};</code>

6.45.28. Ticket::Frontend::AgentTicketPending###RichTextWidth

Description:	Defines the width for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
--------------	--

Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'RichTextWidth'} = '620';</code>

6.45.29. Ticket::Frontend::AgentTicketPending###RichTextHeight

Description:	Defines the height for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPending
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPending'}->{'RichTextHeight'} = '100';</code>

6.46. Frontend::Agent::Ticket::ViewPhoneInbound

6.46.1. Ticket::Frontend::AgentTicketPhoneInbound###Permission

Description:	Required permissions to use the ticket phone inbound screen in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneInbound
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneInbound'}->{'Permission'} = 'phone';</code>

6.46.2. Ticket::Frontend::AgentTicketPhoneInbound###RequiredLock

Description:	Defines if a ticket lock is required in the ticket phone inbound screen of the agent interface (if the ticket isn't locked yet, the ticket gets locked and the current agent will be set automatically as its owner).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneInbound
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneInbound'}->{'RequiredLock'} = '0';</code>

6.46.3. Ticket::Frontend::AgentTicketPhoneInbound###ArticleType

Description:	Defines the default type of the note in the ticket phone inbound screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneInbound
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneInbound'}->{'ArticleType'} = 'phone';</code>

6.46.4. Ticket::Frontend::AgentTicketPhoneInbound###SenderType

Description:	Defines the default sender type for phone tickets in the ticket phone inbound screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneInbound
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneInbound'}->{'SenderType'} = 'customer';</code>

6.46.5. Ticket::Frontend::AgentTicketPhoneInbound###Subject

Description:	Defines the default subject for phone tickets in the ticket phone inbound screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneInbound
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneInbound'}->{'Subject'} = '\$Text{"Phone call"}!';</code>

6.46.6. Ticket::Frontend::AgentTicketPhoneInbound###Body

Description:	Defines the default note body text for phone tickets in the ticket phone inbound screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneInbound
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneInbound'}->{'Body'} = '';</code>

6.46.7. Ticket::Frontend::AgentTicketPhoneInbound###State

Description:	Defines the default ticket next state after adding a phone note in the ticket phone inbound screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneInbound
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneInbound'}->{'State'} = 'open';</code>

6.46.8. Ticket::Frontend::AgentTicketPhoneInbound###StateType

Description:	Next possible ticket states after adding a phone note in the ticket phone inbound screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneInbound
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneInbound'}->{'StateType'} = ['open', 'pending auto', 'pending reminder', 'closed'];</code>

6.46.9. Ticket::Frontend::AgentTicketPhoneInbound###HistoryType

Description:	Defines the history type for the ticket phone inbound screen action, which gets used for ticket history in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneInbound
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneInbound'}->{'HistoryType'} = 'PhoneCallCustomer';</code>

6.46.10. Ticket::Frontend::AgentTicketPhoneInbound###HistoryComment

Description:	Defines the history comment for the ticket phone inbound screen action, which gets used for ticket history in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneInbound
Valid:	1
Required:	1

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneInbound'}->{'HistoryComment'} = '';</code>
-----------------	--

6.46.11. Ticket::Frontend::AgentTicketPhoneInbound###DynamicField

Description:	Dynamic fields shown in the ticket phone inbound screen of the agent interface. Possible settings: 0 = Disabled, 1 = Enabled, 2 = Enabled and required.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneInbound
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneInbound'}->{'DynamicField'} = {};</code>

6.46.12. Ticket::Frontend::AgentTicketPhoneInbound###RichTextWidth

Description:	Defines the width for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneInbound
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneInbound'}->{'RichTextWidth'} = '475';</code>

6.46.13. Ticket::Frontend::AgentTicketPhoneInbound###RichTextHeight

Description:	Defines the height for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneInbound
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneInbound'}->{'RichTextHeight'} = '200';</code>

6.47. Frontend::Agent::Ticket::ViewPhoneNew

6.47.1. Ticket::Frontend::AgentTicketPhone###Priority

Description:	Sets the default priority for new phone tickets in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneNew

Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhone'}->{'Priority'} = '3 normal';</code>

6.47.2. Ticket::Frontend::AgentTicketPhone###Article-Type

Description:	Sets the default article type for new phone tickets in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhone'}->{'ArticleType'} = 'phone';</code>

6.47.3. Ticket::Frontend::AgentTicketPhone###SenderType

Description:	Sets the default sender type for new phone ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhone'}->{'SenderType'} = 'customer';</code>

6.47.4. Ticket::Frontend::AgentTicketPhone::AllowMultipleFrom

Description:	Controls if more than one from entry can be set in the new phone ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhone::AllowMultipleFrom'} = '1';</code>

6.47.5. Ticket::Frontend::AgentTicketPhone###Subject

Description:	Sets the default subject for new phone tickets (e.g. 'Phone call') in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneNew
Valid:	1

Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhone'}->{'Subject'} = '';</code>

6.47.6. Ticket::Frontend::AgentTicketPhone###Body

Description:	Sets the default note text for new telephone tickets. E.g 'New ticket via call' in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhone'}->{'Body'} = '';</code>

6.47.7. Ticket::Frontend::AgentTicketPhone###StateDefault

Description:	Sets the default next state for new phone tickets in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhone'}->{'StateDefault'} = 'open';</code>

6.47.8. Ticket::Frontend::AgentTicketPhone###StateType

Description:	Determines the next possible ticket states, after the creation of a new phone ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhone'}->{'StateType'} = ['open', 'pending auto', 'pending reminder', 'closed'];</code>

6.47.9. Ticket::Frontend::AgentTicketPhone###HistoryType

Description:	Defines the history type for the phone ticket screen action, which gets used for ticket history in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneNew
Valid:	1
Required:	1

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhone'}->{'HistoryType'} = 'PhoneCallCustomer';</code>
-----------------	---

6.47.10. Ticket::Frontend::AgentTicketPhone###HistoryComment

Description:	Defines the history comment for the phone ticket screen action, which gets used for ticket history in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhone'}->{'HistoryComment'} = '';</code>

6.47.11. Ticket::Frontend::AgentTicketPhone###SplitLinkType

Description:	Sets the default link type of splitted tickets in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneNew
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhone'}->{'SplitLinkType'} = { 'Direction' => 'Target', 'LinkType' => 'ParentChild' };</code>

6.47.12. Ticket::Frontend::AgentTicketPhone###ServiceMandatory

Description:	Sets if service must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneNew
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhone'}->{'ServiceMandatory'} = '0';</code>

6.47.13. Ticket::Frontend::AgentTicketPhone###SLAMandatory

Description:	Sets if SLA must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneNew
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhone'}->{'SLAMandatory'} = '0';</code>

6.47.14. Ticket::Frontend::AgentTicketPhone###DynamicField

Description:	Dynamic fields shown in the ticket phone screen of the agent interface. Possible settings: 0 = Disabled, 1 = Enabled, 2 = Enabled and required.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneNew
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhone'}->{'DynamicField'} = {};</code>

6.47.15. Ticket::Frontend::AgentTicketPhone###RichTextWidth

Description:	Defines the width for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneNew
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhone'}->{'RichTextWidth'} = '620';</code>

6.47.16. Ticket::Frontend::AgentTicketPhone###RichTextHeight

Description:	Defines the height for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneNew
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhone'}->{'RichTextHeight'} = '320';</code>

6.48. Frontend::Agent::Ticket::ViewPhoneOutbound

6.48.1. Ticket::Frontend::AgentTicketPhoneOutbound###Permission

Description:	Required permissions to use the ticket phone outbound screen in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneOutbound
Valid:	1

Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneOutbound'}->{'Permission'} = 'phone';</code>

6.48.2. Ticket::Frontend::AgentTicketPhoneOutbound###RequiredLock

Description:	Defines if a ticket lock is required in the ticket phone outbound screen of the agent interface (if the ticket isn't locked yet, the ticket gets locked and the current agent will be set automatically as its owner).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneOutbound
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneOutbound'}->{'RequiredLock'} = '1';</code>

6.48.3. Ticket::Frontend::AgentTicketPhoneOutbound###ArticleType

Description:	Defines the default type of the note in the ticket phone outbound screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneOutbound
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneOutbound'}->{'ArticleType'} = 'phone';</code>

6.48.4. Ticket::Frontend::AgentTicketPhoneOutbound###SenderType

Description:	Defines the default sender type for phone tickets in the ticket phone outbound screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneOutbound
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneOutbound'}->{'SenderType'} = 'agent';</code>

6.48.5. Ticket::Frontend::AgentTicketPhoneOutbound###Subject

Description:	Defines the default subject for phone tickets in the ticket phone outbound screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneOutbound

Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneOutbound'}->{'Subject'} = '\$Text{"Phone call"}!';</code>

6.48.6. Ticket::Frontend::AgentTicketPhoneOutbound###Body

Description:	Defines the default note body text for phone tickets in the ticket phone outbound screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneOutbound
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneOutbound'}->{'Body'} = '';</code>

6.48.7. Ticket::Frontend::AgentTicketPhoneOutbound###State

Description:	Defines the default ticket next state after adding a phone note in the ticket phone outbound screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneOutbound
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneOutbound'}->{'State'} = 'closed successful';</code>

6.48.8. Ticket::Frontend::AgentTicketPhoneOutbound###StateType

Description:	Next possible ticket states after adding a phone note in the ticket phone outbound screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneOutbound
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneOutbound'}->{'StateType'} = ['open', 'pending auto', 'pending reminder', 'closed'];</code>

6.48.9. Ticket::Frontend::AgentTicketPhoneOutbound###HistoryType

Description:	Defines the history type for the ticket phone outbound screen action, which gets used for ticket history in the agent interface.
--------------	--

Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneOutbound
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneOutbound'}->{'HistoryType'} = 'PhoneCallAgent';</code>

6.48.10. Ticket::Frontend::AgentTicketPhoneOutbound###HistoryComment

Description:	Defines the history comment for the ticket phone outbound screen action, which gets used for ticket history in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneOutbound
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneOutbound'}->{'HistoryComment'} = '';</code>

6.48.11. Ticket::Frontend::AgentTicketPhoneOutbound###DynamicField

Description:	Dynamic fields shown in the ticket phone outbound screen of the agent interface. Possible settings: 0 = Disabled, 1 = Enabled, 2 = Enabled and required.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneOutbound
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneOutbound'}->{'DynamicField'} = {};</code>

6.48.12. Ticket::Frontend::AgentTicketPhoneOutbound###RichTextWidth

Description:	Defines the width for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneOutbound
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneOutbound'}->{'RichTextWidth'} = '475';</code>

6.48.13. Ticket::Frontend::AgentTicketPhoneOutbound###RichTextHeight

Description:	Defines the height for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
--------------	---

Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPhoneOutbound
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPhoneOutbound'}->{'RichTextHeight'} = '200';</code>

6.49. Frontend::Agent::Ticket::ViewPrint

6.49.1. Ticket::Frontend::AgentTicketPrint###DynamicField

Description:	Dynamic fields shown in the ticket print screen of the agent interface. Possible settings: 0 = Disabled, 1 = Enabled.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPrint
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPrint'}->{'DynamicField'} = {};</code>

6.50. Frontend::Agent::Ticket::ViewPriority

6.50.1. Ticket::Frontend::AgentTicketPriority###Permission

Description:	Required permissions to use the ticket priority screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'Permission'} = 'priority';</code>

6.50.2. Ticket::Frontend::AgentTicketPriority###RequiredLock

Description:	Defines if a ticket lock is required in the ticket priority screen of a zoomed ticket in the agent interface (if the ticket isn't locked yet, the ticket gets locked and the current agent will be set automatically as its owner).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'RequiredLock'} = '1';</code>
-----------------	---

6.50.3. Ticket::Frontend::AgentTicketPriority###TicketType

Description:	Sets the ticket type in the ticket priority screen of a zoomed ticket in the agent interface (Ticket::Type needs to be activated).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'TicketType'} = '0';</code>

6.50.4. Ticket::Frontend::AgentTicketPriority###Service

Description:	Sets the service in the ticket priority screen of a zoomed ticket in the agent interface (Ticket::Service needs to be activated).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'Service'} = '0';</code>

6.50.5. Ticket::Frontend::AgentTicketPriority###ServiceMandatory

Description:	Sets if service must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'ServiceMandatory'} = '0';</code>

6.50.6. Ticket::Frontend::AgentTicketPriority###SLAMandatory

Description:	Sets if SLA must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'SLAMandatory'} = '0';</code>
-----------------	---

6.50.7. Ticket::Frontend::AgentTicketPriority###Queue

Description:	Sets the queue in the ticket priority screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'Queue'} = '0';</code>

6.50.8. Ticket::Frontend::AgentTicketPriority###Owner

Description:	Sets the ticket owner in the ticket priority screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'Owner'} = '0';</code>

6.50.9. Ticket::Frontend::AgentTicketPriority###OwnerMandatory

Description:	Sets if ticket owner must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'OwnerMandatory'} = '0';</code>

6.50.10. Ticket::Frontend::AgentTicketPriority###Responsible

Description:	Sets the responsible agent of the ticket in the ticket priority screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'Responsible'} = '0';</code>

6.50.11. Ticket::Frontend::AgentTicketPriority###State

Description:	If a note is added by an agent, sets the state of the ticket in the ticket priority screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'State'} = '0';</code>

6.50.12. Ticket::Frontend::AgentTicketPriority###StateType

Description:	Defines the next state of a ticket after adding a note, in the ticket priority screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'StateType'} = ['open', 'pending reminder', 'pending auto'];</code>

6.50.13. Ticket::Frontend::AgentTicketPriority###StateDefault

Description:	Defines the default next state of a ticket after adding a note, in the ticket priority screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'StateDefault'} = 'open';</code>

6.50.14. Ticket::Frontend::AgentTicketPriority###Note

Description:	Allows adding notes in the ticket priority screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'Note'} = '1';</code>
-----------------	---

6.50.15. Ticket::Frontend::AgentTicketPriority###NoteMandatory

Description:	Sets if note must be filled in by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'NoteMandatory'} = '1';</code>

6.50.16. Ticket::Frontend::AgentTicketPriority###Subject

Description:	Sets the default subject for notes added in the ticket priority screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'Subject'} = '\$Text{"Priority Update"}!';</code>

6.50.17. Ticket::Frontend::AgentTicketPriority###Body

Description:	Sets the default body text for notes added in the ticket priority screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'Body'} = '';</code>

6.50.18. Ticket::Frontend::AgentTicketPriority###InvolvedAgent

Description:	Shows a list of all the involved agents on this ticket, in the ticket priority screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'InvolvedAgent'} = '0';</code>

6.50.19. Ticket::Frontend::AgentTicketPriority###InformAgent

Description:	Shows a list of all the possible agents (all agents with note permissions on the queue/ticket) to determine who should be informed about this note, in the ticket priority screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'InformAgent'} = '0';</code>

6.50.20. Ticket::Frontend::AgentTicketPriority###ArticleTypeDefault

Description:	Defines the default type of the note in the ticket priority screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'ArticleTypeDefault'} = 'note-internal';</code>

6.50.21. Ticket::Frontend::AgentTicketPriority###ArticleTypes

Description:	Specifies the available note types for this ticket mask. If the option is deselected, ArticleTypeDefault is used and the option is removed from the mask.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'ArticleTypes'} = { 'note-external' => '0', 'note-internal' => '1', 'note-report' => '0' };</code>

6.50.22. Ticket::Frontend::AgentTicketPriority###Priority

Description:	Shows the ticket priority options in the ticket priority screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority

Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'Priority'} = '1';</code>

6.50.23. Ticket::Frontend::AgentTicketPriority###PriorityDefault

Description:	Defines the default ticket priority in the ticket priority screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'PriorityDefault'} = '3 normal';</code>

6.50.24. Ticket::Frontend::AgentTicketPriority###Title

Description:	Shows the title fields in the ticket priority screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'Title'} = '0';</code>

6.50.25. Ticket::Frontend::AgentTicketPriority###HistoryType

Description:	Defines the history type for the ticket priority screen action, which gets used for ticket history in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'HistoryType'} = 'AddNote';</code>

6.50.26. Ticket::Frontend::AgentTicketPriority###HistoryComment

Description:	Defines the history comment for the ticket priority screen action, which gets used for ticket history in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1

Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'HistoryComment'} = '%Priority';</code>

6.50.27. Ticket::Frontend::AgentTicketPriority###DynamicField

Description:	Dynamic fields shown in the ticket priority screen of the agent interface. Possible settings: 0 = Disabled, 1 = Enabled, 2 = Enabled and required.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'DynamicField'} = {};</code>

6.50.28. Ticket::Frontend::AgentTicketPriority###RichTextWidth

Description:	Defines the width for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'RichTextWidth'} = '620';</code>

6.50.29. Ticket::Frontend::AgentTicketPriority###RichTextHeight

Description:	Defines the height for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewPriority
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketPriority'}->{'RichTextHeight'} = '100';</code>

6.51. Frontend::Agent::Ticket::ViewQueue

6.51.1. Ticket::Frontend::AgentTicketQueue###StripEmptyLines

Description:	Strips empty lines on the ticket preview in the queue view.
Group:	Ticket

SubGroup:	Frontend::Agent::Ticket::ViewQueue
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketQueue'}->{'StripEmptyLines'} = '0';</code>

6.51.2. Ticket::Frontend::AgentTicketQueue###ViewAllPossibleTickets

Description:	Shows all both ro and rw queues in the queue view.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewQueue
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketQueue'}->{'ViewAllPossibleTickets'} = '0';</code>

6.51.3. Ticket::Frontend::AgentTicketQueue###HighlightAge1

Description:	Sets the age in minutes (first level) for highlighting queues that contain untouched tickets.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewQueue
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketQueue'}->{'HighlightAge1'} = '1440';</code>

6.51.4. Ticket::Frontend::AgentTicketQueue###HighlightAge2

Description:	Sets the age in minutes (second level) for highlighting queues that contain untouched tickets.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewQueue
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketQueue'}->{'HighlightAge2'} = '2880';</code>

6.51.5. Ticket::Frontend::AgentTicketQueue###Blink

Description:	Activates a blinking mechanism of the queue that contains the oldest ticket.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewQueue
Valid:	1

Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketQueue'}->{'Blink'} = '1';</code>

6.51.6. Ticket::Frontend::AgentTicketQueue###QueueSort

Description:	Sorts the tickets (ascendingly or descendingly) when a single queue is selected in the queue view and after the tickets are sorted by priority. Values: 0 = ascending (oldest on top, default), 1 = descending (youngest on top). Use the QueueID for the key and 0 or 1 for value.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewQueue
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketQueue'}->{'QueueSort'} = { '3' => '0', '7' => '1' };</code>

6.51.7. Ticket::Frontend::AgentTicketQueue###SortBy::Default

Description:	Defines the default sort criteria for all queues displayed in the queue view.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewQueue
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketQueue'}->{'SortBy::Default'} = 'Age';</code>

6.51.8. Ticket::Frontend::AgentTicketQueue###PreSort::ByPriority

Description:	Defines if a pre-sorting by priority should be done in the queue view.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewQueue
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketQueue'}->{'PreSort::ByPriority'} = '1';</code>

6.51.9. Ticket::Frontend::AgentTicketQueue###Order::Default

Description:	Defines the default sort order for all queues in the queue view, after priority sort.
--------------	---

Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewQueue
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketQueue'}->{'Order::Default'} = 'Up';</code>

6.51.10. Ticket::Frontend::AgentTicketQueue###DefaultColumns

Description:	Columns that can be filtered in the queue view of the agent interface. Possible settings: 0 = Disabled, 1 = Available, 2 = Enabled by default. Note: Only Ticket attributes and Dynamic Fields (DynamicField_NameX) are allowed.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewQueue
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketQueue'}->{'DefaultColumns'} = { 'Age' => '2', 'Changed' => '1', 'CustomerID' => '2', 'CustomerName' => '1', 'CustomerUserID' => '1', 'EscalationResponseTime' => '1', 'EscalationSolutionTime' => '1', 'EscalationTime' => '1', 'EscalationUpdateTime' => '1', 'Lock' => '2', 'Owner' => '2', 'PendingTime' => '1', 'Priority' => '1', 'Queue' => '2', 'Responsible' => '1', 'SLA' => '1', 'Service' => '1', 'State' => '2', 'TicketNumber' => '2', 'Title' => '2', 'Type' => '1' };</code>

6.52. Frontend::Agent::Ticket::ViewResponsible

6.52.1. Ticket::Frontend::AgentTicketResponsible-View###SortBy::Default

Description:	Defines the default ticket attribute for ticket sorting in the responsible view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	1

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsibleView'}->{'SortBy::Default'} = 'Age';</code>
-----------------	---

6.52.2. Ticket::Frontend::AgentTicketResponsibleView###Order::Default

Description:	Defines the default ticket order in the responsible view of the agent interface. Up: oldest on top. Down: latest on top.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsibleView'}->{'Order::Default'} = 'Up';</code>

6.52.3. Ticket::Frontend::AgentTicketResponsible###Permission

Description:	Required permissions to use the ticket responsible screen in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'Permission'} = 'responsible';</code>

6.52.4. Ticket::Frontend::AgentTicketResponsible###RequiredLock

Description:	Defines if a ticket lock is required in the ticket responsible screen of the agent interface (if the ticket isn't locked yet, the ticket gets locked and the current agent will be set automatically as its owner).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'RequiredLock'} = '0';</code>

6.52.5. Ticket::Frontend::AgentTicketResponsible###TicketType

Description:	Sets the ticket type in the ticket responsible screen of the agent interface (Ticket::Type needs to be activated).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1

Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'TicketType'} = '0';</code>

6.52.6. Ticket::Frontend::AgentTicketResponsible###Service

Description:	Sets the service in the ticket responsible screen of the agent interface (Ticket::Service needs to be activated).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'Service'} = '0';</code>

6.52.7. Ticket::Frontend::AgentTicketResponsible###ServiceMandatory

Description:	Sets if service must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'ServiceMandatory'} = '0';</code>

6.52.8. Ticket::Frontend::AgentTicketResponsible###SLAMandatory

Description:	Sets if SLA must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'SLAMandatory'} = '0';</code>

6.52.9. Ticket::Frontend::AgentTicketResponsible###Queue

Description:	Sets the queue in the ticket responsible screen of a zoomed ticket in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'Queue'} = '0';</code>
-----------------	---

6.52.10. Ticket::Frontend::AgentTicketResponsible###Owner

Description:	Sets the ticket owner in the ticket responsible screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'Owner'} = '0';</code>

6.52.11. Ticket::Frontend::AgentTicketResponsible###OwnerMandatory

Description:	Sets if ticket owner must be selected by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'OwnerMandatory'} = '0';</code>

6.52.12. Ticket::Frontend::AgentTicketResponsible###Responsible

Description:	Sets the responsible agent of the ticket in the ticket responsible screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'Responsible'} = '1';</code>

6.52.13. Ticket::Frontend::AgentTicketResponsible###State

Description:	If a note is added by an agent, sets the state of a ticket in the ticket responsible screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'State'} = '0';</code>

6.52.14. Ticket::Frontend::AgentTicketResponsible###StateType

Description:	Defines the next state of a ticket after adding a note, in the ticket responsible screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'StateType'} = ['open', 'pending reminder', 'pending auto'];</pre>

6.52.15. Ticket::Frontend::AgentTicketResponsible###StateDefault

Description:	Defines the default next state of a ticket after adding a note, in the ticket responsible screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'StateDefault'} = 'open';</pre>

6.52.16. Ticket::Frontend::AgentTicketResponsible###Note

Description:	Allows adding notes in the ticket responsible screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'Note'} = '1';</pre>

6.52.17. Ticket::Frontend::AgentTicketResponsible###NoteMandatory

Description:	Sets if note must be filled in by the agent.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'NoteMandatory'} = '1';</code>
-----------------	---

6.52.18. Ticket::Frontend::AgentTicketResponsible###Subject

Description:	Sets the default subject for notes added in the ticket responsible screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'Subject'} = '\$Text{"Responsible Update"}!';</code>

6.52.19. Ticket::Frontend::AgentTicketResponsible###Body

Description:	Sets the default body text for notes added in the ticket responsible screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'Body'} = '';</code>

6.52.20. Ticket::Frontend::AgentTicketResponsible###InvolvedAgent

Description:	Shows a list of all the involved agents on this ticket, in the ticket responsible screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'InvolvedAgent'} = '0';</code>

6.52.21. Ticket::Frontend::AgentTicketResponsible###InformAgent

Description:	Shows a list of all the possible agents (all agents with note permissions on the queue/ticket) to determine who should be informed about this note, in the ticket responsible screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	0

Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'InformAgent'} = '0';</code>

6.52.22. Ticket::Frontend::AgentTicketResponsible###ArticleTypeDefault

Description:	Defines the default type of the note in the ticket responsible screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'ArticleTypeDefault'} = 'note-internal';</code>

6.52.23. Ticket::Frontend::AgentTicketResponsible###ArticleTypes

Description:	Specifies the available note types for this ticket mask. If the option is deselected, ArticleTypeDefault is used and the option is removed from the mask.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'ArticleTypes'} = { 'note-external' => '0', 'note-internal' => '1', 'note-report' => '0' };</code>

6.52.24. Ticket::Frontend::AgentTicketResponsible###Priority

Description:	Shows the ticket priority options in the ticket responsible screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'Priority'} = '0';</code>

6.52.25. Ticket::Frontend::AgentTicketResponsible###PriorityDefault

Description:	Defines the default ticket priority in the ticket responsible screen of the agent interface.
Group:	Ticket

SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'PriorityDefault'} = '3 normal';</code>

6.52.26. Ticket::Frontend::AgentTicketResponsible###Title

Description:	Shows the title fields in the ticket responsible screen of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'Title'} = '1';</code>

6.52.27. Ticket::Frontend::AgentTicketResponsible###HistoryType

Description:	Defines the history type for the ticket responsible screen action, which gets used for ticket history in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'HistoryType'} = 'AddNote';</code>

6.52.28. Ticket::Frontend::AgentTicketResponsible###HistoryComment

Description:	Defines the history comment for the ticket responsible screen action, which gets used for ticket history in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'HistoryComment'} = '%%Responsible';</code>

6.52.29. Ticket::Frontend::AgentTicketResponsible###DynamicField

Description:	Dynamic fields shown in the ticket responsible screen of the agent interface. Possible settings: 0 = Disabled, 1 = Enabled, 2 = Enabled and required.
Group:	Ticket

SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'DynamicField'} = {};</code>

6.52.30. Ticket::Frontend::AgentTicketResponsible###RichTextWidth

Description:	Defines the width for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'RichTextWidth'} = '620';</code>

6.52.31. Ticket::Frontend::AgentTicketResponsible###RichTextHeight

Description:	Defines the height for the rich text editor component for this screen. Enter number (pixels) or percent value (relative).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsible'}->{'RichTextHeight'} = '100';</code>

6.52.32. Ticket::Frontend::AgentTicketResponsible-View###DefaultColumns

Description:	Columns that can be filtered in the responsible view of the agent interface. Possible settings: 0 = Disabled, 1 = Available, 2 = Enabled by default. Note: Only Ticket attributes and Dynamic Fields (DynamicField_NameX) are allowed.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewResponsible
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketResponsibleView'}->{'DefaultColumns'} = { 'Age' => '2', 'Changed' => '1', 'CustomerID' => '2', 'CustomerName' => '1', 'CustomerUserID' => '1', 'EscalationResponseTime' => '1', 'EscalationSolutionTime' => '1', 'EscalationTime' => '1',</code>

```
'EscalationUpdateTime' => '1',
'Lock' => '2',
'Owner' => '2',
'PendingTime' => '1',
'Priority' => '1',
'Queue' => '2',
'Responsible' => '1',
'SLA' => '1',
'Service' => '1',
'State' => '2',
'TicketNumber' => '2',
'Title' => '2',
'Type' => '1'
};
```

6.53. Frontend::Agent::Ticket::ViewSearch

6.53.1. Ticket::Frontend::AgentTicketSearch###ExtendedSearchCondition

Description:	Allows extended search conditions in ticket search of the agent interface. With this feature you can search e. g. with this kind of conditions like "(key1&&key2)" or "(key1 key2)".
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'ExtendedSearchCondition'} = '1';</code>

6.53.2. Ticket::Frontend::AgentTicketSearch###SearchLimit

Description:	Maximum number of tickets to be displayed in the result of a search in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'SearchLimit'} = '2000';</code>

6.53.3. Ticket::Frontend::AgentTicketSearch###SearchPageShown

Description:	Number of tickets to be displayed in each page of a search result in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'SearchPageShown'} = '40';</code>

6.53.4. Ticket::Frontend::AgentTicketSearch###SearchViewableTicketLines

Description:	Number of lines (per ticket) that are shown by the search utility in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'SearchViewableTicketLines'} = '10';</code>

6.53.5. Ticket::Frontend::AgentTicketSearch###SortBy::Default

Description:	Defines the default ticket attribute for ticket sorting of the ticket search result of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'SortBy::Default'} = 'Age';</code>

6.53.6. Ticket::Frontend::AgentTicketSearch###Order::Default

Description:	Defines the default ticket order in the ticket search result of the agent interface. Up: oldest on top. Down: latest on top.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Order::Default'} = 'Down';</code>

6.53.7. Ticket::Frontend::AgentTicketSearch###SearchArticleCSVTree

Description:	Exports the whole article tree in search result (it can affect the system performance).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'SearchArticleCSVTree'} = '0';</code>

6.53.8. Ticket::Frontend::AgentTicketSearch###SearchCSVData

Description:	Data used to export the search result in CSV format.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'SearchCSVData'} = ['TicketNumber', 'Age', 'Created', 'Closed', 'FirstLock', 'FirstResponse', 'State', 'Priority', 'Queue', 'Lock', 'Owner', 'UserFirstname', 'UserLastname', 'CustomerID', 'CustomerName', 'From', 'Subject', 'AccountedTime', 'ArticleTree', 'SolutionInMin', 'SolutionDiffInMin', 'FirstResponseInMin', 'FirstResponseDiffInMin'];</pre>

6.53.9. Ticket::Frontend::AgentTicketSearch###ArticleCreateTime

Description:	Includes article create times in the ticket search of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'ArticleCreateTime'} = '0';</pre>

6.53.10. Ticket::Frontend::AgentTicketSearch###Defaults###Fulltext

Description:	Defines the default shown ticket search attribute for ticket search screen.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	1
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'Fulltext'} = '';</code>
-----------------	---

6.53.11. Ticket::Frontend::AgentTicketSearch###Defaults###TicketNumber

Description:	Defines the default shown ticket search attribute for ticket search screen.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'TicketNumber'} = '';</code>

6.53.12. Ticket::Frontend::AgentTicketSearch###Defaults###Title

Description:	Defines the default shown ticket search attribute for ticket search screen.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'Title'} = '';</code>

6.53.13. Ticket::Frontend::AgentTicketSearch###Defaults###From

Description:	Defines the default shown ticket search attribute for ticket search screen.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'From'} = '';</code>

6.53.14. Ticket::Frontend::AgentTicketSearch###Defaults###To

Description:	Defines the default shown ticket search attribute for ticket search screen.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	0
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'To'} = '';</code>
-----------------	---

6.53.15. Ticket::Frontend::AgentTicketSearch###Defaults###Cc

Description:	Defines the default shown ticket search attribute for ticket search screen.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'Cc'} = '';</code>

6.53.16. Ticket::Frontend::AgentTicketSearch###Defaults###Subject

Description:	Defines the default shown ticket search attribute for ticket search screen.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'Subject'} = '';</code>

6.53.17. Ticket::Frontend::AgentTicketSearch###Defaults###Body

Description:	Defines the default shown ticket search attribute for ticket search screen.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'Body'} = '';</code>

6.53.18. Ticket::Frontend::AgentTicketSearch###Defaults###CustomerID

Description:	Defines the default shown ticket search attribute for ticket search screen.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	0
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'CustomerID'} = '';</code>
-----------------	---

6.53.19. Ticket::Frontend::AgentTicketSearch###Defaults###CustomerUserLogin

Description:	Defines the default shown ticket search attribute for ticket search screen.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'CustomerUserLogin'} = '';</code>

6.53.20. Ticket::Frontend::AgentTicketSearch###Defaults###StateIDs

Description:	Defines the default shown ticket search attribute for ticket search screen.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'StateIDs'} = [];</code>

6.53.21. Ticket::Frontend::AgentTicketSearch###Defaults###QueueIDs

Description:	Defines the default shown ticket search attribute for ticket search screen.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'QueueIDs'} = [];</code>

6.53.22. Ticket::Frontend::AgentTicketSearch###Defaults###TicketCreateTimePoint

Description:	Default data to use on attribute for ticket search screen. Example: "TicketCreateTimePointFormat=year;TicketCreateTimePointStart=Last;TicketCreateTimePoint=2;"
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	0
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'TicketCreateTimePoint'} = '';</code>
-----------------	--

6.53.23. Ticket::Frontend::AgentTicketSearch###Defaults###TicketCreateTimeSlot

Description:	Default data to use on attribute for ticket search screen. Example: "TicketCreateTimeStartYear=2010;TicketCreateTimeStartMonth=10;TicketCreateTimeStartDay=4;TicketCreateTimeStopYear=2010;TicketCreateTimeStopMonth=11;TicketCreateTimeStopDay=3;".
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'TicketCreateTimeSlot'} = '';</code>

6.53.24. Ticket::Frontend::AgentTicketSearch###Defaults###TicketChangeTimePoint

Description:	Defines the default shown ticket search attribute for ticket search screen.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'TicketChangeTimePoint'} = '';</code>

6.53.25. Ticket::Frontend::AgentTicketSearch###Defaults###TicketChangeTimeSlot

Description:	Defines the default shown ticket search attribute for ticket search screen.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'TicketChangeTimeSlot'} = '';</code>

6.53.26. Ticket::Frontend::AgentTicketSearch###Defaults###TicketCloseTimePoint

Description:	Defines the default shown ticket search attribute for ticket search screen.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	0

Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'TicketCloseTimePoint'} = '';</code>

6.53.27. Ticket::Frontend::AgentTicketSearch###Defaults###TicketCloseTimeSlot

Description:	Defines the default shown ticket search attribute for ticket search screen.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'TicketCloseTimeSlot'} = '';</code>

6.53.28. Ticket::Frontend::AgentTicketSearch###Defaults###TicketEscalationTimePoint

Description:	Defines the default shown ticket search attribute for ticket search screen.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'TicketEscalationTimePoint'} = '';</code>

6.53.29. Ticket::Frontend::AgentTicketSearch###Defaults###TicketEscalationTimeSlot

Description:	Defines the default shown ticket search attribute for ticket search screen.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'TicketEscalationTimeSlot'} = '';</code>

6.53.30. Ticket::Frontend::AgentTicketSearch###Defaults###ArticleCreateTimePoint

Description:	Defines the default shown ticket search attribute for ticket search screen.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	0
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'ArticleCreateTimePoint'} = '';</code>
-----------------	---

6.53.31. Ticket::Frontend::AgentTicketSearch###Defaults###ArticleCreateTimeSlot

Description:	Defines the default shown ticket search attribute for ticket search screen.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'ArticleCreateTimeSlot'} = '';</code>

6.53.32. Ticket::Frontend::AgentTicketSearch###Defaults###SearchInArchive

Description:	Defines the default shown ticket search attribute for ticket search screen.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'SearchInArchive'} = '';</code>

6.53.33. Ticket::Frontend::CustomerTicketSearch###SearchArticleCSVTree

Description:	Exports the whole article tree in search result (it can affect the system performance).
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketSearch'}->{'SearchArticleCSVTree'} = '0';</code>

6.53.34. Ticket::Frontend::AgentTicketSearch###DynamicField

Description:	Dynamic fields shown in the ticket search screen of the agent interface. Possible settings: 0 = Disabled, 1 = Enabled, 2 = Enabled and shown by default.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	1
Required:	0

Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'DynamicField'} = {};</code>
-----------------	--

6.53.35. Ticket::Frontend::AgentTicketSearch###Defaults###DynamicField

Description:	Defines the default shown ticket search attribute for ticket search screen. Example: "Key" must have the name of the Dynamic Field in this case 'X', "Content" must have the value of the Dynamic Field depending on the Dynamic Field type, Text: 'a text', Dropdown: '1', Date/Time: 'Search_DynamicField_XTimeSlotStartYear=1974; Search_DynamicField_XTimeSlotStartMonth=01; Search_DynamicField_XTimeSlotStartDay=26; Search_DynamicField_XTimeSlotStartHour=00; Search_DynamicField_XTimeSlotStartMinute=00; Search_DynamicField_XTimeSlotStartSecond=00; Search_DynamicField_XTimeSlotStopYear=2013; Search_DynamicField_XTimeSlotStopMonth=01; Search_DynamicField_XTimeSlotStopDay=26; Search_DynamicField_XTimeSlotStopHour=23; Search_DynamicField_XTimeSlotStopMinute=59; Search_DynamicField_XTimeSlotStopSecond=59;' and or 'Search_DynamicField_XTimePointFormat=week; Search_DynamicField_XTimePointStart=Before; Search_DynamicField_XTimePointValue=7';.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'Defaults'}->{'DynamicField'} = {};</code>

6.53.36. Ticket::Frontend::AgentTicketSearch###SearchCSVDynamicField

Description:	Dynamic Fields used to export the search result in CSV format.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'SearchCSVDynamicField'} = {};</code>

6.53.37. Ticket::Frontend::AgentTicketSearch###DefaultColumns

Description:	Columns that can be filtered in the ticket search result view of the agent interface. Possible settings: 0 = Disabled, 1 = Available, 2 = Enabled by default. Note: Only Ticket attributes and Dynamic Fields (DynamicField_NameX) are allowed.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewSearch
Valid:	1

Required:	0
Config-Setting:	<pre> \$Self->{'Ticket::Frontend::AgentTicketSearch'}->{'DefaultColumns'} = { 'Age' => '2', 'Changed' => '1', 'CustomerID' => '2', 'CustomerName' => '1', 'CustomerUserID' => '1', 'EscalationResponseTime' => '1', 'EscalationSolutionTime' => '1', 'EscalationTime' => '1', 'EscalationUpdateTime' => '1', 'Lock' => '2', 'Owner' => '2', 'PendingTime' => '1', 'Priority' => '1', 'Queue' => '2', 'Responsible' => '1', 'SLA' => '1', 'Service' => '1', 'State' => '2', 'TicketNumber' => '2', 'Title' => '2', 'Type' => '1' }; </pre>

6.54. Frontend::Agent::Ticket::ViewStatus

6.54.1. Ticket::Frontend::AgentTicketStatusView###ViewableTicketsPage

Description:	Shows all open tickets (even if they are locked) in the status view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewStatus
Valid:	1
Required:	1
Config-Setting:	<pre> \$Self->{'Ticket::Frontend::AgentTicketStatusView'}->{'ViewableTicketsPage'} = '50'; </pre>

6.54.2. Ticket::Frontend::AgentTicketStatusView###SortBy::Default

Description:	Defines the default ticket attribute for ticket sorting in the status view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewStatus
Valid:	1
Required:	1
Config-Setting:	<pre> \$Self->{'Ticket::Frontend::AgentTicketStatusView'}->{'SortBy::Default'} = 'Age'; </pre>

6.54.3. Ticket::Frontend::AgentTicketStatusView###Order::Default

Description:	Defines the default ticket order (after priority sort) in the status view of the agent interface. Up: oldest on top. Down: latest on top.
--------------	---

Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewStatus
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketStatusView'}->{'Order::Default'} = 'Down';</code>

6.54.4. Ticket::Frontend::AgentTicketStatusView###DefaultColumns

Description:	Columns that can be filtered in the status view of the agent interface. Possible settings: 0 = Disabled, 1 = Available, 2 = Enabled by default. Note: Only Ticket attributes and Dynamic Fields (DynamicField_NameX) are allowed.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewStatus
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketStatusView'}->{'DefaultColumns'} = { 'Age' => '2', 'Changed' => '1', 'CustomerID' => '2', 'CustomerName' => '1', 'CustomerUserID' => '1', 'EscalationResponseTime' => '1', 'EscalationSolutionTime' => '1', 'EscalationTime' => '1', 'EscalationUpdateTime' => '1', 'Lock' => '2', 'Owner' => '2', 'PendingTime' => '1', 'Priority' => '1', 'Queue' => '2', 'Responsible' => '1', 'SLA' => '1', 'Service' => '1', 'State' => '2', 'TicketNumber' => '2', 'Title' => '2', 'Type' => '1' };</code>

6.55. Frontend::Agent::Ticket::ViewWatch

6.55.1. Ticket::Frontend::AgentTicketWatchView###SortBy::Default

Description:	Defines the default ticket attribute for ticket sorting in the watch view of the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewWatch
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketWatchView'}->{'SortBy::Default'} = 'Age';</code>

6.55.2. Ticket::Frontend::AgentTicket-WatchView###Order::Default

Description:	Defines the default ticket order in the watch view of the agent interface. Up: oldest on top. Down: latest on top.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewWatch
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketWatchView'}->{'Order::Default'} = 'Up';</code>

6.55.3. Ticket::Frontend::AgentTicket-WatchView###DefaultColumns

Description:	Columns that can be filtered in the watch view of the agent interface. Possible settings: 0 = Disabled, 1 = Available, 2 = Enabled by default. Note: Only Ticket attributes and Dynamic Fields (DynamicField_NameX) are allowed.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewWatch
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketWatchView'}->{'DefaultColumns'} = { 'Age' => '2', 'Changed' => '1', 'CustomerID' => '2', 'CustomerName' => '1', 'CustomerUserID' => '1', 'EscalationResponseTime' => '1', 'EscalationSolutionTime' => '1', 'EscalationTime' => '1', 'EscalationUpdateTime' => '1', 'Lock' => '2', 'Owner' => '2', 'PendingTime' => '1', 'Priority' => '1', 'Queue' => '2', 'Responsible' => '1', 'SLA' => '1', 'Service' => '1', 'State' => '2', 'TicketNumber' => '2', 'Title' => '2', 'Type' => '1' };</code>

6.56. Frontend::Agent::Ticket::ViewZoom

6.56.1. Ticket::Frontend::PlainView

Description:	Shows a link to see a zoomed email ticket in plain text.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewZoom
Valid:	1

Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::PlainView'} = '0';</code>

6.56.2. Ticket::Frontend::ZoomExpand

Description:	Shows all the articles of the ticket (expanded) in the zoom view.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewZoom
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::ZoomExpand'} = '0';</code>

6.56.3. Ticket::Frontend::ZoomExpandSort

Description:	Shows the articles sorted normally or in reverse, under ticket zoom in the agent interface.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewZoom
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::ZoomExpandSort'} = 'normal';</code>

6.56.4. Ticket::ZoomAttachmentDisplayCount

Description:	Shows a count of icons in the ticket zoom, if the article has attachments.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewZoom
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::ZoomAttachmentDisplayCount'} = '20';</code>

6.56.5. Ticket::ZoomTimeDisplay

Description:	Displays the accounted time for an article in the ticket zoom view.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewZoom
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::ZoomTimeDisplay'} = '0';</code>

6.56.6. Ticket::UseArticleColors

Description:	Shows colors for different article types in the article table.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewZoom
Valid:	1

Required:	1
Config-Setting:	<code>\$Self->{'Ticket::UseArticleColors'} = '0';</code>

6.56.7. Ticket::Frontend::TicketArticleFilter

Description:	Activates the article filter in the zoom view to specify which articles should be shown.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewZoom
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::TicketArticleFilter'} = '0';</code>

6.56.8. Ticket::Frontend::HTMLArticleHeightDefault

Description:	Set the default height (in pixels) of inline HTML articles in AgentTicketZoom.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewZoom
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::HTMLArticleHeightDefault'} = '100';</code>

6.56.9. Ticket::Frontend::HTMLArticleHeightMax

Description:	Set the maximum height (in pixels) of inline HTML articles in AgentTicketZoom.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewZoom
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::HTMLArticleHeightMax'} = '2500';</code>

6.56.10. Ticket::Frontend::ZoomRichTextForce

Description:	Show article as rich text even if rich text writing is disabled.
Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewZoom
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::ZoomRichTextForce'} = '1';</code>

6.56.11. Ticket::Frontend::AgentTicketZoom###DynamicField

Description:	Dynamic fields shown in the sidebar of the ticket zoom screen of the agent interface. Possible settings: 0 = Disabled, 1 = Enabled.
--------------	---

Group:	Ticket
SubGroup:	Frontend::Agent::Ticket::ViewZoom
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::AgentTicketZoom'}->{'DynamicField'} = {};</code>

6.57. Frontend::Agent::TicketOverview

6.57.1. Ticket::Frontend::Overview###Small

Description:	Allows having a small format ticket overview (CustomerInfo => 1 - shows also the customer information).
Group:	Ticket
SubGroup:	Frontend::Agent::TicketOverview
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::Overview'}->{'Small'} = { 'CustomerInfo' => '1', 'Module' => 'Kernel::Output::HTML::TicketOverviewSmall', 'ModulePriority' => '100', 'Name' => 'Small', 'NameShort' => 'S' };</code>

6.57.2. Ticket::Frontend::OverviewSmall###Column-Header

Description:	Shows either the last customer article's subject or the ticket title in the small format overview.
Group:	Ticket
SubGroup:	Frontend::Agent::TicketOverview
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::OverviewSmall'}->{'ColumnHeader'} = 'LastCustomerSubject';</code>

6.57.3. Ticket::Frontend::Overview###Medium

Description:	Allows having a medium format ticket overview (CustomerInfo => 1 - shows also the customer information).
Group:	Ticket
SubGroup:	Frontend::Agent::TicketOverview
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::Overview'}->{'Medium'} = { 'CustomerInfo' => '0', 'Module' => 'Kernel::Output::HTML::TicketOverviewMedium', 'ModulePriority' => '200', 'Name' => 'Medium', 'NameShort' => 'M', };</code>

```
'OverviewMenuModules' => '1',
'TicketActionsPerTicket' => '0'
};
```

6.57.4. Ticket::Frontend::Overview###Preview

Description:	Shows a preview of the ticket overview (CustomerInfo => 1 - shows also Customer-Info, CustomerInfoMaxSize max. size in characters of Customer-Info).
Group:	Ticket
SubGroup:	Frontend::Agent::TicketOverview
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::Overview'}->{'Preview'} = { 'CustomerInfo' => '0', 'CustomerInfoMaxSize' => '18', 'DefaultPreViewLines' => '25', 'DefaultViewNewLine' => '90', 'Module' => 'Kernel::Output::HTML::TicketOverviewPreview', 'ModulePriority' => '300', 'Name' => 'Large', 'NameShort' => 'L', 'OverviewMenuModules' => '1', 'StripEmptyLines' => '0', 'TicketActionsPerTicket' => '0' };</pre>

6.57.5. Ticket::Frontend::Overview::PreviewArticleSenderTypes

Description:	Defines which article sender types should be shown in the preview of a ticket.
Group:	Ticket
SubGroup:	Frontend::Agent::TicketOverview
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::Overview::PreviewArticleSenderTypes'} = { 'agent' => '1', 'customer' => '1', 'system' => '1' };</pre>

6.57.6. Ticket::Frontend::Overview::PreviewArticleLimit

Description:	Sets the count of articles visible in preview mode of ticket overviews.
Group:	Ticket
SubGroup:	Frontend::Agent::TicketOverview
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::Overview::PreviewArticleLimit'} = '5';</pre>

6.57.7. Ticket::Frontend::Overview::PreviewArticleTypeExpanded

Description:	Defines wich article type should be expanded when entering the overview. If nothing defined, latest article will be expanded.
Group:	Ticket
SubGroup:	Frontend::Agent::TicketOverview
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::Overview::PreviewArticleTypeExpanded'} = '';</code>

6.57.8. Ticket::Frontend::OverviewSmall###DynamicField

Description:	Dynamic fields shown in the ticket small format overview screen of the agent interface. Possible settings: 0 = Disabled, 1 = Available, 2 = Enabled by default.
Group:	Ticket
SubGroup:	Frontend::Agent::TicketOverview
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::OverviewSmall'}->{'DynamicField'} = {};</code>

6.57.9. Ticket::Frontend::OverviewMedium###DynamicField

Description:	Dynamic fields shown in the ticket medium format overview screen of the agent interface. Possible settings: 0 = Disabled, 1 = Enabled.
Group:	Ticket
SubGroup:	Frontend::Agent::TicketOverview
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::OverviewMedium'}->{'DynamicField'} = {};</code>

6.57.10. Ticket::Frontend::OverviewPreview###DynamicField

Description:	Dynamic fields shown in the ticket preview format overview screen of the agent interface. Possible settings: 0 = Disabled, 1 = Enabled.
Group:	Ticket
SubGroup:	Frontend::Agent::TicketOverview
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::OverviewPreview'}->{'DynamicField'} = {};</code>

6.58. Frontend::Agent::ToolBarModule

6.58.1. Frontend::ToolBarModule###1-Ticket::AgentTicketQueue

Description:	Toolbar Item for a shortcut.
Group:	Ticket
SubGroup:	Frontend::Agent::ToolBarModule
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::ToolBarModule'}->{'1-Ticket::AgentTicketQueue'} = { 'AccessKey' => 'q', 'Action' => 'AgentTicketQueue', 'CssClass' => 'QueueView', 'Icon' => 'icon-folder-close', 'Link' => 'Action=AgentTicketQueue', 'Module' => 'Kernel::Output::HTML::ToolBarLink', 'Name' => 'Queue view', 'Priority' => '1010010' };</pre>

6.58.2. Frontend::ToolBarModule###2-Ticket::AgentTicketStatus

Description:	Toolbar Item for a shortcut.
Group:	Ticket
SubGroup:	Frontend::Agent::ToolBarModule
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::ToolBarModule'}->{'2-Ticket::AgentTicketStatus'} = { 'AccessKey' => 'o', 'Action' => 'AgentTicketStatusView', 'CssClass' => 'StatusView', 'Icon' => 'icon-list-ol', 'Link' => 'Action=AgentTicketStatusView', 'Module' => 'Kernel::Output::HTML::ToolBarLink', 'Name' => 'Status view', 'Priority' => '1010020' };</pre>

6.58.3. Frontend::ToolBarModule###3-Ticket::AgentTicketEscalation

Description:	Toolbar Item for a shortcut.
Group:	Ticket
SubGroup:	Frontend::Agent::ToolBarModule
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::ToolBarModule'}->{'3- Ticket::AgentTicketEscalation'} = { 'AccessKey' => 'w', 'Action' => 'AgentTicketEscalationView',</pre>

```
'CssClass' => 'EscalationView',
'Icon' => 'icon-exclamation',
'Link' => 'Action=AgentTicketEscalationView',
'Module' => 'Kernel::Output::HTML::ToolBarLink',
'Name' => 'Escalation view',
'Priority' => '1010030'
};
```

6.58.4. Frontend::ToolBarModule###4-Ticket::AgentTicketPhone

Description:	Toolbar Item for a shortcut.
Group:	Ticket
SubGroup:	Frontend::Agent::ToolBarModule
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::ToolBarModule'}->{'4-Ticket::AgentTicketPhone'} = { 'AccessKey' => 'l', 'Action' => 'AgentTicketPhone', 'CssClass' => 'PhoneTicket', 'Icon' => 'icon-phone', 'Link' => 'Action=AgentTicketPhone', 'Module' => 'Kernel::Output::HTML::ToolBarLink', 'Name' => 'New phone ticket', 'Priority' => '1020010' };</pre>

6.58.5. Frontend::ToolBarModule###5-Ticket::AgentTicketEmail

Description:	Toolbar Item for a shortcut.
Group:	Ticket
SubGroup:	Frontend::Agent::ToolBarModule
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::ToolBarModule'}->{'5-Ticket::AgentTicketEmail'} = { 'AccessKey' => 'e', 'Action' => 'AgentTicketEmail', 'CssClass' => 'EmailTicket', 'Icon' => 'icon-envelope', 'Link' => 'Action=AgentTicketEmail', 'Module' => 'Kernel::Output::HTML::ToolBarLink', 'Name' => 'New email ticket', 'Priority' => '1020020' };</pre>

6.58.6. Frontend::ToolBarModule###6-Ticket::AgentTicketProcess

Description:	Toolbar Item for a shortcut.
Group:	Ticket
SubGroup:	Frontend::Agent::ToolBarModule
Valid:	0
Required:	0

Config-Setting:	<pre>\$Self->{'Frontend::ToolBarModule'}->{'6-Ticket::AgentTicketProcess'} = { 'AccessKey' => 'p', 'Action' => 'AgentTicketProcess', 'CssClass' => 'ProcessTicket', 'Icon' => 'icon-th-large', 'Link' => 'Action=AgentTicketProcess', 'Module' => 'Kernel::Output::HTML::ToolBarLink', 'Name' => 'New process ticket', 'Priority' => '1020030' };</pre>
-----------------	---

6.58.7. Frontend::ToolBarModule###6-Ticket::TicketResponsible

Description:	Agent interface notification module to see the number of tickets an agent is responsible for.
Group:	Ticket
SubGroup:	Frontend::Agent::ToolBarModule
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::ToolBarModule'}->{'6-Ticket::TicketResponsible'} = { 'CssClass' => 'Responsible', 'CssClassNew' => 'Responsible New', 'CssClassReached' => 'Responsible Reached', 'Icon' => 'icon-user', 'IconNew' => 'icon-user', 'IconReached' => 'icon-user', 'Module' => 'Kernel::Output::HTML::ToolBarTicketResponsible', 'Priority' => '1030010' };</pre>

6.58.8. Frontend::ToolBarModule###7-Ticket::TicketWatcher

Description:	Agent interface notification module to see the number of watched tickets.
Group:	Ticket
SubGroup:	Frontend::Agent::ToolBarModule
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::ToolBarModule'}->{'7-Ticket::TicketWatcher'} = { 'CssClass' => 'Watcher', 'CssClassNew' => 'Watcher New', 'CssClassReached' => 'Watcher Reached', 'Icon' => 'icon-eye-open', 'IconNew' => 'icon-eye-open', 'IconReached' => 'icon-eye-open', 'Module' => 'Kernel::Output::HTML::ToolBarTicketWatcher', 'Priority' => '1030020' };</pre>

6.58.9. Frontend::ToolBarModule###8-Ticket::TicketLocked

Description:	Agent interface notification module to check the used charset.
--------------	--

Group:	Ticket
SubGroup:	Frontend::Agent::ToolBarModule
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::ToolBarModule'}->{'8-Ticket::TicketLocked'} = { 'CssClass' => 'Locked', 'CssClassNew' => 'Locked New', 'CssClassReached' => 'Locked Reached', 'Icon' => 'icon-lock', 'IconNew' => 'icon-lock', 'IconReached' => 'icon-lock', 'Module' => 'Kernel::Output::HTML::ToolBarTicketLocked', 'Priority' => '1030030' };</pre>

6.58.10. Frontend::ToolBarModule###9-Ticket::TicketSearchProfile

Description:	Agent interface module to access search profiles via nav bar.
Group:	Ticket
SubGroup:	Frontend::Agent::ToolBarModule
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::ToolBarModule'}->{'9-Ticket::TicketSearchProfile'} = { 'Block' => 'ToolBarSearchProfile', 'Description' => 'Search-Template', 'MaxWidth' => '40', 'Module' => 'Kernel::Output::HTML::ToolBarTicketSearchProfile', 'Name' => 'Search-Template', 'Priority' => '1990010' };</pre>

6.58.11. Frontend::ToolBarModule###10-Ticket::TicketSearchFulltext

Description:	Agent interface module to access fulltext search via nav bar.
Group:	Ticket
SubGroup:	Frontend::Agent::ToolBarModule
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::ToolBarModule'}->{'10-Ticket::TicketSearchFulltext'} = { 'Block' => 'ToolBarSearchFulltext', 'CSS' => 'Core.Agent.Toolbar.FulltextSearch.css', 'Description' => 'Fulltext search', 'Module' => 'Kernel::Output::HTML::ToolBarGeneric', 'Name' => 'Fulltext-Search', 'Priority' => '1990020', 'Size' => '10' };</pre>

6.58.12. Frontend::ToolBarModule###11-CICSearch-CustomerID

Description:	Agent interface module to access CIC search via nav bar.
--------------	--

Group:	Ticket
SubGroup:	Frontend::Agent::ToolBarModule
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::ToolBarModule'}->{'11-CICSearchCustomerID'} = { 'Block' => 'ToolBarCICSearchCustomerID', 'CSS' => 'Core.Agent.Toolbar.CICSearch.css', 'Description' => 'CustomerID Search', 'Module' => 'Kernel::Output::HTML::ToolBarGeneric', 'Name' => 'CustomerID search', 'Priority' => '1990030', 'Size' => '10' };</pre>

6.58.13. Frontend::ToolBarModule###11-CICSearch-CustomerUser

Description:	Agent interface module to access CIC search via nav bar.
Group:	Ticket
SubGroup:	Frontend::Agent::ToolBarModule
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::ToolBarModule'}->{'11-CICSearchCustomerUser'} = { 'Block' => 'ToolBarCICSearchCustomerUser', 'CSS' => 'Core.Agent.Toolbar.CICSearch.css', 'Description' => 'CustomerUser Search', 'Module' => 'Kernel::Output::HTML::ToolBarGeneric', 'Name' => 'Customer user search', 'Priority' => '1990040', 'Size' => '10' };</pre>

6.59. Frontend::Customer

6.59.1. Ticket::Frontend::CustomerDisableCompanyTicketAccess

Description:	This option will deny the access to customer company tickets, which are not created by the customer user.
Group:	Ticket
SubGroup:	Frontend::Customer
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::CustomerDisableCompanyTicketAccess'} = '0';</pre>

6.59.2. Ticket::Frontend::CustomerTicketOverviewCustomEmptyText

Description:	Custom text for the page shown to customers that have no tickets yet.
Group:	Ticket

SubGroup:	Frontend::Customer
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::CustomerTicketOverviewCustomEmptyText'} = { 'Button' => 'Create your first ticket', 'Text' => 'Please click the button below to create your first ticket.', 'Title' => 'Welcome!' };</pre>

6.59.3. Frontend::CustomerUser::Item###15-OpenTickets

Description:	Customer item (icon) which shows the open tickets of this customer as info block. Setting CustomerUserLogin to 1 searches for tickets based on login name rather than CustomerID.
Group:	Ticket
SubGroup:	Frontend::Customer
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::CustomerUser::Item'}->{'15-OpenTickets'} = { 'Action' => 'AgentTicketSearch', 'Attributes' => 'StateType=Open;', 'CSS' => 'Core.Agent.CustomerUser.OpenTicket.css', 'CSSClassNoOpenTicket' => 'NoOpenTicket', 'CSSClassOpenTicket' => 'OpenTicket', 'CustomerUserLogin' => '0', 'Module' => 'Kernel::Output::HTML::CustomerUserGenericTicket', 'Subaction' => 'Search', 'Target' => '_blank', 'Text' => 'Open tickets' };</pre>

6.59.4. Frontend::CustomerUser::Item###16-OpenTicketsForCustomerUserLogin

Description:	Customer item (icon) which shows the open tickets of this customer as info block. Setting CustomerUserLogin to 1 searches for tickets based on login name rather than CustomerID.
Group:	Ticket
SubGroup:	Frontend::Customer
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::CustomerUser::Item'}->{'16-OpenTicketsForCustomerUserLogin'} = { 'Action' => 'AgentTicketSearch', 'Attributes' => 'StateType=Open;', 'CSS' => 'Core.Agent.CustomerUser.OpenTicket.css', 'CSSClassNoOpenTicket' => 'NoOpenTicket', 'CSSClassOpenTicket' => 'OpenTicket', 'CustomerUserLogin' => '1', 'Module' => 'Kernel::Output::HTML::CustomerUserGenericTicket', 'Subaction' => 'Search', 'Target' => '_blank', };</pre>

	<pre>'Text' => 'Open tickets of customer' };</pre>
--	---

6.59.5. Frontend::CustomerUser::Item###17-ClosedTickets

Description:	Customer item (icon) which shows the closed tickets of this customer as info block. Setting CustomerUserLogin to 1 searches for tickets based on login name rather than CustomerID.
Group:	Ticket
SubGroup:	Frontend::Customer
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::CustomerUser::Item'}->{'17-ClosedTickets'} = { 'Action' => 'AgentTicketSearch', 'Attributes' => 'StateType=Closed;', 'CSS' => 'Core.Agent.CustomerUser.OpenTicket.css', 'CSSClassNoOpenTicket' => 'NoOpenTicket', 'CSSClassOpenTicket' => 'OpenTicket', 'CustomerUserLogin' => '0', 'Module' => 'Kernel::Output::HTML::CustomerUserGenericTicket', 'Subaction' => 'Search', 'Target' => '_blank', 'Text' => 'Closed tickets' };</pre>

6.59.6. Frontend::CustomerUser::Item###18-ClosedTicketsForCustomerUserLogin

Description:	Customer item (icon) which shows the closed tickets of this customer as info block. Setting CustomerUserLogin to 1 searches for tickets based on login name rather than CustomerID.
Group:	Ticket
SubGroup:	Frontend::Customer
Valid:	0
Required:	0
Config-Setting:	<pre>\$Self->{'Frontend::CustomerUser::Item'}->{'18-ClosedTicketsForCustomerUserLogin'} = { 'Action' => 'AgentTicketSearch', 'Attributes' => 'StateType=Closed;', 'CSS' => 'Core.Agent.CustomerUser.OpenTicket.css', 'CSSClassNoOpenTicket' => 'NoOpenTicket', 'CSSClassOpenTicket' => 'OpenTicket', 'CustomerUserLogin' => '1', 'Module' => 'Kernel::Output::HTML::CustomerUserGenericTicket', 'Subaction' => 'Search', 'Target' => '_blank', 'Text' => 'Closed tickets of customer' };</pre>

6.59.7. CustomerFrontend::CommonObject###QueueObject

Description:	Path of the file that stores all the settings for the QueueObject object for the customer interface.
--------------	--

Group:	Ticket
SubGroup:	Frontend::Customer
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CustomerFrontend::CommonObject'}->{'QueueObject'} = 'Kernel::System::Queue';</code>

6.59.8. CustomerFrontend::CommonObject###TicketObject

Description:	Path of the file that stores all the settings for the TicketObject for the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CustomerFrontend::CommonObject'}->{'TicketObject'} = 'Kernel::System::Ticket';</code>

6.59.9. CustomerFrontend::CommonParam###Action

Description:	Defines the default used Frontend-Module if no Action parameter given in the url on the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CustomerFrontend::CommonParam'}->{'Action'} = 'CustomerTicketOverview';</code>

6.59.10. CustomerFrontend::CommonParam###TicketID

Description:	Default ticket ID used by the system in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CustomerFrontend::CommonParam'}->{'TicketID'} = '';</code>

6.60. Frontend::Customer::ModuleMetaHead

6.60.1. CustomerFrontend::HeaderMetaModule###2-TicketSearch

Description:	Module to generate html OpenSearch profile for short ticket search in the customer interface.
--------------	---

Group:	Ticket
SubGroup:	Frontend::Customer::ModuleMetaHead
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerFrontend::HeaderMetaModule'}->{'2-TicketSearch'} = { 'Action' => 'CustomerTicketSearch', 'Module' => 'Kernel::Output::HTML::CustomerHeaderMetaTicketSearch' };</pre>

6.61. Frontend::Customer::ModuleRegistration

6.61.1. CustomerFrontend::Module###CustomerTicketOverview

Description:	Frontend module registration for the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerFrontend::Module'}->{'CustomerTicketOverview'} = { 'Description' => 'Overview of customer tickets', 'NavBar' => [{ 'AccessKey' => 't', 'Block' => '', 'Description' => 'Tickets', 'Link' => 'Action=CustomerTicketOverview;Subaction=MyTickets', 'LinkOption' => '', 'Name' => 'Tickets', 'NavBar' => 'Ticket', 'Prio' => '100', 'Type' => 'Menu' }, { 'AccessKey' => 'm', 'Block' => '', 'Description' => 'My Tickets', 'Link' => 'Action=CustomerTicketOverview;Subaction=MyTickets', 'LinkOption' => '', 'Name' => 'My Tickets', 'NavBar' => 'Ticket', 'Prio' => '110', 'Type' => 'Submenu' }, { 'AccessKey' => 'c', 'Block' => '', 'Description' => 'Company Tickets', 'Link' => 'Action=CustomerTicketOverview;Subaction=CompanyTickets', 'LinkOption' => '', 'Name' => 'Company Tickets', 'NavBar' => 'Ticket', 'Prio' => '120', 'Type' => 'Submenu' }], 'NavBarName' => 'Ticket', };</pre>

```
'Title' => 'Overview'
};
```

6.61.2. CustomerFrontend::Module###CustomerTicketMessage

Description:	Frontend module registration for the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerFrontend::Module'}->{'CustomerTicketMessage'} = { 'Description' => 'Create tickets', 'NavBar' => [{ 'AccessKey' => 'n', 'Block' => '', 'Description' => 'Create new Ticket', 'Link' => 'Action=CustomerTicketMessage', 'LinkOption' => '', 'Name' => 'New Ticket', 'NavBar' => 'Ticket', 'Prio' => '100', 'Type' => 'Submenu' }], 'NavBarName' => 'Ticket', 'Title' => 'New Ticket' };</pre>

6.61.3. CustomerFrontend::Module###CustomerTicketZoom

Description:	Frontend module registration for the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerFrontend::Module'}->{'CustomerTicketZoom'} = { 'Description' => 'Ticket zoom view', 'Loader' => { 'JavaScript' => ['Core.Customer.TicketZoom.js', 'Core.UI.Popup.js'] }, 'NavBarName' => 'Ticket', 'Title' => 'Zoom' };</pre>

6.61.4. CustomerFrontend::Module###CustomerTicketPrint

Description:	Frontend module registration for the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::ModuleRegistration

Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerFrontend::Module'}->{'CustomerTicketPrint'} = { 'Description' => 'Customer Ticket Print Module', 'NavBarName' => '', 'Title' => 'Print' };</pre>

6.61.5. CustomerFrontend::Module###CustomerTicketAttachment

Description:	Frontend module registration for the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerFrontend::Module'}->{'CustomerTicketAttachment'} = { 'Description' => 'To download attachments', 'NavBarName' => '', 'Title' => '' };</pre>

6.61.6. CustomerFrontend::Module###CustomerTicketSearch

Description:	Frontend module registration for the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::ModuleRegistration
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerFrontend::Module'}->{'CustomerTicketSearch'} = { 'Description' => 'Customer ticket search', 'NavBar' => [{ 'AccessKey' => 's', 'Block' => '', 'Description' => 'Search', 'Link' => 'Action=CustomerTicketSearch', 'LinkOption' => '', 'Name' => 'Search', 'NavBar' => 'Ticket', 'Prio' => '300', 'Type' => 'Submenu' }], 'NavBarName' => 'Ticket', 'Title' => 'Search' };</pre>

6.62. Frontend::Customer::Preferences

6.62.1. CustomerPreferencesGroups###ShownTickets

Description:	Defines all the parameters for the ShownTickets object in the customer preferences of the customer interface.
--------------	---

Group:	Ticket
SubGroup:	Frontend::Customer::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerPreferencesGroups'}->{'ShownTickets'} = { 'Active' => '1', 'Column' => 'User Profile', 'Data' => { '15' => '15', '20' => '20', '25' => '25', '30' => '30' }, 'DataSelected' => '25', 'Key' => 'Tickets per page', 'Label' => 'Number of displayed tickets', 'Module' => 'Kernel::Output::HTML::PreferencesGeneric', 'PrefKey' => 'UserShowTickets', 'Prio' => '4000' };</pre>

6.62.2. CustomerPreferencesGroups###RefreshTime

Description:	Defines all the parameters for the RefreshTime object in the customer preferences of the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Preferences
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'CustomerPreferencesGroups'}->{'RefreshTime'} = { 'Active' => '1', 'Column' => 'User Profile', 'Data' => { '' => 'off', '10' => '10 minutes', '15' => '15 minutes', '2' => ' 2 minutes', '5' => ' 5 minutes', '7' => ' 7 minutes' }, 'DataSelected' => '', 'Key' => 'Refresh interval', 'Label' => 'Ticket overview', 'Module' => 'Kernel::Output::HTML::PreferencesGeneric', 'PrefKey' => 'UserRefreshTime', 'Prio' => '4000' };</pre>

6.63. Frontend::Customer::Ticket::ViewNew

6.63.1. Ticket::Frontend::CustomerTicketMessage###NextScreenAfterNewTicket

Description:	Determines the next screen after new customer ticket in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewNew
Valid:	1

Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketMessage'}->{'NextScreenAfterNewTicket'} = 'CustomerTicketOverview';</code>

6.63.2. Ticket::Frontend::CustomerTicketMessage###Priority

Description:	Allows customers to set the ticket priority in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketMessage'}->{'Priority'} = '1';</code>

6.63.3. Ticket::Frontend::CustomerTicketMessage###PriorityDefault

Description:	Defines the default priority of new customer tickets in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketMessage'}->{'PriorityDefault'} = '3 normal';</code>

6.63.4. Ticket::Frontend::CustomerTicketMessage###Queue

Description:	Allows customers to set the ticket queue in the customer interface. If this is set to 'No', QueueDefault should be configured.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketMessage'}->{'Queue'} = '1';</code>

6.63.5. Ticket::Frontend::CustomerTicketMessage###QueueDefault

Description:	Defines the default queue for new customer tickets in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewNew
Valid:	0

Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketMessage'}->{'QueueDefault'} = 'Postmaster';</code>

6.63.6. Ticket::Frontend::CustomerTicketMessage###TicketType

Description:	Allows customers to set the ticket type in the customer interface. If this is set to 'No', TicketTypeDefault should be configured.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketMessage'}->{'TicketType'} = '1';</code>

6.63.7. Ticket::Frontend::CustomerTicketMessage###TicketTypeDefault

Description:	Defines the default ticket type for new customer tickets in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewNew
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketMessage'}->{'TicketTypeDefault'} = 'default';</code>

6.63.8. Ticket::Frontend::CustomerTicketMessage###Service

Description:	Allows customers to set the ticket service in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketMessage'}->{'Service'} = '1';</code>

6.63.9. Ticket::Frontend::CustomerTicketMessage###SLA

Description:	Allows customers to set the ticket SLA in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewNew
Valid:	1

Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketMessage'}->{'SLA'} = '1';</code>

6.63.10. Ticket::Frontend::CustomerTicketMessage###ServiceMandatory

Description:	Sets if service must be selected by the customer.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewNew
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketMessage'}->{'ServiceMandatory'} = '0';</code>

6.63.11. Ticket::Frontend::CustomerTicketMessage###SLAMandatory

Description:	Sets if SLA must be selected by the customer.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewNew
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketMessage'}->{'SLAMandatory'} = '0';</code>

6.63.12. Ticket::Frontend::CustomerTicketMessage###StateDefault

Description:	Defines the default state of new customer tickets in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketMessage'}->{'StateDefault'} = 'new';</code>

6.63.13. Ticket::Frontend::CustomerTicketMessage###ArticleType

Description:	Defines the default type for article in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketMessage'}->{'ArticleType'} = 'webrequest';</code>

6.63.14. Ticket::Frontend::CustomerTicketMessage###SenderType

Description:	Sender type for new tickets from the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketMessage'}->{'SenderType'} = 'customer';</code>

6.63.15. Ticket::Frontend::CustomerTicketMessage###HistoryType

Description:	Defines the default history type in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketMessage'}->{'HistoryType'} = 'WebRequestCustomer';</code>

6.63.16. Ticket::Frontend::CustomerTicketMessage###HistoryComment

Description:	Comment for new history entries in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketMessage'}->{'HistoryComment'} = '';</code>

6.63.17. CustomerPanelSelectionType

Description:	Defines the receipt target of the tickets ("Queue" shows all queues, "SystemAddress" displays all system addresses) in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CustomerPanelSelectionType'} = 'Queue';</code>

6.63.18. CustomerPanelSelectionString

Description:	Determines the strings that will be shown as receipt (To:) of the ticket in the customer interface. For Queue as CustomerPanelS-
--------------	--

	electionType, "<Queue>" shows the names of the queues, and for SystemAddress, "<Realname> <<Email>>" shows the name and email of the receipt.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewNew
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'CustomerPanelSelectionString'} = '<Queue>';</code>

6.63.19. CustomerPanelOwnSelection

Description:	Determines which queues will be valid for ticket's recipients in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewNew
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'CustomerPanelOwnSelection'} = { 'Junk' => 'First Queue', 'Misc' => 'Second Queue' };</code>

6.63.20. CustomerPanel::NewTicketQueueSelection-Module

Description:	Module for To-selection in new ticket screen in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewNew
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'CustomerPanel::NewTicketQueueSelectionModule'} = 'Kernel::Output::HTML::CustomerNewTicketQueueSelectionGeneric';</code>

6.63.21. Ticket::Frontend::CustomerTicketMessage###DynamicField

Description:	Dynamic fields options shown in the ticket message screen of the customer interface. Possible settings: 0 = Disabled, 1 = Enabled, 2 = Enabled and required. NOTE. If you want to display these fields also in the ticket zoom of the customer interface, you have to enable them in CustomerTicketZoom###DynamicField.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewNew
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketMessage'}->{'DynamicField'} = {};</code>

6.64. Frontend::Customer::Ticket::ViewPrint

6.64.1. Ticket::Frontend::CustomerTicketPrint###DynamicField

Description:	Dynamic fields shown in the ticket print screen of the customer interface. Possible settings: 0 = Disabled, 1 = Enabled.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewPrint
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketPrint'}->{'DynamicField'} = {};</code>

6.65. Frontend::Customer::Ticket::ViewSearch

6.65.1. Ticket::CustomerTicketSearch::SearchLimit

Description:	Maximum number of tickets to be displayed in the result of a search in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewSearch
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::CustomerTicketSearch::SearchLimit'} = '5000';</code>

6.65.2. Ticket::CustomerTicketSearch::Search-PageShown

Description:	Number of tickets to be displayed in each page of a search result in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewSearch
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::CustomerTicketSearch::SearchPageShown'} = '40';</code>

6.65.3. Ticket::CustomerTicketSearch::SortBy::Default

Description:	Defines the default ticket attribute for ticket sorting in a ticket search of the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewSearch
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::CustomerTicketSearch::SortBy::Default'} = 'Age';</code>

6.65.4. Ticket::CustomerTicketSearch::Order::Default

Description:	Defines the default ticket order of a search result in the customer interface. Up: oldest on top. Down: latest on top.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewSearch
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::CustomerTicketSearch::Order::Default'} = 'Down';</code>

6.65.5. Ticket::Frontend::CustomerTicketSearch###ExtendedSearchCondition

Description:	Allows extended search conditions in ticket search of the customer interface. With this feature you can search w. g. with this kind of conditions like "(key1&&key2)" or "(key1 key2)".
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewSearch
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketSearch'}->{'ExtendedSearchCondition'} = '1';</code>

6.65.6. Ticket::Frontend::CustomerTicketSearch###SearchCSVData

Description:	Data used to export the search result in CSV format.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewSearch
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketSearch'}->{'SearchCSVData'} = ['TicketNumber', 'Age', 'Created', 'Closed', 'State', 'Priority', 'Lock', 'CustomerID', 'CustomerName', 'From', 'Subject'];</code>

6.65.7. Ticket::Frontend::CustomerTicketSearch###DynamicField

Description:	Dynamic fields shown in the ticket search screen of the customer interface. Possible settings: 0 = Disabled, 1 = Enabled.
Group:	Ticket

SubGroup:	Frontend::Customer::Ticket::ViewSearch
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketSearch'}->{'DynamicField'} = {};</code>

6.65.8. Ticket::Frontend::CustomerTicketSearch###SearchOverviewDynamicField

Description:	Dynamic fields shown in the ticket search overview results screen of the customer interface. Possible settings: 0 = Disabled, 1 = Enabled.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewSearch
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketSearch'}->{'SearchOverviewDynamicField'} = {};</code>

6.65.9. Ticket::Frontend::CustomerTicketSearch###SearchCSVDynamicField

Description:	Dynamic Fields used to export the search result in CSV format.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewSearch
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketSearch'}->{'SearchCSVDynamicField'} = {};</code>

6.66. Frontend::Customer::Ticket::ViewZoom

6.66.1. Ticket::Frontend::CustomerTicketZoom###NextScreenAfterFollowUp

Description:	Determines the next screen after the follow up screen of a zoomed ticket in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewZoom
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketZoom'}->{'NextScreenAfterFollowUp'} = 'CustomerTicketOverview';</code>

6.66.2. Ticket::Frontend::CustomerTicketZoom###ArticleType

Description:	Defines the default type of the note in the ticket zoom screen of the customer interface.
--------------	---

Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewZoom
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketZoom'}->{'ArticleType'} = 'webrequest';</code>

6.66.3. Ticket::Frontend::CustomerTicketZoom###SenderType

Description:	Defines the default sender type for tickets in the ticket zoom screen of the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewZoom
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketZoom'}->{'SenderType'} = 'customer';</code>

6.66.4. Ticket::Frontend::CustomerTicketZoom###HistoryType

Description:	Defines the history type for the ticket zoom action, which gets used for ticket history in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewZoom
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketZoom'}->{'HistoryType'} = 'FollowUp';</code>

6.66.5. Ticket::Frontend::CustomerTicketZoom###HistoryComment

Description:	Defines the history comment for the ticket zoom action, which gets used for ticket history in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewZoom
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketZoom'}->{'HistoryComment'} = '';</code>

6.66.6. Ticket::Frontend::CustomerTicketZoom###Priority

Description:	Allows customers to change the ticket priority in the customer interface.
--------------	---

Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewZoom
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketZoom'}->{'Priority'} = '1';</code>

6.66.7. Ticket::Frontend::CustomerTicketZoom###PriorityDefault

Description:	Defines the default priority of follow up customer tickets in the ticket zoom screen in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewZoom
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketZoom'}->{'PriorityDefault'} = '3 normal';</code>

6.66.8. Ticket::Frontend::CustomerTicketZoom###State

Description:	Allows choosing the next compose state for customer tickets in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewZoom
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketZoom'}->{'State'} = '1';</code>

6.66.9. Ticket::Frontend::CustomerTicketZoom###StateDefault

Description:	Defines the default next state for a ticket after customer follow up in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewZoom
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketZoom'}->{'StateDefault'} = 'open';</code>

6.66.10. Ticket::Frontend::CustomerTicketZoom###StateType

Description:	Defines the next possible states for customer tickets in the customer interface.
--------------	--

Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewZoom
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::CustomerTicketZoom'}->{'StateType'} = ['open', 'closed'];</pre>

6.66.11. Ticket::Frontend::CustomerTicketZoom###AttributesView

Description:	Shows the activated ticket attributes in the customer interface (0 = Disabled and 1 = Enabled).
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewZoom
Valid:	1
Required:	1
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::CustomerTicketZoom'}->{'AttributesView'} = { 'Owner' => '0', 'Priority' => '1', 'Queue' => '1', 'Responsible' => '0', 'SLA' => '0', 'Service' => '0', 'State' => '1', 'Type' => '0' };</pre>

6.66.12. Ticket::Frontend::CustomerTicketZoom###DynamicField

Description:	Dynamic fields shown in the ticket zoom screen of the customer interface. Possible settings: 0 = Disabled, 1 = Enabled.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewZoom
Valid:	1
Required:	0
Config-Setting:	<pre>\$Self->{'Ticket::Frontend::CustomerTicketZoom'}->{'DynamicField'} = {};</pre>

6.66.13. Ticket::Frontend::CustomerTicketZoom###FollowUpDynamicField

Description:	Dynamic fields options shown in the ticket reply section in the ticket zoom screen of the customer interface. Possible settings: 0 = Disabled, 1 = Enabled, 2 = Enabled and required.
Group:	Ticket
SubGroup:	Frontend::Customer::Ticket::ViewZoom
Valid:	1

Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketZoom'}->{'FollowUpDynamicField'} = {};</code>

6.67. Frontend::Customer::TicketOverview

6.67.1. Ticket::Frontend::CustomerTicketOverviewSortable

Description:	Controls if customers have the ability to sort their tickets.
Group:	Ticket
SubGroup:	Frontend::Customer::TicketOverview
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketOverviewSortable'} = '';</code>

6.67.2. Ticket::Frontend::CustomerTicketOverview###ColumnHeader

Description:	Shows either the last customer article's subject or the ticket title in the small format overview.
Group:	Ticket
SubGroup:	Frontend::Customer::TicketOverview
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketOverview'}->{'ColumnHeader'} = 'TicketTitle';</code>

6.67.3. Ticket::Frontend::CustomerTicketOverview###Owner

Description:	Show the current owner in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::TicketOverview
Valid:	1
Required:	1
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketOverview'}->{'Owner'} = '0';</code>

6.67.4. Ticket::Frontend::CustomerTicketOverview###Queue

Description:	Show the current queue in the customer interface.
Group:	Ticket
SubGroup:	Frontend::Customer::TicketOverview
Valid:	1
Required:	1

Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketOverview'}->{'Queue'} = '0';</code>
-----------------	---

6.67.5. Ticket::Frontend::CustomerTicketOverview###DynamicField

Description:	Dynamic fields shown in the ticket overview screen of the customer interface. Possible settings: 0 = Disabled, 1 = Enabled, 2 = Enabled and required.
Group:	Ticket
SubGroup:	Frontend::Customer::TicketOverview
Valid:	1
Required:	0
Config-Setting:	<code>\$Self->{'Ticket::Frontend::CustomerTicketOverview'}->{'DynamicField'} = {};</code>

6.68. Frontend::Queue::Preferences

6.68.1. QueuePreferences###Comment2

Description:	Parameters of the example queue attribute Comment2.
Group:	Ticket
SubGroup:	Frontend::Queue::Preferences
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'QueuePreferences'}->{'Comment2'} = { 'Block' => 'TextArea', 'Cols' => '50', 'Desc' => 'Define the queue comment 2.', 'Label' => 'Comment2', 'Module' => 'Kernel::Output::HTML::QueuePreferencesGeneric', 'PrefKey' => 'Comment2', 'Rows' => '5' };</code>

6.69. Frontend::SLA::Preferences

6.69.1. SLAPreferences###Comment2

Description:	Parameters of the example SLA attribute Comment2.
Group:	Ticket
SubGroup:	Frontend::SLA::Preferences
Valid:	0
Required:	0
Config-Setting:	<code>\$Self->{'SLAPreferences'}->{'Comment2'} = { 'Block' => 'TextArea', 'Cols' => '50', 'Desc' => 'Define the sla comment 2.', 'Label' => 'Comment2', 'Module' => 'Kernel::Output::HTML::SLAPreferencesGeneric', 'PrefKey' => 'Comment2', 'Rows' => '5' };</code>

6.70. Frontend::Service::Preferences

6.70.1. ServicePreferences###Comment2

Description:	Parameters of the example service attribute Comment2.
Group:	Ticket
SubGroup:	Frontend::Service::Preferences
Valid:	0
Required:	0
Config-Setting:	<pre> \$self->{'ServicePreferences'}->{'Comment2'} = { 'Block' => 'TextArea', 'Cols' => '50', 'Desc' => 'Define the service comment 2.', 'Label' => 'Comment2', 'Module' => 'Kernel::Output::HTML::ServicePreferencesGeneric', 'PrefKey' => 'Comment2', 'Rows' => '5' }; </pre>

Appendix C. Mikopo


OTRS ni mradi ulio wazi, na tungependa kuwashukuru watu wengi kwa mchango wao na msaada. Orodha ifuatayo haiko kamili, na tunaomba radhi kwa hilo! Tuparie tu taarifa kama haupo kwenye orodha hii.

Watu wafuatao wamesukuma mradi kwa asilimia kubwa au ni wasaidi hai:

- Robert Kehl, aliyetengeneza kisakinishi cha Win32 kwa ajili ya matoleo ya 1.x. Asante sana, Robert!
- Torsten Werner, ambaye anasimamia kisakinishi cha Debian kwa ajili ya OTRS. Asante sana, Torsten, kwa kufanya OTRS ipatikane pia kwa wanajamii wa Debian.
- Nils Jeppe (mirror Hamburg, Ujerumani), Bryan Fullerton (mirror Toronto, Canada), Eberhard Mönkeberg (mirror Göttingen, Ujerumani), Timo Dreger (mirror Düsseldorf, Ujerumani) na Netmonic (mirror Vienna, Austria), ambao wanafanya mirroring ya seva zetu za FTP. Asante sana, kwa msaada wenu ni rahisi siku zote kupakua OTRS kwa haraka!
- Anja Schneider, ambaye anasaidia na tafsiri ya huu mwongozo na masahihisho na marekebisho ya nakala za Kijerumani. Shukrani nyingi kwa usaidizi wako na uvumilivu, Anja!
- Tunapokea mawazo mengi kupitia orodha ya watumiwa wa OTRS kwa ajili ya maboresho ya mfumo, viraka na urekebishaji makosa. Msaada mkubwa kwa watumiaji wote unapatikana hapa kwa muda wote. Asante sana kwa watu wote kwenye orodha ya watumiwa kwa ushiriki wenu hai.

Pia tungependa kutanguliza shukrani kubwa kwa watu wafuatao:

- Martin Scherbaum
- Carsten Gross
- Harald Müller
- Stefan Schmidt
- Milisav Radmanic
- Uli Hecht
- Norman Walsh
- Heiko Baumann
- Atif Ghaffar
- Pablo Ruiz Garcia
- Dan Rau
- Christoph Kaulich
- Mark Jackson
- Diane Shieh
- Bernard Choppy
- Carl Bailey

-
- Phil Davis
 - Edwin D. Vinas
 - Lars Müller
 - Vladimir Gerdjikov
 - Fred van Dijk
 - Sebastien Guilbaud
 - Wiktor Wodecki
 - Arnold Ligtvoet
 - Antti Kämäräinen
 - Nicolas Goralski
 - Gilberto Cezar de Almeida
 - Jorge Becerra
 - Eddie Urenda
 - Stella Power
 - Andreas Haase
 - Reiner Keller
 - Covert Jake
 - Moshe Leibovitch
 - Björn Jacke
 - Remo Catelotti
 - Alfons Obermeyer
 - Michael Rech
 - Danie Theron
 - Richard Paradies
 - Art Powell
- 

Appendix D. Leseni ya Nyaraka Huru ya GNU

Toleo 1.1, Machi 2000

Hakimiliki (C) 2000 Free Software Foundation, Inc. 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA Kila mtu anaruhusiwa kuchukua nakala na kusambaza nakala za maneno yale yale za leseni ya nyaraka hii lakini kubadilisha hairuhusiwi.

0. UTANGULIZI

Lengo la hii Leseni ni kutengeneza mwongozo, daftari, au nyaraka nyingine iliyoandikwa "huru" katika hali ya uhuru: kumhakikishia kila mtu uhuru wa kunakili na kuisambaza upya, bila au kwa kuibadilisha, kwa biashara au sio kwa biashara. Kwa hali ya juu zaidi, hii Leseni inahifadhi kwa ajili ya mwandishi na mchapishaji jinsi ya kupata sifa kwa kazi zao, na sio kuonekana wahusika wa kubadili kaziza wengine.

Hii Leseni ni aina ya "nakilikushoto", ambayo inamaanisha kwamba kazi zitokanazo na nyaraka lazima nazo ziwe huru katika hali hiyo hiyo. Inaongezea kwenye GNU General Public Licence, ambayo ni leseni ya nakalakushoto iliyoundwa kwa ajili ya programu za bure.

Tumeunda hii leseni ili kuweza kuitumia kwa ajili ya miongozo ya programu za bure, kwa sababau programu za bure zinahitaji nyaraka za bure: programu ya bure lazima ije na miongozo inayotoa uhuru sawa na ule unaotolewa na programu. Lakini hii leseni haina kikomo kwa miongozo ya programu; inaweza kutumika kwa ajili ya kazi zozote za nakala, bila kujali mada au kwamba inachapishwa kama kitabu. Tunashauri hii leseni kwa kazi ambazo lengo lake ni maelekezo au marejeo.

1. UTUMIKAJI NA FASILI

Leseni inafanya kazi kwa mwongozo wowote au kazi nyingine ambayo ina notisi iliyowekwa na mmiliki wa hakimiliki inayosema inaweza kusambazwa chini ya makubaiano ya Leseni hii. "Waraka", hapa chini, unaashiria mwongozo wowote au kazi. Mwanachama yoyote wa umma ni mmiliki wa leseni, na anaitwa "wewe".

"Toleo Lililobadilishwa" la Nyaraka inamaanisha kazi yoyote yenye Nyaraka au sehemu yake, aidha nakala isiyobadilishwa, au yenye mabadiliko na/au iliyotafsiriwa kwenda lugha nyingine.

"Kifungu cha Sekondari" ni kiambatanisho kilichopewa jina au kifungu cha mambo ya mbele ya nyaraka, inayohusika kipekee na uhusiano wa mchapishaji au mwandishi wa nyaraka na kichwa cha habari cha ujumla cha nyaraka (au kwa mambo yanayohusiana), na haina kitu ambacho kinaweza kuingia moja kwa moja ndani ya kichwa cha habari cha ujumla. (Kwa Mfano, kama Nyaraka ni sehemu ya kitabu cha hisabati, Kifungu cha Sekondari hakiwezi kuelezea hesabu yoyote.) Uhusiano huo unaweza kuwa wa muunganiko wa kihistoria au mambo yanayohusika, au sheria, biashara, falsafa, maadili au nafasi ya siasa inayohusiana nazo.

"Vifungu Visivyoathirika" ni Vifungu fulani vya Sekondari ambavyo vichwa vyao vimeteuliwa, kama vile vya Vifungu Visivyoathirika, katika notisi isemayo nyaraka imetolewa chini ya Leseni hii.

"Nakala za Jalada" ni vifungu vifupi vya maneno ambavyo vimeorodheshwa, kama Nakala za Mbele za Jalada au Nakala za Nyuma za Jalada, katika notisi inayosema Nyaraka imetolewa chini ya Leseni hii.

Naka "Angavu" ya Nyaraka inamaanisha nakala inayoweza kusomwa na mashine, inayowakilishwa katika umbo ambalo ubainishwaji wake unapatikana kwa umma kwa ujumla, ambao maudhui yake yanaweweza kuonekana na kuhaririwa moja kwa moja na kwa urahisi kwa kutumia vihariri vya nakala za ujumla au (kwa ajili ya taswira zilizojengwa na pikseli) programu za uchoraji za ujumla au (kwa ajili ya michoro) baadhi ya vihariri vya michoro vinavyopatikana kirahisi, na ambavyo vinafaa kwa ajili ya ingizo la nakala kwenye vinavyoandaa umbizo au kwa ajili ya tafsiri otomatiki kwa maumbo mbali mbali, vinavyofaa kwa ajili ya ingizo la viandaa umbizo la nakala. Nakala iliyotengenezwa katika faili lenye umbizo Angavu, ambalo dhulisho mabadiliko yake imeundwa kuzuia au kukatisha tamaa maboresho ya wasomaji sio Angavu. Nakala ambayo siyo "Angavu" inaitwa "Isiyo angavu".

Mifano ya maumbo yanayofaa kwa ajili ya nakala Angavu inajumuisha: ASCII wazi bila dhulisho mabadiliko, umbizo la maingizo la Texinfo, umbizo la maingizo la LaTeX, SGML au XML kwa kutumia DTD inayopatikana kwa umma, na HTML ya kawaida iliyoundwa kwa ajili ya mabadiliko ya mwanadamu. Maumbo yasiyo angavu yanajumuisha: PostScript, PDF, maumbo binafsi ambayo yanaweza kusomwa na kuhaririwa na vichakatishi vya maneno binafsi tu, SGML au XML ambazo DTD na/au vifaa vya uchakatishaji havipatikani kwa ujumla, na HTML zinazozalishwa na mashine zinazotengenezwa na baadhi ya vichakatishi maneno kwa ajili ya matokeo tu.

"Ukurasa wa mbele" inamaanisha, kwa kitabu kilichochapishwa, ukurasa wa mbele wenyewe, kujumuisha na kurasa zinazofwata kama zinavyohitajika kushikilia, kusomwa, vitu ambavyo hii Leseni inahitaji vionekane kwenye ukurasa wa mbele. Kwa kazi zenye maumbo ambayo hayana ukurasa wa mbele wowote kama huu, "Ukurasa wa Mbele" inamaanisha nakala karibu ya muonekano muhimu wa kichwa cha habari cha kazi, kabla ya mwanzo wa kiini cha nakala.

2. KUNAKILI BILA KUBADILISHA KITU

Unaweza kunakili na kusambaza waraka kwa njia yoyote, aidha kwa biashara au sio kwa biashara, ukizingatia kwamba hii Leseni, notisi za hakimiliki, na notisi za leseni zinasema hii Leseni inafanya kazi kwa waraka huu inakuwepo kwa kila nakala, na huongezi masharti mengine yoyote kwa yale yaliyopo kwenye hii leseni. Hutakiwi kutumia vipimo vya kiu-fundi kuzuia au kudhibiti usomaji au utengenezaji wa nakala zingine zaidi ya zile ulizotengeneza au kusambaza. Hata hivyo unaweza kupokea fidia kwa ajili ya nakala. Kama ukisambaza idadi ya kutosha ya nakala pia ni lazima ufuate masharti katika kifungu cha 3.

Unaweza pia kuazima nakala, chini ya masharti sawa na yaliyosemwa juu, na unaweza kuonyesha kwa umma.

3. KUNAKILI KATIKA IDADI

Kama ukichapisha nakala za Nyaraka zenye idadi zaidi ya 100, na notisi ya leseni ya nyaraka inahitaji Nakala za Jalada, unatakiwa kujumuisha nakala zinazobeba, zinazosomeka na kuonekana kwa urahisi, Nakala za jalada zote hizi: Nakala za Jalada la Mbele katika jalada la mbele, na Nakala za Jalada la nyuma kwenye jalada la nyuma. Majalada yote lazima yaonyeshe kiurahisi na kwa kusomeka kwamba wewe ndiyo mchapishaji wa hizi nakala. Jalada la mbele lazima lionyeshe kichwa cha habari kizima chenye maneno yote yenye usawa na kuonekana. Unaweza kuongeza vitu vingine kwenye jalada kwa nyongeza. Kunakili na mabadiliko yenye kikomo kwa jalada, ikiwa tu zinahifadhi kichwa cha habari cha nyaraka na kuridhisha masharti haya, inaweza kuchukuliwa kama kunakili bila mabadiliko kwa upande mwingine.

Kama nakala zinazotakiwa kwa ajili ya majalada yote ni nyingi sana ili kutosha vizuri, unatakiwa kuweka za kwanza zikiwa zimeorodheshwa (nyingi kadri zitakavyotosha) katika jalada halisi, na kuendelea na zinazofwata katika kurasa za karibu.

Kama ukichapisha au kusambaza nakala Zisizo Angavu za Nyaraka idadi zaidi ya 100, lazima aidha ujumuishe nakala Angavu isomwayo na mashine pamoja na nakala Isiyo Angavu, au tamka kwenye au kwa kila nakala Isiyo Angavu eneo linalofikika na umma la mtandao wa kompyuta, lenye nakala kamili Angavu ya Nyaraka, isiyokuwa na nyongeza yoyote, ambayo mtandao wa ujumla wa umma una uwezo wa kupakua bila kujulikana, bila gharama yoyote, kwa kutumia kanuni za kawaida za mtandao wa umma. Kama ukitumia chaguo la mwisho, lazima uchukue hatua kwa uangalifu, ukianza usambazaji wa nakala Zisizo Angavu kwa idadi, kuhakikisha hii nakala Angavu itabakia ikipatikana katika eneo tajwa, mpaka angalau mwaka mmoja tangu mara ya mwisho umegawa nakala Isiyo Angavu (mwenyewe au kupitia mawakala wako au wauzaji wa rejareja) wa toleo hilo kwa umma.

Inaombwa na sio lazima, kwamba uwasiliane na waandishi wa nyaraka kabla ya kusambaza upya idadi kubwa ya nakala, kuwapa nafsi ya kukupa toleo lililosasishwa la nyaraka.

4. MABADILIKO

Unaweza kunakili na kusambaza Toleo Lililobadilishwa la Nyaraka chini ya masharti ya kifungu 2 na 3 juu, ikiwa kwamba unatoa Toleo Lililobadilishwa chini ya Leseni hii, na Toleo Lililobadilishwa likichukua jukumu la Nyaraka, hivyo usambazaji wa leseni na ubadilishaji wa Toleo Lililobadilishwa kwa yoyote anaemiliki nakala yake. Kwa zaidi, unatakiwa kufanya haya mambo kwenye Toleo Lililobadilishwa.

- A. Tumia katika Ukurasa wa Mada (na kwenye majalada kama yapo) mada tofauti kutoika ile ya Nyaraka, na zile za matoleo ya nyuma (ambazo zinatakiwa, kama zilikwepo kuorodheshwa katika kifungu cha Historia cha Nyaraka). Unaweza kutumia mada sawa na ya toleo la nyuma kama mchapishaji halisi wa toleo hilo akitoa ruhusa.
- B. Orodha kwenye Ukurasa wa Mbele, kama waandishi, mtu mmoja au zaidi au vyombo vilivyohusika na uandishi wa mabadiliko katika Matoleo Mapya, pamoja na japo waandishi wakuu watano wa Nyaraka (waandishi wakuu wote, kama ina chini ya watano).
- C. Tamka katika ukurasa wa mbele jina la mchapishaji wa Toleo Lililobadilishwa, kama mchapishaji.
- D. Hifadhi notisi za hakimiliki zote za Nyaraka.
- E. Ongeza notisi sahihi ya hakimiliki kwa mabadiliko yake karibu na na notisi nyingine za hakimiliki.
- F. Jumuisha, baada tu ya notisi za hakimiliki, notisi ya leseni kuupa umma ruhusa ya kutumia Toleo Lililobadilishwa chini ya sheria za Leseni, katika mfumo ulioonyeshwa katika kiambatanisho chini.
- G. Hifadhi katika notisi hiyo ya leseni orodha kamili ya Vifungu Visivyoathirika na Nakala za Jalada zinazotakiwa zilizotolewa katika notisi ya leseni ya Nyaraka.
- H. Ongeza nakala isiyobadilishwa ya Leseni hii.
- I. Hifadhi kifungu kiitwacho "Historia", na mada yake, na iongezee kifaa kinachosema japo mada, mwaka, waandishi wapya, na mchapishaji wa Toleo Lililobadilishwa kama ilivyo kwenye Ukurasa wa Mada. Kama hakuna kifungu kiitwacho "Historia" katika Nyaraka, tengeneza moja inayosema mada, mwaka, waandishi, na mchapishaji wa Nyaraka kama ilivyo kwenye Ukurasa wa Mada, kisha ongeza kifaa kinacholeleza Toleo Lililobadilishwa, kama ilivyoelezwa kwenye sentensi iliyopita.
- J. Hifadhi eneo la mtandao, kama lipo, ikiwa katika Nyaraka kwa ajili ya ufikivu wa umma kwenye nakala Wazi ya Nyaraka, na hivyo hivyo maeneo ya mtandao yaliyo kwenye Nyaraka kwa ajili ya matoleo yaliyopita iliyokuwa ikijikita. Hizi zinaweza kuwek-

wa kwenye kifungu "Historia". Unaweza kuondoa eneo la mtandao kwa kazi ambayo ilichapishwa japo miaka miine kabla ya Nyaraka yenyewe, au mchapishaji halisi wa toleo husika akiruhusu.

K. Katika kifungu chochote kilichoandikwa "Shukrani" au "Kujitolea", hifadhi mada za vifungu, na hifadhi kwenye vifungu vitu vyote na muonekano wa kila Shukrani ya mchangiaji na/au kujitolea yaliyotolewa.

L. Hifadhi Vifungu vyote Visivyoathirika vya Nyaraka, bila kubadilishwa nakala na katika sheria zake. Nambari za Vifungu au kinachofanania hazichukuliwi kama sehemu ya kichwa cha kifungu.

M. Futa kifungu chochote kiitwacho "Idhini". Kifungu kama hicho hakitakiwi kuwepo katika Toleo Lililobadilishwa.

N. Hutakiwi kukipa upya jina "Idhini" kipengele chochote kilichopo au kuingiliana majina na Kipengele Kisichobadilika chochote.

Kama Toleo Lililobadilishwa linajumuisha vifungu vya mambo ya mbele vipya au viambat-anisho ambavyo vina sifa kama Vifungu vya Sekondari na havina kitu chochote kilichonakiliwa kutoka kwenye Nyaraka, unaweza kwa uamuzi wako mwenyewe kuteua baadhi au vifungu vyote hivi kuwa Visivyobadilika. Kufanya hivi, ongeza vichwa vyao vya habari kwenye orodha ya Vifungu Visivyobadilika katika Matoleo Yaliyobadilishwa ya notisi ya leseni. Hivi vichwa vya habari lazima viwe tofauti na vile vya vifungu vingine.

Unaweza kuongeza kipengele kiitwacho "Idhini", ikiwa kwamba haina kitu kingine lakini idhini au uthibitisho wa Toleo Lako jipya kutoka kwa makundi mbali mbali--kwa mfano, kauli ya mapitio ya watu au kwamba nakala imeidhinishwa na shirika au mamlaka ya ufafanuzi wa viwango.

Unaweza kuongeza kifungu cha mpaka maneno matano kama Nakala ya Jalada la Mbele, na kiungu cha mpaka maneno 25 kama Nakala ya Jalada la Nyuma, kwenye mwisho wa orodha ya Nakala za Majalada katika Toleo Lililobadilishwa. Kifungu kimoja tu cha Nakala ya Jalada la Mbele na Nakala ya Jalada la Nyuma kinaweza kuongezwa na (au kupitia mipango iliyofanywa na) chombo chochote kimoja. Kama nyaraka tayari inajumuisha nakala ya jalada kutoka kwenye jalada hilo hilo, iliyoongezwa kabla na wewe au kwa mpango uliofanywa na chombo kile kile ambacho unakitumikia, huwezi kuongeza nyingine; lakini unaweza kuwa mbadala wa lililokuwepo, kwa ruhusa ya wazi kutoka kwa mchapishaji aliyeongeza ya zamani.

Mwandishi (waandishi) na mchapishaji (wachapishaji) wa nyaraka hawatoi ruhus akwa leseni hii kutumia majina yao kwa utangazaji au kwa madai au kama idhini ya Toleo lolote jipya.

5. KUJUMUISHA NYARAKA

Unaweza kuunganisha Nyaraka hiyo na Nyaraka nyingine zilizotolewa chini ya Leseni hii, chini ya masharti yaliyofafanuliwa katika kifungu 4 juu kwa matoleo yaliyobadilishwa, ikiwa kwamba unajumuisha katika muunganiko Vifungu vyote Visivyoathirika vya nyaraka zote halisi, ambazo hazijabadilishwa, na kuziorodhesha zote kama Vifungu Visivyoathirika vya kazi yako katika notisi yake ya leseni.

Kazi iliyounganishwa inahitaji kuwa na nakala moja ya hii Leseni, na Vifungu Visivyoathirika vingi vinavyofanana vinaweza kubadilishwa na nakala moja. Kama kuna Vifungu Visivyoathirika vingi vyenye jina moja lakini maudhui tofauti, fanya kichwa cha kila kifungu kuwa cha kipekee kwa kuongeza mwishoni mwake, katika mabano, jina la mwandishi halisi au mchapishaji wa kifungu hicho kama anajulikana, au namba ya kipekee. Fanya mabadiliko hayo hayo kwenye vichwa vya vifungu katika orodha ya Vifungu Visivyoathirika kwenye notisi ya leseni ya kazi iliyojumuishwa.

Katika majumuisho, lazima ujumuishie kifungu chochote kilichoandikwa "Historia" katika nyaraka halisi zozote, kutengeneza kifungu kimoja kiitwacho "Historia"; hivyo hivyo juumuisha vifungu vyovyote viitwavyo "Shukrani", na vifungu vyovyote viitwavyo "Kujitolea." Lazima ufute vifungu vyote viitwavyo "Endorsements."

6. MKUSANYIKO WA NYARAKA

Unaweza kutengeneza mkusanyiko unaojumuisha Nyaraka hiyo na nyaraka nyingine zilizotolewa chini ya Leseni hii, na kubadilisha nakala binafsi za leseni hii katika nyaraka tofauti kwa kutumia nakala moja ambayo imejumuishwa na mkusanyiko huu, ikiwa kwamba unafuata sheria za Leseni hii, kwa kunakili bila mabadiliko katika kila nyaraka kwa mambo mengine yote.

Unaweza kutoa dondoo ya nyaraka moja kutoka kwenye mkusanyiko, na kuisambaza kibinafsi chini ya hii Leseni, ikiwa umeingiza nakala ya leseni hii kwenye nyaraka hiyo, na kufuata hii Leseni katika mambo mengine yote kuhusu kunakili bila mabadiliko ya nyaraka hiyo.

7. KUJUMUISHA NA KAZI BINAFSI

Mkusanyiko wa Nyaraka au sehemu zake na nyaraka nyingine tofauti na huru au kazi, juu ya au ndani ya hifadhi ya wingi au chombo cha usambazaji, haihesabiki kwa ujumla kama Toleo lililobadilishwa la Nyaraka, ikiwa hakuna hakimiliki ya ukusanyaji iliyoombwa. Mkusanyiko wa aina hii unaitwa "aggregate", na hii Leseni haifanyi kazi kwenye kazi nyingine za binafsi ambazo zimejumuishwa na Nyaraka, kwa kuwa zimejumuishwa, kama zenyewe siyo sehemu za kazi ya Nyaraka.

Kama mahitaji ya Nakala ya Jalada ya kifungu 3 yanaweza kutumika kwenye hizi nakala za Nyaraka, basi kama nyaraka ni ndogo zaidi ya robo ya mkusanyiko mzima, Nakala za Jalada la Nyaraka zinaweza kuwekwa kwenye majalada ambayo yanazunguka Nyaraka tu ndani ya mkusanyiko. La sivyo lazima zitokee kwenye majalada kwenye mkusanyiko wote.

8. TAFSIRI

Tafsiri inachukuliwa kama aina ya ubadilishaji, kwa hiyo unaweza kusambaza tafsiri ya Nyaraka chini ya masharti ya kifungu 4. Kubadilisha Vifungu Visivyobadilika kwa tafsiri inahitaji rufusa maalumu kutoka kwa wanaoshikilia hakimiliki, lakini unaweza kujumuisha tafsiri ya baadhi au Vifungu Visivyobadilika vyote, kama nyongeza kwa matoleo halisi ya hivi Vifungu Visivyobadilika. Unaweza kujumuisha tafsiri ya hii Leseni ikiwa kwamba umejumuishwa pia toleo halisi la Kiingereza la hii Leseni. Ikitokea kutokuwapo na makubaliano kati ya tafsiri na toleo halisi la Kiingereza la hii Leseni, toleo halisi la Kiingereza litatumika.

9. USITISHAJI

Huwezi kunakili, kubadilisha, kupata leseni ndogo, au kusambaza Nyaraka hiyo ila tu ikiwa imeonyeshwa chini ya Leseni hii. Jaribio lingine lolote la kunakili, kubadilisha, kupata leseni ndogo, au kusambaza Nyaraka ni batili, na itasitisha kiotomatiki haki zako chini ya Leseni hii. Hata hivyo, washirika waliopokea nakala, au haki, kutoka kwako chini ya Leseni hii hawatasisitishiwa leseni zao ikiwa tu wataendeleza ushirikiano kamili.

10. MAREKEBISHO YA BAADAYE YA HII LESENI

Free Software Foundation inaweza kuchapisha toleo jipya, lililorekebishwa la GNU Free Documentation Licence kutoka muda hadi muda. Matoleo hayo mapya yatakuwa sawa

kiroho na toleo la sasa, lakini yanaweza kutofautiana kiundani kushughulikia matatizo mapya au wasiwasi. Tembelea <http://www.gnu.org/copyleft/>.

Kila toleo la Leseni limepewa nambari ya toleo tofauti na nyingine. Kama nyaraka ikibainisha kwamba toleo la Leseni hii lenye nambari fulani "au toleo lolote la mbele" linahusika nayo, una machaguo ya kufuata masharti na vigezo ya aidha toleo lililobainishwa au toleo lolote la mbele ambalo limechapishwa (sio kama rasimu) na Free Software Foundation. Kama nyaraka haijabainisha nambari ya toleo la hii Leseni, unaweza kuchagua toleo lolote lililowahi kuchapishwa (sio kama rasimu) na Free Software Foundation.

. Jinsi ya kutumia hii Leseni kwa ajili ya nyaraka zako

Kutumia hii leseni kwenye nyaraka uliyoandika, jumuisha nakala ya Leseni kwenye nyaraka na weka hakimiliki ifuatayo na notisi za leseni baada tu ya ukurasa wa mbele:

Hakimiliki (c) JINA LAKO. Ruhusa imetolewa kunakili, kusambaza na/au kurekebisha nyaraka hii chini ya masharti ya GNU Free Documentation Licence, Toleo 1.1 au toleo lolote la mbele lililochapishwa na Free Software Foundation; na sehemu zisizobadilika zikiwa ORODHESHA VICHWA VYA HABARI VYAO, na Nakala za Jalada la Mbele likiwa ORODHA, na Jalada la Nyuma likiwa ORODHA. Nakala ya leseni imejumuishwa katika kifungu kiitwacho "GNU Free documentation Licence" .

Kama hauna Vifungu Visivyobadilika, andika "bila Vifungu Visivyobadilika" badala ya kusema ni vipi havibadiliki. Kama hauna Nakala za Jalada la Mbele, andika "hakuna Nakala za Jalada la Mbele" badala ya "Nakala za Jalada la Mbele kuwa ORODHA"; hivyo hivyo kwa Nakala za Jalada la Nyuma.

Kama nyaraka yako ina mifano iliyo ya msingi ya kanuni za programu, tunashauri kutoa hii mifano sambamba chini ya leseni huru ya programu ya chaguo lako, kama GNU General Public License, kuruhusu utumizi wake katika programu za bure.